





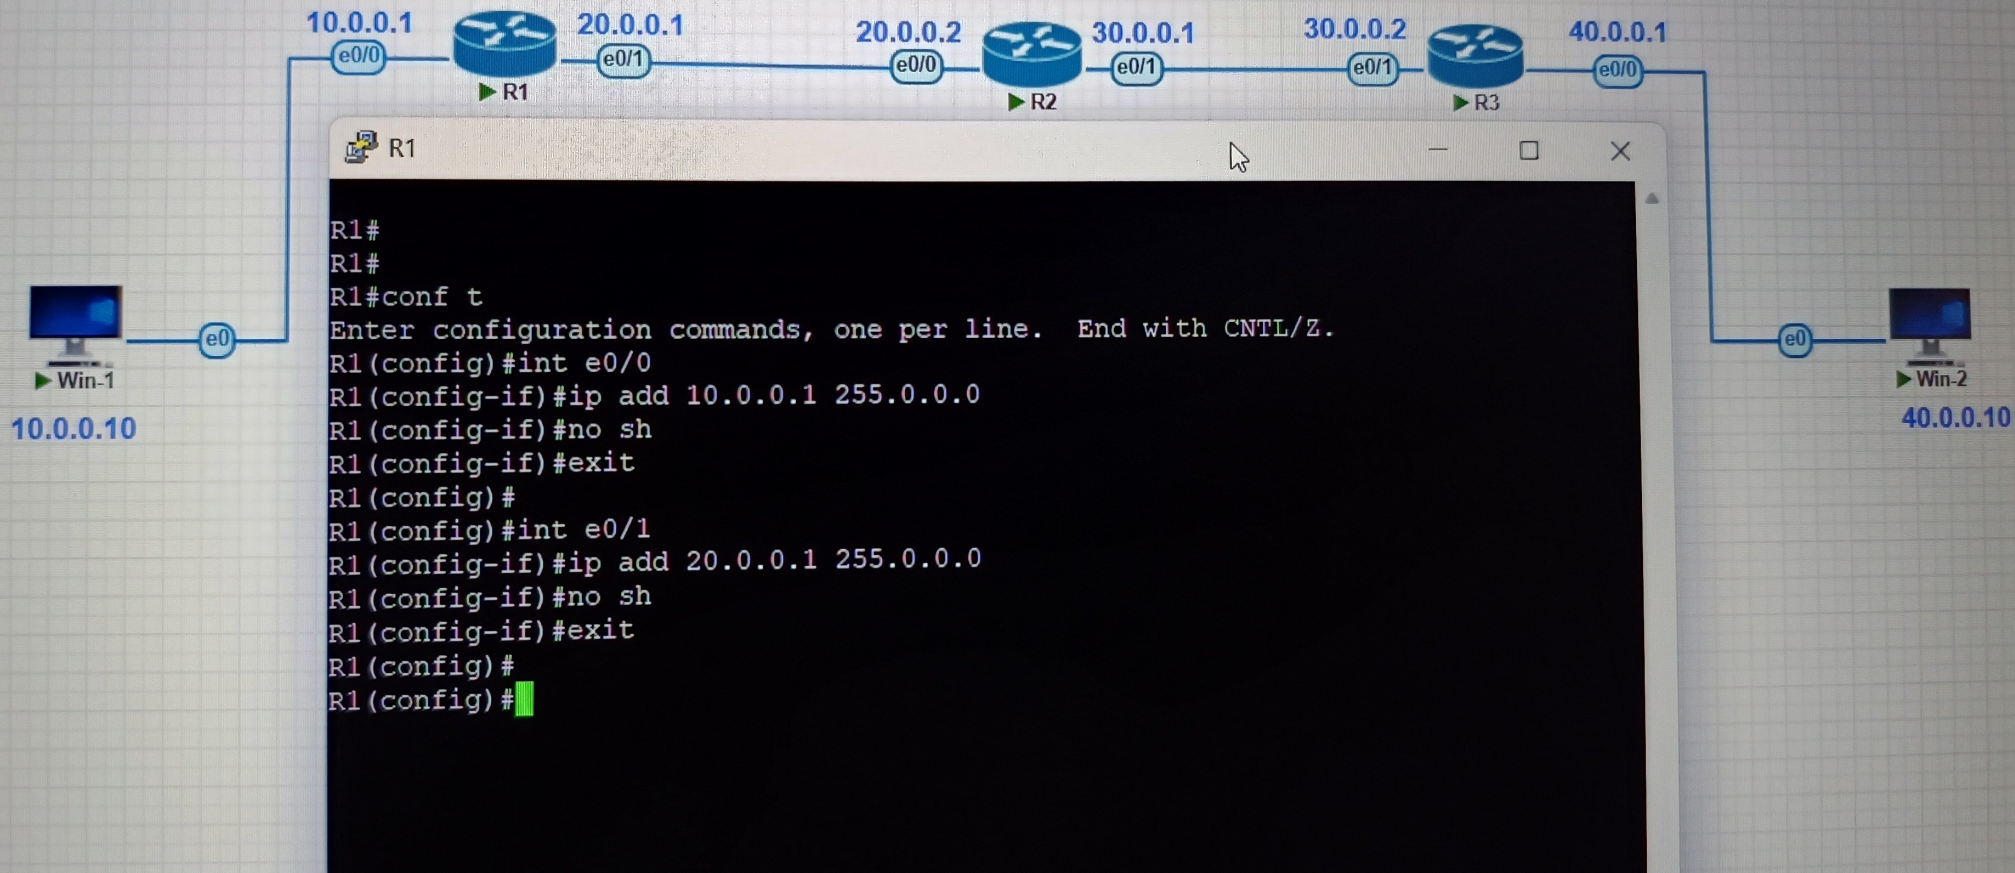


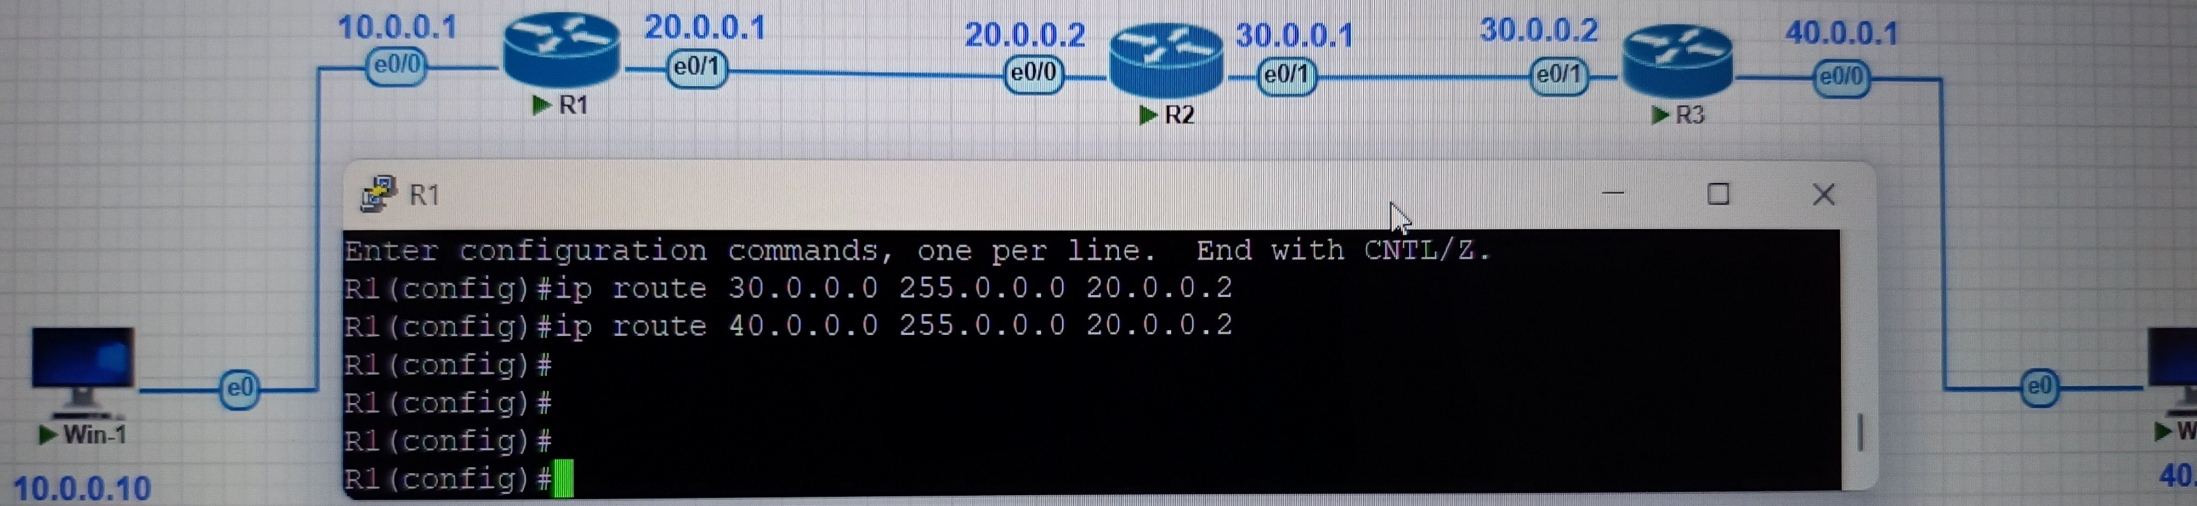


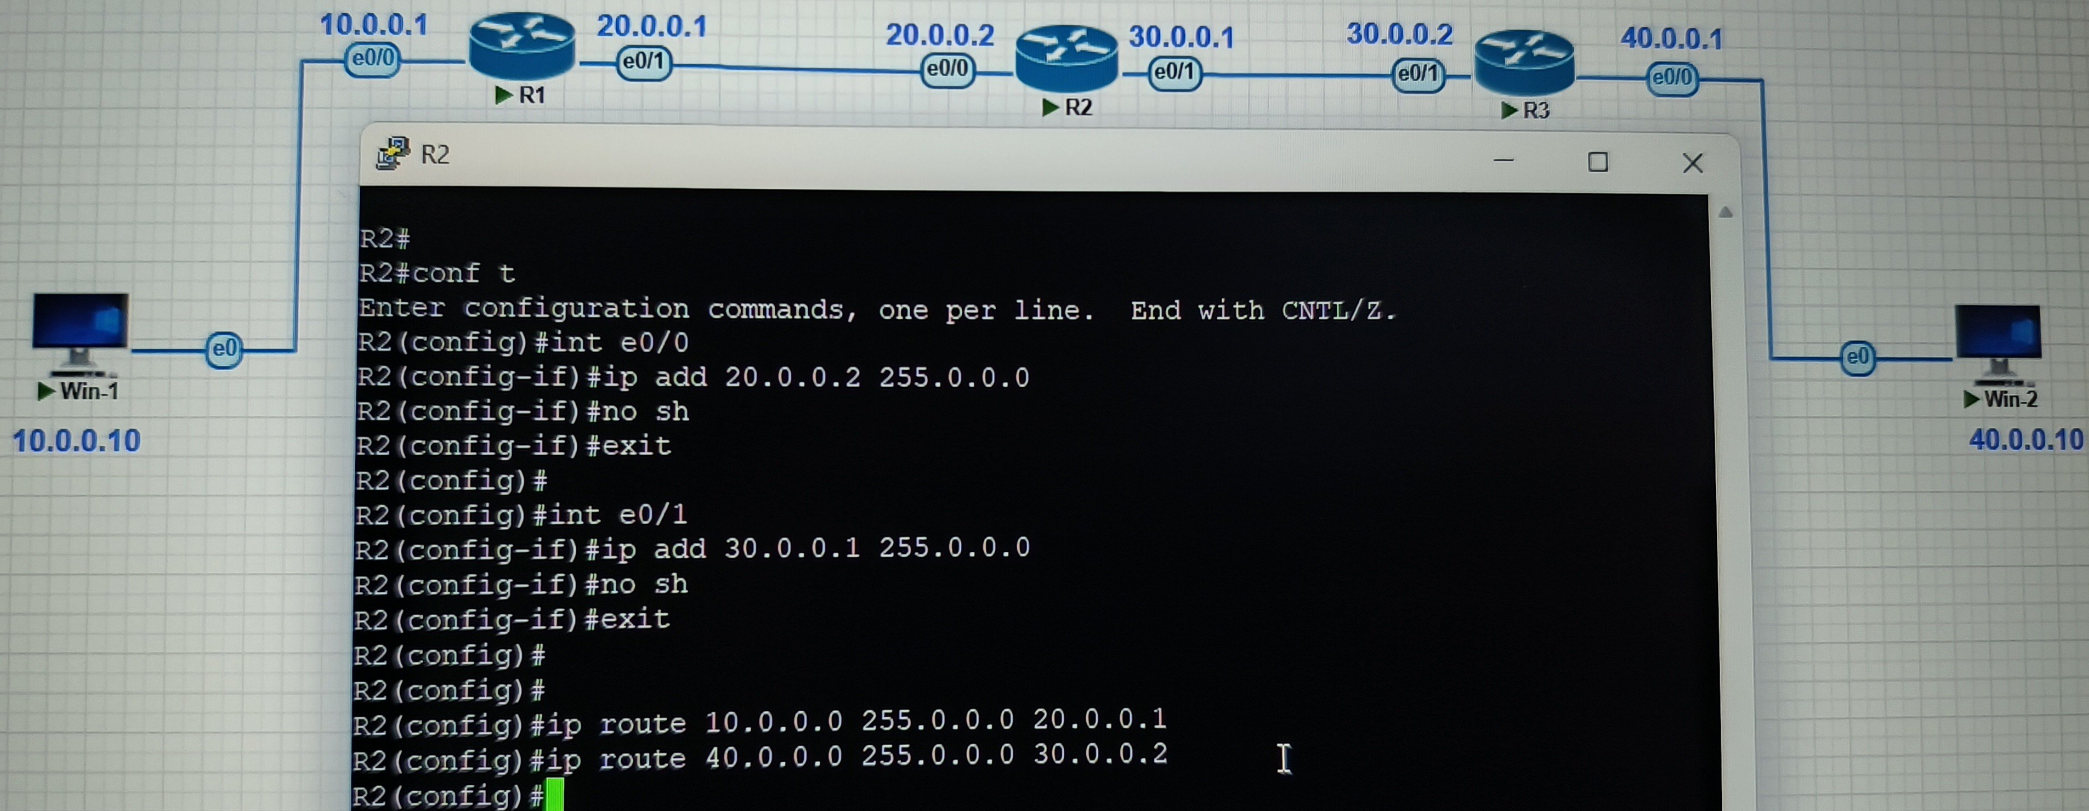


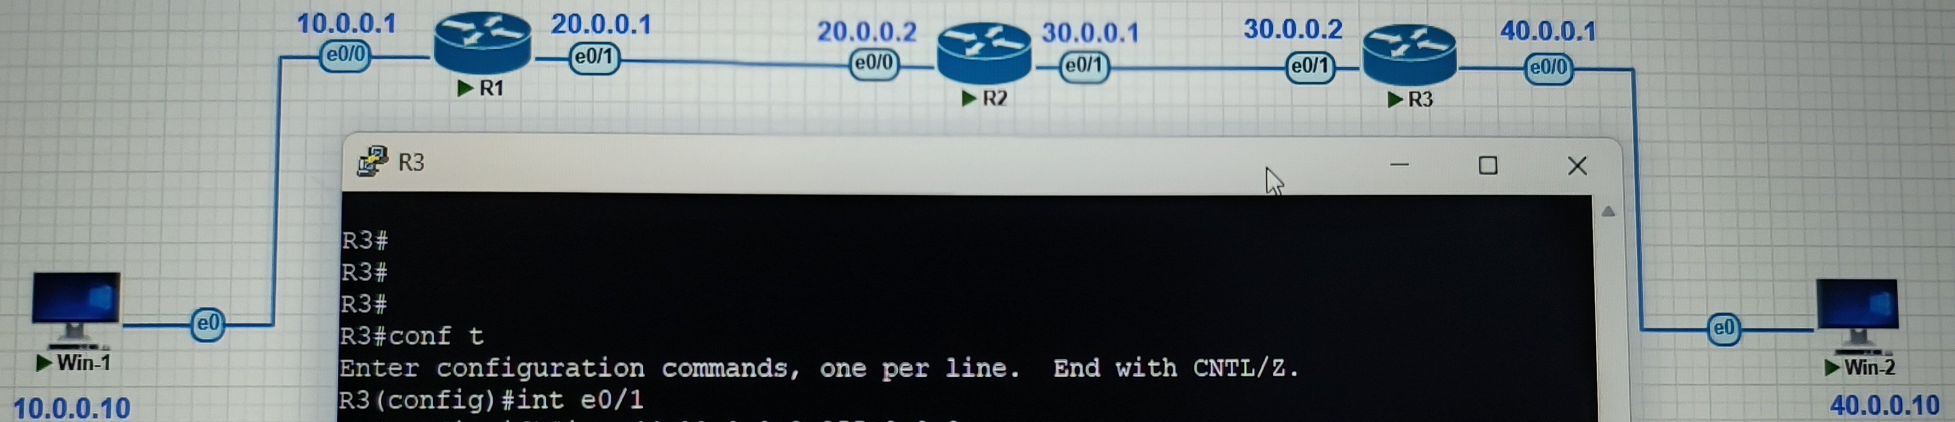


```
R3#
R3#
R3#
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#int e0/1
R3(config-if)#ip add 30.0.0.2 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#
R3(config)#int e0/0
R3(config-if)#ip add 40.0.0.1 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#
R3(config)#
R3(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
R3(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
R3(config)#
```

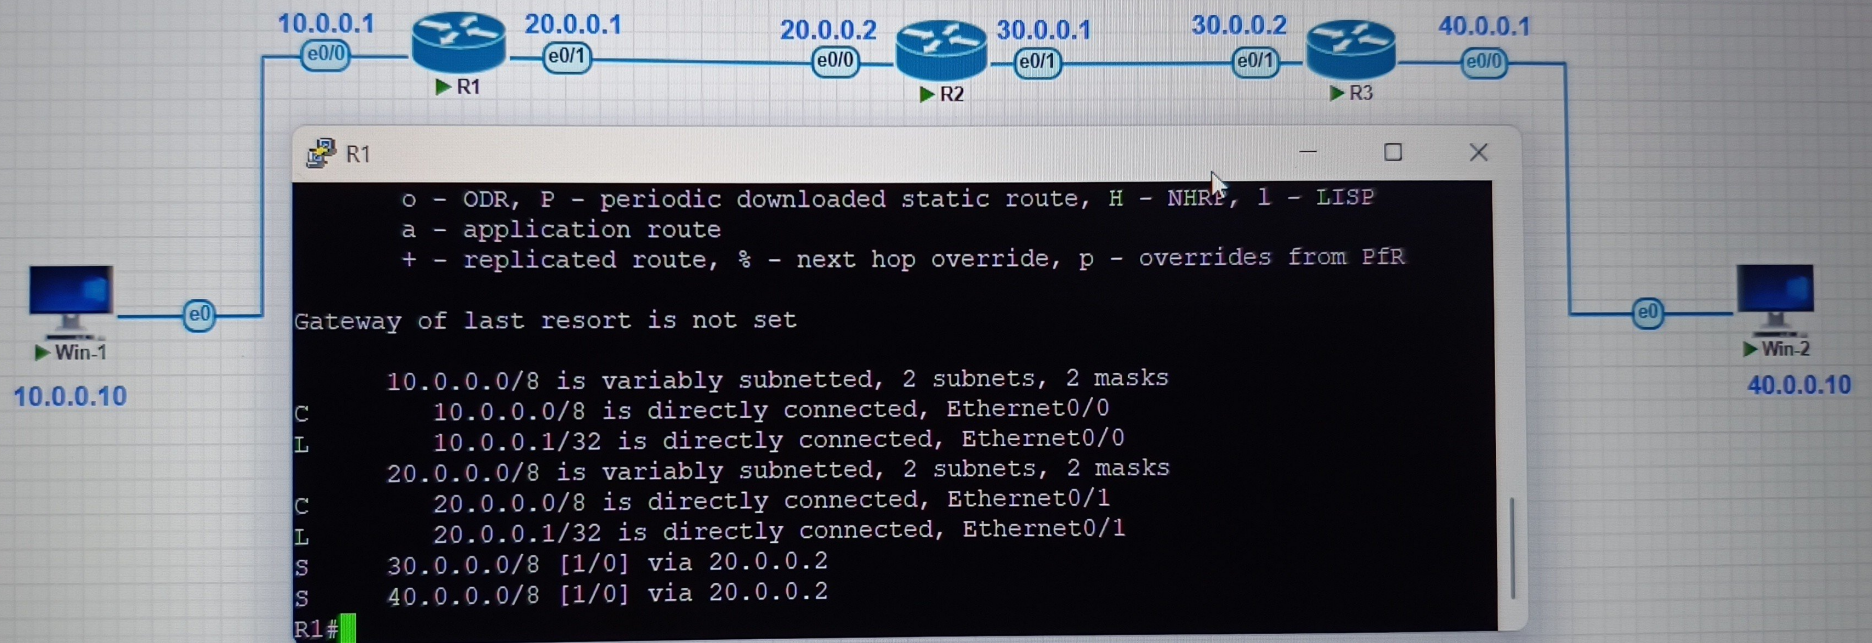


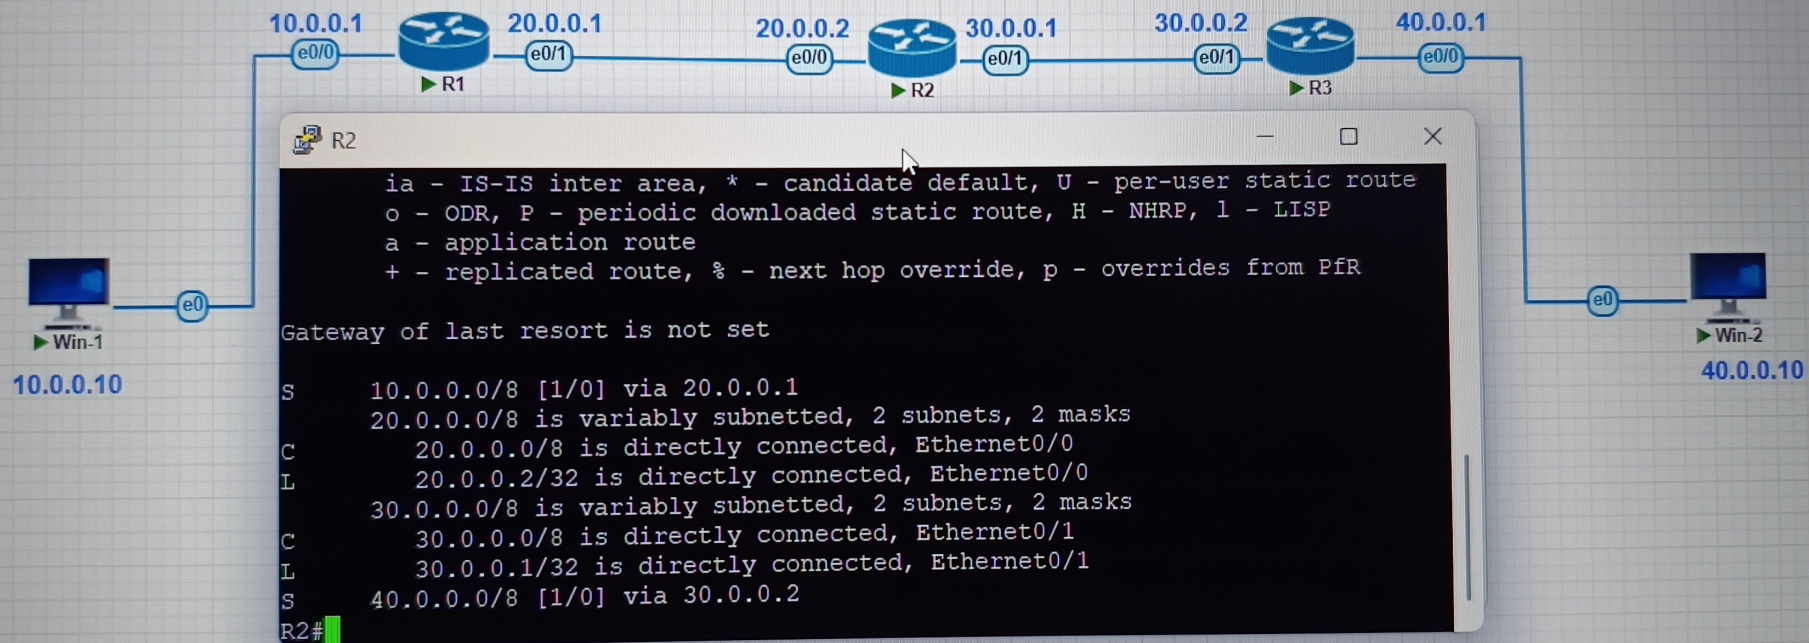

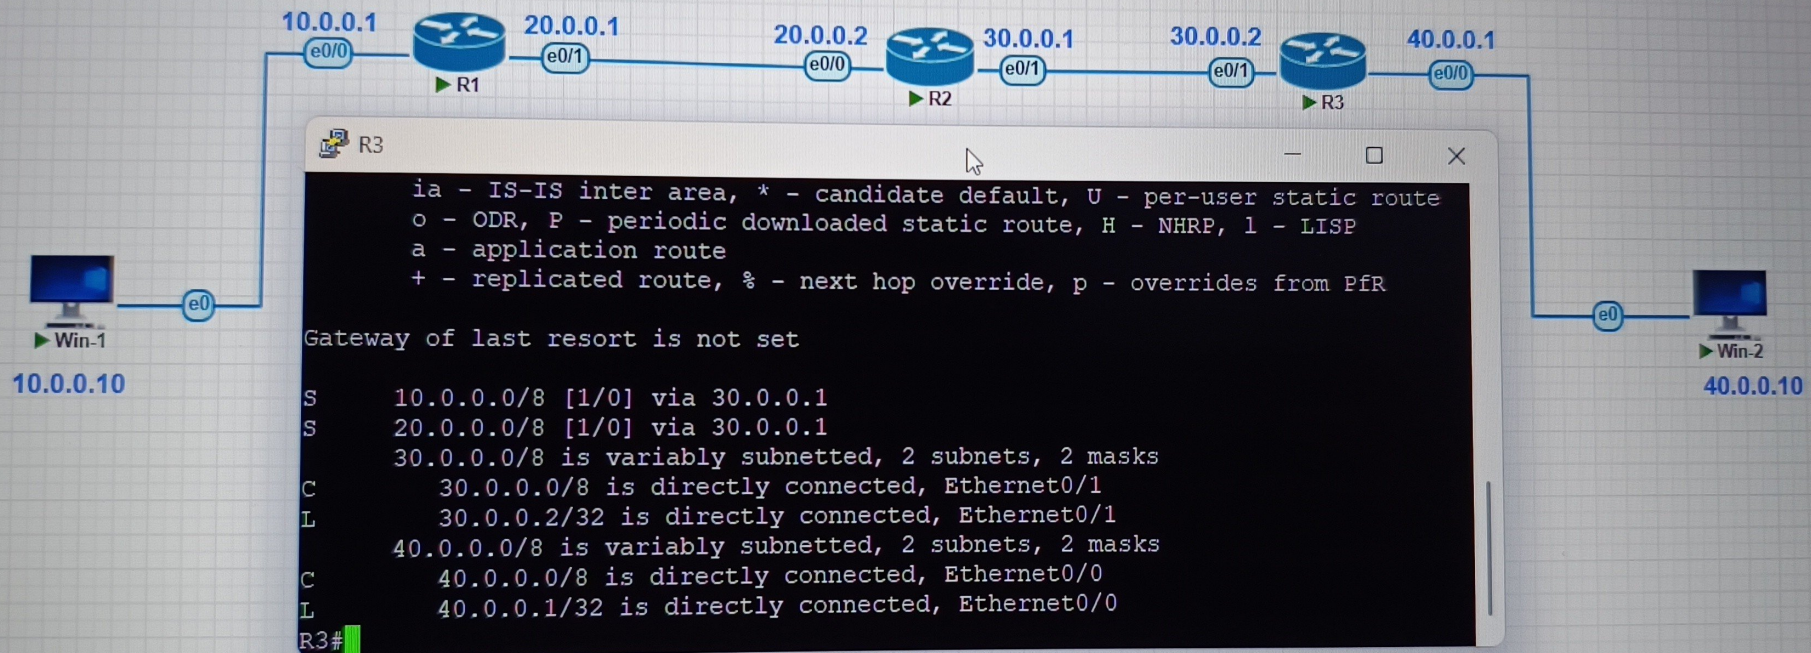


10.0.0.10

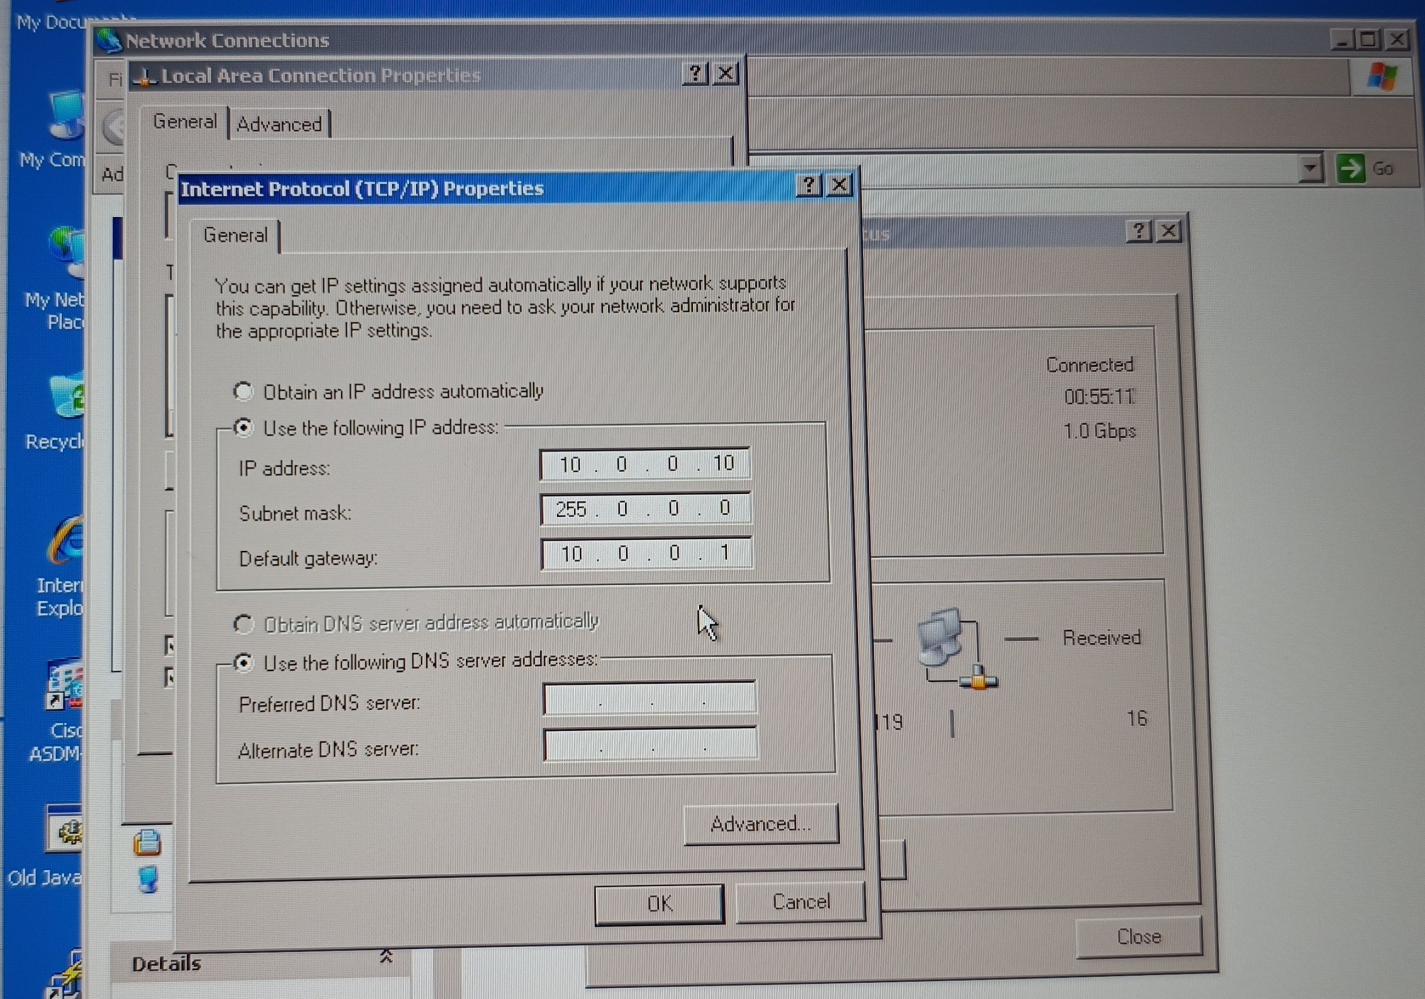

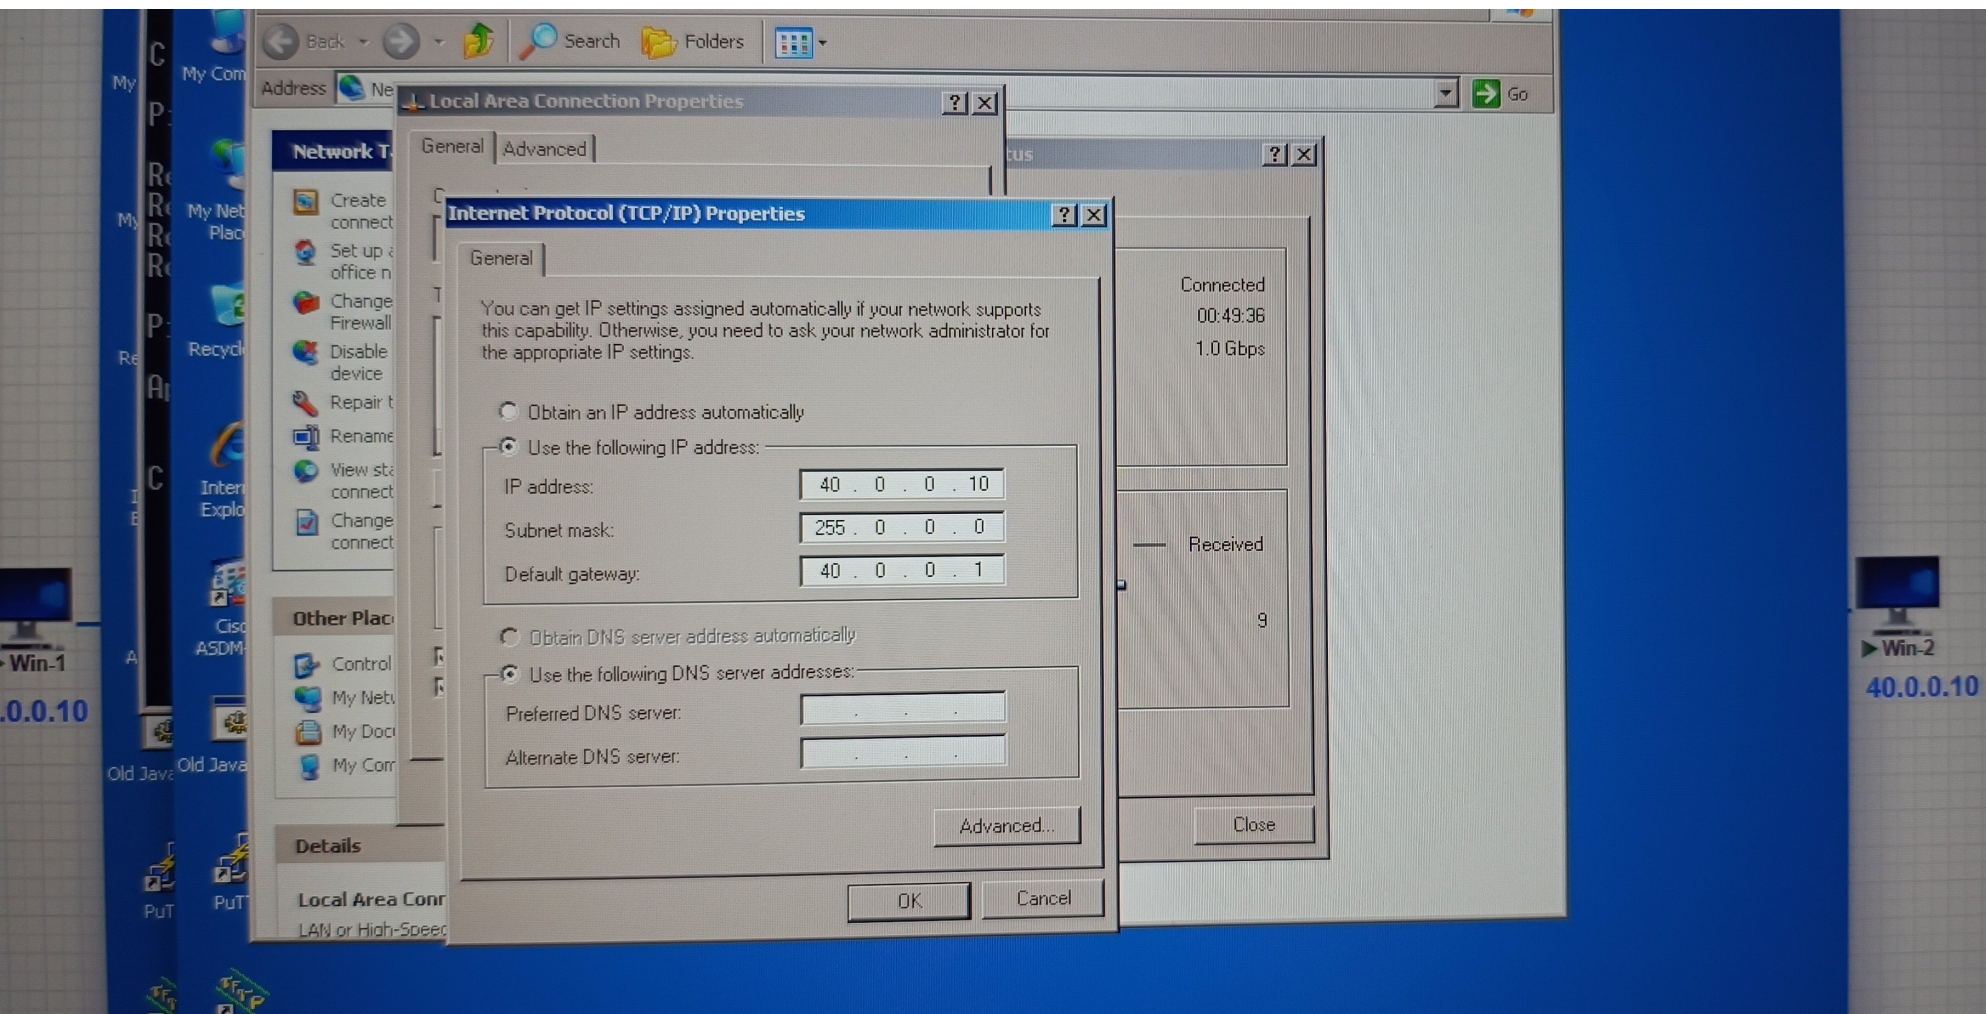

QEMU (Win-1)

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=4ms TTL=125

Reply from 40.0.0.10: bytes=32 time=2ms TTL=125

Reply from 40.0.0.10: bytes=32 time=1ms TTL=125

Reply from 40.0.0.10: bytes=32 time=1ms TTL=125

Ping statistics for 40.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>



Win-1

10.0.0.10

Old Java ASDM



Win-2

40.0.0.10