NYLON SERIES

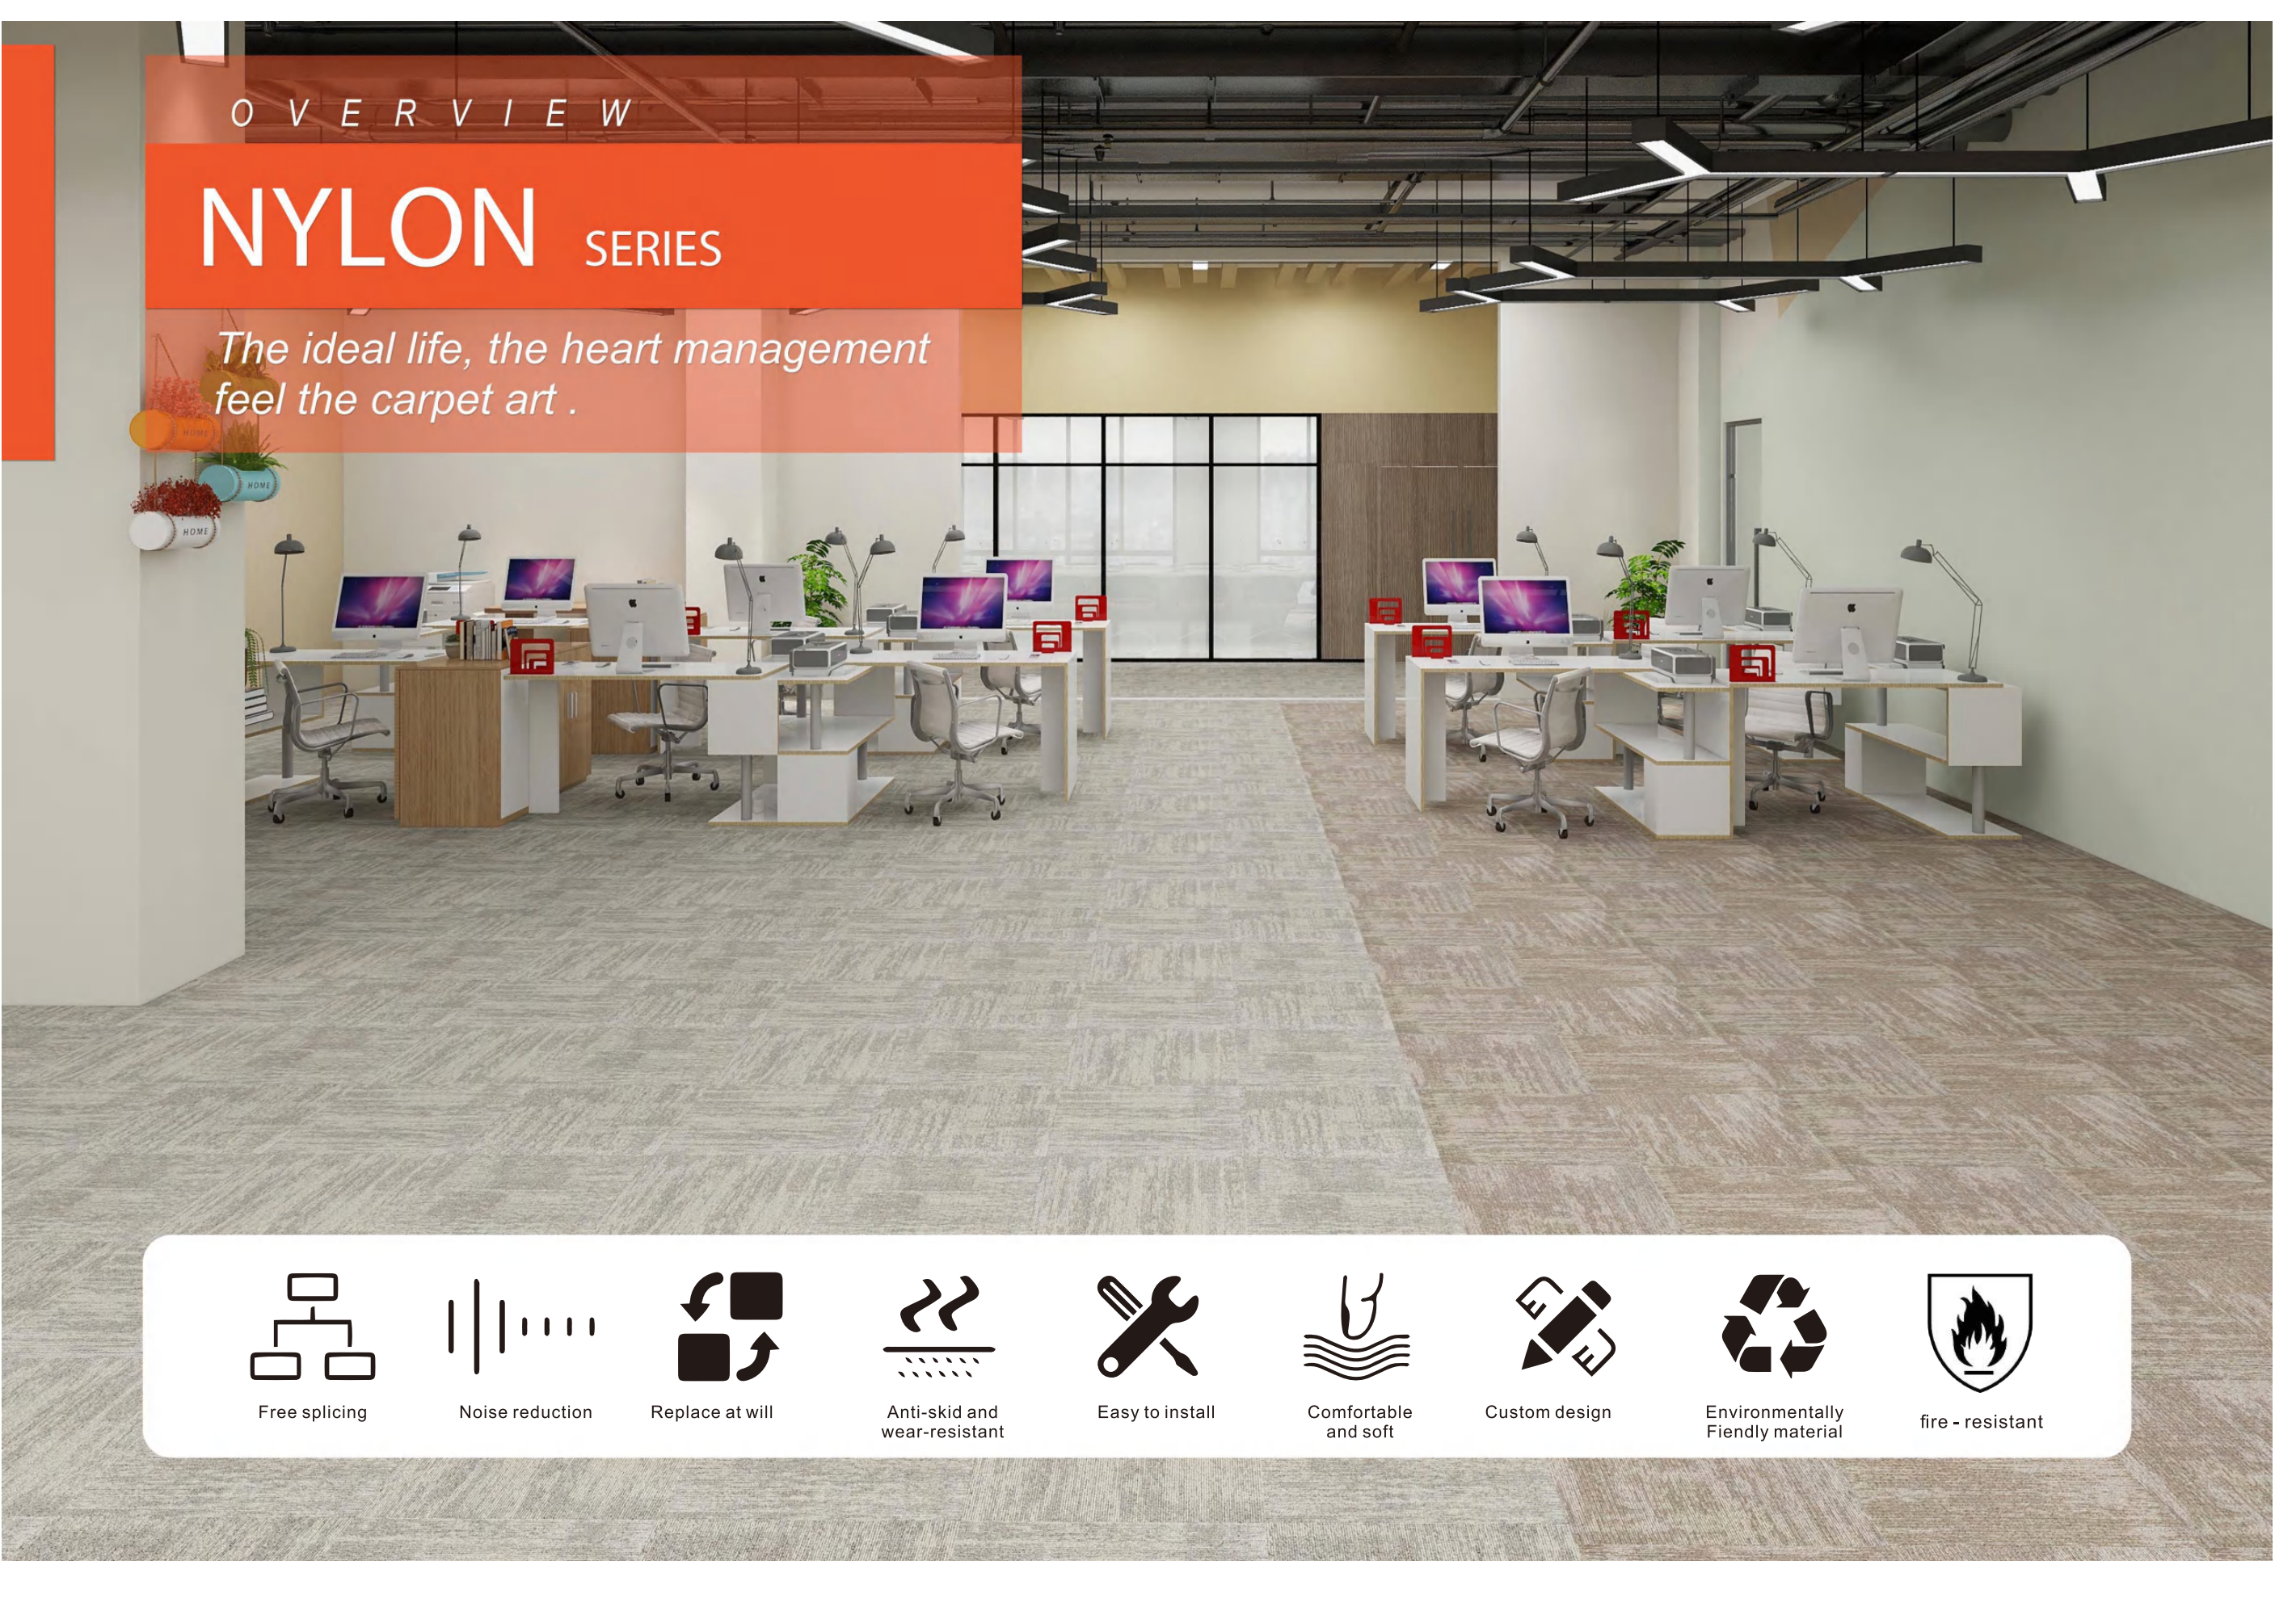
OVERVIEW

NYLON SERIES

The ideal life, the heart management feel the carpet art .

Free splicing
Noise reduction
Replace at will
Anti-skid and wear-resistant
Easy to install
Comfortable and soft
Custom design
Environmentally Fiendly material
fire - resistant

PRODUCT COLORS

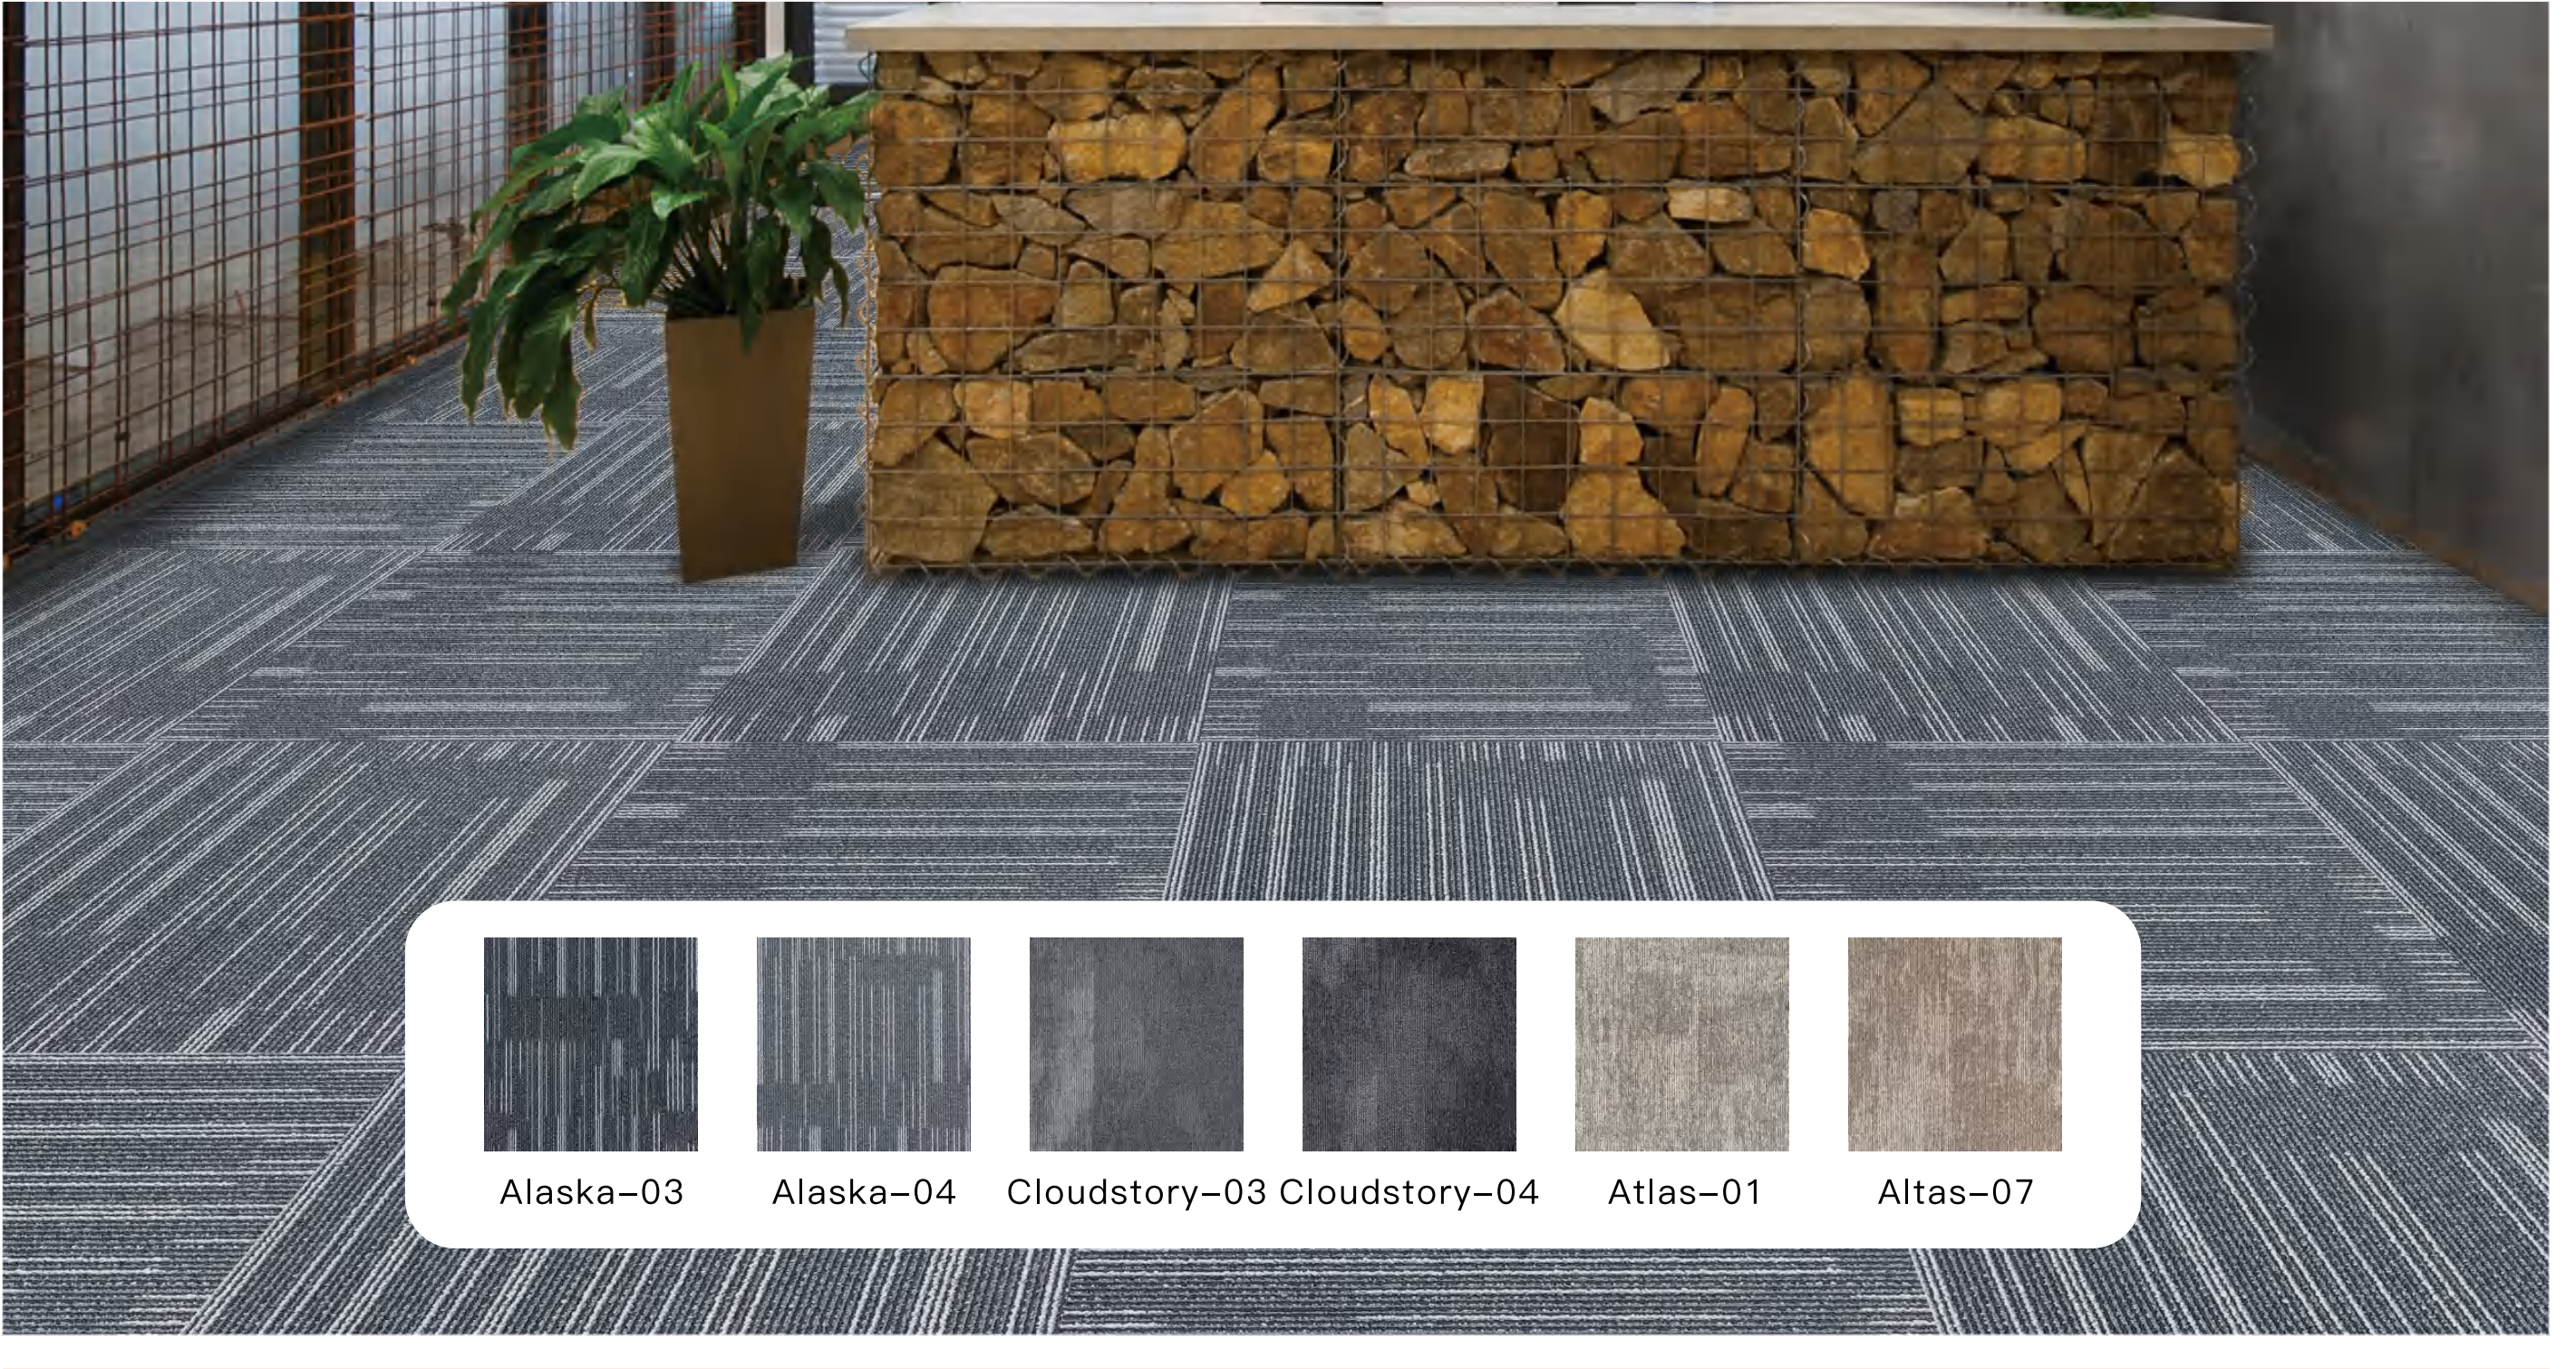
Alaska–03
Alaska–04
Cloudstory–03
Cloudstory–04
Atlas–01
Altas–07

PRODUCT DETAILS

Good quality surface
Thickness:7±1mm
PVC Backing (Customizable)

PRODUCT ADVANTAGES

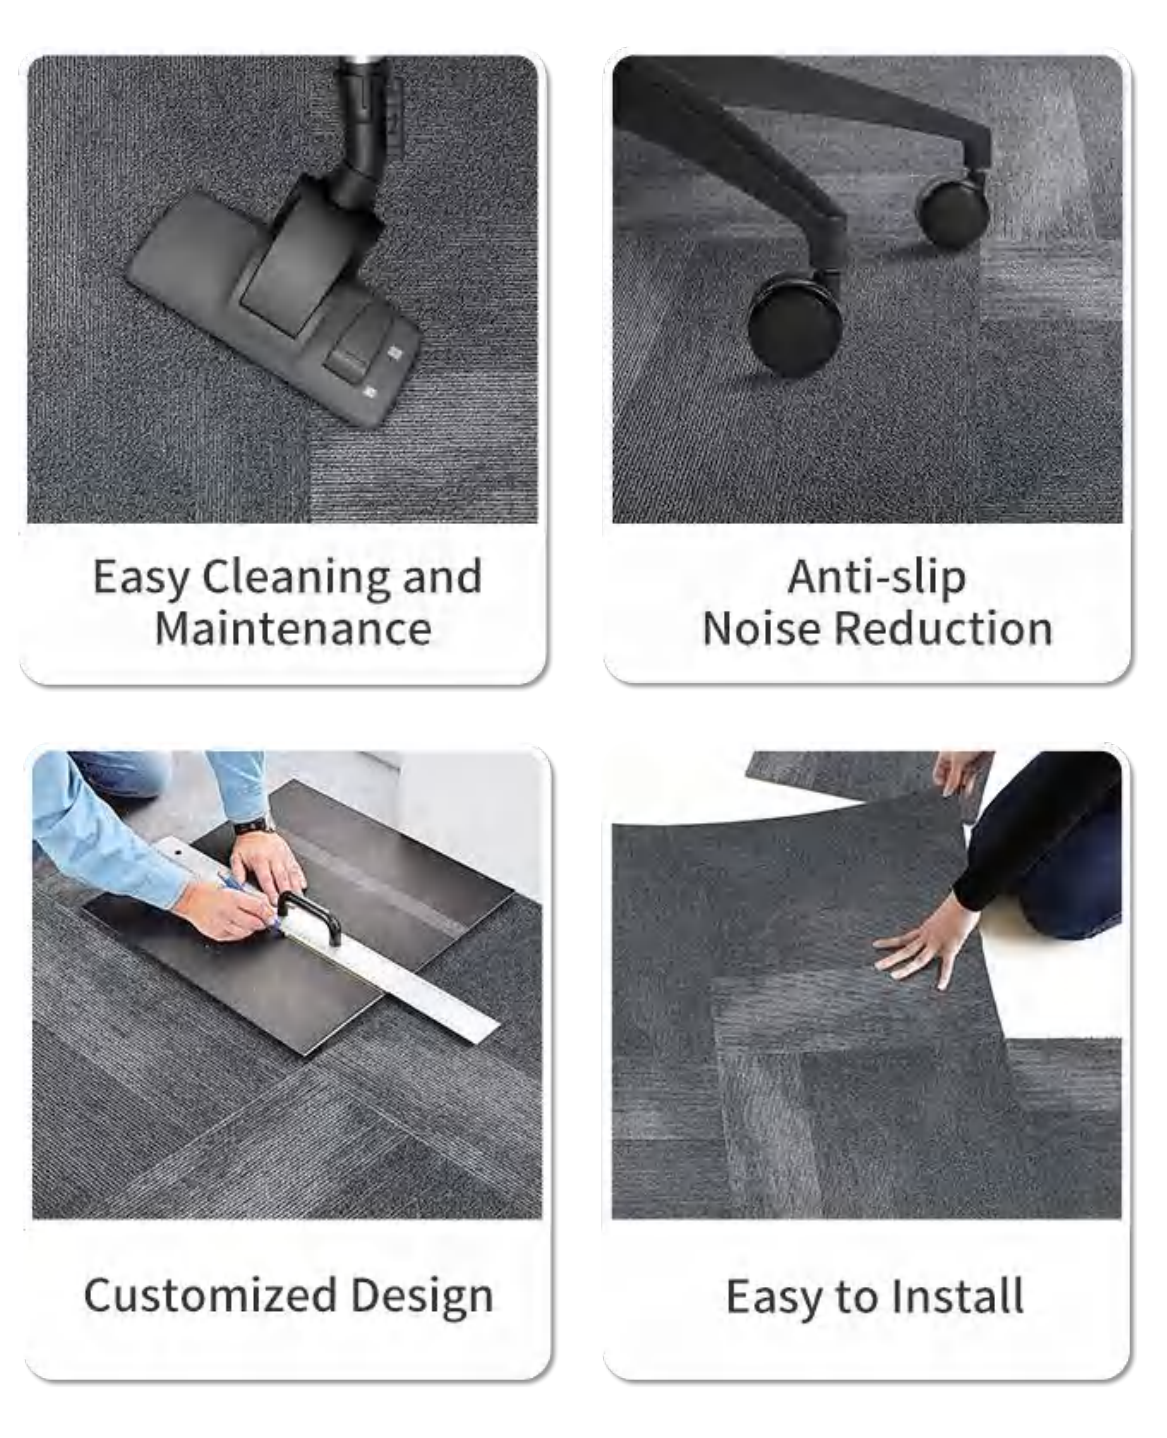
Easy Cleaning and Maintenance
Anti-slip Noise Reduction
Customized Design
Easy to Install

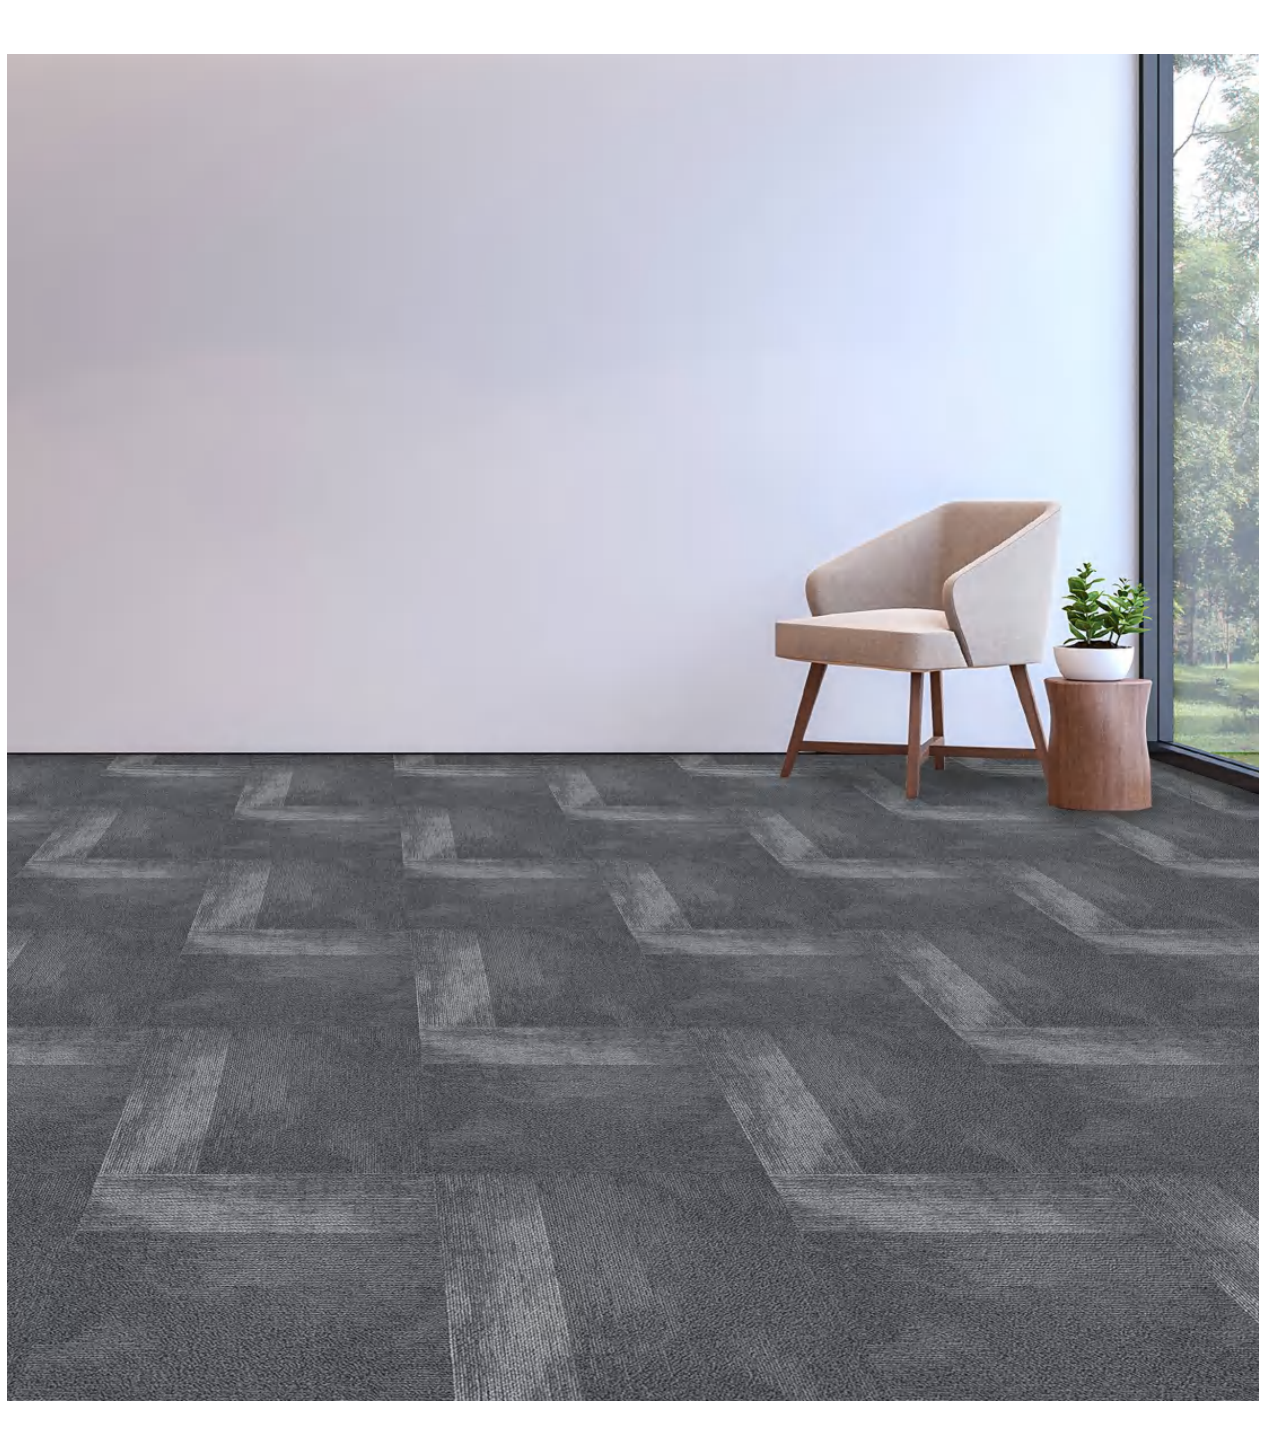

EFFECT SHOW

Alaska-03+04

SPECIFICATION ALASKA

SPECIFICATIONS:

Type:	Multi–level Loop
Fiber:	100% Solution Dyed Nylon 6
Backing Material:	PVC reinforced glassfiber
Gauge:	1/12"
Pile Height:	5/4/2mm
Pile Weight:	500±20g/m²
Tile Size:	50cm×50cm
Tile Weight:	4.0–4.2kg/m² (PVC Backing)
Total Thickness:	7±1mm
Packaging:	5sqm/20Tiles per Box

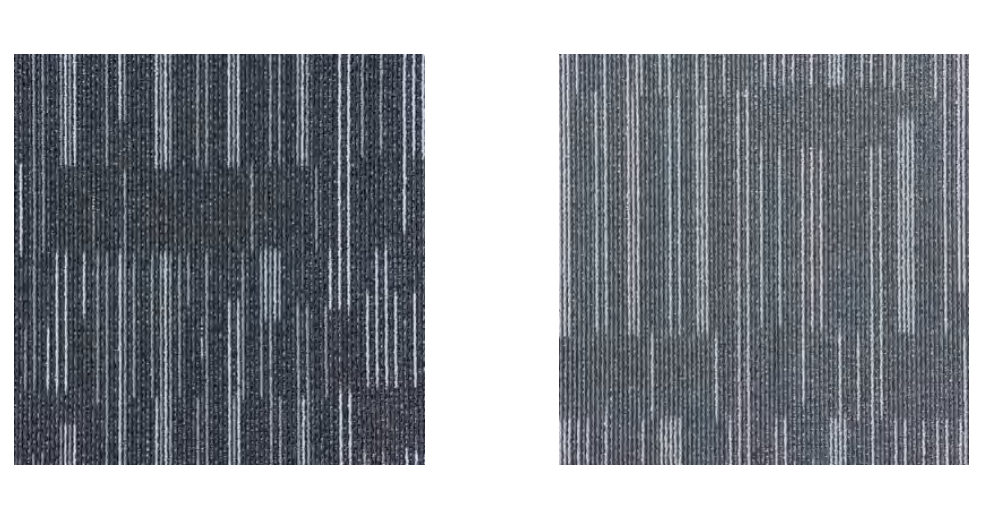
Alaska– 04
Alaska– 03

INSTALLATION METHODS

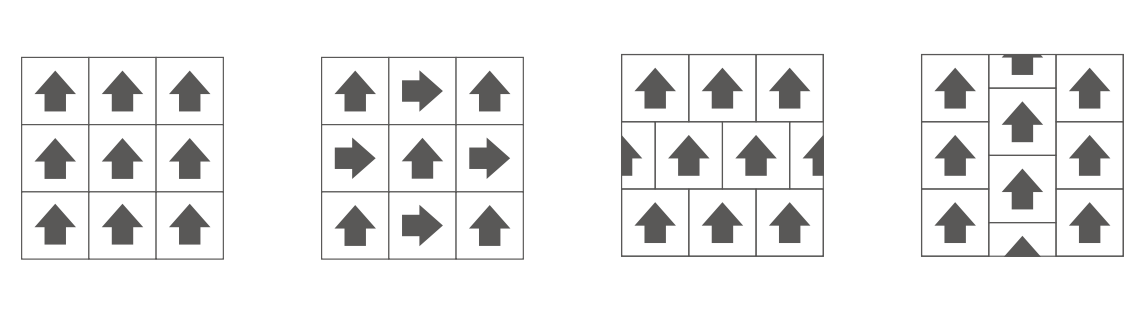

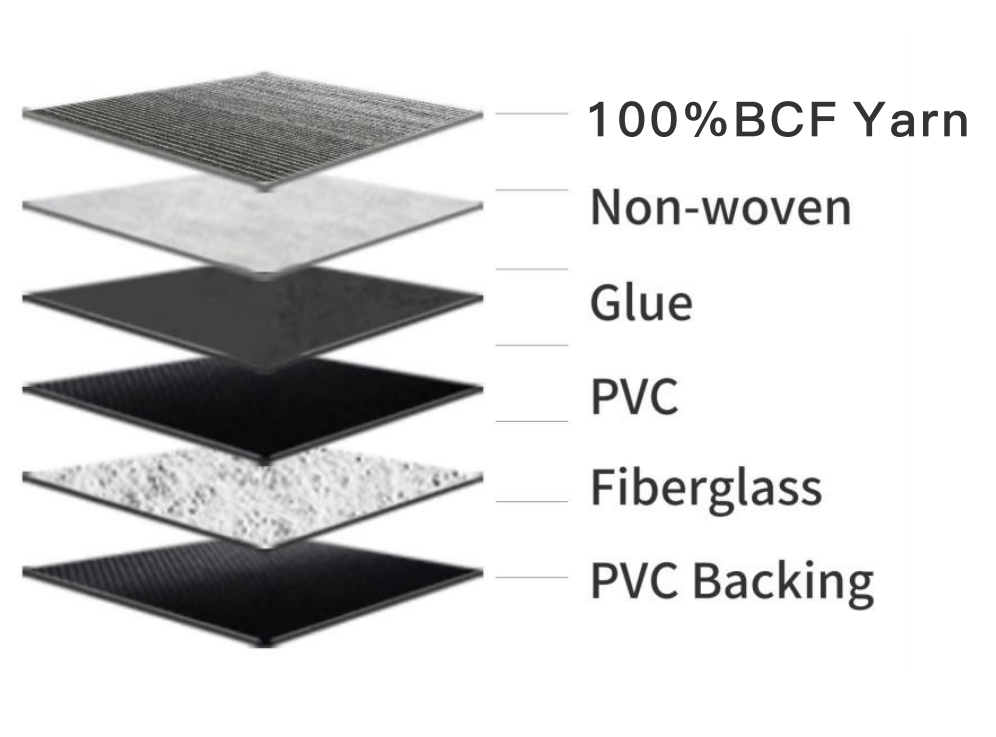
100%BCF Yarn
Non-woven
Glue
PVC
Fiberglass
PVC Backing

Cloudstory-

SPECIFICATION CLOUDSTORY ATLAS

Cloudstory–03
Cloudstory–04
Atlas–01
Altas–07

SPECIFICATIONS:

Type:	Multi–level Loop
Fiber:	100% Solution Dyed Nylon 6
Backing Material:	PVC reinforced glassfiber
Gauge:	1/12"
Pile Height:	5/4/2mm
Pile Weight:	500±20g/m²
Tile Size:	50cm×50cm
Tile Weight:	4.0–4.2kg/m² (PVC Backing)
Total Thickness:	7±1mm
Packaging:	5sqm/20Tiles per Box

INSTALLATION METHODS

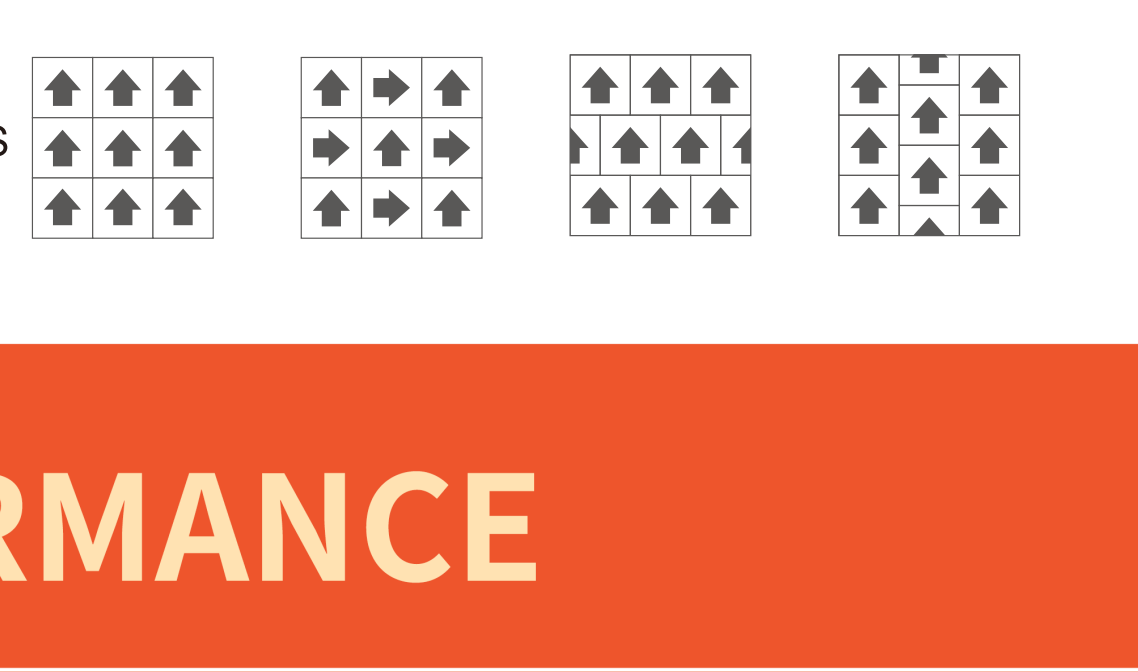

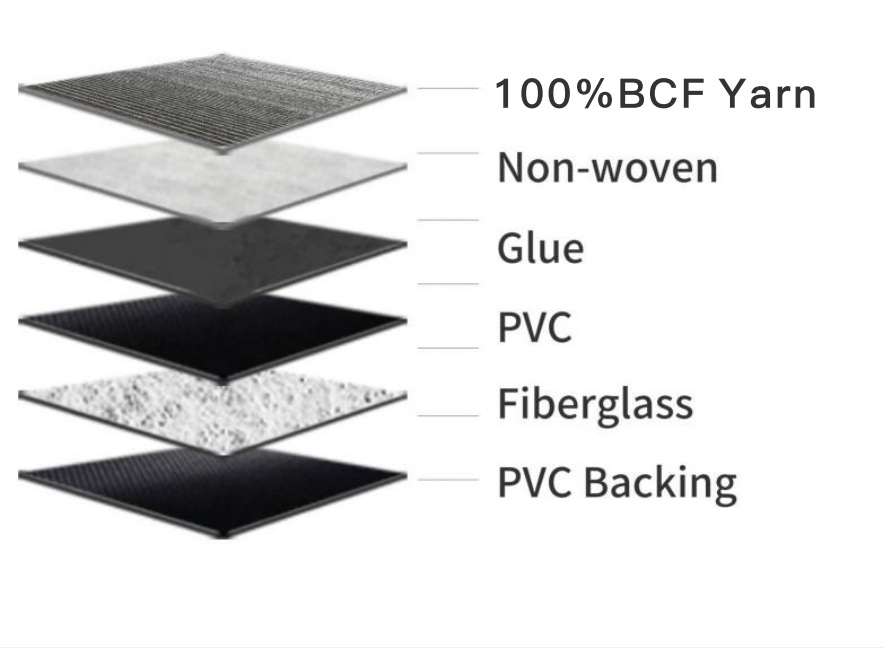
100%BCF Yarn
Non-woven
Glue
PVC
Fiberglass
PVC Backing

PERFORMANCE

Smoke density:	ASTM E-662-09
Wear resistance:	ASTM D5252
Appearance retention:	ASTM D5252-2020/ISO 9405:2015
Tuft anchorage:	ASTM D1335
Dimensional Stability:	ASTM D7570-09
Fire resistant:	ASTM D2859
Color fastness:	ASTM D5252-2020
Static Generation:	GB/T 18044-2008
Formaldehyde Emission:	GB 18587-2001

www.keyone.sa
Hassan.m@keyone.sa
+966509628800

KEY ONE
WE WORK SPECIAL FOR YOU