

OM234-3535-1x1-3°



Features & Application

- ◆ High lighting efficiency
- ◆ Optimized for uniform effects
- ◆ Ultra Narrow Beam Lens
- ◆ Stadium Lighting
- ◆ Surgical Light / Medical Light
- ◆ Security Lighting
- ◆ Task Lighting
- ◆ Industrial Light / Commercial
- ◆ Table and Floor Lamps
- ◆ Indoor Architectural & General Lighting
- ◆ Spot Lighting and Projectors
- ◆ Glare Free
- ◆ Facade Lighting
- ◆ Indoor Recessed Fixtures
- ◆ Office Lighting
- ◆ Indoor and Outdoor Lighting
- ◆ Perfect uniform flux
- ◆ Soft wide beam with good illuminance uniformity
- ◆ Easy fixing system to the PCB
- ◆ Complying with UL94 Specifications
- ◆ UV protected
- ◆ Easy fixing onto the PCB: 3 Pins provided for precise and robust mounting


Table of Contents

- ◆ General information & Product Nomenclature.....P.2
- ◆ Material specificationP.3
- ◆ Optical specificationP.3
- ◆ Mechanical specificationP.4

GENERAL INFORMATION

- ◆ Ultra Narrow Beam Light Application.
- ◆ Operating Temperature range $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$ (upper limit $+130^{\circ}\text{C}$)
- ◆ Storage Temperature range $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$ (upper limit $+130^{\circ}\text{C}$)
- ◆ Average transmittance in visible spectrum $400\text{nm} \sim 700\text{nm} > 90\%$

PRODUCT NOMENCLATURE

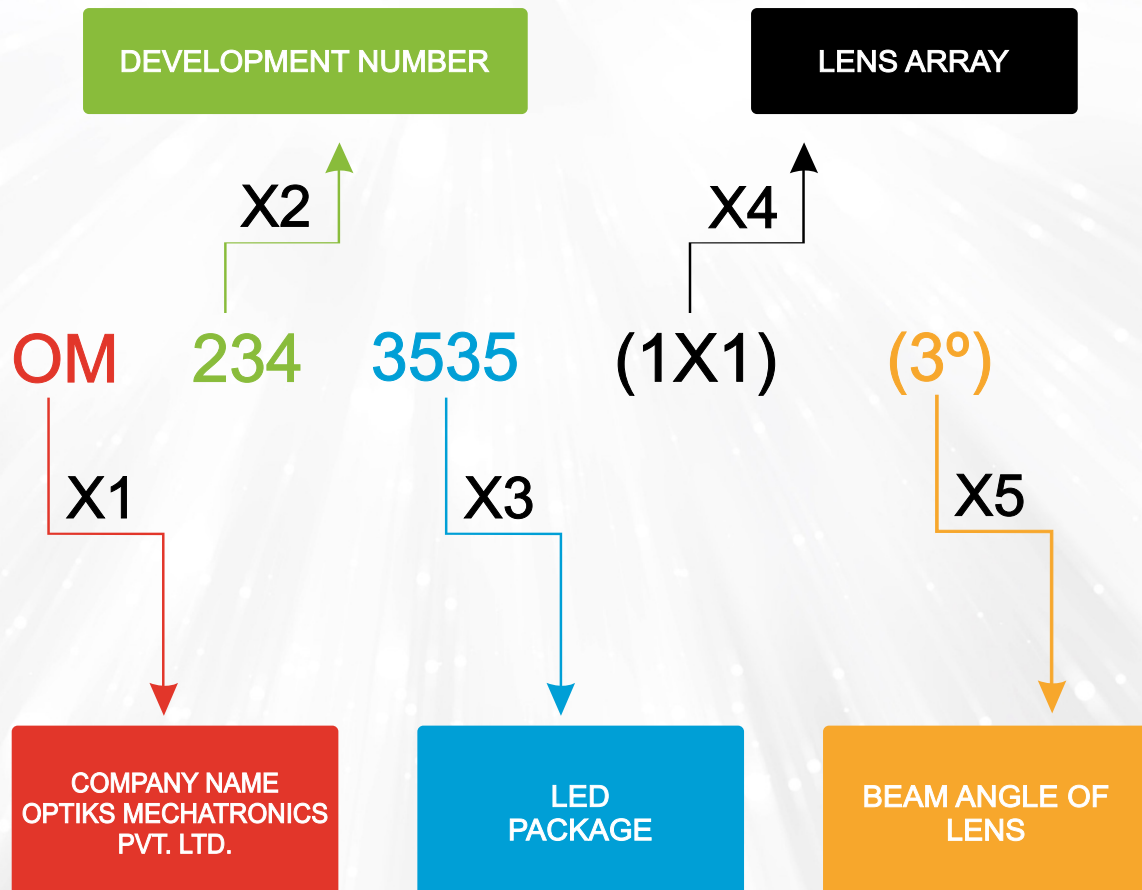


MATERIAL SPECIFICATION

- ◆ Lens Material : Poly(methyl methacrylate) PMMA
- ◆ Luminous transmittance : 89 to 90% (ISO 13468-2/ASTM D1003)
- ◆ Refractive index : 1.584 (ISO 489/ASTM D542)
- ◆ Flammability : HB/V-0 (UL94)
- ◆ Clean spot, efficiency : 89%
- ◆ Colour : Clear


OPTICAL SPECIFICATION

Note: (1) All the results of analysis are based on 0 degrees of elevation.
(2) Tolerance: $\pm 10\%$.

Beam Angle

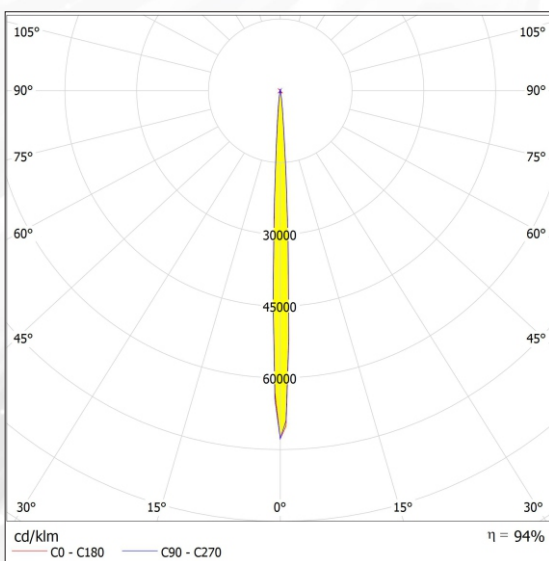

Beam Pattern

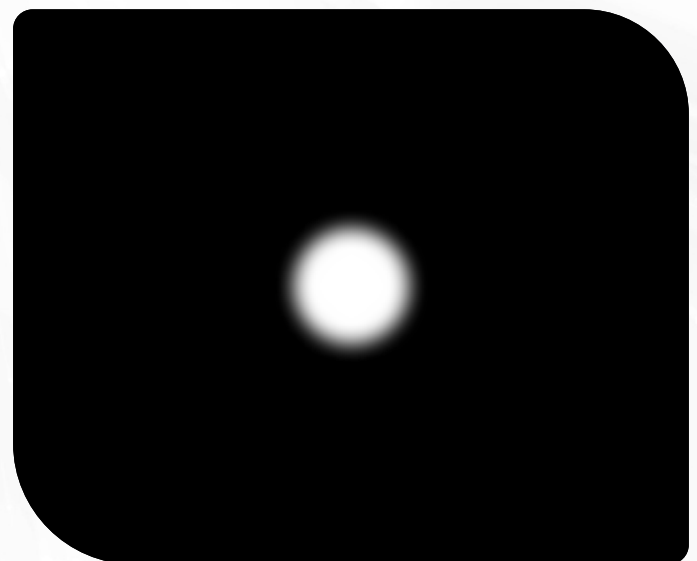

MECHANICAL SPECIFICATION

FASTENING

✓ Glue


Screw

Tape

✓ Fixing-ring

✓ Frame

LENS DIMENSION

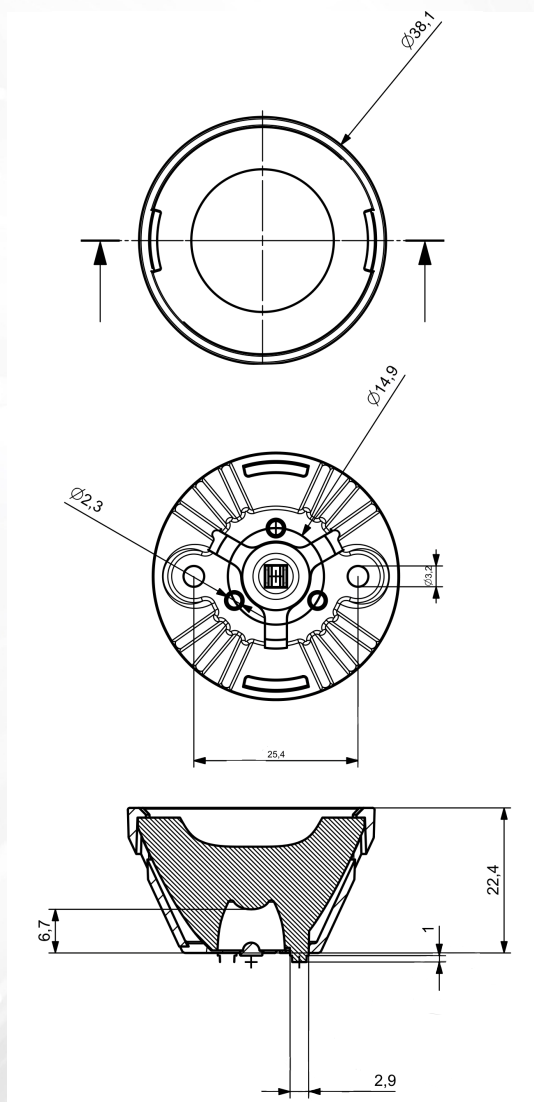

USAGE AND MAINTENANCE

1. If necessary, clean lenses with mild soap, water and soft cloth.
2. Never use any commercial cleaning solvents on lenses, like alcohol.
3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Note:

1. Unit measurement: mm
2. General tolerance: $\pm 0.2\text{mm}$
3. Protruding of the gate from the side surface: less than 0.3mm

LED+LENS ASSEMBLY INSTRUCTION

