


# CAMEL LV5120

## LOW-VOLTAGE CABINET/RACK RESIDENTIAL ENERGY STORAGE SYSTEM

-  Built-in battery cabinet for easy movement
-  Stack and play, easy installation by 1-2 persons
-  Capacity options from 10 to 20 kWh
-  Compatible with popular inverters



## TECHNICAL SPECIFICATIONS

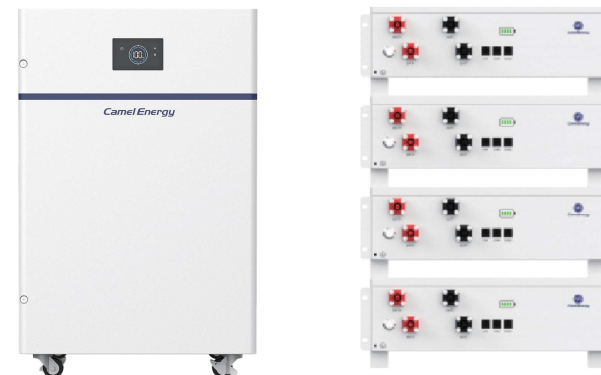

| Model                              | Camel LV5120-5                                                                                                                                                                           | Camel LV5120-10 | Camel LV5120-15             | Camel LV5120-20             |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------|-----------------------------|
| Number of Batteries                | 1                                                                                                                                                                                        | 2               | 3                           | 4                           |
| Rated Capacity (kWh)               | 5.12                                                                                                                                                                                     | 10.24           | 15.36                       | 20.48                       |
| Rated Voltage (V)                  | 51.2                                                                                                                                                                                     |                 |                             |                             |
| Voltage Range (V)                  | 44.8-57.6                                                                                                                                                                                |                 |                             |                             |
| Rated Charge/Discharge Current (A) | 50                                                                                                                                                                                       | 100             | 150                         | 200                         |
| Max. Charge/Discharge Current (A)  | 100                                                                                                                                                                                      | 180             | 200 (Cabinet)<br>200 (Rack) | 200 (Cabinet)<br>200 (Rack) |
| Communication Interface            | CAN/RS485/Wi-Fi                                                                                                                                                                          |                 |                             |                             |
| Protection Features                | Charging over voltage protection, Discharging under voltage protection, Over current protection, Over temperature protection, Low temperature protection, Short circuit protection, etc. |                 |                             |                             |
| Protection Level                   | IP55 (Cabinet type)/IP20 (Rack type)                                                                                                                                                     |                 |                             |                             |
| Operating Altitude                 | ≤2000m (Rated power will decrease at an altitude of above 2000m)                                                                                                                         |                 |                             |                             |
| Operating Temperature              | Charge: 0~55°C; Discharge: -20~60°C                                                                                                                                                      |                 |                             |                             |
| Storage Temperature                | -10°C~35°C (Recommended)                                                                                                                                                                 |                 |                             |                             |
| Relative Humidity                  | 5%~90%, Non-condensation                                                                                                                                                                 |                 |                             |                             |
| Weight (kg)                        | 45                                                                                                                                                                                       | 90              | 135                         | 180                         |
| Dimension (W*H*D, mm)              | 480*137*460/Pack                                                                                                                                                                         |                 |                             |                             |
|                                    | 592*964*542/Standard cabinet                                                                                                                                                             |                 |                             |                             |
| Warranty                           | 5 years (Extendable to 10 years)                                                                                                                                                         |                 |                             |                             |
| Certification                      | CE, IEC 62619                                                                                                                                                                            |                 |                             |                             |
| Transport Standard                 | UN 38.3                                                                                                                                                                                  |                 |                             |                             |