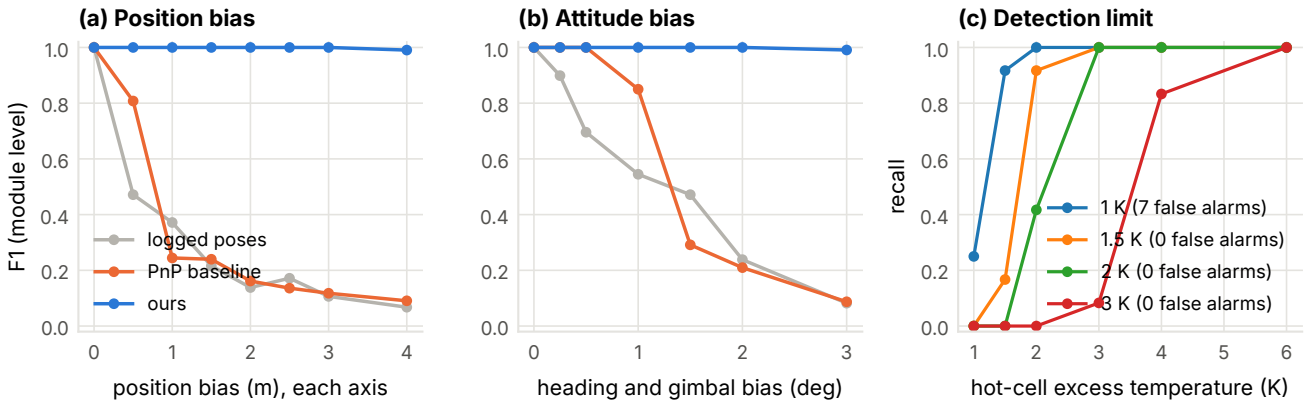
(a) Position bias
F1 (module level)
1.0
0.8
0.6
0.4
0.2
0.0
0
1
2
3
4
logged poses
PnP baseline
ours
position bias (m), each axis
(b) Attitude bias
1.0
0.8
0.6
0.4
0.2
0.0
0
1
2
3
heading and gimbal bias (deg)
(c) Detection limit
recall
1.0
0.8
0.6
0.4
0.2
0.0
1
2
3
4
5
6
1 K (7 false alarms)
1.5 K (0 false alarms)
2 K (0 false alarms)
3 K (0 false alarms)
hot-cell excess temperature (K)