17/9/26

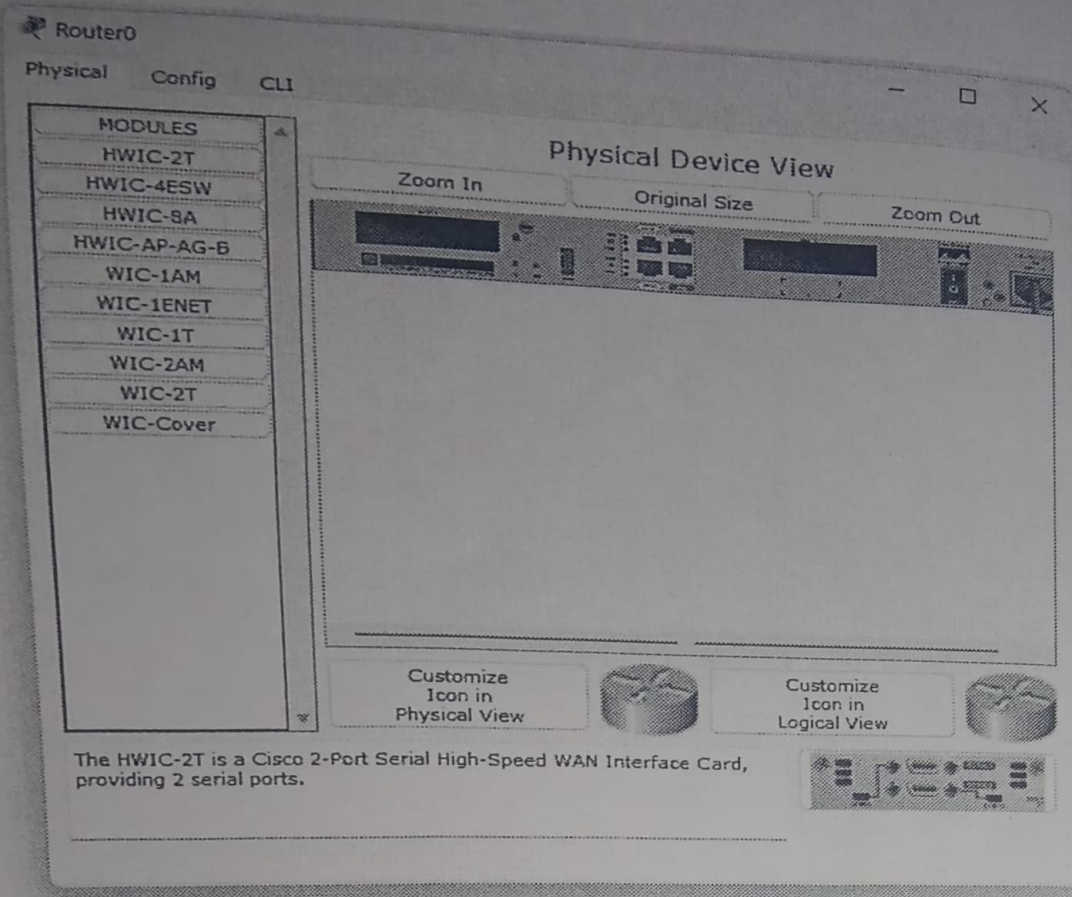
9.a) IMPLEMENTATION OF SUBNETTING IN CISCO PACKET TRACER SIMULATOR DESIGN MULTIPLE SUBNETS WITH A SUITABLE

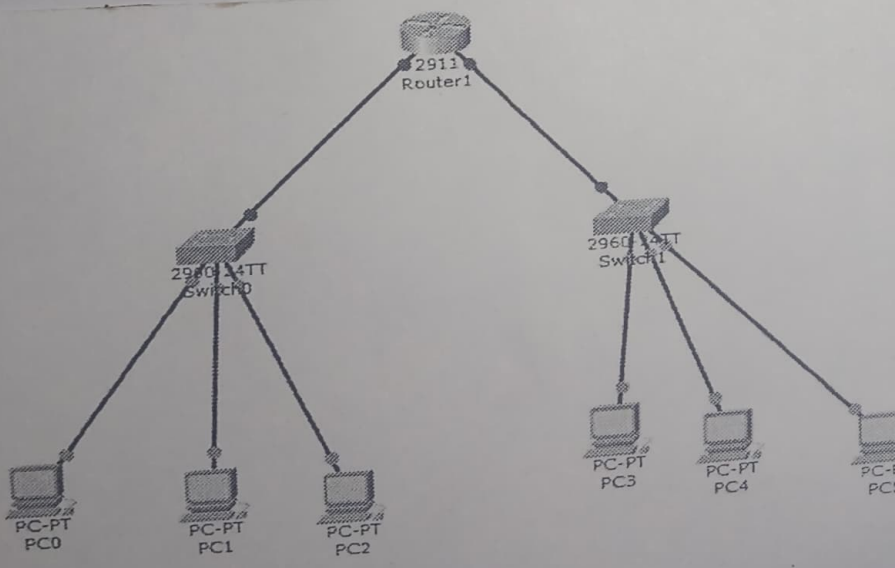
AIM:

TO implements subnetting by dividing a large network into multiple smaller subnetworks according to the required number of host and to study the allocation of IP addresses in Cisco Packet tracer

STEPS:-

1. Open Cisco Packet Tracer and Create a new project
2. Design the network topology by Placing the required network devices such as routers, switches and PC's
3. Select a suitable network address for the experiment.
4. Calculate the number of subnets required.
5. Determine the no. of hosts needed in each subnet.
6. Calculate the subnet mask using subnetting techniques.
7. Divide the network into multiple subnets
8. Assign a seperate network addr to each subnet
9. Verify the subnet calculation and host ranges.
10. Save the network topology.


Router0
Physical
Config
CLI
MODULES
HWIC-2T
HWIC-4ESW
HWIC-8A
HWIC-AP-AG-B
WIC-1AM
WIC-1ENET
WIC-1T
WIC-2AM
WIC-2T
WIC-Cover
Physical Device View
Zoom In
Original Size
Zoom Out
Customize Icon in Physical View
Customize Icon in Logical View
The HWIC-2T is a Cisco 2-Port Serial High-Speed WAN Interface Card, providing 2 serial ports.


2911
Router1
Switch0
Switch1
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
PC-PT
PC4

RESULT:-

Thus, multiple subnets were successfully created according to the required no. of host, and the network address was efficiently divided into smaller subnetworks.