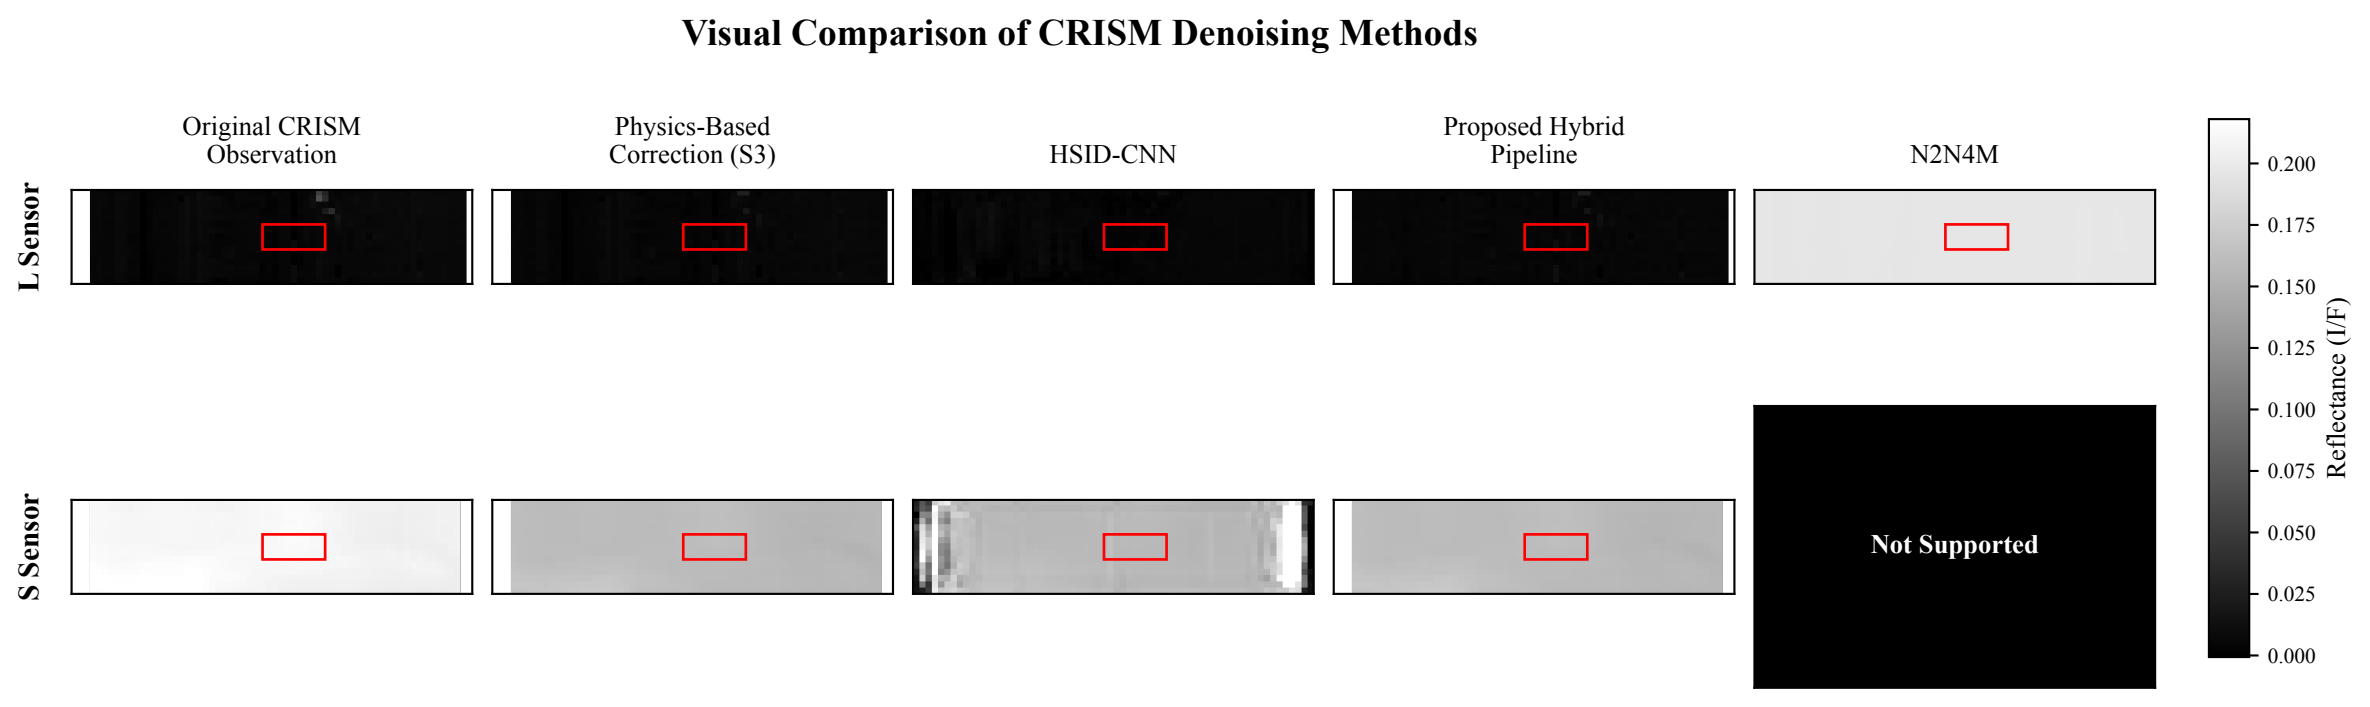

Visual Comparison of CRISM Denoising Methods
Original CRISM Observation
Physics-Based Correction (S3)
HSID-CNN
Proposed Hybrid Pipeline
N2N4M
L Sensor
S Sensor
Not Supported
Reflectance (I/F)
0.200
0.175
0.150
0.125
0.100
0.075
0.050
0.025
0.000