

Rail-Guard Track — Dimensioned Drawing Pack (v4)

All confirmed lengths are in inches/cm as you gave them; converted to mm for drawing

CONFIRMED BY YOU

- Each rail = 2 I-section pieces, 12 in (1 ft) each -> 24 in (2 ft) total track length
- Web height: 2 in | Bottom flange width: 2 in
- Top flange (cart rides on this): 2.1 cm (about 0.83 in)
- Fishplate: 4 in long, as thin as possible (thickness ~1.5mm, height ~1.8in)
- Sleeper spacing: about 4 in (a little more/less is fine)
- Gauge (distance between the 2 rails): 4.25 in
- Bolts: M6 - 6mm shaft, 10mm hex head (spanner size), shown separately on page 4
- Motor compartment (70x50x50mm) is an optional addition, illustrative only


STILL ASSUMED - PLEASE CONFIRM

- Flange thickness: assumed 0.12 in (~3mm)
- Web thickness: assumed 0.1 in (~2.5mm)


PAGES IN THIS PACK

2. Top view (plan) - with lengths
3. Front elevation - with lengths
4. Joint detail (fishplate + M6 bolts, zoomed) - with lengths, spanner vs shaft shown separately
5. Isometric reference view - with lengths


TOP VIEW (Plan)

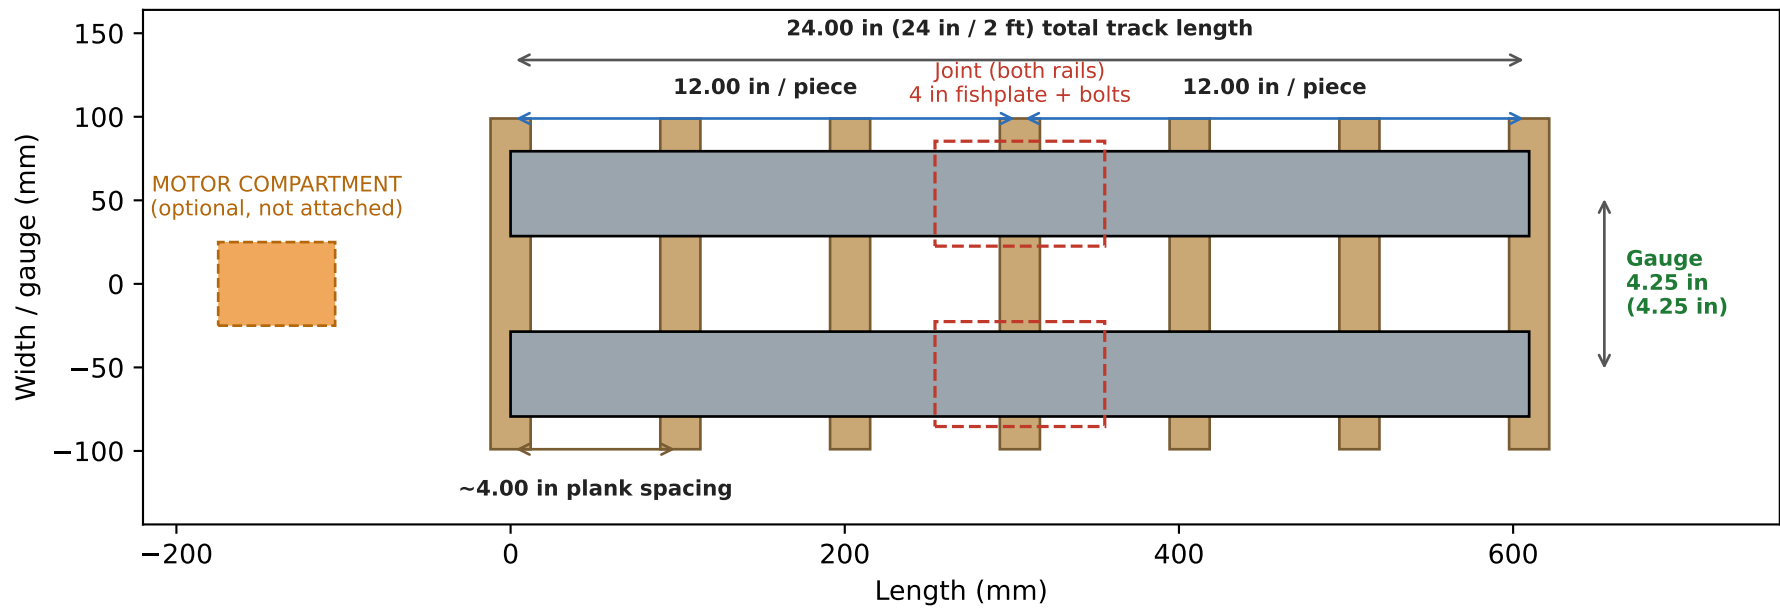

FRONT ELEVATION (looking along the track)

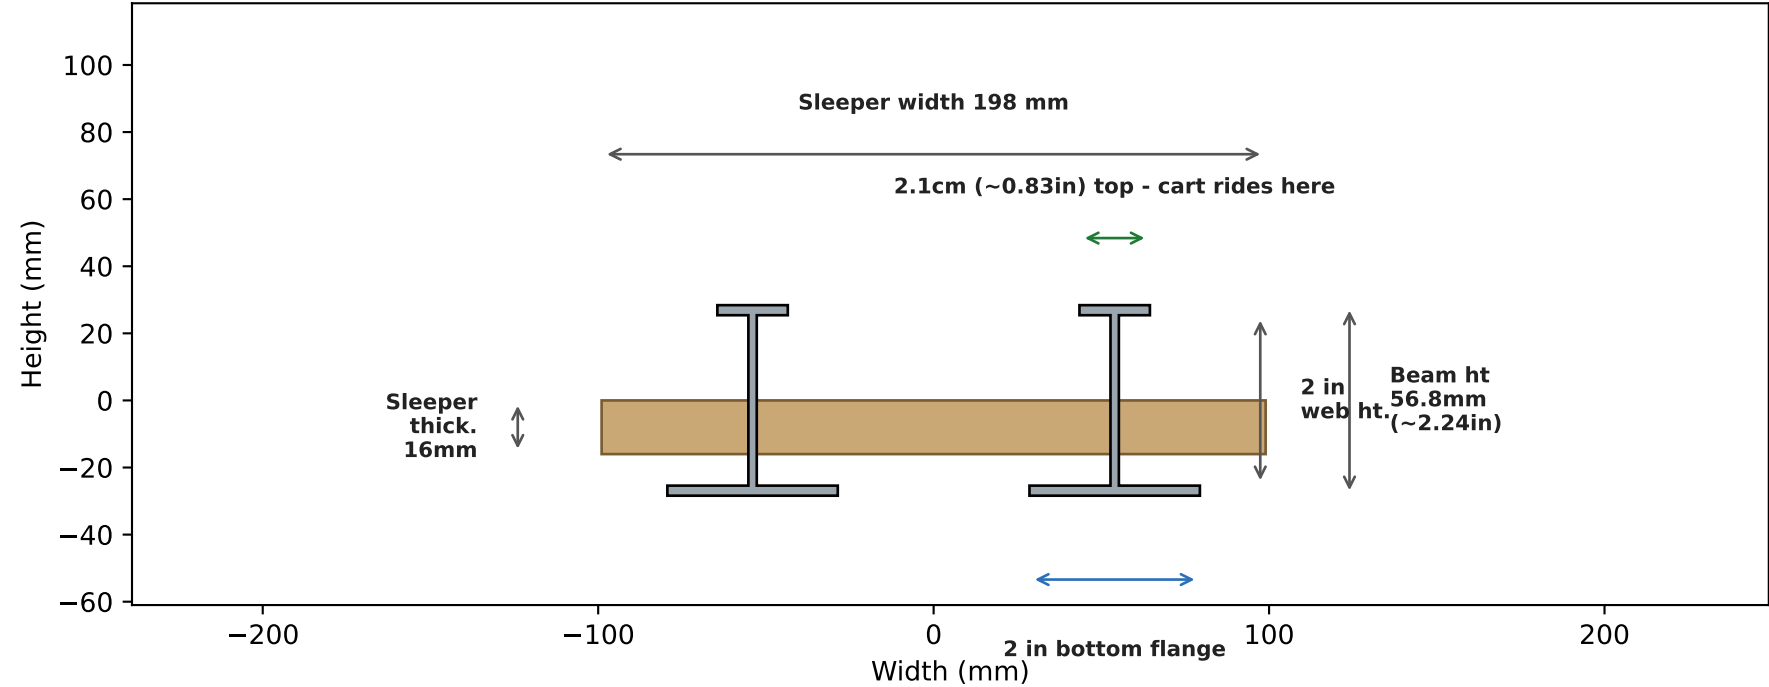

JOINT DETAIL — realistic fishplate + M6 hex bolts (zoomed, one rail)

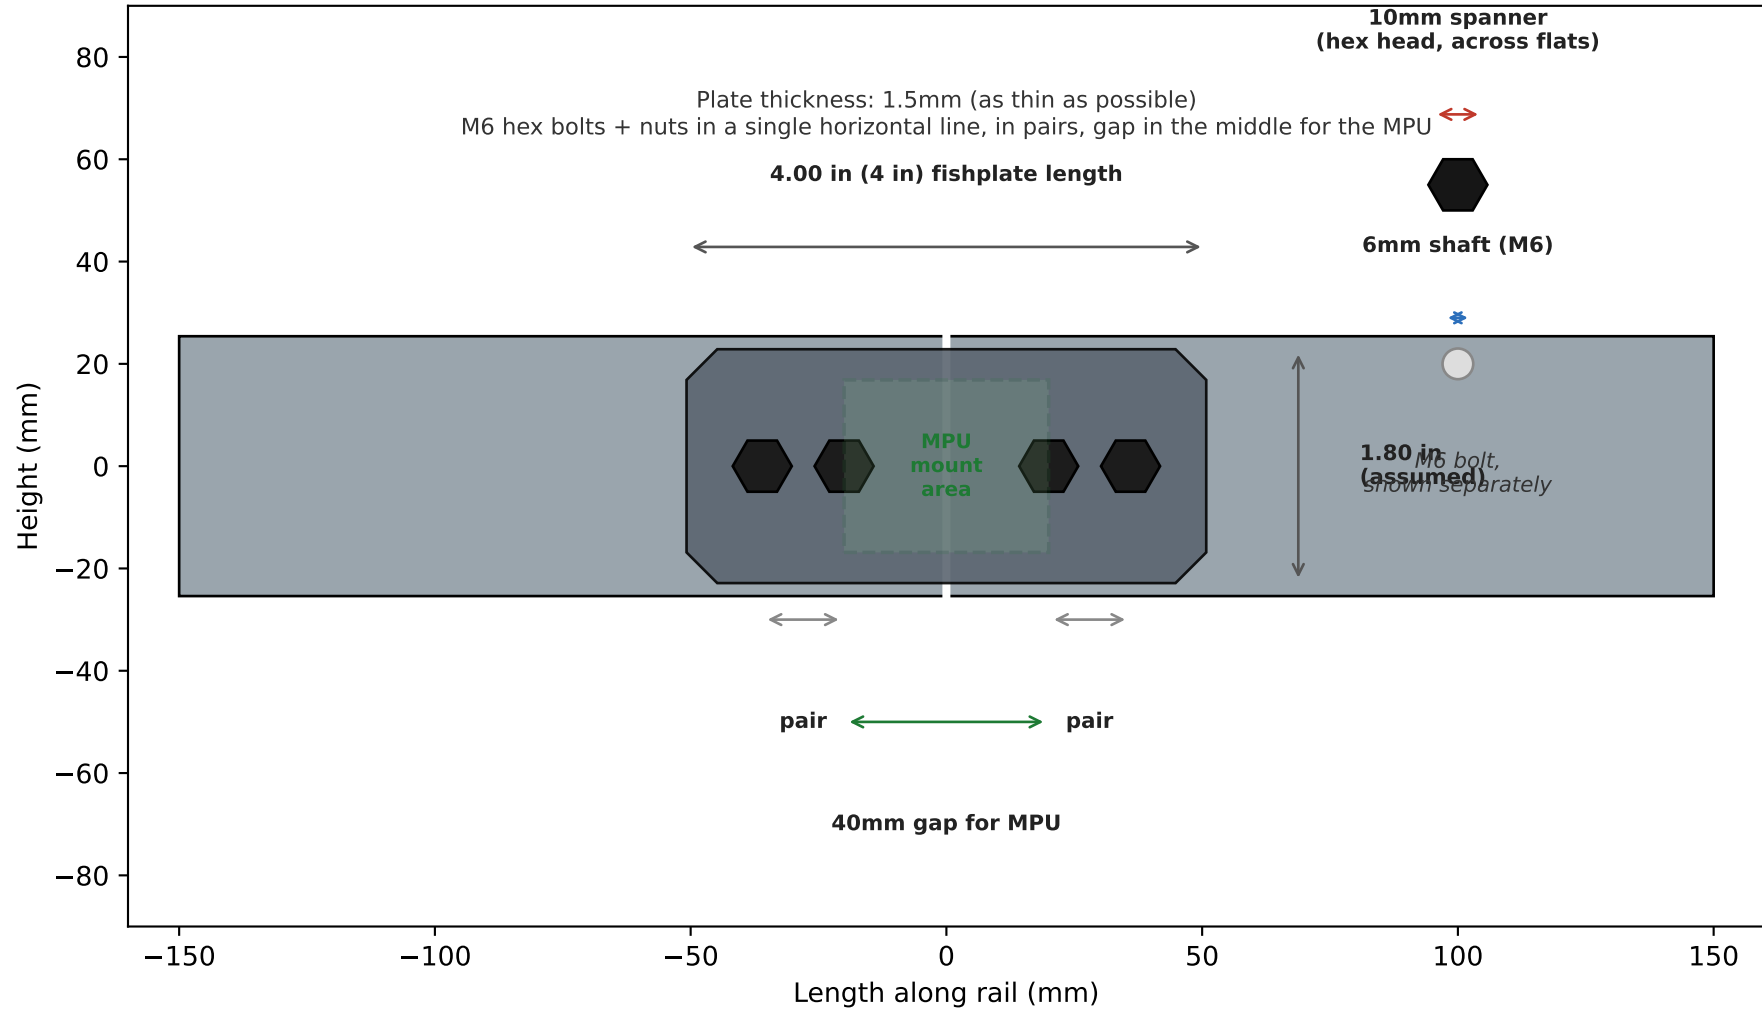

ISOMETRIC REFERENCE VIEW (schematic, not to exact scale) — with lengths

