

VECTOR+

Metal Bracket Conventional System

Prescriptions

- ROTH
- MBT
- JORGE RODRIGUES




KIT VARIATIONS/VARIACIONES KIT 5X5	
SLOT .018	05.39.0390 - Kit 1 case w/g 3,4,5
	05.39.0300 - Kit 10 cases w/g 3,4,5
	05.39.0309 - Kit 50 cases w/g 3,4,5
	05.39.0302 - Kit 100 cases w/g 3,4,5

KIT VARIATIONS/VARIACIONES KIT 5X5	
SLOT .022	05.40.0390 - Kit 1 case w/g 3,4,5
	05.40.0300 - Kit 10 cases w/g 3,4,5
	05.40.0309 - Kit 50 cases w/g 3,4,5
	05.40.0302 - Kit 100 cases w/g 3,4,5

METALLIC
METÁLICO

Width	3,3 mm	3,3 mm	3,5 mm	3,4 mm	3,9 mm	3,9 mm	3,4 mm	3,5 mm	3,3 mm	3,3 mm
Torque	-7°	-7°	0°	8°	12°	12°	8°	0°	-7°	-7°
Ang	0°	0°	9°/11°	9°	5°	5°	9°	9°/11°	0°	0°
Offset	2°	2°	4°	0°	0°	0°	0°	4°	2°	2°
In-out	0,45 mm	0,45 mm	0,40 mm	0,60 mm	0,55 mm	0,55 mm	0,60 mm	0,40 mm	0,45 mm	0,45 mm

SLOT	REPLACEMENT/REPOSICIÓN - PK W/10									
.018" x .028"	05.39.3414	05.39.3414	05.39.0313	05.39.0312	05.39.0311	05.39.0321	05.39.0322	05.39.0323	05.39.3424	05.39.3424
.022" x .028"	05.40.3414	05.40.3414	05.40.0313	05.40.0312	05.40.0311	05.40.0321	05.40.0322	05.40.0323	05.40.3424	05.40.3424

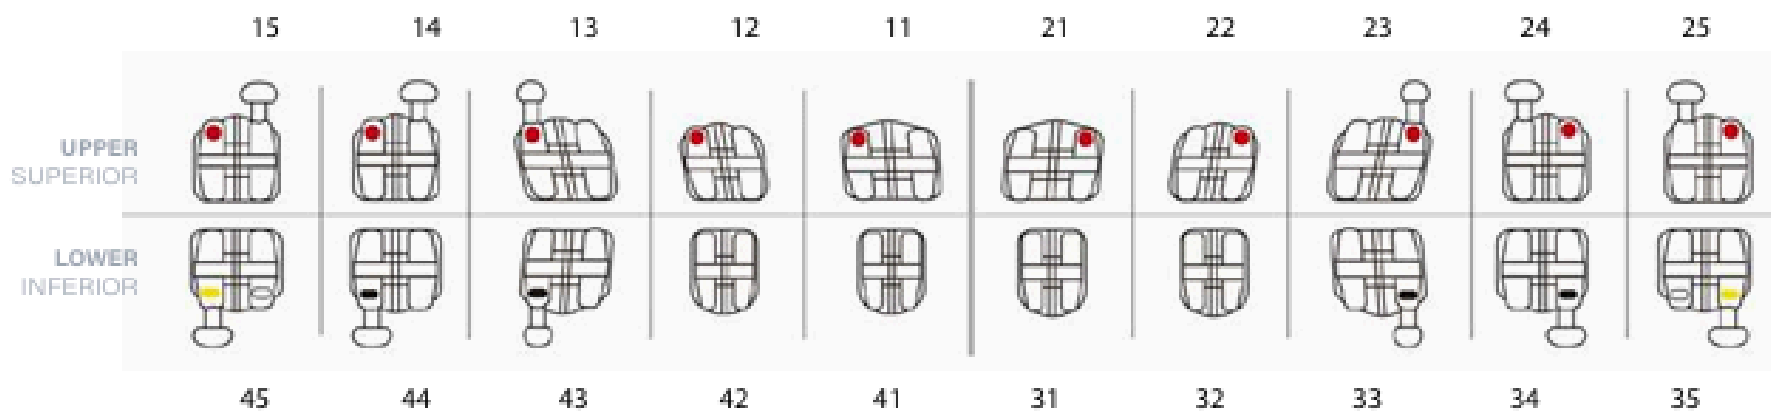

Width	3,3 mm	3,3 mm	3,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm	3,5 mm	3,3 mm	3,3 mm
Torque	-22°	-17°	-11°	0°	0°	0°	0°	-11°	-17°	-22°
Ang	0°	0°	5°	0°	0°	0°	0°	5°	0°	0°
Offset	4°	4°	2°	0°	0°	0°	0°	2°	4°	4°
In-out	0,45 mm	0,45 mm	0,40 mm	0,70 mm	0,70 mm	0,70 mm	0,70 mm	0,40 mm	0,45 mm	0,45 mm

SLOT	REPLACEMENT/REPOSICIÓN - PK W/10									
.018" x .028"	05.39.3245	05.39.3244	05.39.3643	05.39.3350	05.39.3350	05.39.3350	05.39.3350	05.39.3633	05.39.3234	05.39.3235
.022" x .028"	05.40.3245	05.40.3244	05.40.3643	05.40.3350	05.40.3350	05.40.3350	05.40.3350	05.40.3633	05.40.3234	05.40.3235



VECTOR+

Metal Bracket Conventional System

PRESCRIPTION/PRESCRIPCIÓN MBT

KIT VARIATIONS/VARIACIONES KIT 5X5

	05.39.0890 - Kit 1 case w/g 3,4,5
SLOT	05.39.0800 - Kit 10 cases w/g 3,4,5
.018	05.39.0809 - Kit 50 cases w/g 3,4,5
	05.39.0802 - Kit 100 cases w/g 3,4,5

KIT VARIATIONS/VARIACIONES KIT 5X5

	05.40.0890 - Kit 1 case w/g 3,4,5
SLOT	05.40.0800 - Kit 10 cases w/g 3,4,5
.022	05.40.0809 - Kit 50 cases w/g 3,4,5
	05.40.0802 - Kit 100 cases w/g 3,4,5

METALLIC
METÁLICO

Width	3,3 mm	3,3 mm	3,5 mm	3,4 mm	3,9 mm	3,9 mm	3,4 mm	3,5 mm	3,3 mm	3,3 mm
Torque	-7°	-7°	-7°	10°	17°	17°	10°	-7°	-7°	-7°
Ang	0°	0°	8°	8°	4°	4°	8°	8°	0°	0°
Offset	2°	2°	4°	0°	0°	0°	0°	4°	2°	2°
In-out	0,45 mm	0,45 mm	0,45 mm	0,65 mm	0,60 mm	0,60 mm	0,65 mm	0,45 mm	0,45 mm	0,45 mm

SLOT

REPLACEMENT/REPOSICIÓN - PK W/10

.018" x .028"	05.39.3414	05.39.3414	05.39.0813	05.39.0812	05.39.0811	05.39.0821	05.39.0822	05.39.0823	05.39.3424	05.39.3424
.022" x .028"	05.40.3414	05.40.3414	05.40.0813	05.40.0812	05.40.0811	05.40.0821	05.40.0822	05.40.0823	05.40.3424	05.40.3424

	15	14	13	12	11	21	22	23	24	25
UPPER SUPERIOR										
LOWER INFERIOR										
	45	44	43	42	41	31	32	33	34	35

Width	3,3 mm	3,3 mm	3,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm	3,5 mm	3,3 mm	3,3 mm
Torque	-17°	-12°	-6°	-6°	-6°	-6°	-6°	-6°	-12°	-17°
Ang	0°	0°	3°	0°	0°	0°	0°	3°	0°	0°
Offset	4°	4°	2°	0°	0°	0°	0°	2°	4°	4°
In-out	0,45 mm	0,45 mm	0,40 mm	0,70 mm	0,70 mm	0,70 mm	0,70 mm	0,40 mm	0,45 mm	0,45 mm

SLOT

REPLACEMENT/REPOSICIÓN - PK W/10

.018" x .028"	05.39.8945	05.39.0844	05.39.0843	05.39.0850	05.39.0850	05.39.0850	05.39.0850	05.39.0833	05.39.0834	05.39.8935
.022" x .028"	05.40.8945	05.40.0844	05.40.0843	05.40.0850	05.40.0850	05.40.0850	05.40.0850	05.40.0833	05.40.0834	05.40.8935



VECTOR+

Metal Bracket Conventional System

PRESCRIPTION/PRESCRIPCIÓN JORGE RODRIGUES

Kit variations/variaciones kit 5x5:	05.36.1490 - Kit 1 case w/g 3,4,5					05.36.1409 - Kit 50 cases w/g 3,4,5				
	05.36.1400 - Kit 10 cases w/g 3,4,5					05.36.1402 - Kit 100 cases w/g 3,4,5				

Width	3,3 mm	3,3 mm	3,5 mm	3,4 mm	3,9 mm	3,9 mm	3,4 mm	3,5 mm	3,3 mm	3,3 mm
Torque	-7°	-7°	-7°	14°	22°	22°	14°	7°	-7°	-7°
Ang	0°	0°	5°	9°	5°	5°	9°	5°	0°	0°
Offset	2°	2°	4°	0°	0°	0°	0°	4°	2°	2°
In-out	0,45	0,45	0,50	0,75	0,70	0,70	0,75	0,50	0,45	0,45

SLOT	REPLACEMENT/REPOSICIÓN - PK W/10									
.018" x .028"	-	-	05.39.0913	05.39.0912	05.39.0911	05.39.0921	05.39.0922	05.39.0923	-	-
.022" x .028"	05.40.3414	05.40.3414	-	-	-	-	-	-	05.40.3424	05.40.3424

	15	14	13	12	11	21	22	23	24	25
UPPER SUPERIOR										
LOWER INFERIOR										
	45	44	43	42	41	31	32	33	34	35


Width	3,3 mm	3,3 mm	3,5 mm	2,5 mm	2,5 mm	2,5 mm	2,5 mm	3,5 mm	3,3 mm	3,3 mm
Torque	-22°	-17°	0°	-6°	-6°	-6°	-6°	0°	-17°	-22°
Ang	0°	0°	3°	0°	0°	0°	0°	3°	0°	0°
Offset	4°	4°	2°	0°	0°	0°	0°	2°	4°	4°
In-out	0,45	0,45	0,45	0,70	0,70	0,70	0,70	0,45	0,45	0,45

SLOT	REPLACEMENT/REPOSICIÓN - PK W/10									
.018" x .028"	-	-	05.39.1843	05.39.0850	05.39.0850	05.39.0850	05.39.0850	05.39.1833	-	-
.022" x .028"	05.40.3245	05.40.3244	-	-	-	-	-	-	05.40.3234	05.40.3235



VECTOR+

Metal Bracket Conventional System

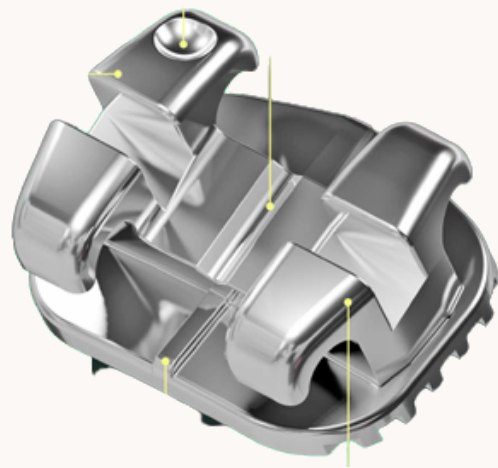

 Specifications

MIM (Metal Injection Molding)	• Bracket as a one unit • No separation between the base and body • High corrosion resistance and durability
Rounded corner & Low Profile	• Increase patient comfort • Reduced Soft Tissue Trauma • Improved Oral Hygiene
Anatomical shaped ball hook	• Better Elastic Engagement • Easier Clinical Handling
80 GAUGE	• Improved Bonding • Better Adaptation to Tooth Surface • Reduced Bulk
Midline permanent mark	• Facilitate positioning • Accuracy in bracket placement
Selective laser sintering	• Increased Mechanical Retention • More Consistent Bonding • Reduced Risk of Bracket Debonding • Compatible with Light Forces