

## HIKVISION

## ARG-2642

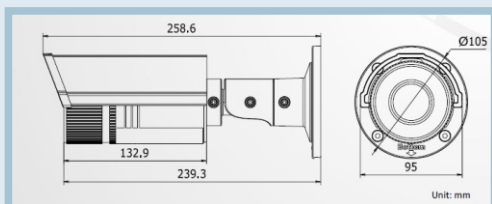


### LAYOUT FEATURES



### Key features

- 4.0 mp resolution
- 3D DNR
- Vari-focal lens Motorized
- IR LED's (up to 30m)
- Support H.264+
- IP66
- on-board storage (max. 128GB)


 DS-1275ZJ  
Vertical pole mount

 DS-1260ZJ  
Junction box

#### Camera

Image Sensor	1/3" progressive scan CMOS
Minimum Illumination	0.014 lux @ (f/1.4, AGC on), 0 lux with IR
Shutter Speed	1/3 s to 1/10,000 s
Slow Shutter	Yes
Lens	2.8 mm to 12 mm @ f/1.4 motorized lens
Angle of View	112° to 33.8°
Lens Mount	Φ14
Day/Night	IR cut filter with auto switch
Digital Noise Reduction	3D DNR
Wide Dynamic Range	120 dB
Pan/Tilt/Rotation	3-axis positioning

#### Compression Standards

Video Compression	H.264+/H.264/MJPEG
H.264 Type	Main Profile
Video Bit Rate	32 Kbps to 16 Mbps
Dual Streams	Yes
Audio	G.711/G.722.1/G.726/MP2L2/64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 128 Kbps (MP2L2)

#### Image

Maximum Resolution	2688 × 1520
Frame Rate	20 fps (2688 × 1520), 30 fps (1920 × 1080, 1280 × 720)
Image Setting	Compression, color, saturation, brightness, contrast, sharpness, rotate mode, privacy mask
Backlight Compensation	Yes, zone configured
Region of Interest (ROI)	Yes

#### Analytics

Smart Features	Line crossing detection, intrusion detection
----------------	--

#### Network

Network Storage	NAS (supports NFS, SMB/CIFS); ANR
Alarm Triggers	Motion detection, line crossing detection, intrusion detection, tamper alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	Three level user authentication, password authorization, HTTPS and SSH certificate, IEEE802.1X, basic and digest authentication, watermark, IP address filtering, log-in lockout

#### Standards

	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
--	--

#### Interface

Communication	1 RJ-45 10M/100M Ethernet port
On-Board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Alarm	1 alarm I/O
Audio	1 audio I/O

#### General

Operating Conditions	-30° C to 60° C (-22° F to 140° F), humidity 95% or less (non-condensing)
Power	12 VDC ±10%, PoE (802.3af)
Power Consumption	Maximum 5.5 W (maximum 7.5 W with IR cut filter on)
IR Range	30 meters
Ingress Protection	IP66
Dimensions	95 mm × 105 mm × 258.6 mm (3.74" × 4.13" × 10.18")
Weight	1200 g (2.65 lbs)