

HIKVISION


ARG-77xxseries

LAYOUT FEATURES

Front panel




Rear panel

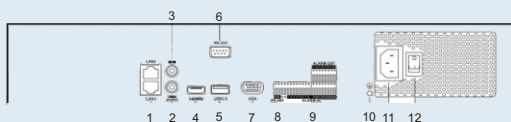

1. LAN1/LAN2
2. Audio out
3. Audio in
4. HDMI interface
5. USB 3.0 interface
6. RS 232 Serial interface
7. VGA interface
8. RS 485 Serial interface
9. Alarm IN and Alarm OUT
10. GND
11. 100-240VAC Power Input
12. Power Switch

Key features

- Third-party network cameras supported.
- Up to 5 megapixels resolution recording.
- HDMI and VGA output, up to 1920x1080P resolution.
- HDD quota and group management.
- 4 SATA , 2 USB 2.0

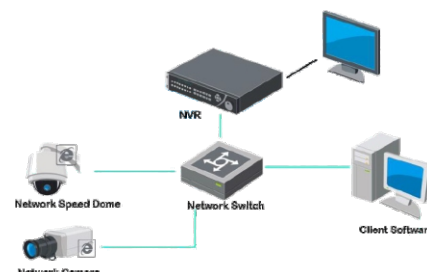

Model		DS-7708NI-E4	DS-7716NI-E4	DS-7732NI-E4
Video/Audio input	IP video input	8-ch	16-ch	32-ch
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)		
Network	Incoming bandwidth	80Mbps	160Mbps	160Mbps
	Outgoing bandwidth	80Mbps		
	Remote connection	128		
Video/Audio output	Recording resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Frame rate	Main stream: 50 fps (P) / 60 fps (N)		
		Sub-stream: 50 fps (P) / 60 fps (N)		
	HDMI/VGA output	1-ch, resolution: 1920 × 1080 /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz		
	Audio output	1-ch, RCA (Linear, 1KΩ)		
Decoding	Live view / Playback resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Capability	8-ch@720P, 6-ch@1080P	16-ch@4CIF, 12-ch@720P, 6-ch@1080P	
Hard disk	SATA	4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4HDDs		
	eSATA (Optional)	1 eSATA interface		
	Capacity	Up to 6TB capacity for each HDD		
External interface	Network interface	2 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interfaces		
	Serial interface	RS-232 and RS-485		
	USB interface	2 × USB 2.0 + 1 × USB 3.0		
	Alarm in / out	16 / 4 (optionally can be expanded to 16 / 8)		
Others	Power supply	100 ~ 240 VAC		
	Consumption (without hard disk or DVD-R/W)	≤ 20 W	≤ 20 W	≤ 20 W
	Working temperature	-10 °C ~ +55 °C (14°F ~ 131°F)		
	Working humidity	10 % ~ 90 %		
	Chassis	19-inch rack-mounted 1.5U chassis		
	Dimensions (W × D × H)	445 × 390 × 70 mm (17.5"× 15.3" × 2.8")		
	Weight (without hard disk or DVD-R/W)	≤ 4 kg (8.82 lb)		

HIKVISION

ARG-76xxseries


LAYOUT FEATURES

Front panel



1. LED power on/off
2. Recording/not recording
3. Indication LAN/WAN connection
4. USB Interface


Rear panel

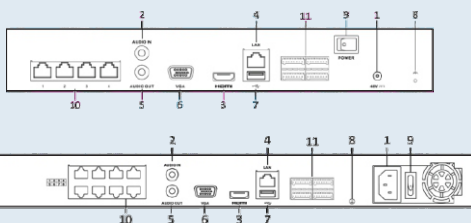

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch
10. Network Interfaces with PoE Function
11. Alarm I/O

Key features

- Third-party network cameras supported.
- Up to 5 megapixels resolution recording.
- HDMI and VGA output, up to 1920x1080P resolution.
- HDD quota and group management.
- 4 independent PoE network interfaces are provided.

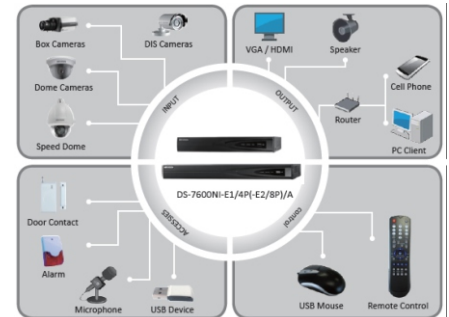

	DS-7604	DS-7608	DS-7616
Video/Audio input			
IP video input	4-ch	8-ch	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
Incoming bandwidth	20Mbps	40Mbps	80Mbps
Video/Audio output			
Decoding resolution	5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF		
HDMI / VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz		
CVBS	1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC) (optional)		
Audio output	1-ch, RCA (Linear, 1 kΩ)		
Playback resolution	5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF		
Synchronous playback	4-ch 720P / 2-ch 1080P / 1-ch 5MP	8-ch 4CIF / 4-ch 720P/ 2-ch 1080P / 1-ch 5MP	
Hard disk			
SATA	2 SATA interfaces		
Capacity	Up to 4TB for each disk		
External interface			
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface		
PoE interface	4 independent 10 / 100 Mbps PoE Ethernet interfaces		8 independent 10 / 100 Mbps PoE Ethernet interfaces
Serial interface	1 RS-485 half-duplex interface		
USB interface	2 × USB 2.0		
Alarm in / out	4 / 1 (optional)		
General			
Power supply	100 ~ 240 VAC, 47 ~ 63 Hz, 3A		
Consumption	≤ 15 W (without hard disk)		
Working temperature	-10 °C ~ +55 °C		
Working humidity	10% ~ 90%		
Chassis	19-inch rack-mounted 1U chassis		
Dimensions (W × D × H)	445 × 290 × 45mm		
Weight	≤ 2 Kg (without hard disk)		