

## HIKVISION

## ARG-76xxseries


### LAYOUT FEATURES

#### Front panel



1. LED power on/off
2. Recording/not recording
3. Indication LAN/WAN connection
4. USB Interface


#### Rear panel

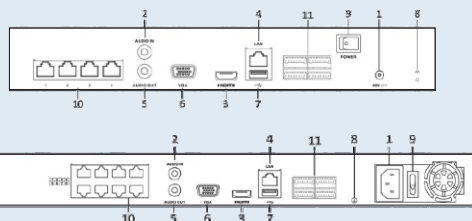

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch
10. Network Interfaces with PoE Function
11. Alarm I/O

### Key features

- Third-party network cameras supported.
- Up to 5 megapixels resolution recording.
- HDMI and VGA output, up to 1920x1080P resolution.
- HDD quota and group management.
- 4 independent PoE network interfaces are provided.

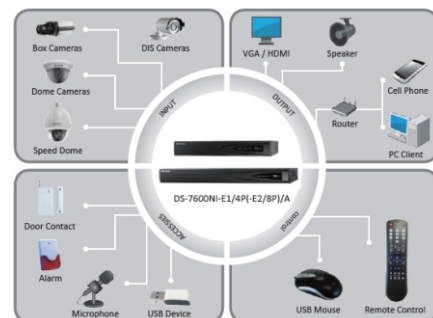

	DS-7604	DS-7608	DS-7616
Video/Audio input			
IP video input	4-ch	8-ch	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)		
Incoming bandwidth	20Mbps	40Mbps	80Mbps
Video/Audio output			
Decoding resolution	5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF		
HDMI / VGA output	1-ch, resolution: 1920 x 1080P /60Hz, 1600 x 1200 /60Hz, 1280 x 1024 /60Hz, 1280 x 720 /60Hz, 1024 x 768 /60Hz		
CVBS	1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 x 576 (PAL); 704 x 480 (NTSC) (optional)		
Audio output	1-ch, RCA (Linear, 1kΩ)		
Playback resolution	5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF		
Synchronous playback	4-ch 720P / 2-ch 1080P / 1-ch 5MP	8-ch 4CIF / 4-ch 720P/ 2-ch 1080P / 1-ch 5MP	
Hard disk			
SATA	2 SATA interfaces		
Capacity	Up to 4TB for each disk		
External interface			
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface		
PoE interface	4 independent 10 / 100 Mbps PoE Ethernet interfaces	8 independent 10 / 100 Mbps PoE Ethernet interfaces	
Serial interface	1 RS-485 half-duplex interface		
USB interface	2 x USB 2.0		
Alarm in / out	4 / 1 (optional)		
General			
Power supply	100 ~ 240 VAC, 47 ~ 63 Hz, 3A		
Consumption	≤ 15 W (without hard disk)		
Working temperature	-10 °C ~ +55 °C		
Working humidity	10% ~ 90%		
Chassis	19-inch rack-mounted 1U chassis		
Dimensions (W x D x H)	445 x 290 x 45mm		
Weight	≤ 2 Kg ( without hard disk)		