

HIKVISION

ARG-73xxseries

LAYOUT FEATURES

Front panel




Rear panel



1. Main video out, spot video out
2. Video in
3. Audio in
4. LINE in
5. CVBS audio out, VGA audio out
6. VGA
7. HDMI
8. RS-232 interface
9. eSATA
10. LAN interface
11. USB
12. RS-485, alarm in/alarm out
13. GND
14. 100-240 VAC power input
15. power switch

Key features

- 960H, H.264 video compression
- 4CIF resolution real time recording
- HDMI / VGA output at 1920x1080P resolution
- eSATA interface
- 4/8/16 ch synchronous playback
- SADP(IP finder), SMTP,SNMP,FTP
- NFS, NDP protocols

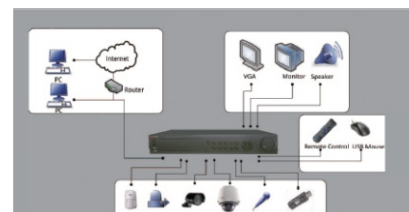

| | DS-7304 | DS-7308 | DS-7316 |
|--------------------------------------|---|---|--|
| Video / Audio input | | | |
| Video compression | H.264 | | |
| Analog video input | 4-ch, BNC (1.0 Vp-p,75 Ω), PAL / NTSC self-adaptive | 8-ch, BNC (1.0 Vp-p,75 Ω), PAL / NTSC self-adaptive | 16-ch, BNC (1.0 Vp-p,75 Ω), PAL / NTSC self-adaptive |
| Audio compression | G.711 | | |
| Audio input | 4-ch, RCA (2.0 Vp-p, 1 kΩ) | | |
| Voice talk input | 1-ch, RCA (2.0 Vp-p, 1 kΩ) | | |
| Video / Audio output | | | |
| HDMI output (with HDMI audio output) | 1-ch, resolution: 1080P:1920×1080 /60 Hz; UXGA: 1600×1200 /60 Hz; SXGA: 1280×1024 /60 Hz; 720P:1280×720 /60 Hz; XGA: 1024×768 /60 Hz. | | |
| VGA output | 1-ch, resolution: 1080P:1920×1080 /60 Hz; UXGA: 1600×1200 /60Hz; SXGA: 1280×1024 /60 Hz; 720P:1280×720 /60 Hz; XGA: 1024×768 /60 Hz. | | |
| CVBS output | 2-ch (1 Main Video Out+1 Spot Video Out), BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704×576, NTSC: 704×480 | | |
| Video loop out (optional) | 4-ch | 8-ch | 16-ch |
| Encoding resolution | 4CIF / 2CIF / CIF / QCIF | | |
| Frame rate | 25 fps (P) / 30 fps (N) | | |
| Video bit rate | 32 Kbps ~ 2048 Kbps, or user defined (max. 3072 Kbps) | | |
| Audio output | 2-ch, RCA (linear, 600Ω) | | |
| Audio bit rate | 64 Kbps | | |
| Dual-stream | Support, Sub stream: CIF / QCIF | | |
| Stream type | Video, Video & Audio | | |
| Playback resolution | 4CIF / 2CIF / CIF / QCIF | | |
| Synchronous playback | 4-ch | 8-ch | 16-ch |
| Hard disk | | | |
| SATA | 4 SATA interfaces | | |
| eSATA | 1 eSATA interface | | |
| Capacity | Up to 4TB capacity for each disk | | |
| External interface | | | |
| Network interface | 1 RJ45 10M / 100M self-adaptive ethernet interface | | |
| Serial interface | 1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface (for PTZ control); 1 RS-485 keyboard interface (for special keyboard control) | | |
| USB interface | 3, USB2.0 | | |
| Alarm in | 8 | 8 | 16 |
| Alarm out | 4 | | |
| General | | | |
| Power supply | 100 ~ 240 VAC, 5A, 50-60Hz | | |
| Consumption | ≤ 25W (without hard disk or DVD-R/W) | ≤ 30W (without hard disk or DVD-R/W) | ≤ 35W (without hard disk or DVD-R/W) |
| Working temperature | -10 °C ~ + 55 °C | | |
| Working humidity | 10% ~ 90% | | |
| Chassis | 19-inch rack-mounted 1.5 U chassis | | |
| Dimensions(W x D x H) | 440 × 390 × 70 mm | | |
| Weight | ≤ 8kg (without hard disk or DVD-R/W) | | |