



Versorgung 230 V AC → 12 V / 5 V / 3,3 V




I²C-Pegelwandler 3,3 V → 5 V

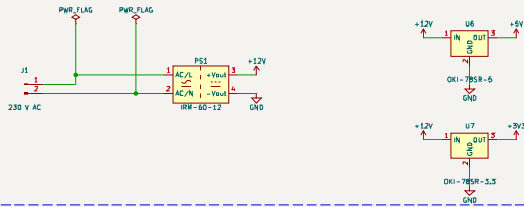


ESP32 I²C-Master

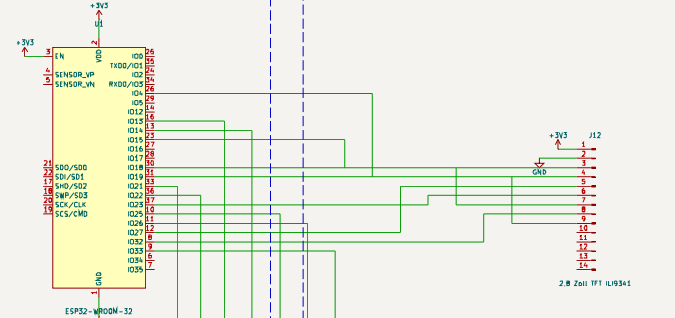

Schrittmotoren 3 × A4988 (GRBL 1.1)

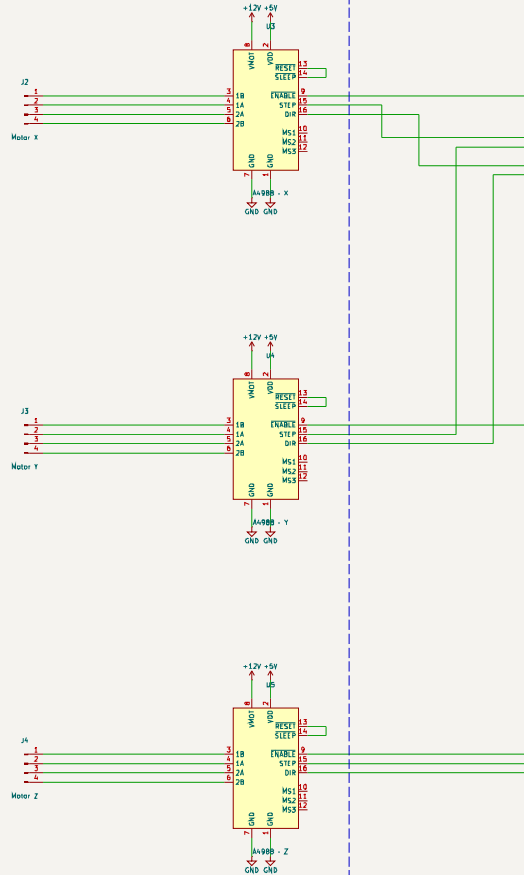

UNO + CNC Shield V3 - 0x33

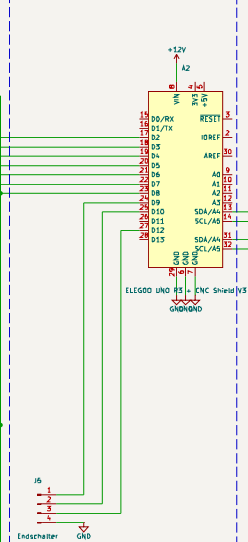

Servosteuerung Arduino Nano · I²C 0x32 · 6 Servos an D7-D12

