


Design Title : Coasters 02.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

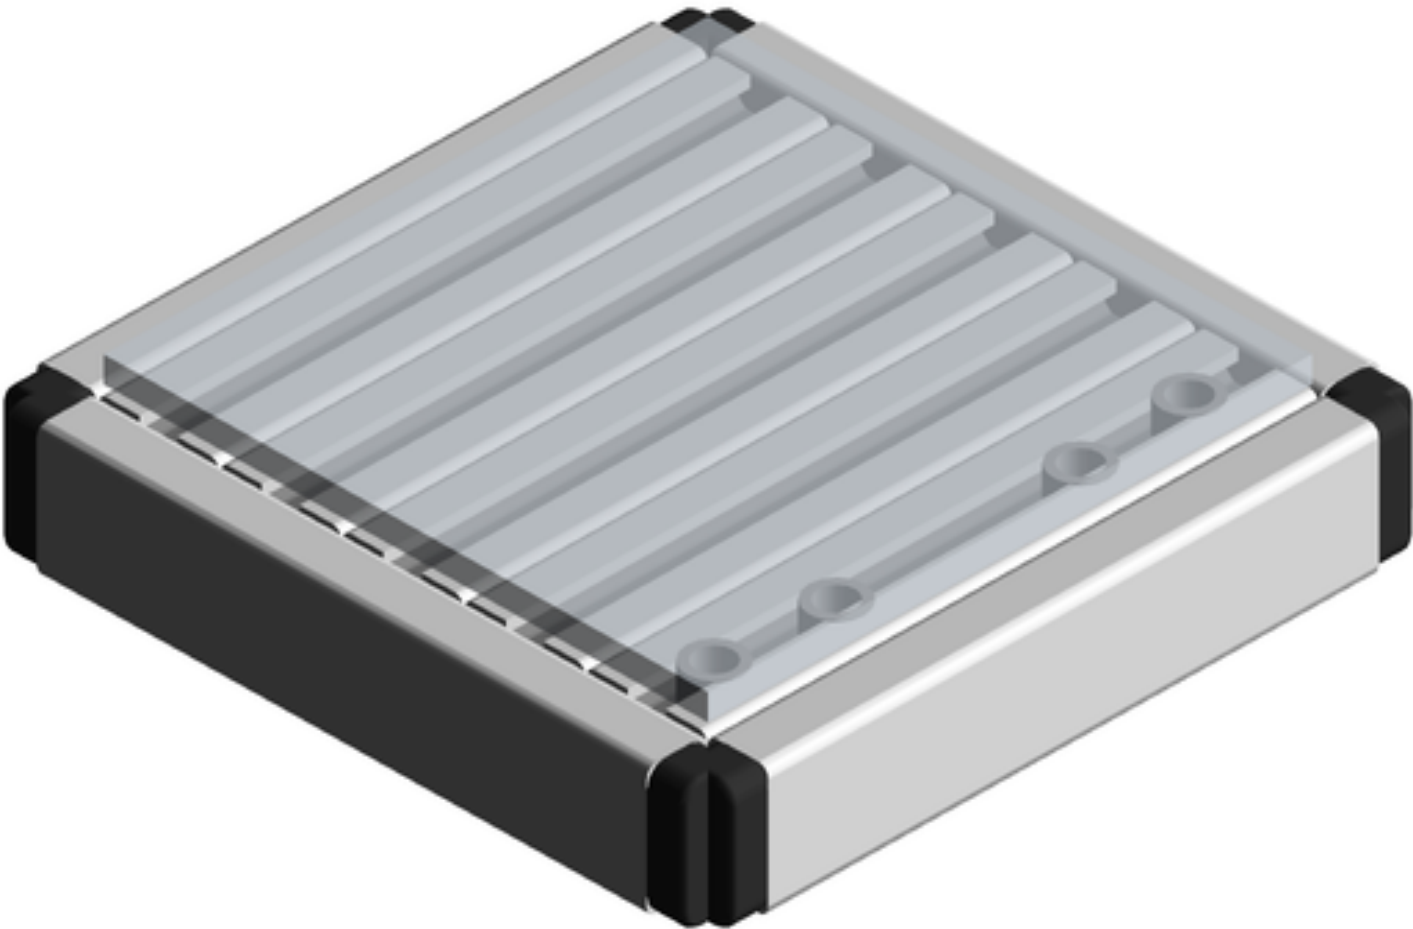


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA3AA3/100	Profile 20x20, 4H, light, plain **PER DRAWING 1**	MM	1
1.A	ZA3/30.0	Parallel-connector distance left: 30.0 mm, anchor on side: 2	EA	1
1.B	ZA3/70.0	Parallel-connector distance left: 70.0 mm, anchor on side: 2	EA	1
2	1.10.020020.43LP-AA4AA4/100	Profile 20x20, 4H, light, plain **PER DRAWING 2**	MM	1
2.A	ZA4/40.0	Parallel-connector distance left: 40.0 mm, anchor on side: 3	EA	1
2.B	ZA4/40.0	Parallel-connector distance left: 40.0 mm, anchor on side: 1	EA	1
2.C	ZA4/60.0	Parallel-connector distance left: 60.0 mm, anchor on side: 3	EA	1
2.D	ZA4/60.0	Parallel-connector distance left: 60.0 mm, anchor on side: 1	EA	1
3	1.10.020020.43LP-AA4AA4/100	Profile 20x20, 4H, light, plain	MM	3
4	1.11.020010.14LP-A00A00/100	Profile 20x10, 1F, light, plain	MM	2
5	1.11.020010.14LP-A00A00/100	Profile 20x10, 1F, light, plain	MM	2
8	1.42.20201.2	Cover cap 20x10, black	EA	8
9	0.63.D07991.04008	Flat head screw, DIN 7991 - M4x8	EA	10
10	1.20.2F0	Connector, universal	EA	10
11	1.20.2H0	Connector, universal	EA	6
12	1.31.HM4	Threaded plate H, M4	EA	5
Frame weight:				0.95 kg (2.10 lbs)
6	2.87.1571-99	Polycarbonat 4mm, SIZE: 98.96MM x 99.00MM **PER DRAWING 3**	SM	1
7	2.87.1571-99	Polycarbonat 4mm, SIZE: 98.96MM x 99.00MM **PER DRAWING 4**	SM	1


Panels weight:0.09 kg (0.19 lbs)

Total Weight:1.04 kg (2.29 lbs)

Isometric view
Some accessories may not be shown

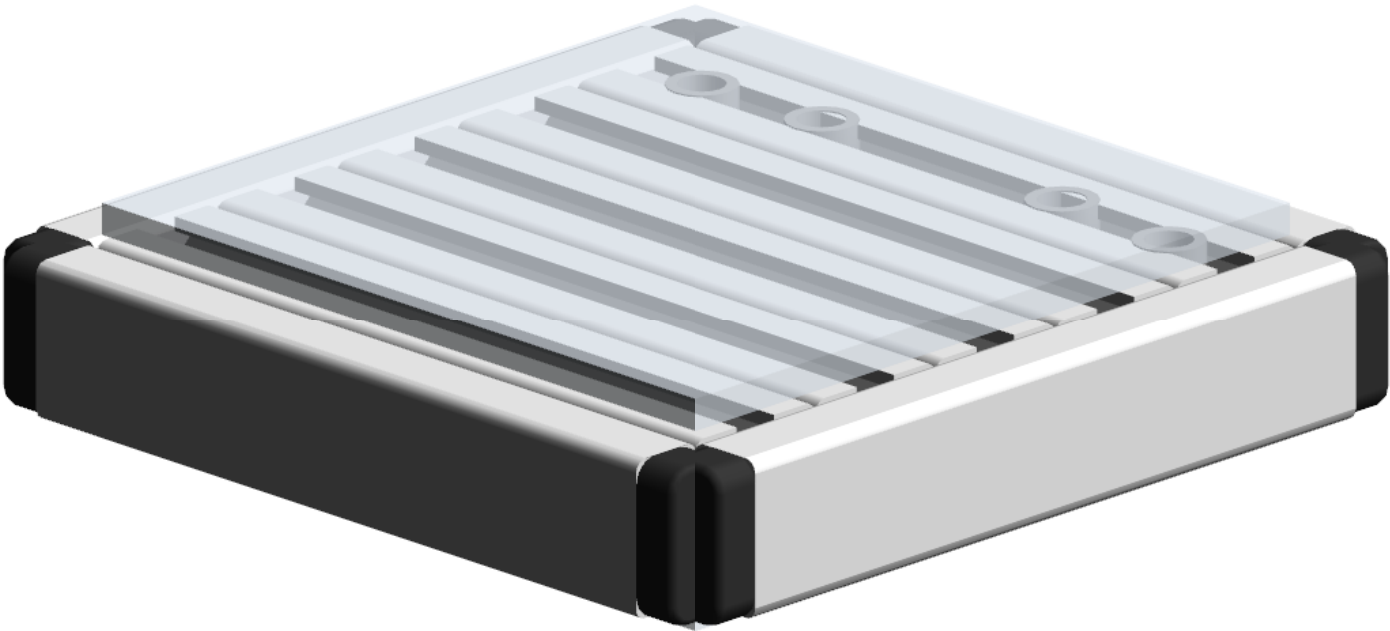


Multiview

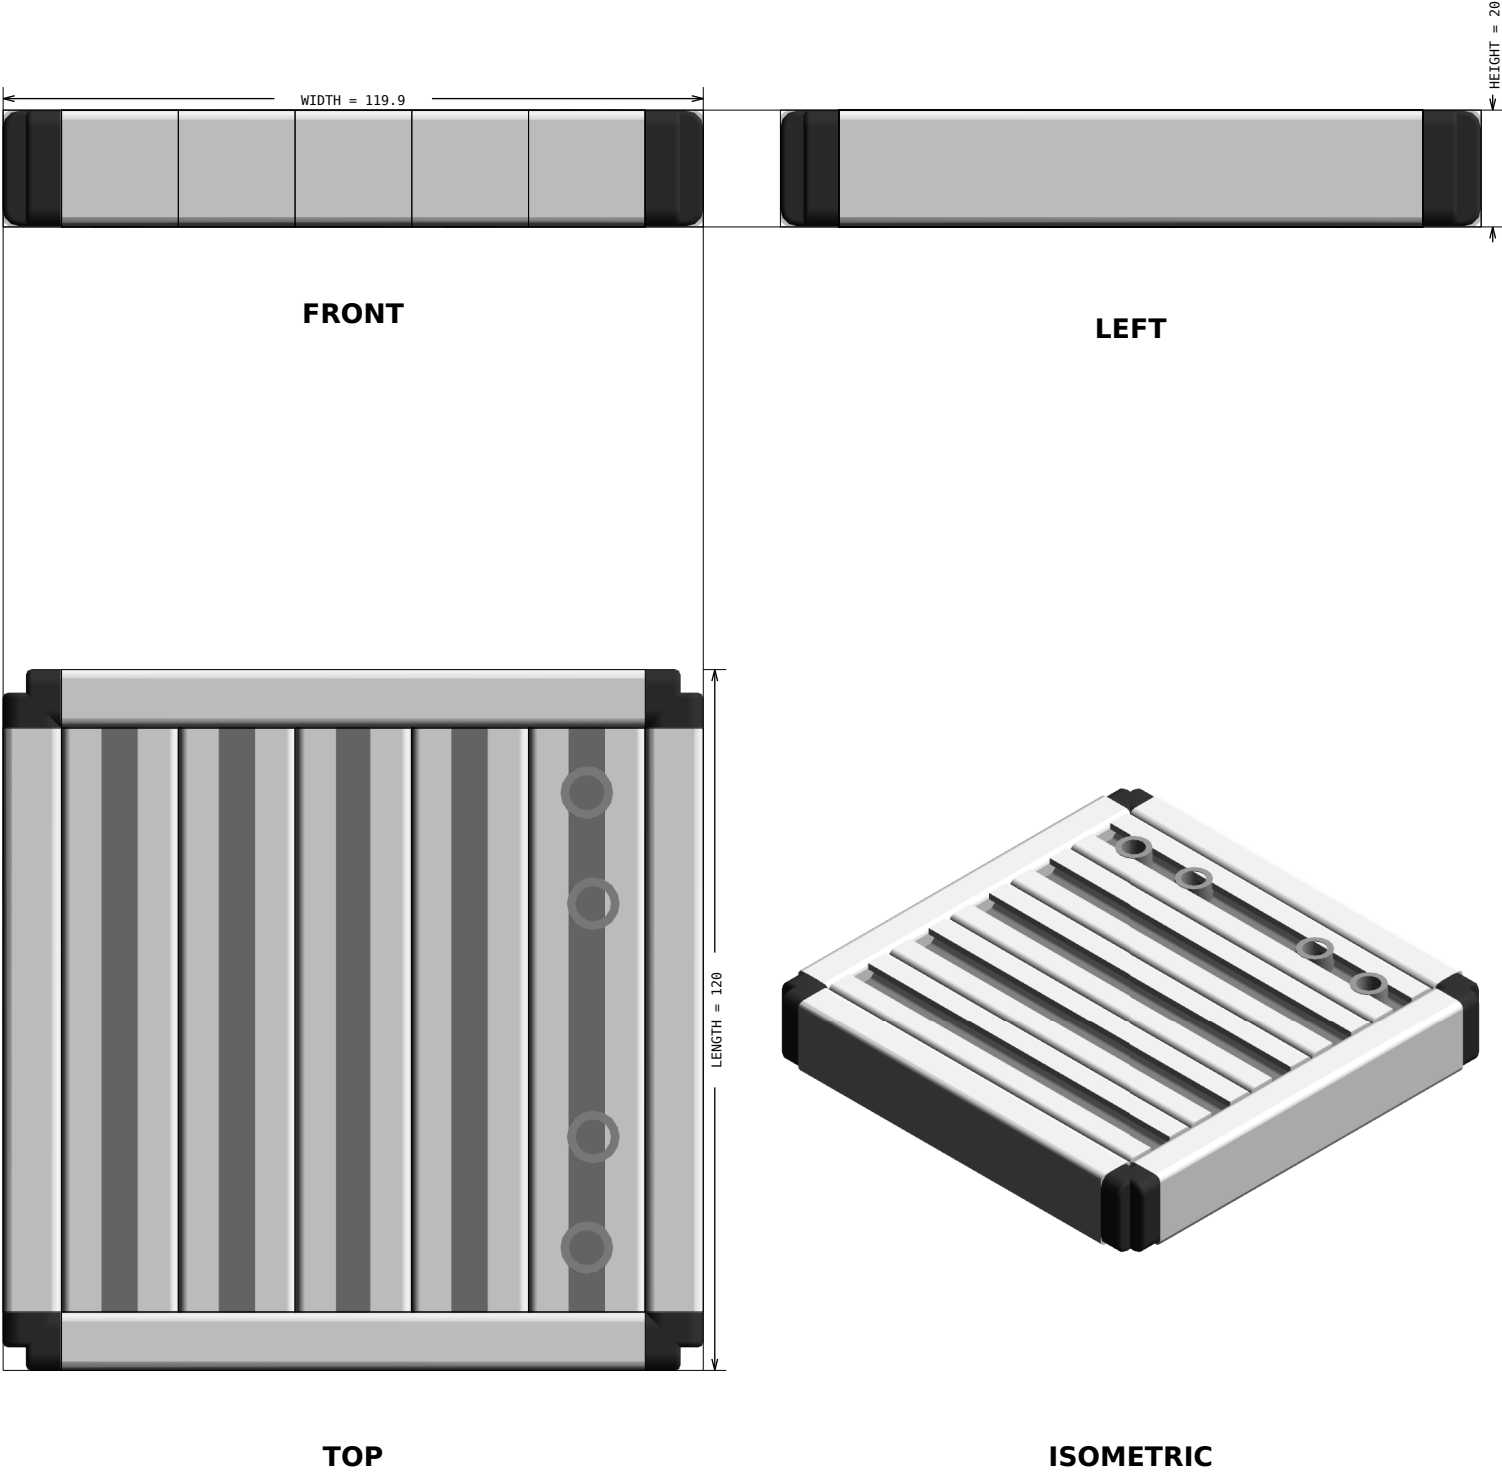

Design Title : Coasters 02.scene
Customer Name :
Date : 2025-06-19


FRONT VIEW

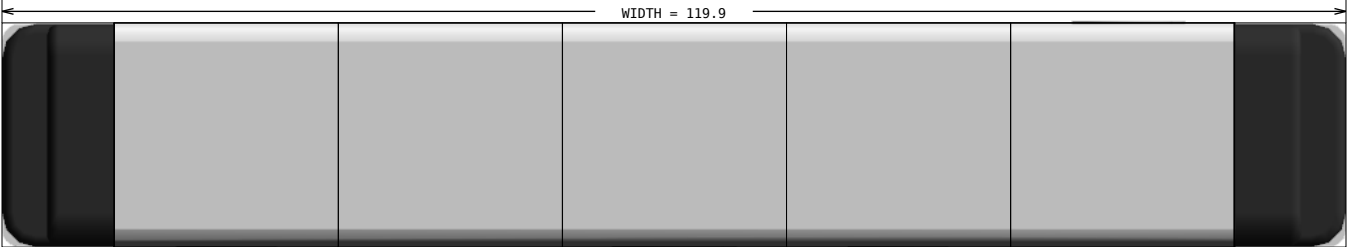


Design Title : Coasters 02.scene
Customer Name :
Date : 2025-06-19

LEFT VIEW



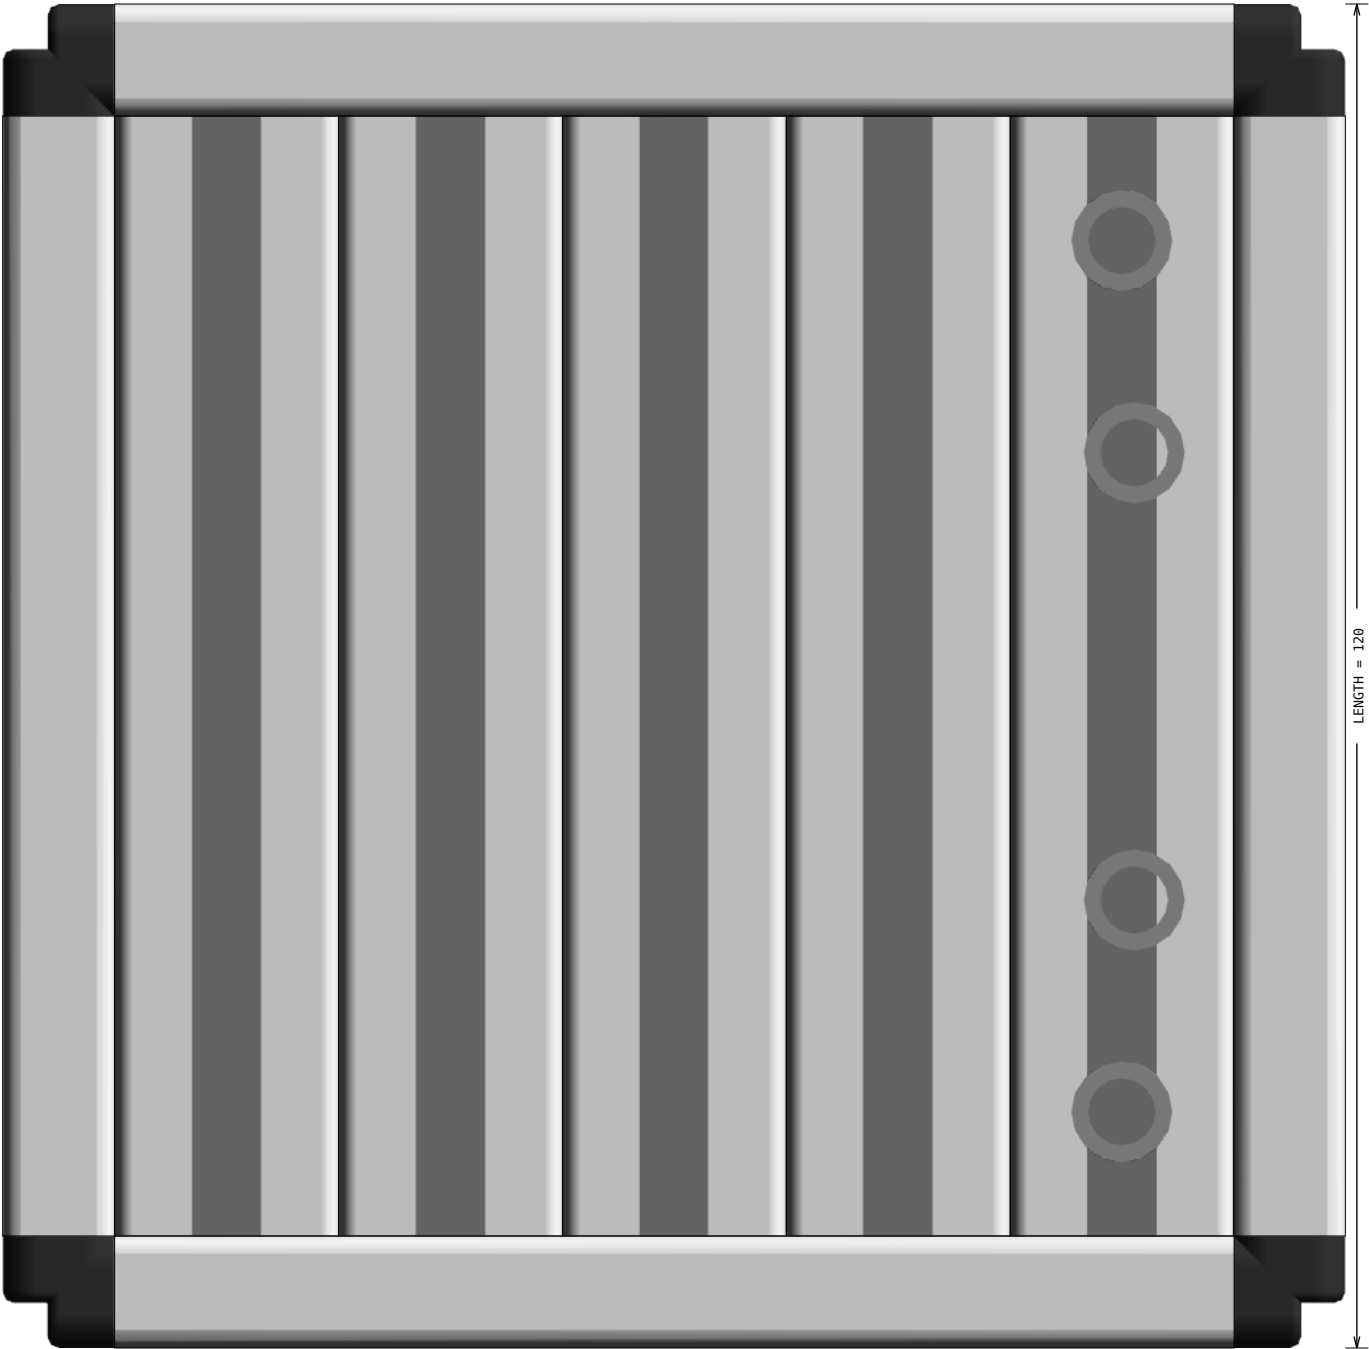


LENGTH = 120

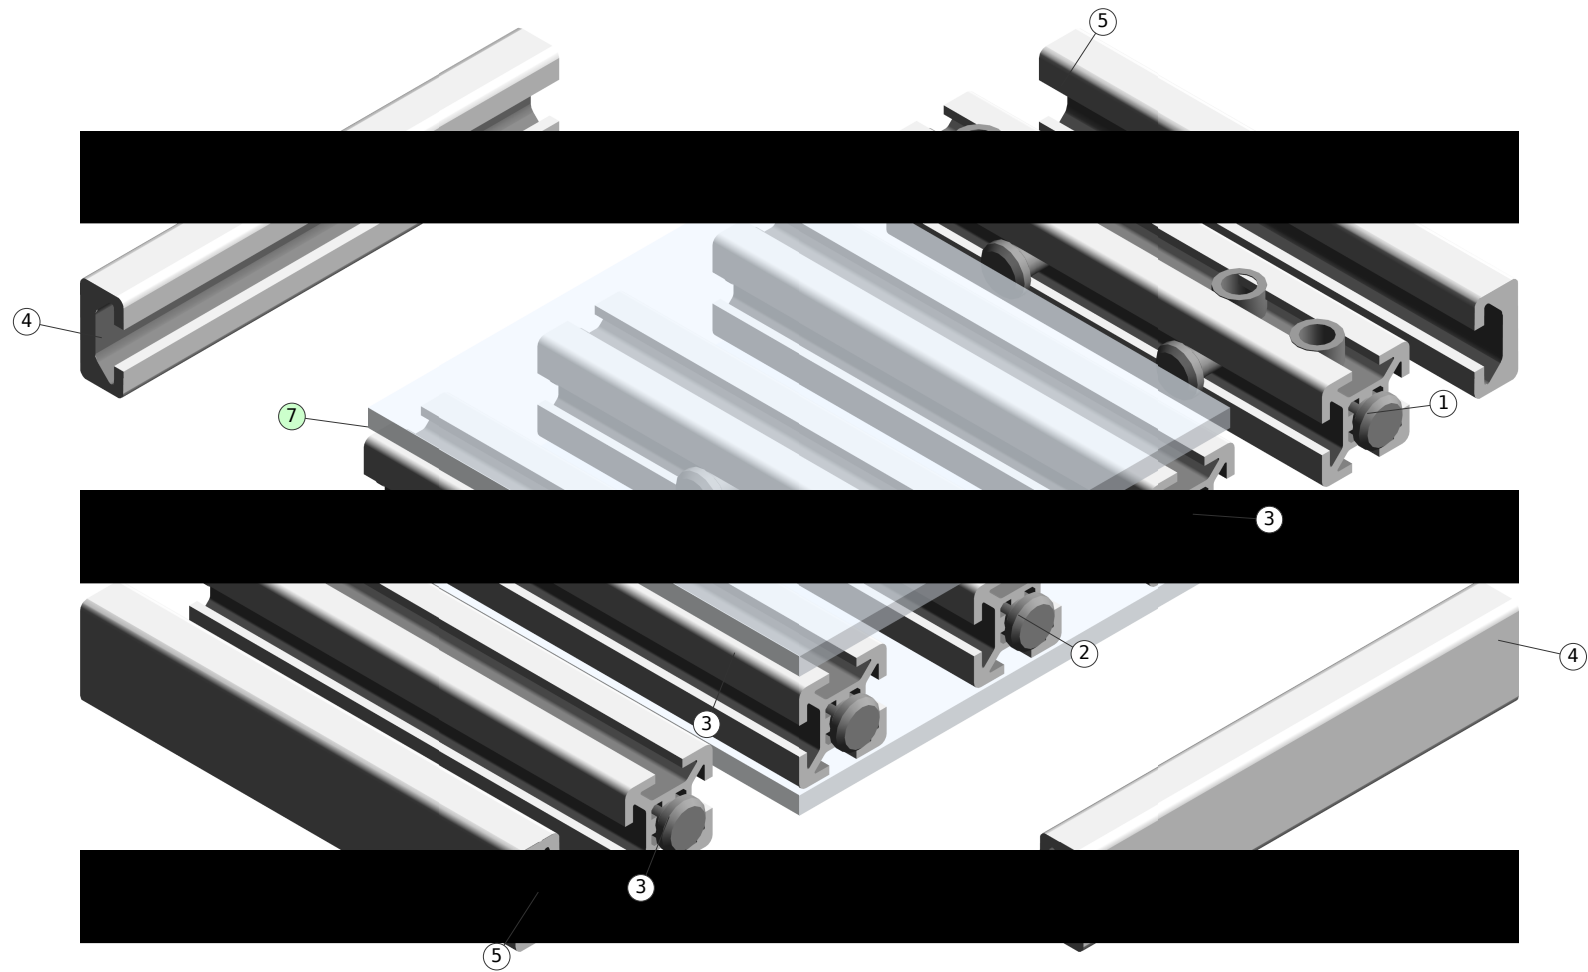


Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA3AA3/100	Profile 20x20, 4H, light, plain	1.20.2F0, Connector, universal 1.20.2H0, Connector, universal	2 2
2	1.10.020020.43LP-AA4AA4/100	Profile 20x20, 4H, light, plain	1.20.2F0, Connector, universal 1.20.2H0, Connector, universal	2 4
3	1.10.020020.43LP-AA4AA4/100	Profile 20x20, 4H, light, plain	1.20.2F0, Connector, universal	6
6	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8 1.31.HM4, Threaded plate H, M4	5 5


Profile machining details

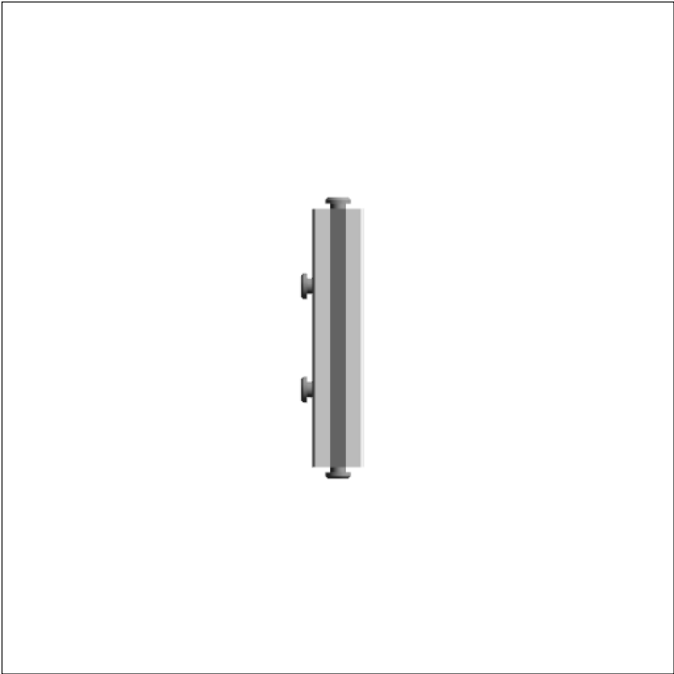


DRAWING 1, Pos 1
SIDE 1, bar length: 100.0 mm

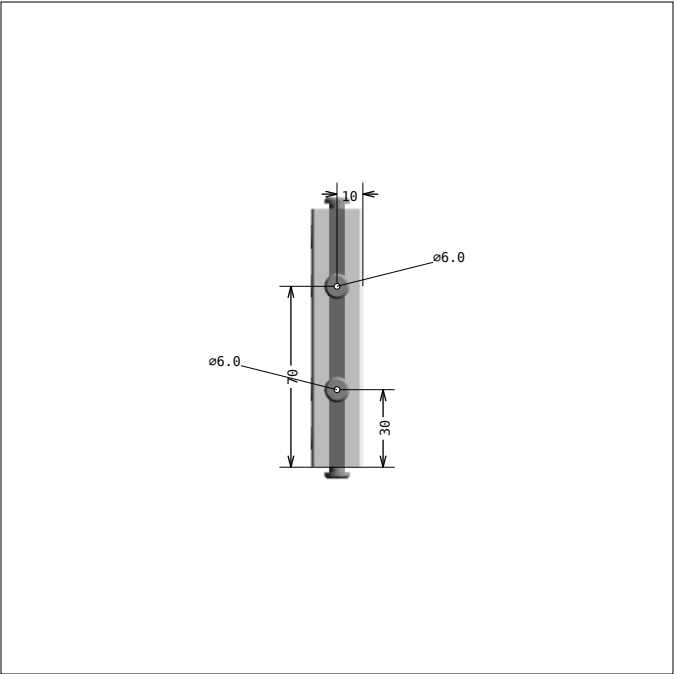

DRAWING 1, Pos 1
SIDE 2

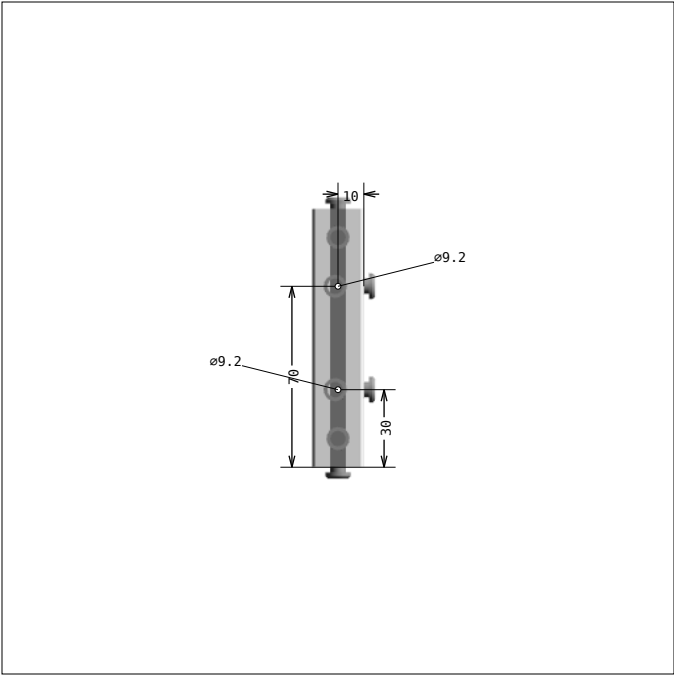


DRAWING 1, Pos 1
SIDE 3

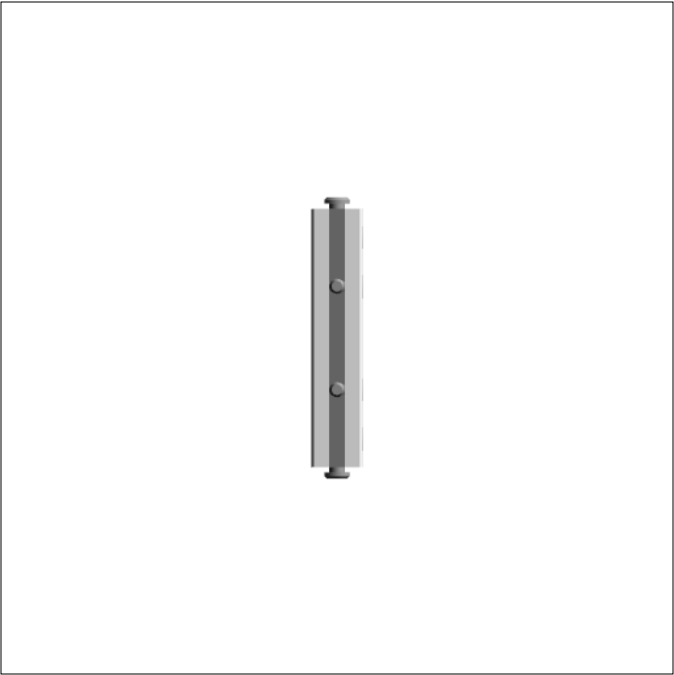


DRAWING 1, Pos 1
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

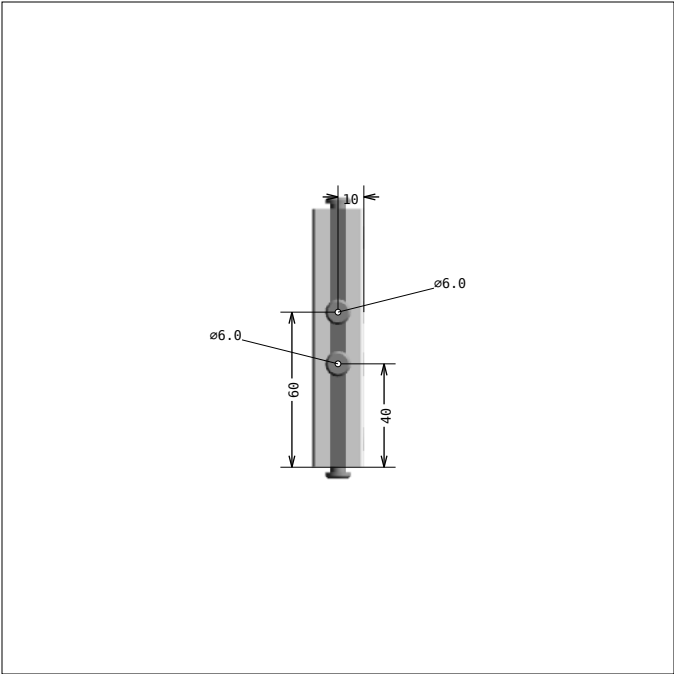


DRAWING 2, Pos 2
SIDE 1, bar length: 100.0 mm

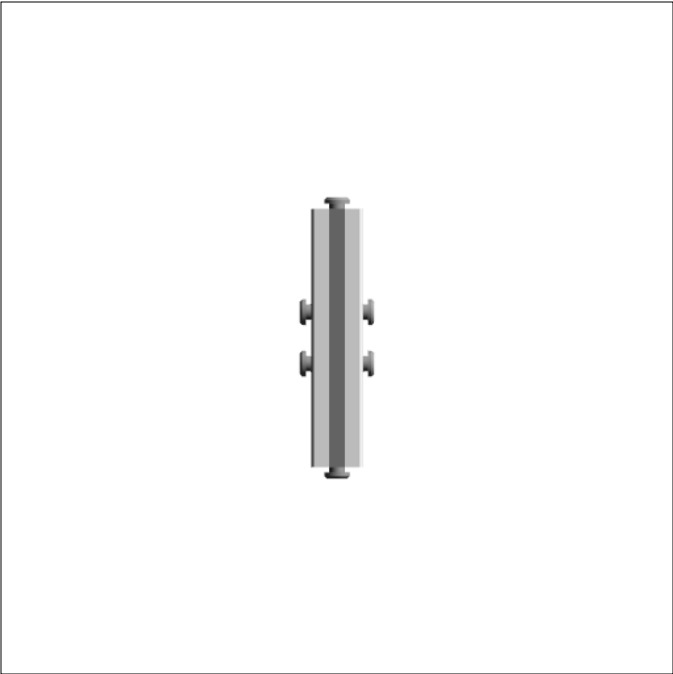

DRAWING 2, Pos 2
SIDE 2

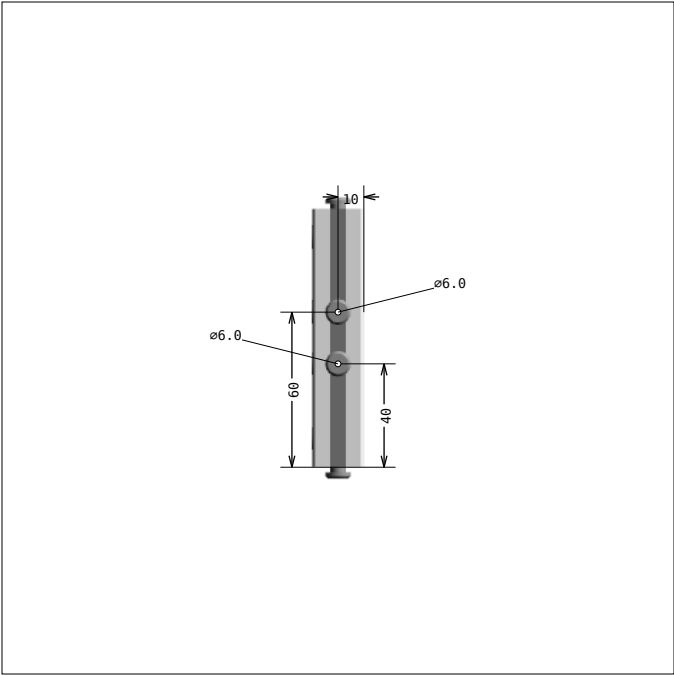


DRAWING 2, Pos 2
SIDE 3

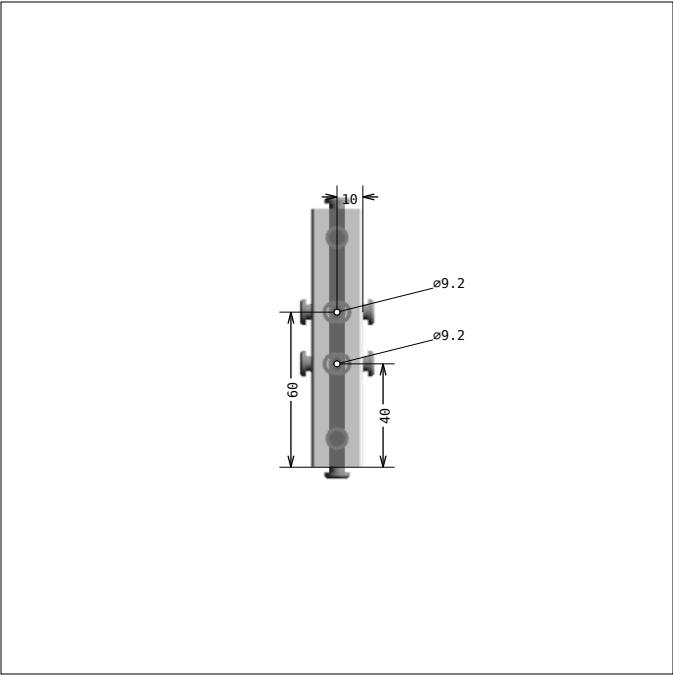


DRAWING 2, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Panels

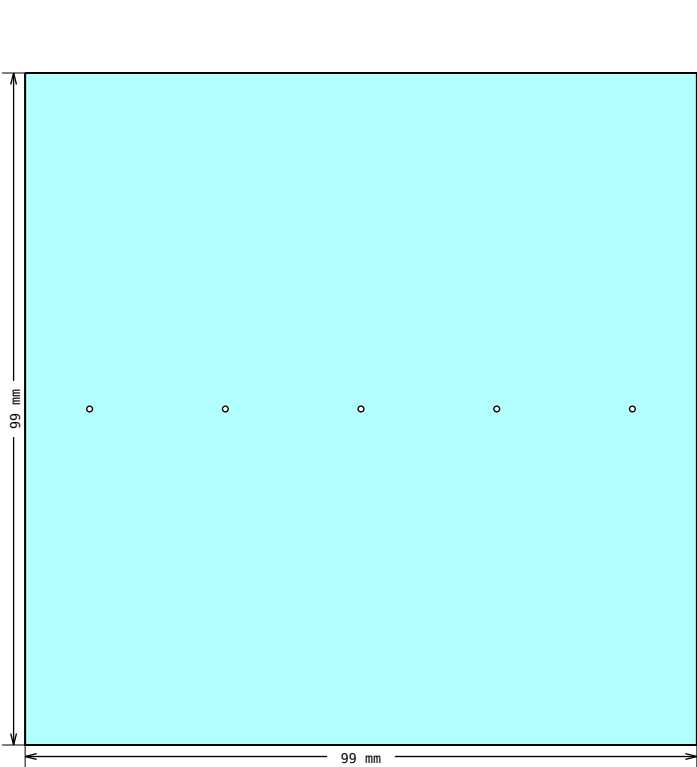

DRAWING 3, Pos 6
Shape measurements


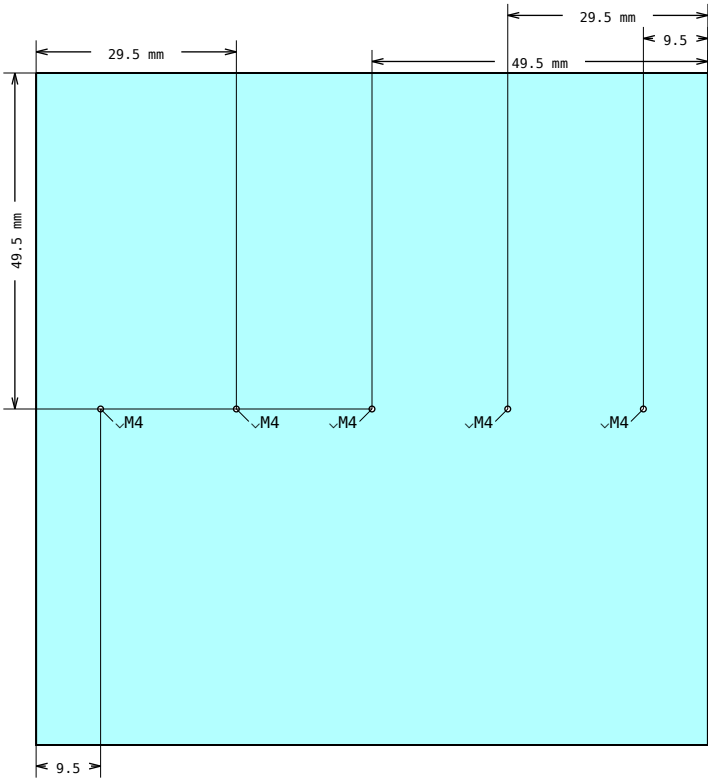


DRAWING 3, Pos 6
Hole placement






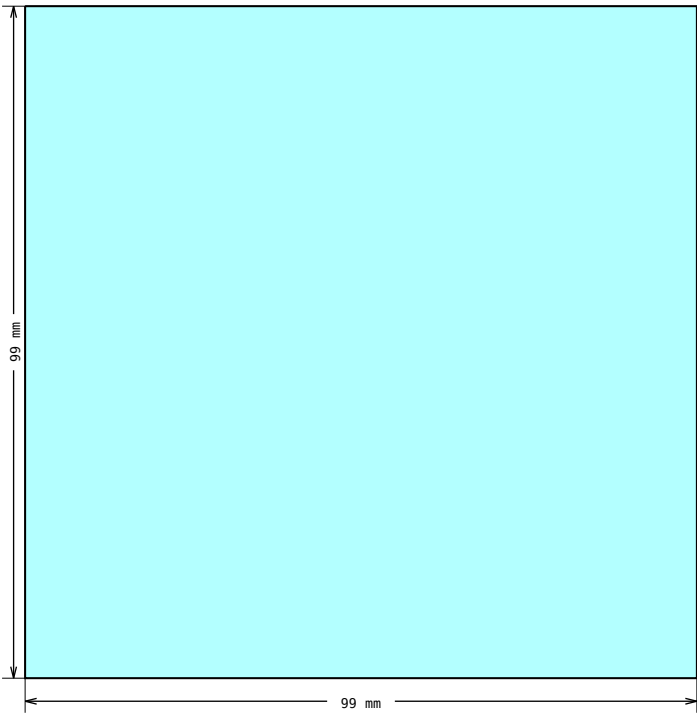


DRAWING 4, Pos 7
Shape measurements

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.10.020020.43LP		5482.5 mm
1.11.020010.14LP		5586.1 mm

Assembly hints

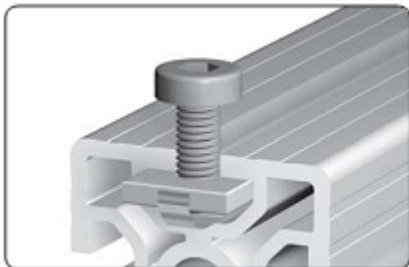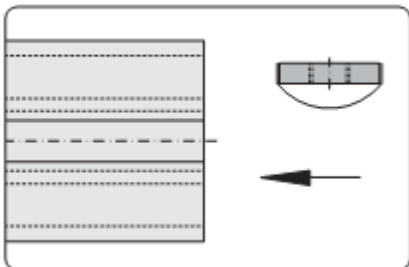CONNECTOR	1.20.2F0	Connector, universal	
	1.20.2H0	Connector, universal	
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.			
None	1.31.HM4	Threaded plate H, M4	
 Fixed into position with leaf spring  Application Fastening element for screw-type connections Assembly Insert from end These plates must be inserted from the open side of the profile, prior to final frame assembly			