


Design Title : SUPER TABLE 4.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

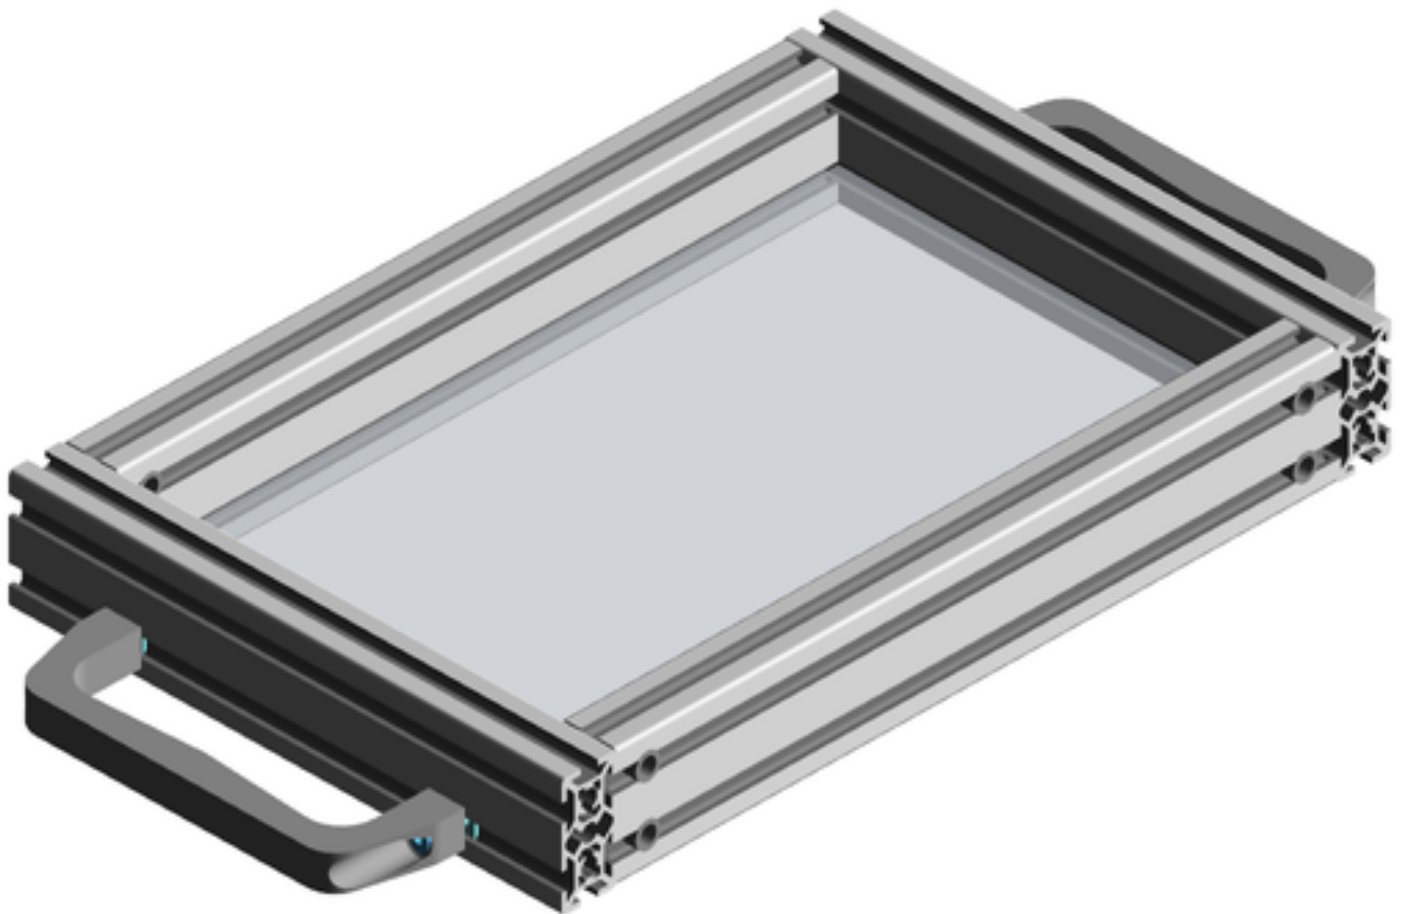

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020040.64LP-AB2AB2/260	Profile 20x40, 6H, light, plain	MM	1
2	1.10.020040.64LP-AB0AB2/260	Profile 20x40, 6H, light, plain Position for cross bushing bore, left: CF;	MM	1
3	1.10.020040.64LP-A00A00/200	Profile 20x40, 6H, light, plain	MM	2
5	1.61.20.1	Handle light PA, grey	EA	2
6	0.63.D07991.04016	Flat head screw, DIN 7991 - M4x16	EA	4
7	1.20.2H0	Connector, universal	EA	8
8	1.31.HM4	Threaded plate H, M4	EA	4

Frame weight: 1.17 kg (2.59 lbs)


4	2.87.1571-99	Polycarbonat 4mm, SIZE: 168.00MM x 268.00MM **PER DRAWING 1**	SM	1
---	--------------	---	----	---

Panels weight: 0.18 kg (0.40 lbs)


Total Weight: 1.36 kg (2.99 lbs)

Isometric view

Some accessories may not be shown

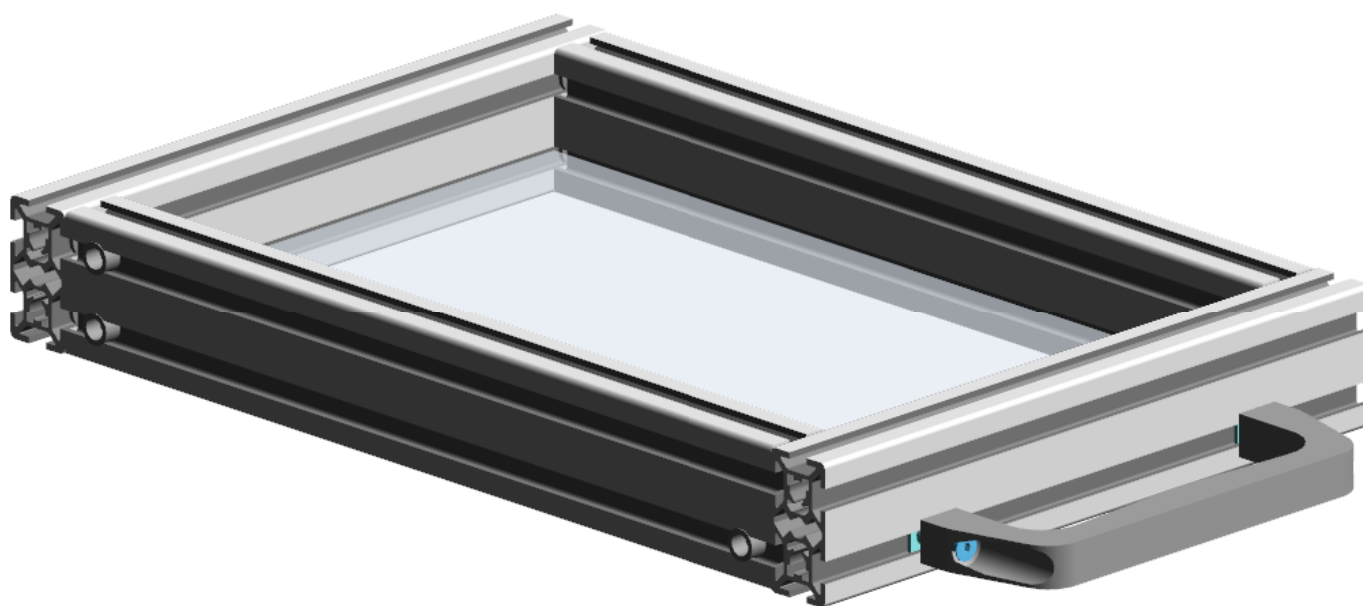


Multiview

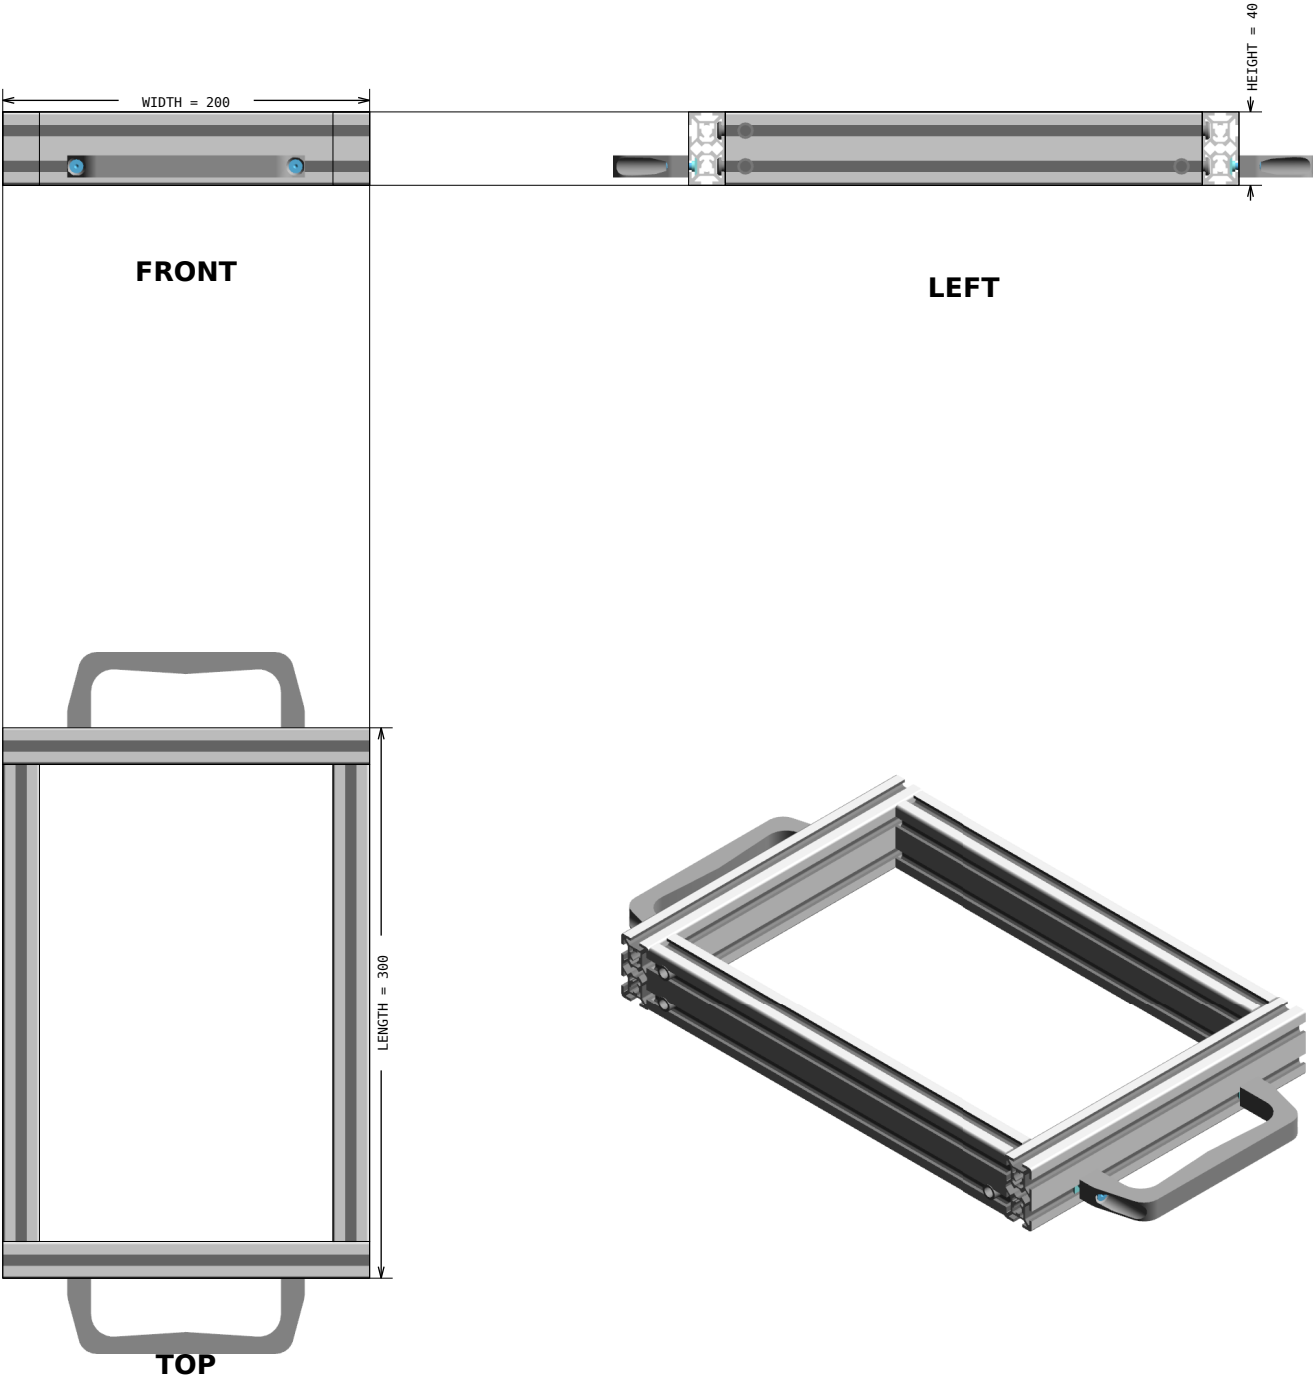



Design Title : SUPER TABLE 4.scene
Customer Name :
Date : 2025-06-19

FRONT VIEW

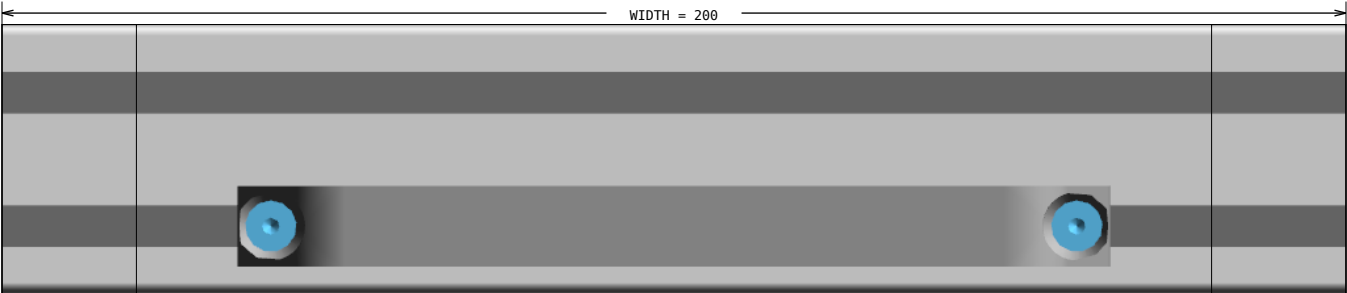



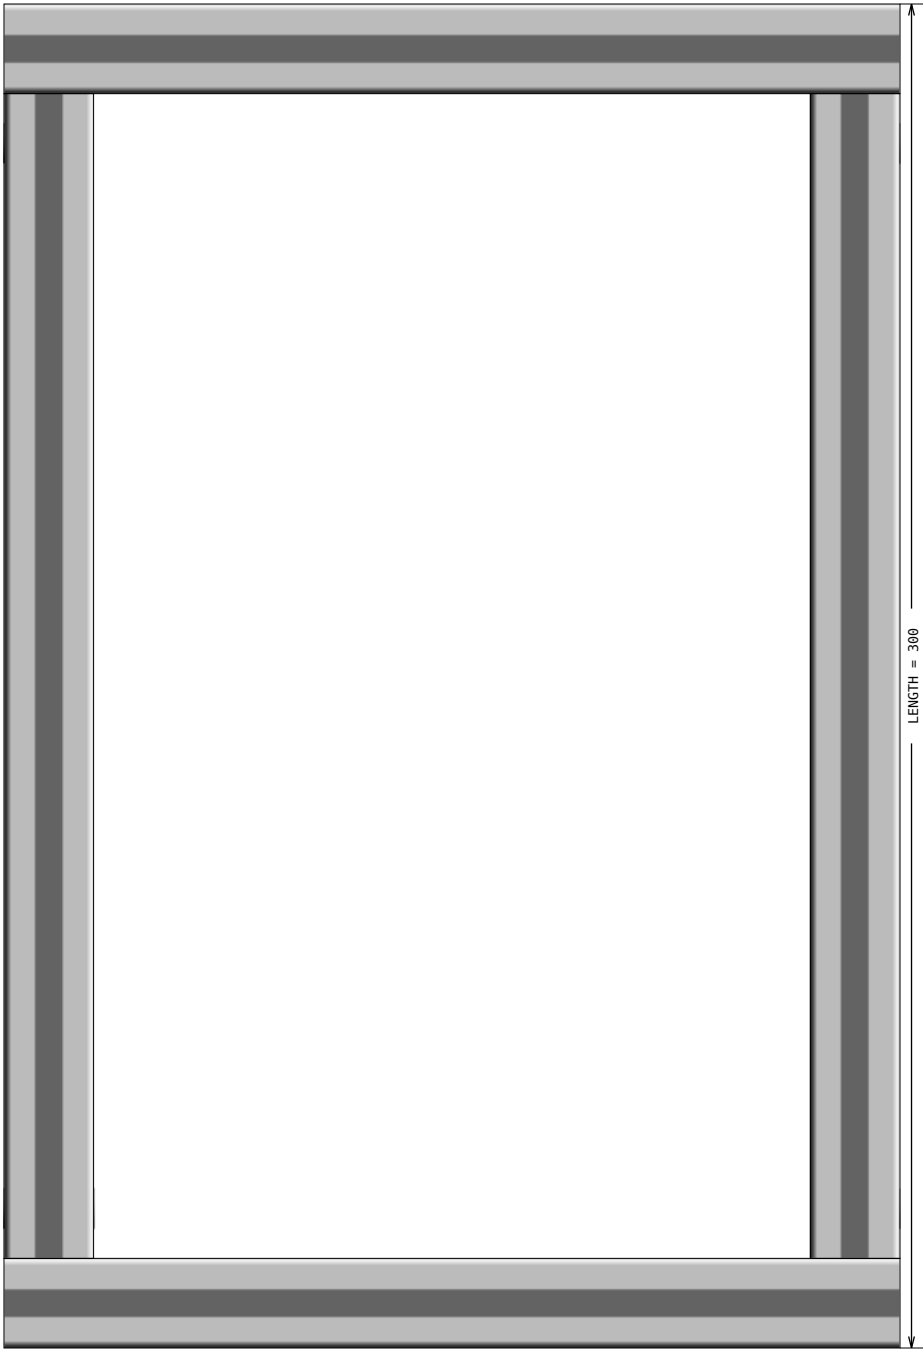


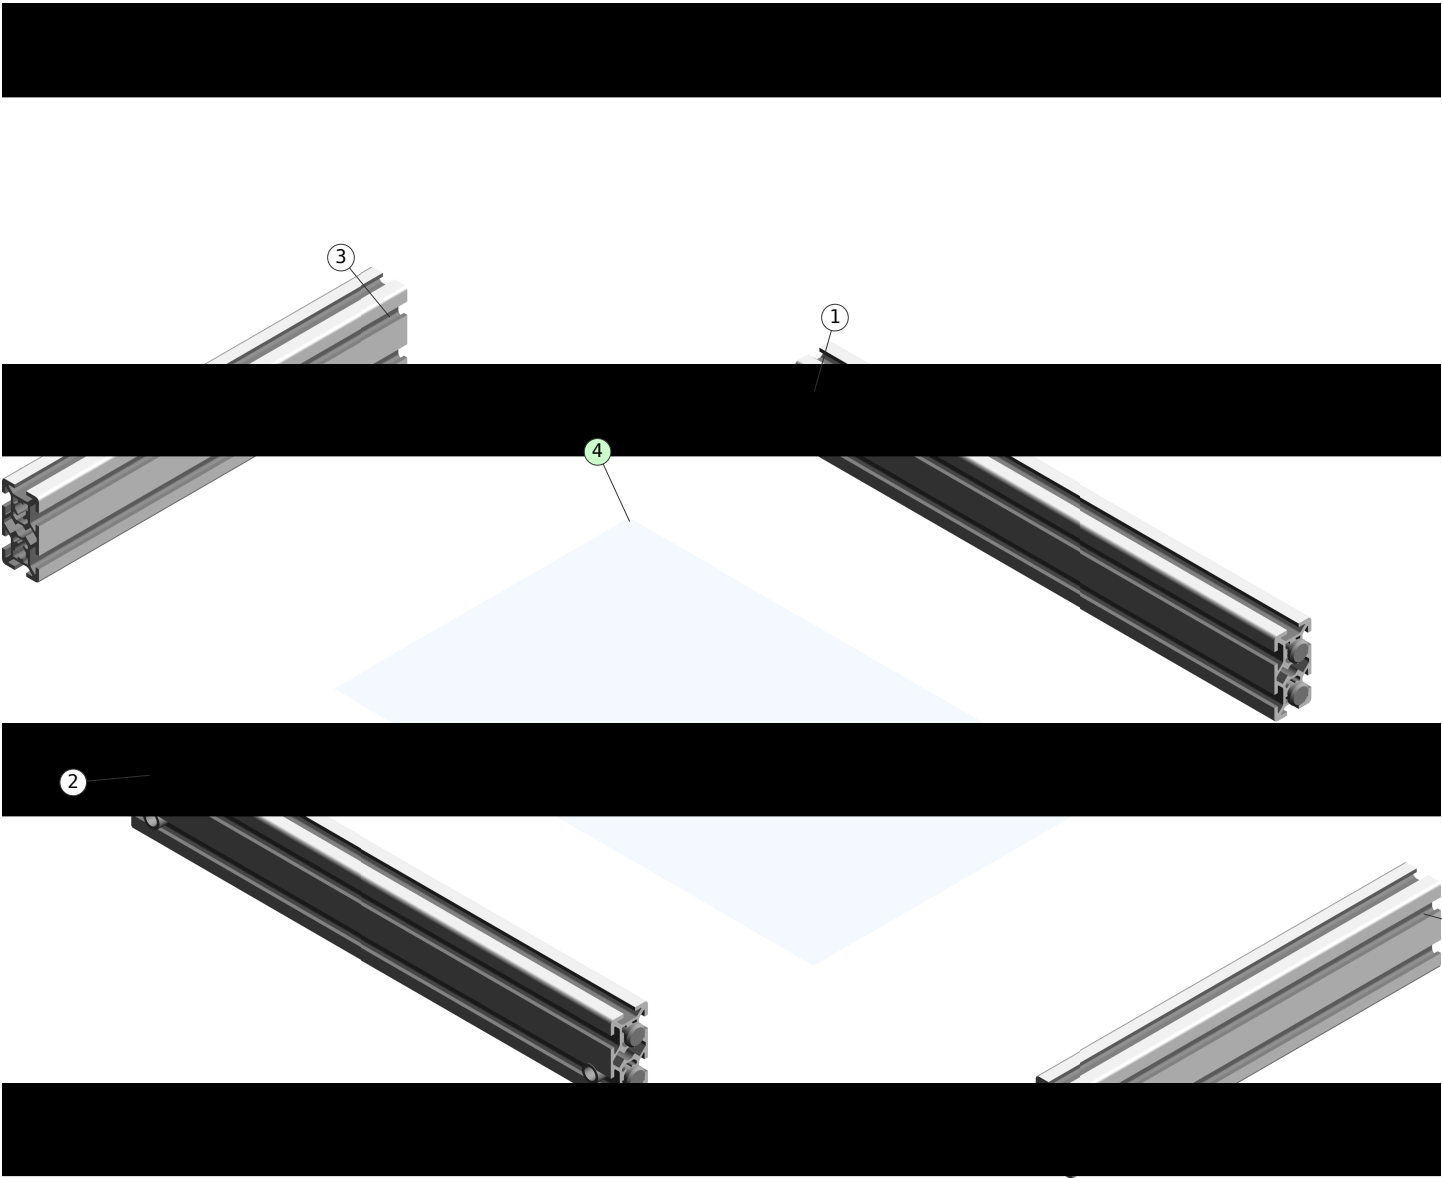

Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020040.64LP-AB2AB2/260	Profile 20x40, 6H, light, plain	1.20.2H0, Connector, universal	4
2	1.10.020040.64LP-AB0AB2/260	Profile 20x40, 6H, light, plain	1.20.2H0, Connector, universal	4
5	1.61.20.1	Handle light PA, grey	0.63.D07991.04016, Flat head screw, DIN 7991 - M4x16 1.31.HM4, Threaded plate H, M4	4 4

Panels






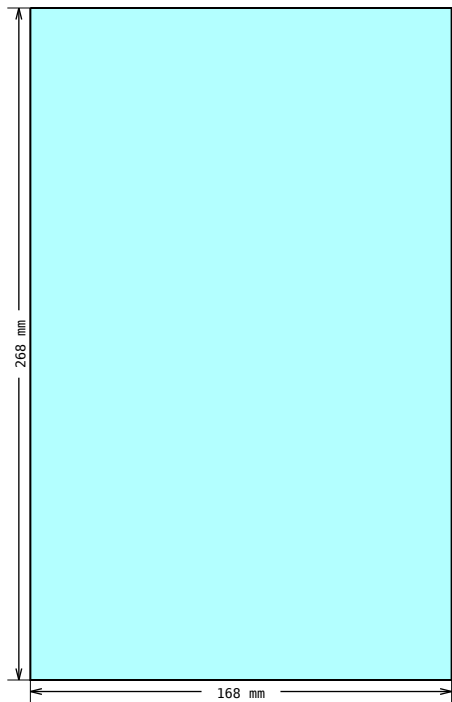


DRAWING 1, Pos 4
Shape measurements

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.10.020040.64LP	③ ③ ② ① 200.0 200.0 260.0 260.0	5066.0 mm

Assembly hints

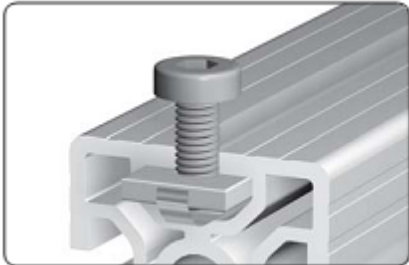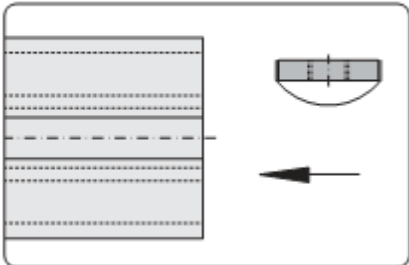CONNECTOR	1.20.2H0	Connector, universal	 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
None	1.31.HM4	Threaded plate H, M4	 Fixed into position with leaf spring  Assembly Insert from end These plates must be inserted from the open side of the profile, prior to final frame assembly