


Design Title : Lamp 01.scene  
Revision Level :  
Approved by :  
Designer :  
Company :  
Address :  
E-Mail :  
Phone :  
Date : 2025-06-19

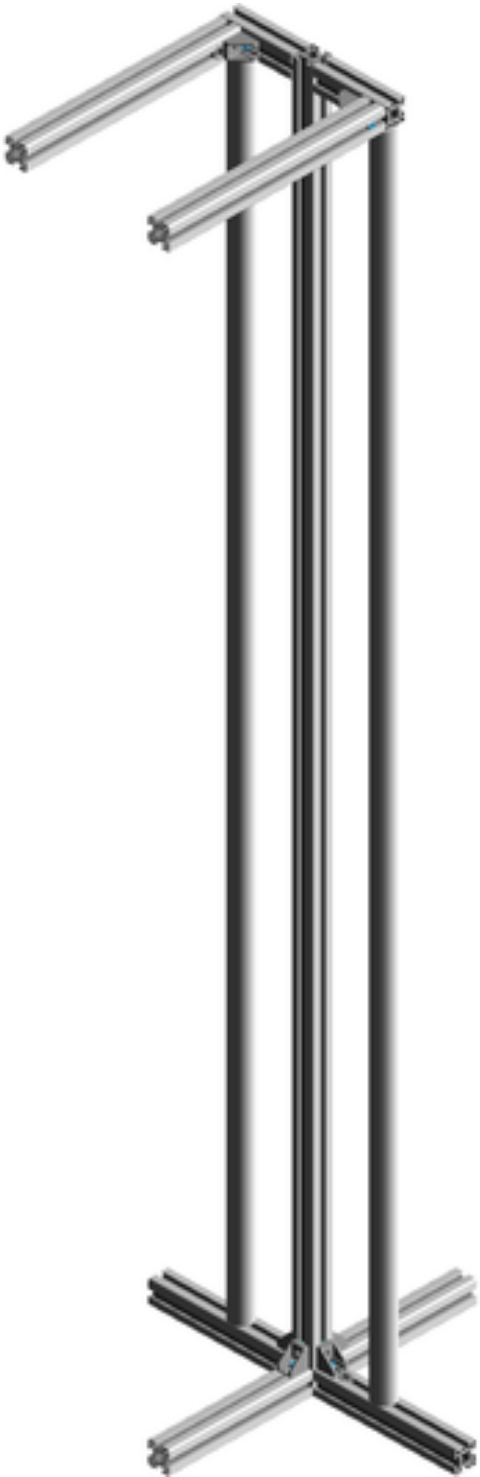


Bill of materials (Number of kits: 1)


| Pos | Article-No                   | Description                                              | Units | Qty |
|-----|------------------------------|----------------------------------------------------------|-------|-----|
| 1   | 1.11.030030.43LP-A00AA4/200  | Profile 30x30, 4F, light, plain                          | MM    | 1   |
| 2   | 1.11.030030.43LP-A00A00/1500 | Profile 30x30, 4F, light, plain **PER DRAWING 1**        | MM    | 1   |
| 2.A | Q11A4I07161-6.5              | Counterbore, left    Ø 6.5 mm, distance 44.8 mm, Side: 4 | EA    | 1   |
| 2.B | Q11A2I07161-6.5              | Counterbore, left    Ø 6.5 mm, distance 44.8 mm, Side: 2 | EA    | 1   |
| 2.C | Q11A3I07161-6.5              | Counterbore, left    Ø 6.5 mm, distance 44.8 mm, Side: 3 | EA    | 1   |
| 2.D | Q11A1I07161-6.5              | Counterbore, left    Ø 6.5 mm, distance 44.8 mm, Side: 1 | EA    | 1   |
| 3   | 1.11.030030.43LP-AA4A00/100  | Profile 30x30, 4F, light, plain                          | MM    | 2   |
| 4   | 1.11.030030.43LP-AA4A00/300  | Profile 30x30, 4F, light, plain **PER DRAWING 2**        | MM    | 2   |
| 4.A | Q11A2I07161-6.5              | Counterbore, left    Ø 6.5 mm, distance 14.8 mm, Side: 2 | EA    | 2   |
| 5   | 1.11.030030.43LP-AA4A00/200  | Profile 30x30, 4F, light, plain                          | MM    | 3   |
| 6   | 1.19.16130-A00A00/1440       | Tube dia: 30x3                                           | MM    | 1   |
| 7   | 1.19.16130-A00A00/1440       | Tube dia: 30x3                                           | MM    | 1   |
| 8   | 1.64.10M6.1                  | Mounting block screw-type, M6, grey                      | EA    | 6   |
| 9   | 0.63.D06912.06008            | Cylindric head screw, DIN 6912 - M6x8                    | EA    | 12  |
| 10  | 1.21.3F0                     | Connector, universal                                     | EA    | 8   |
| 11  | 1.31.FM6                     | Threaded plate F, M6                                     | EA    | 12  |


Total Weight: 5.59 kg (12.32 lbs)


**Isometric view**  
Some accessories may not be shown

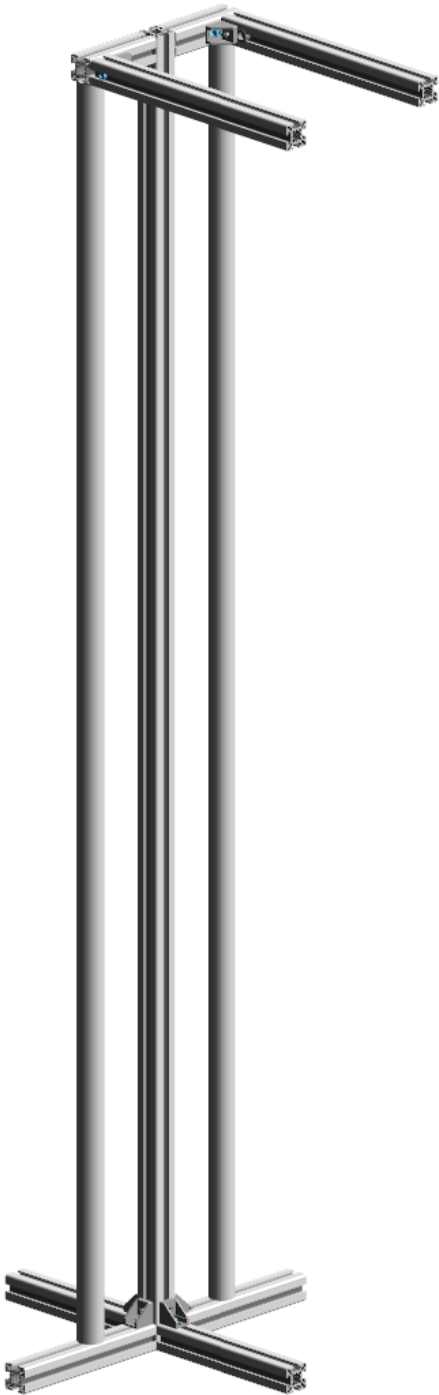



# Multiview

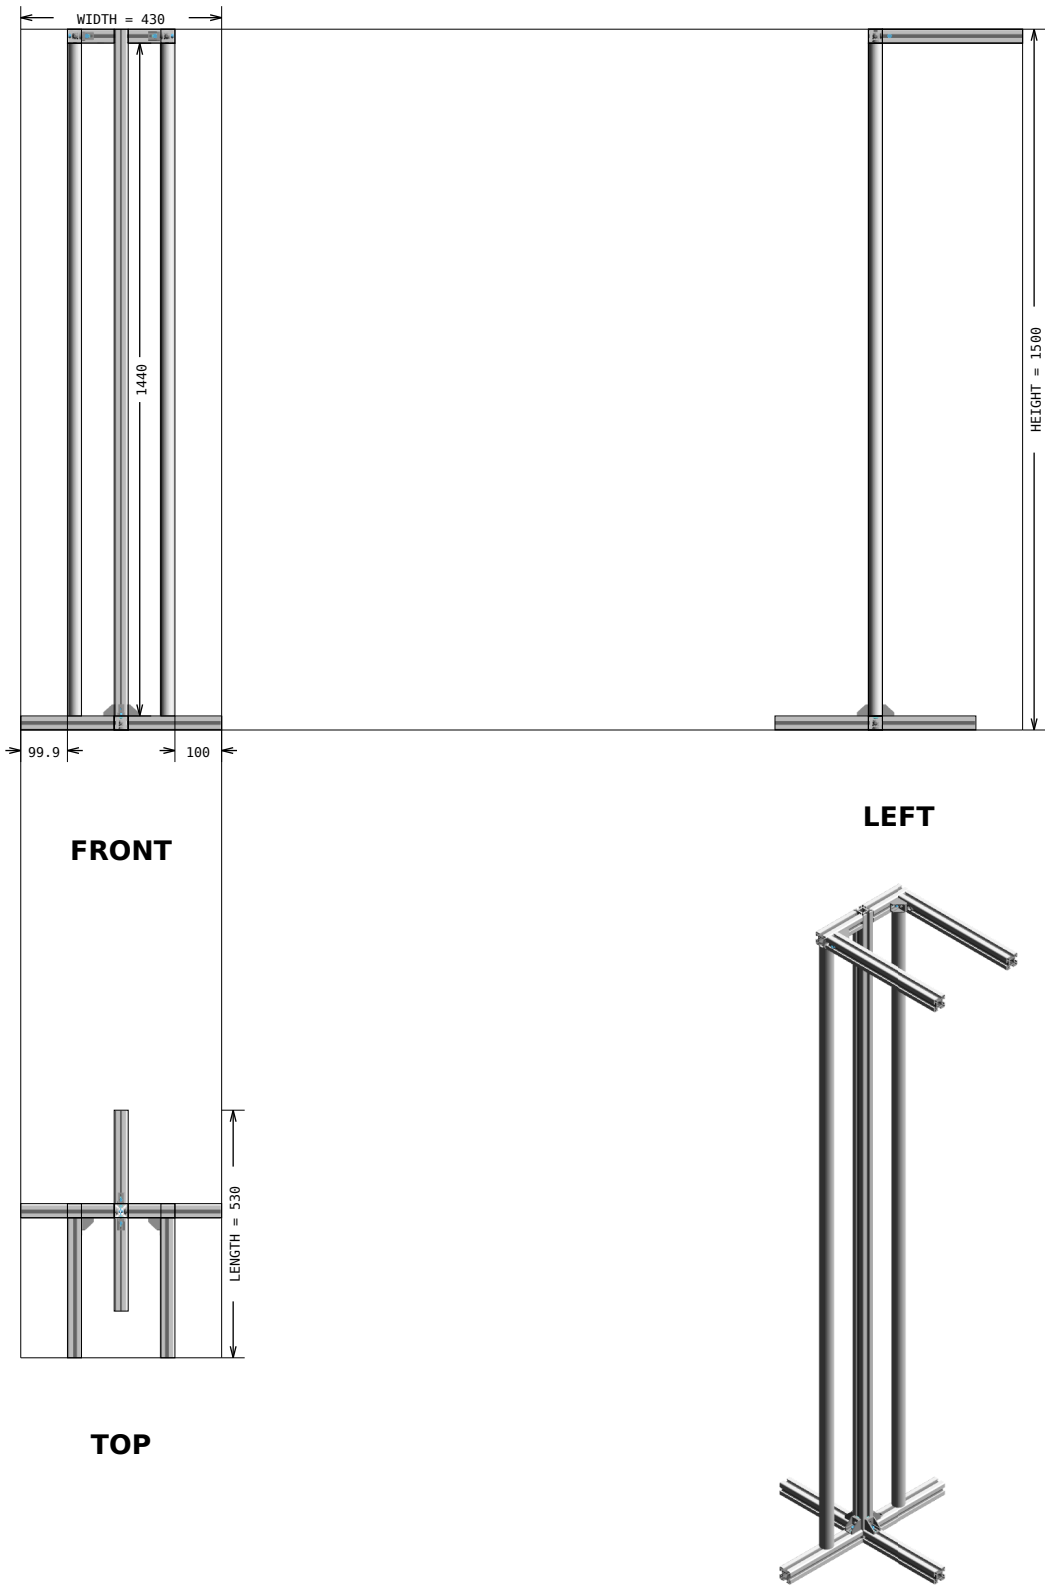

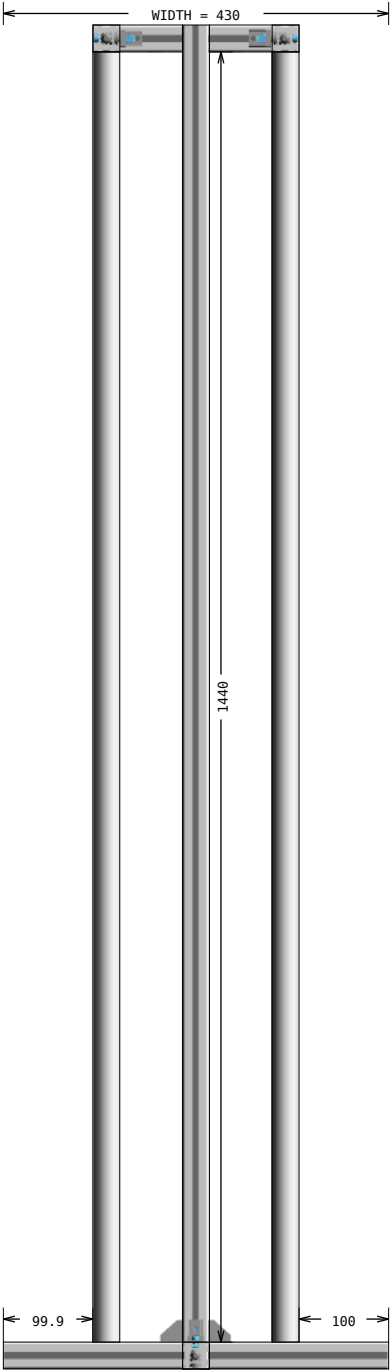

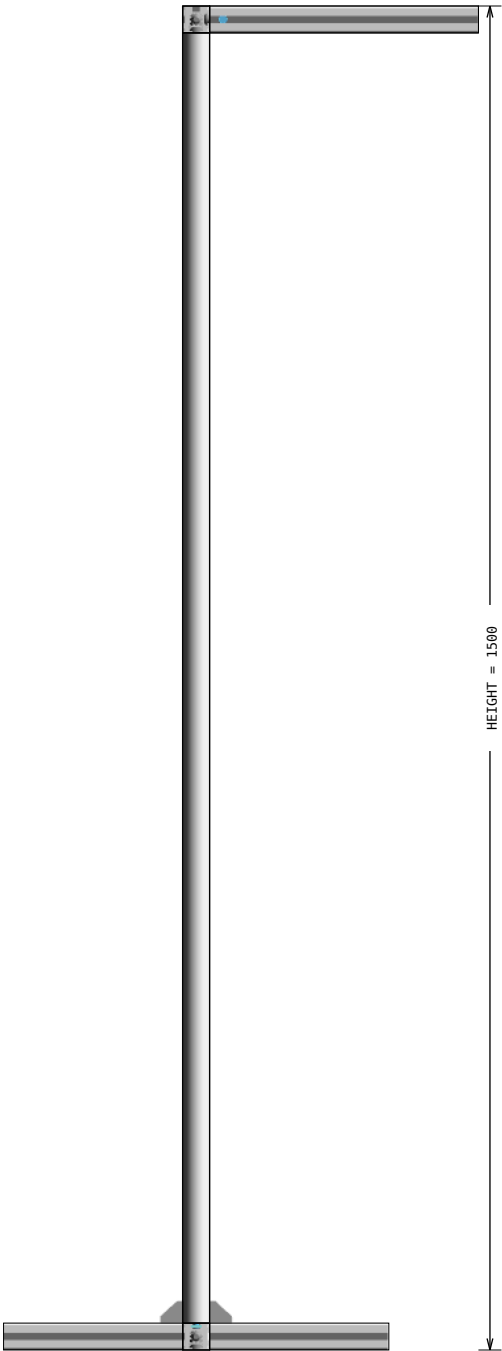

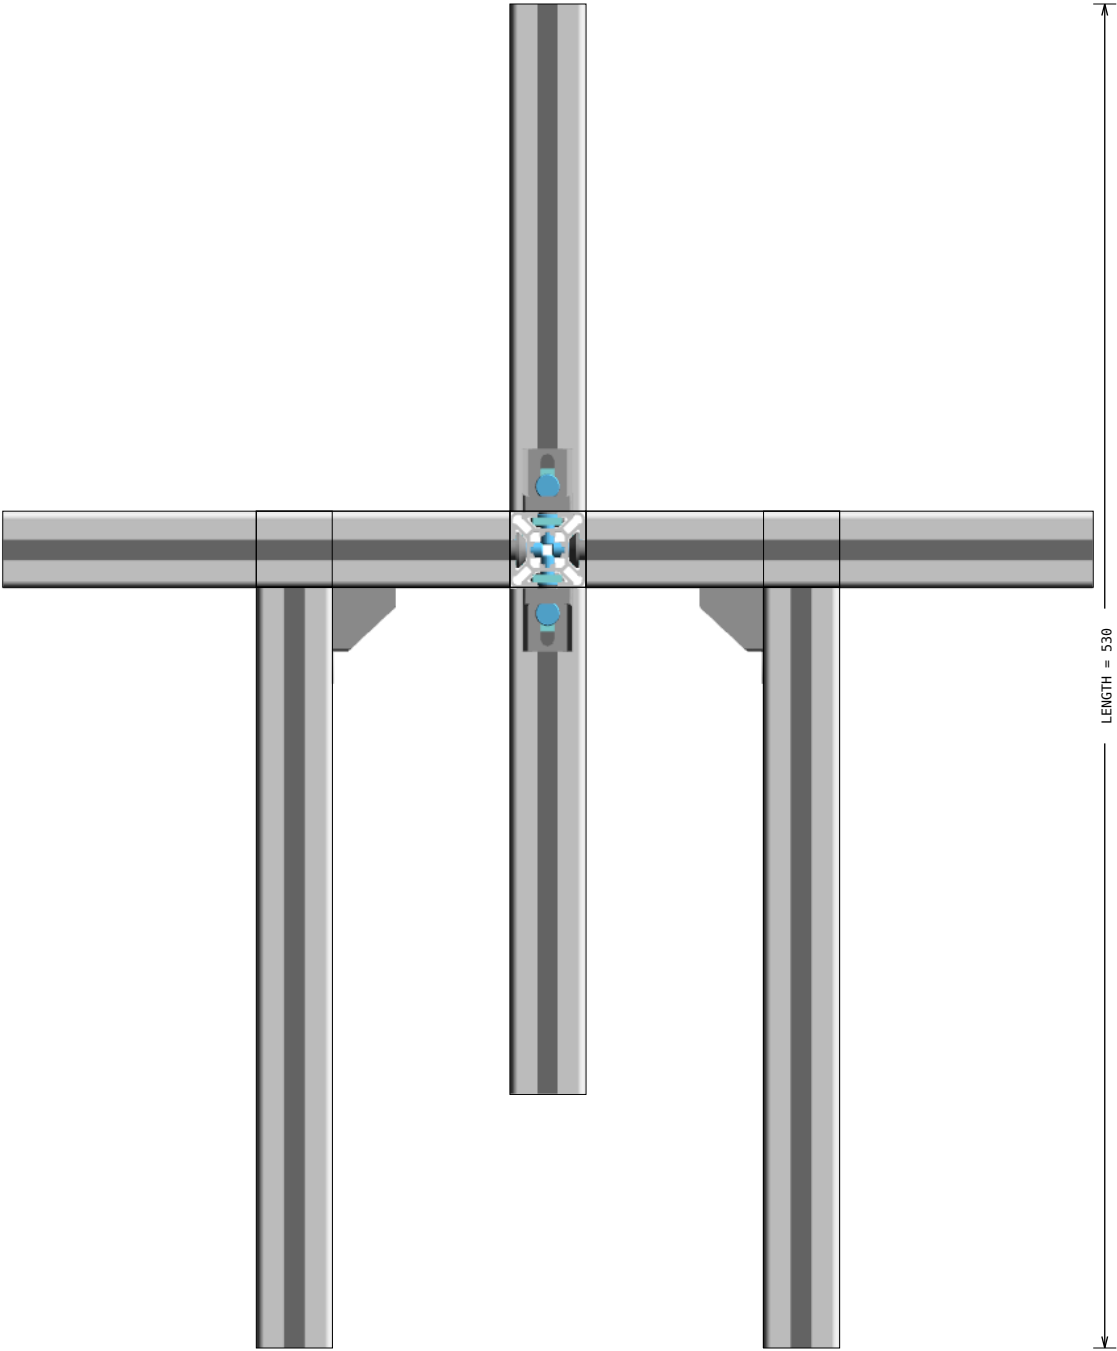

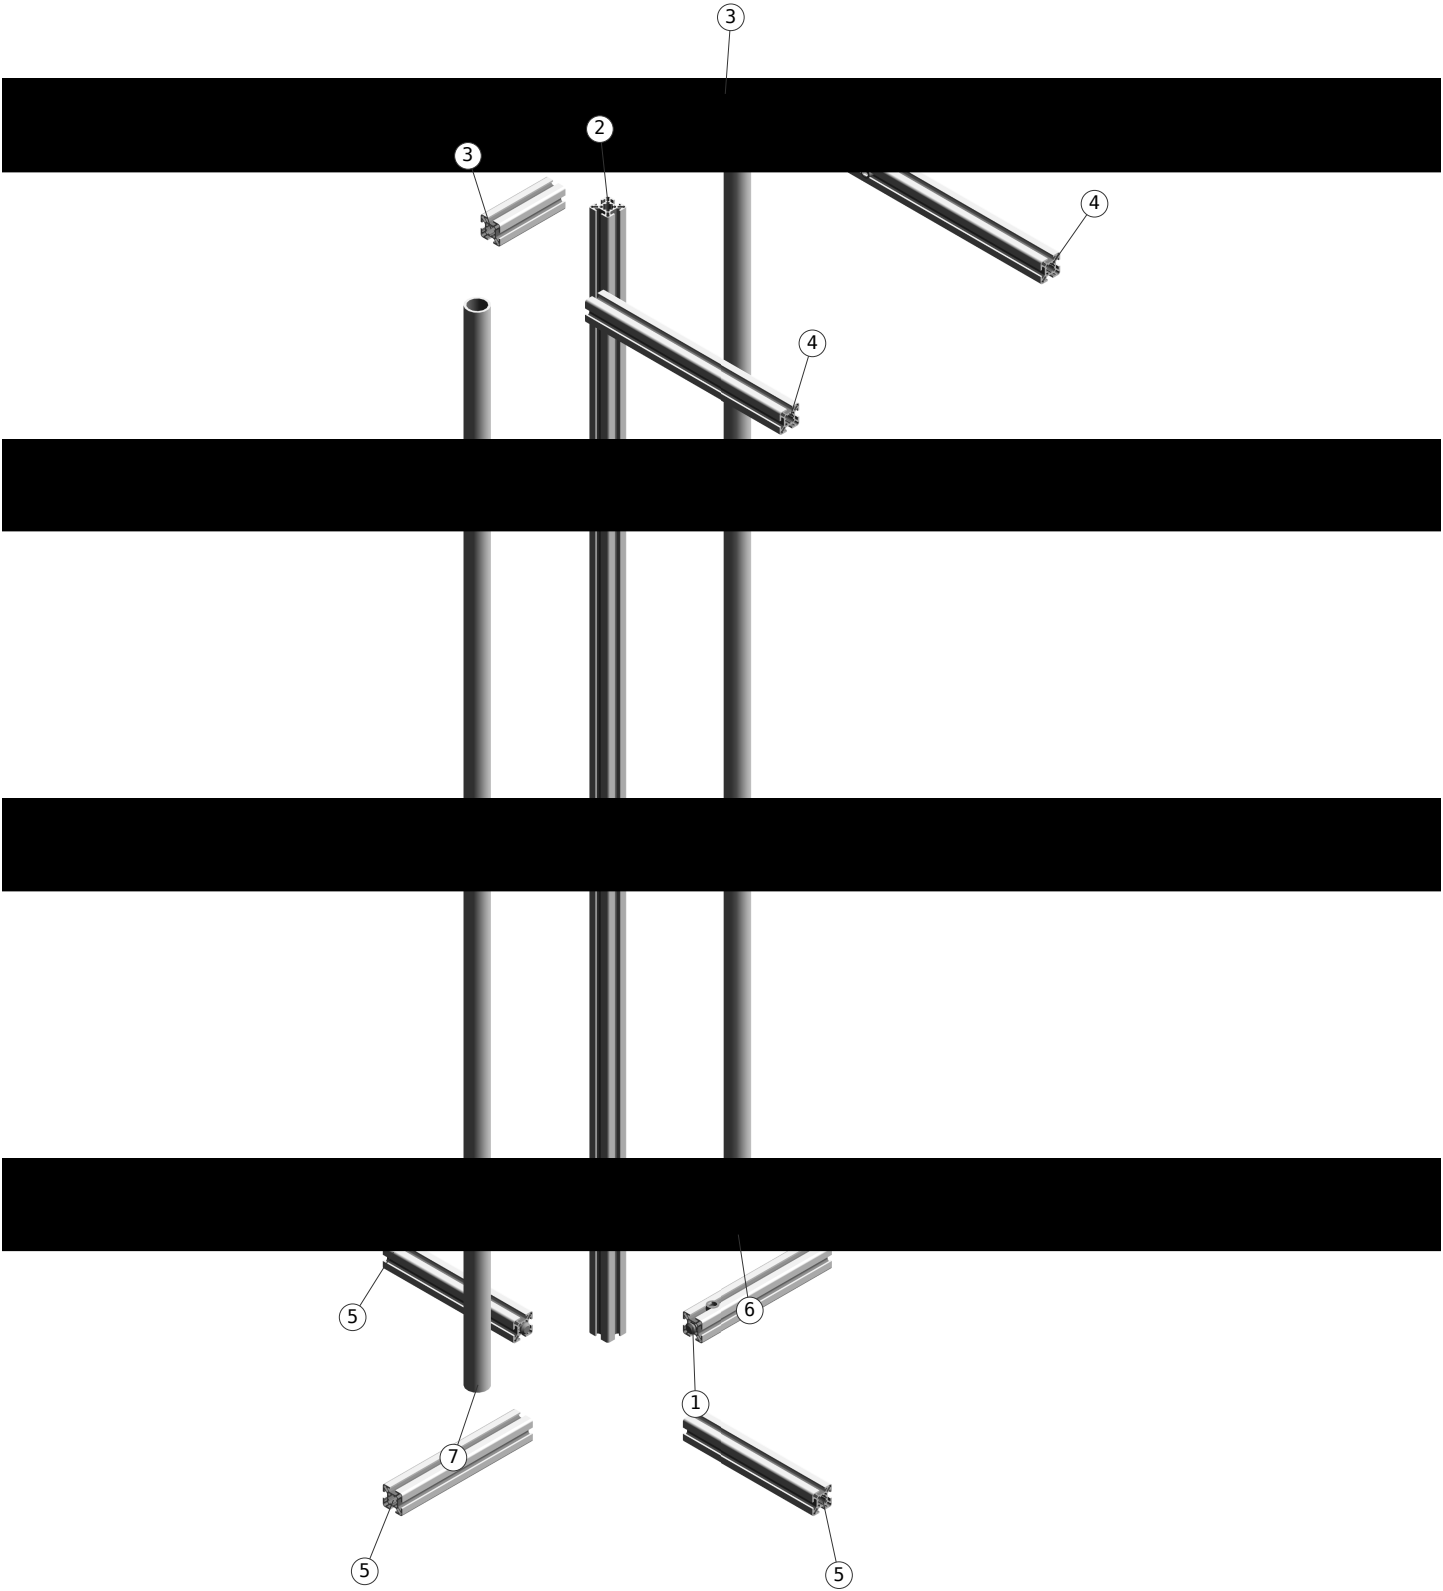





# Assembly List

| Pos | Article-No                  | Description                         | Related parts                                                                              | Qty      |
|-----|-----------------------------|-------------------------------------|--------------------------------------------------------------------------------------------|----------|
| 1   | 1.11.030030.43LP-A00AA4/200 | Profile 30x30, 4F, light, plain     | 1.21.3F0, Connector, universal                                                             | 1        |
| 3   | 1.11.030030.43LP-AA4A00/100 | Profile 30x30, 4F, light, plain     | 1.21.3F0, Connector, universal                                                             | 2        |
| 4   | 1.11.030030.43LP-AA4A00/300 | Profile 30x30, 4F, light, plain     | 1.21.3F0, Connector, universal                                                             | 2        |
| 5   | 1.11.030030.43LP-AA4A00/200 | Profile 30x30, 4F, light, plain     | 1.21.3F0, Connector, universal                                                             | 3        |
| 8   | 1.64.10M6.1                 | Mounting block screw-type, M6, grey | 1.31.FM6, Threaded plate F, M6<br>0.63.D06912.06008, Cylindric head screw, DIN 6912 - M6x8 | 12<br>12 |


# Profile machining details

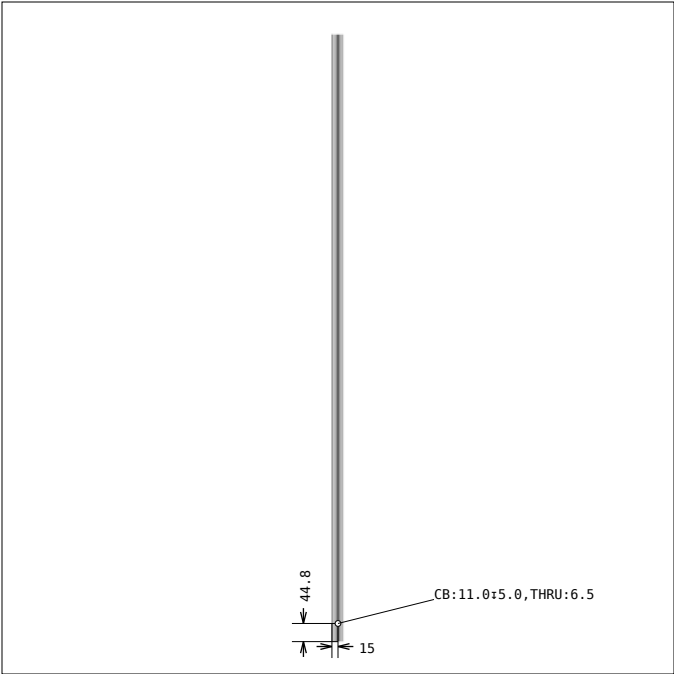


**DRAWING 1, Pos 2**  
**SIDE 1, bar length: 1500.0 mm**

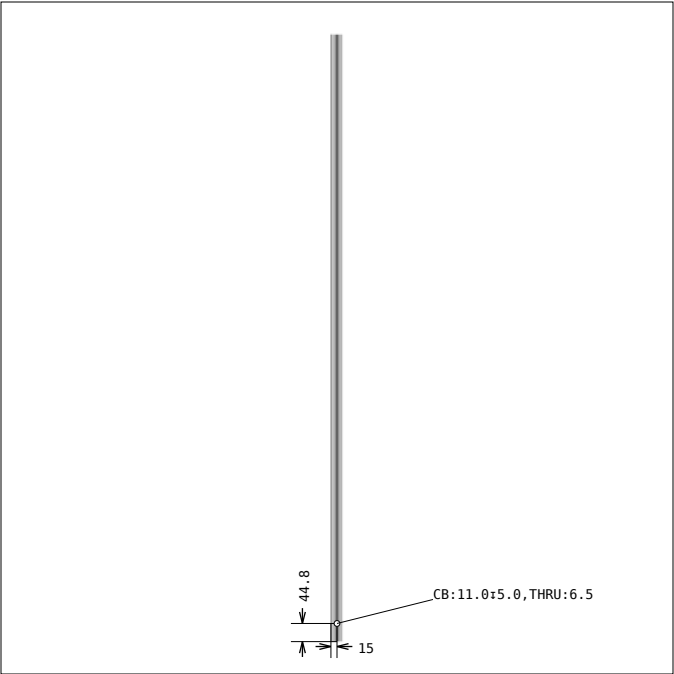

**DRAWING 1, Pos 2**  
**SIDE 2**

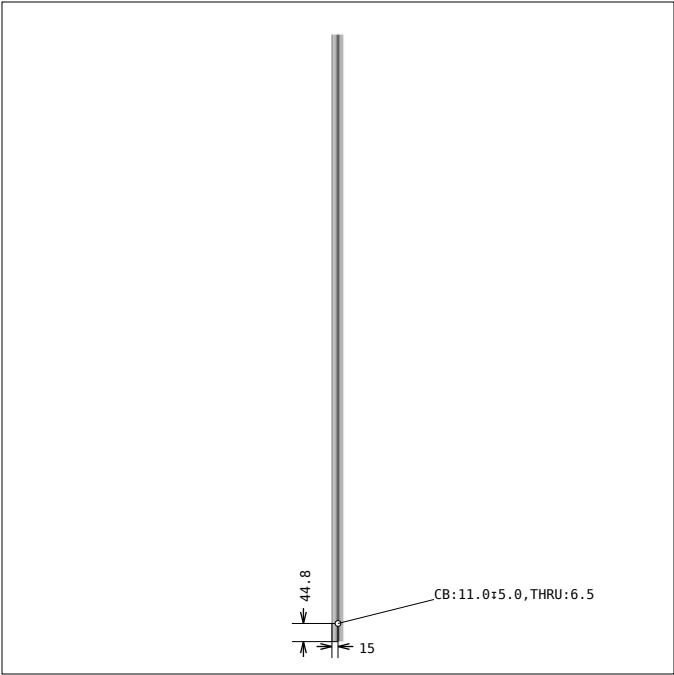


**DRAWING 1, Pos 2**  
**SIDE 3**

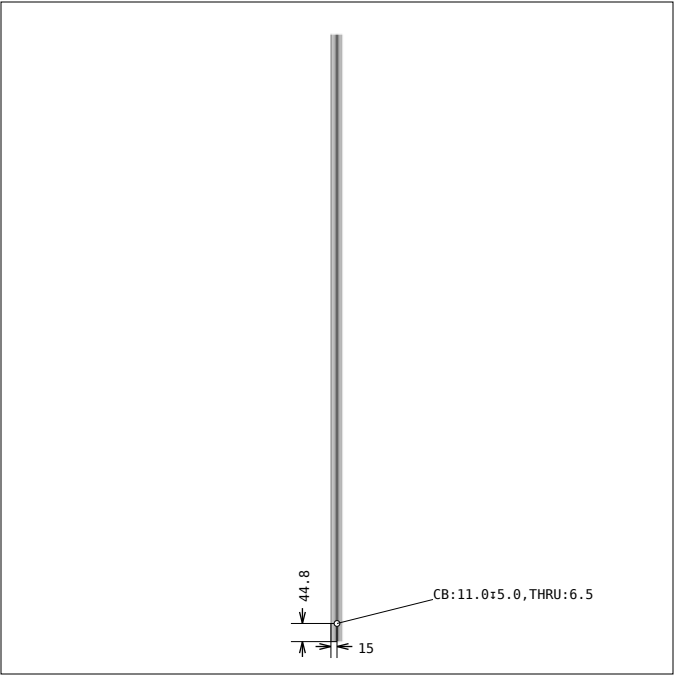


**DRAWING 1, Pos 2**  
**SIDE 4**

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


# Profile machining details

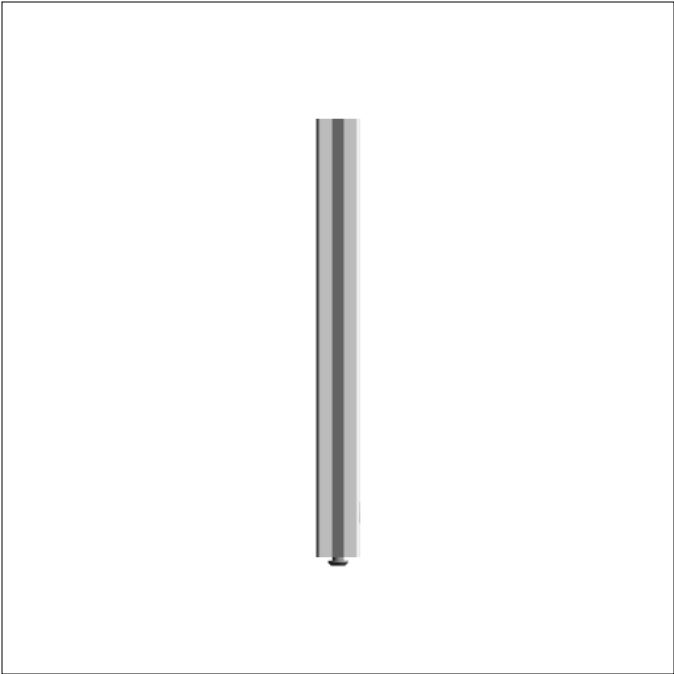


**DRAWING 2, Pos 4**  
**SIDE 1, bar length: 300.0 mm**

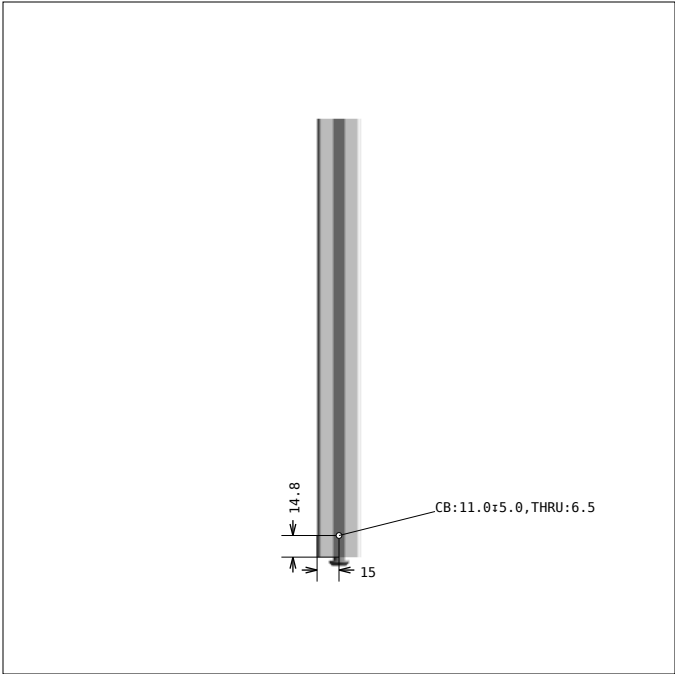

**DRAWING 2, Pos 4**  
**SIDE 2**

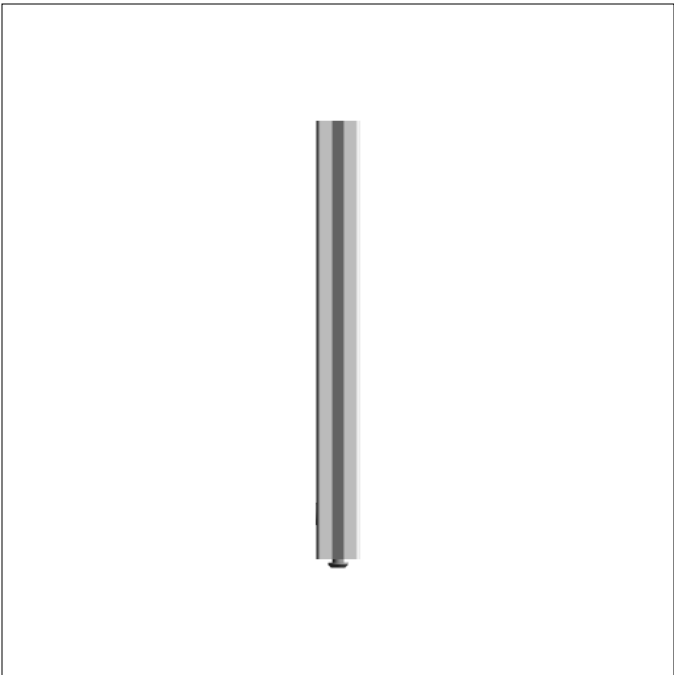



**DRAWING 2, Pos 4**  
**SIDE 3**

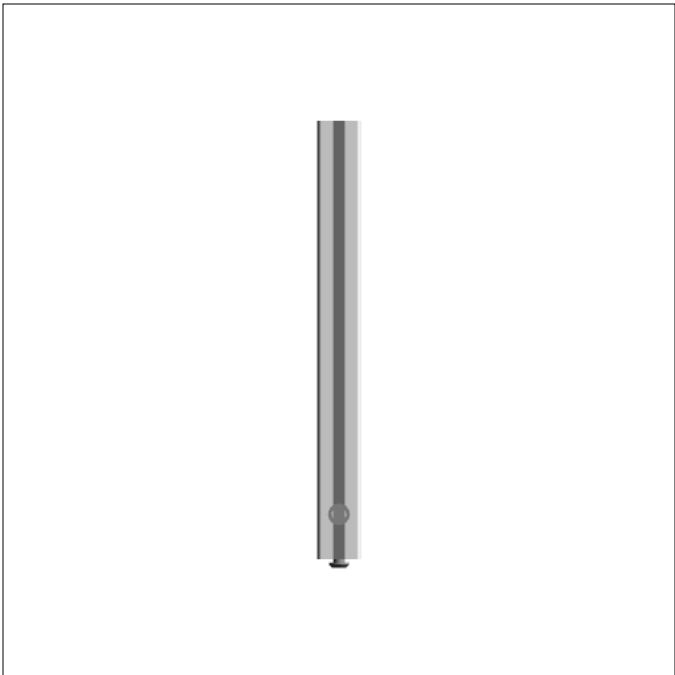







**DRAWING 2, Pos 4**  
**SIDE 4**

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

# Suggested profile cuts (incl. kerf: 3.5 mm)

| Article-No       | Cuts                                                                              | Waste (mm) |
|------------------|-----------------------------------------------------------------------------------|------------|
| 1.19.16130       |  | 3113.0 mm  |
| 1.11.030030.43LP |  | 2868.5 mm  |

# Assembly hints
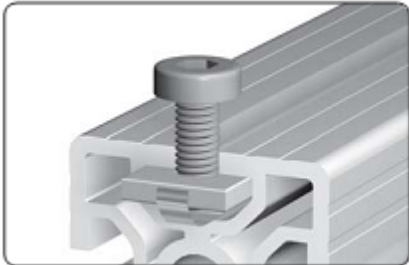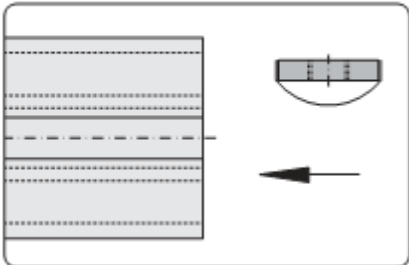
|            |          |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------|----------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CONNECTOR  | 1.21.3F0 | Connector, universal | <div><div><p>Insert the cross bushing</p></div><div><p>Push in the anchor</p></div><div><p>Pretension the anchor</p></div><div><p>Neck flush to the profile front side</p><p><b>Comments</b><br/>For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side</p></div></div> <div>Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.</div> |
| PNL_FASTEN | 1.31.FM6 | Threaded plate F, M6 | <div><div><p>Fixed into position with leaf spring</p></div><div><p><b>Assembly</b><br/>Insert from end</p></div></div> <div>These plates must be inserted from the open side of the profile, prior to final frame assembly</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |