


Design Title : Lamp 02.scene  
Revision Level :  
Approved by :  
Designer :  
Company :  
Address :  
E-Mail :  
Phone :  
Date : 2025-06-19

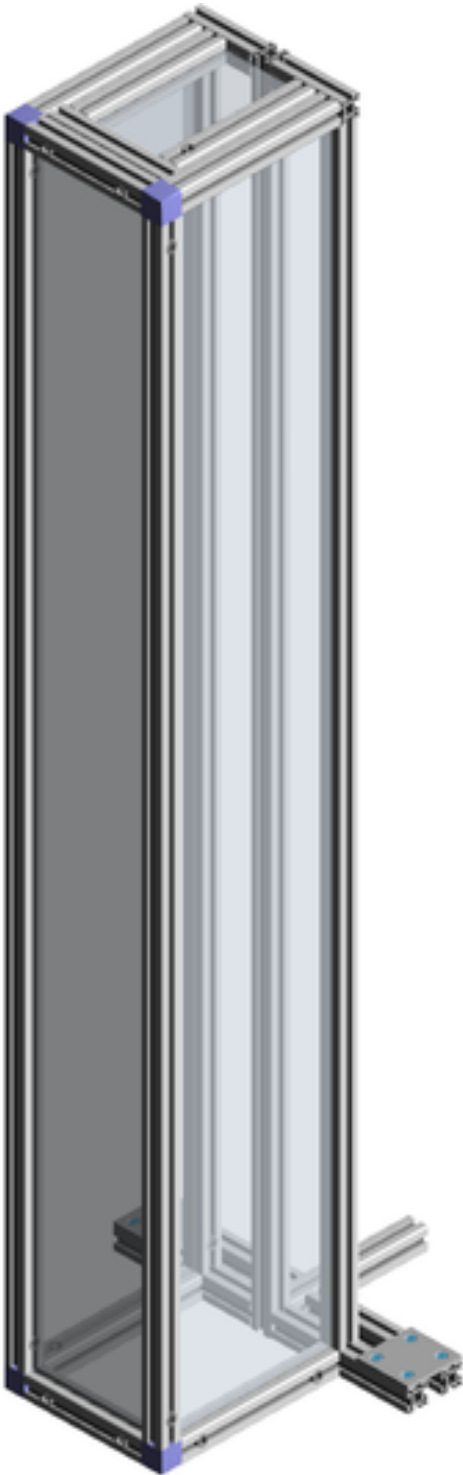


Bill of materials (Number of kits: 1)

| Pos | Article-No                   | Description                                                    | Units | Qty |
|-----|------------------------------|----------------------------------------------------------------|-------|-----|
| 1   | 1.11.030030.43LP-AA4AA4/170  | Profile 30x30, 4F, light, plain **PER DRAWING 1**              | MM    | 1   |
| 2   | 1.11.030030.43LP-AA1AA1/200  | Profile 30x30, 4F, light, plain                                | MM    | 1   |
| 3   | 1.11.030030.43LP-A00AA4/200  | Profile 30x30, 4F, light, plain                                | MM    | 1   |
| 4   | 1.11.030030.43LP-AA4AA1/200  | Profile 30x30, 4F, light, plain                                | MM    | 1   |
| 5   | 1.11.030030.43LP-AA4AA1/230  | Profile 30x30, 4F, light, plain                                | MM    | 1   |
| 6   | 1.11.030030.43LP-A00A00/1500 | Profile 30x30, 4F, light, plain                                | MM    | 1   |
| 7   | 1.11.030030.43LP-AA4A00/100  | Profile 30x30, 4F, light, plain                                | MM    | 2   |
| 8   | 1.11.030030.43LP-AA4AA4/170  | Profile 30x30, 4F, light, plain                                | MM    | 2   |
| 9   | 1.11.030030.43LP-AA4A00/1439 | Profile 30x30, 4F, light, plain                                | MM    | 2   |
| 10  | 1.11.030030.43LP-AA4AA4/1440 | Profile 30x30, 4F, light, plain                                | MM    | 2   |
| 11  | 1.11.030030.43LP-AA4AA4/230  | Profile 30x30, 4F, light, plain                                | MM    | 3   |
| 12  | 1.11.030030.43LP-AA4A00/200  | Profile 30x30, 4F, light, plain                                | MM    | 4   |
| 13  | 1.41.F14.1                   | Combination profile PP, F, 1-4.5, grey (bar 2.5 m)             | EA    | 5   |
| 17  | 1.47.50758                   | Connection plate 75x80                                         | EA    | 2   |
| 18  | 1.48.331                     | Corner piece cubic 30, anodized                                | EA    | 4   |
| 19  | 0.63.D07991.06010            | Flat head screw, DIN 7991 - M6x10                              | EA    | 8   |
| 20  | 1.21.3F0                     | Connector, universal                                           | EA    | 31  |
| 21  | 1.21.3F5                     | Connector, parallel-square                                     | EA    | 2   |
| 22  | 1.32.4FM6                    | T-Nut for subsequent insertion, w. spring F, M6                | EA    | 8   |
|     |                              | <b>Frame weight:</b> 10.63 kg (23.44 lbs)                      |       |     |
| 14  | 2.87.1571-99                 | Polycarbonat 4mm, SIZE: 110.00MM x 210.00MM **PER DRAWING 2**  | SM    | 1   |
| 15  | 2.87.1571-99                 | Polycarbonat 4mm, SIZE: 180.00MM x 1450.00MM **PER DRAWING 3** | SM    | 1   |
| 16  | 2.87.1571-99                 | Polycarbonat 4mm, SIZE: 240.00MM x 1450.00MM **PER DRAWING 4** | SM    | 2   |
|     |                              | <b>Panels weight:</b> 4.08 kg (8.99 lbs)                       |       |     |
|     |                              | <b>Total Weight:</b> 14.71 kg (32.43 lbs)                      |       |     |

**Isometric view**  
Some accessories may not be shown





# Multiview

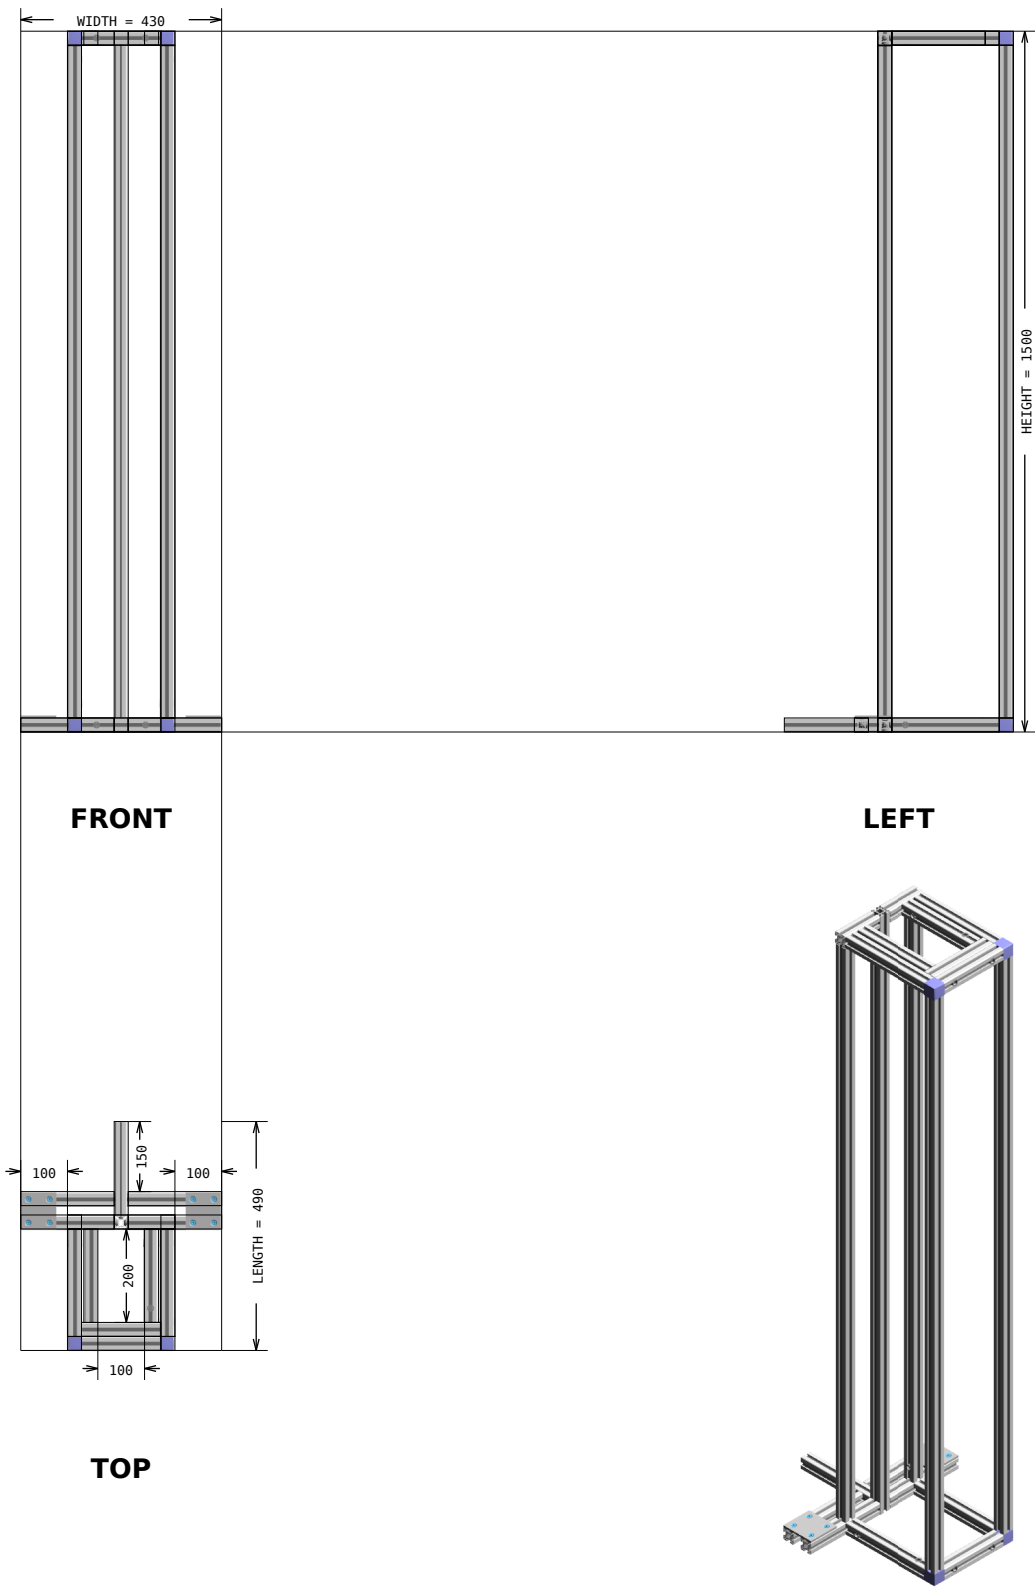



Design Title : Lamp 02.scene  
Customer Name :  
Date : 2025-06-19

FRONT VIEW

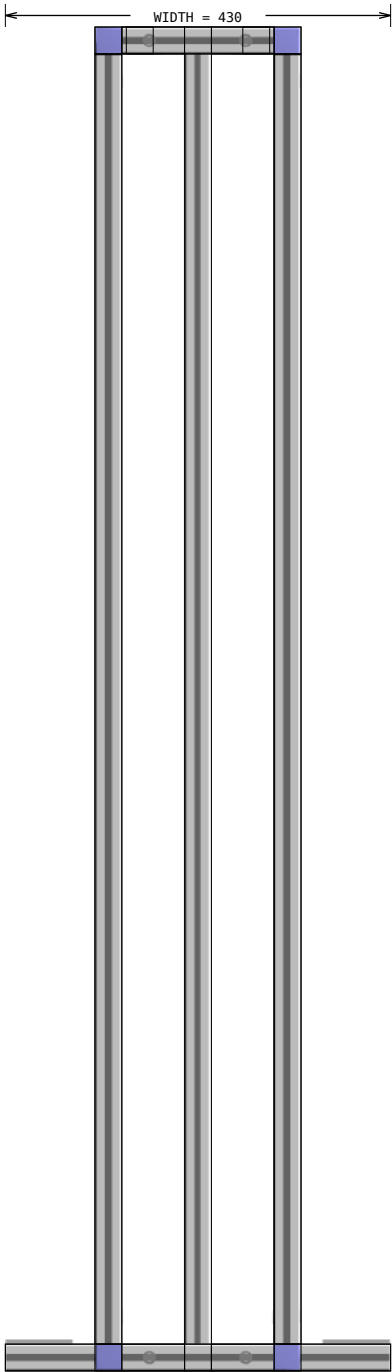


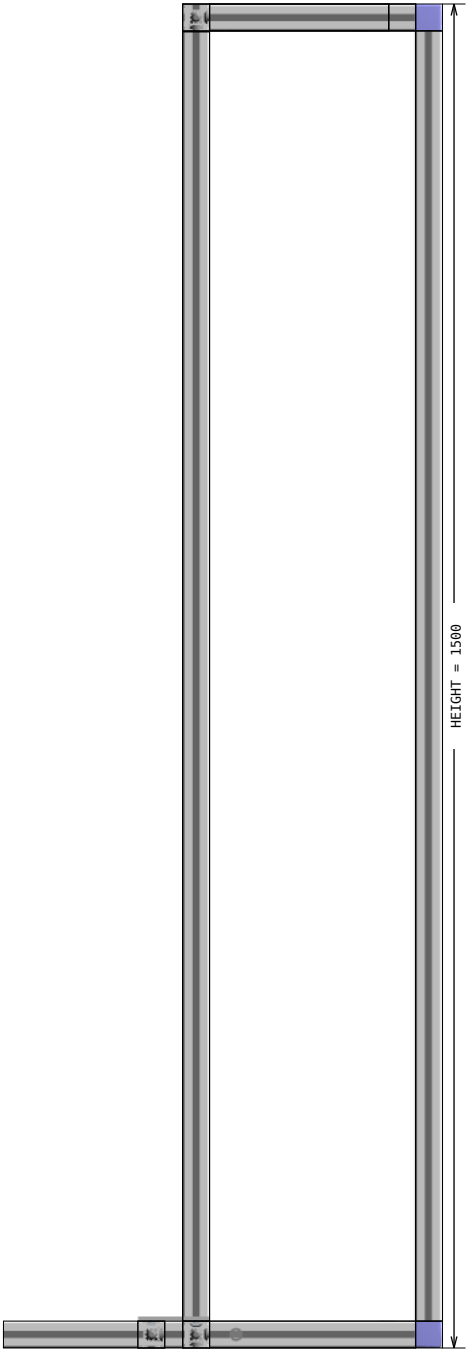

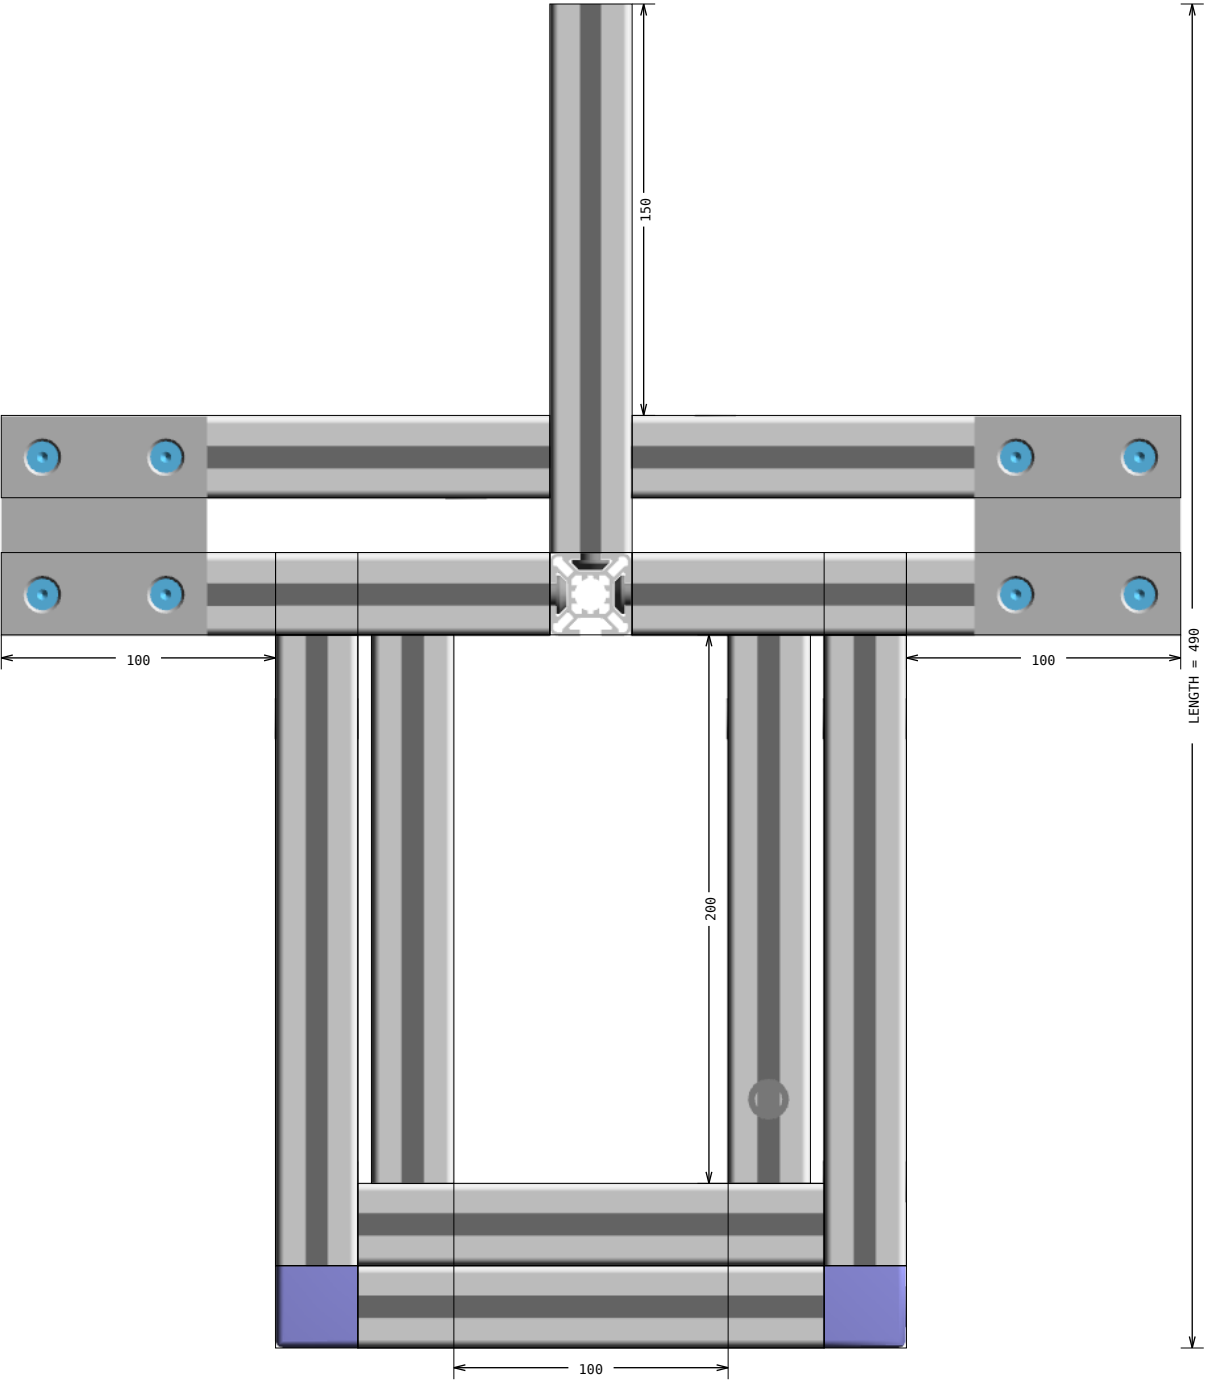

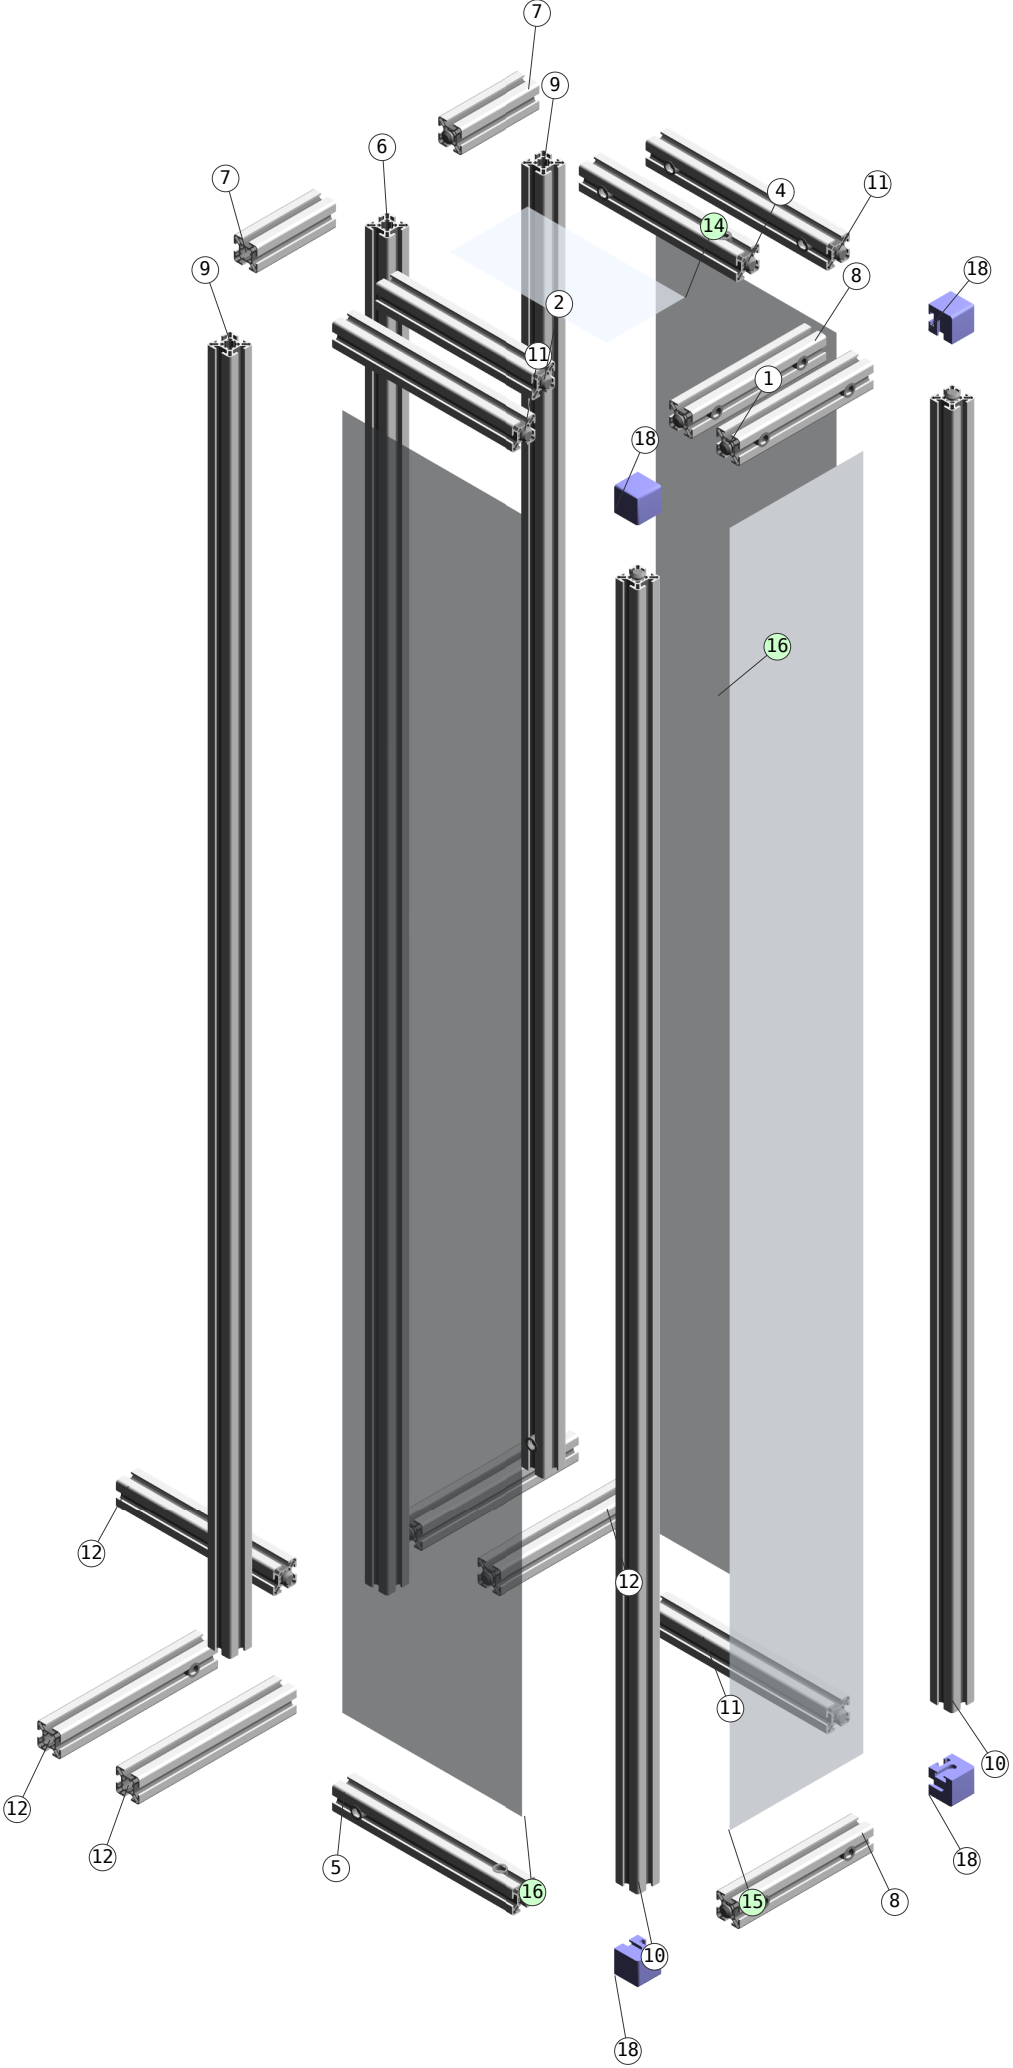




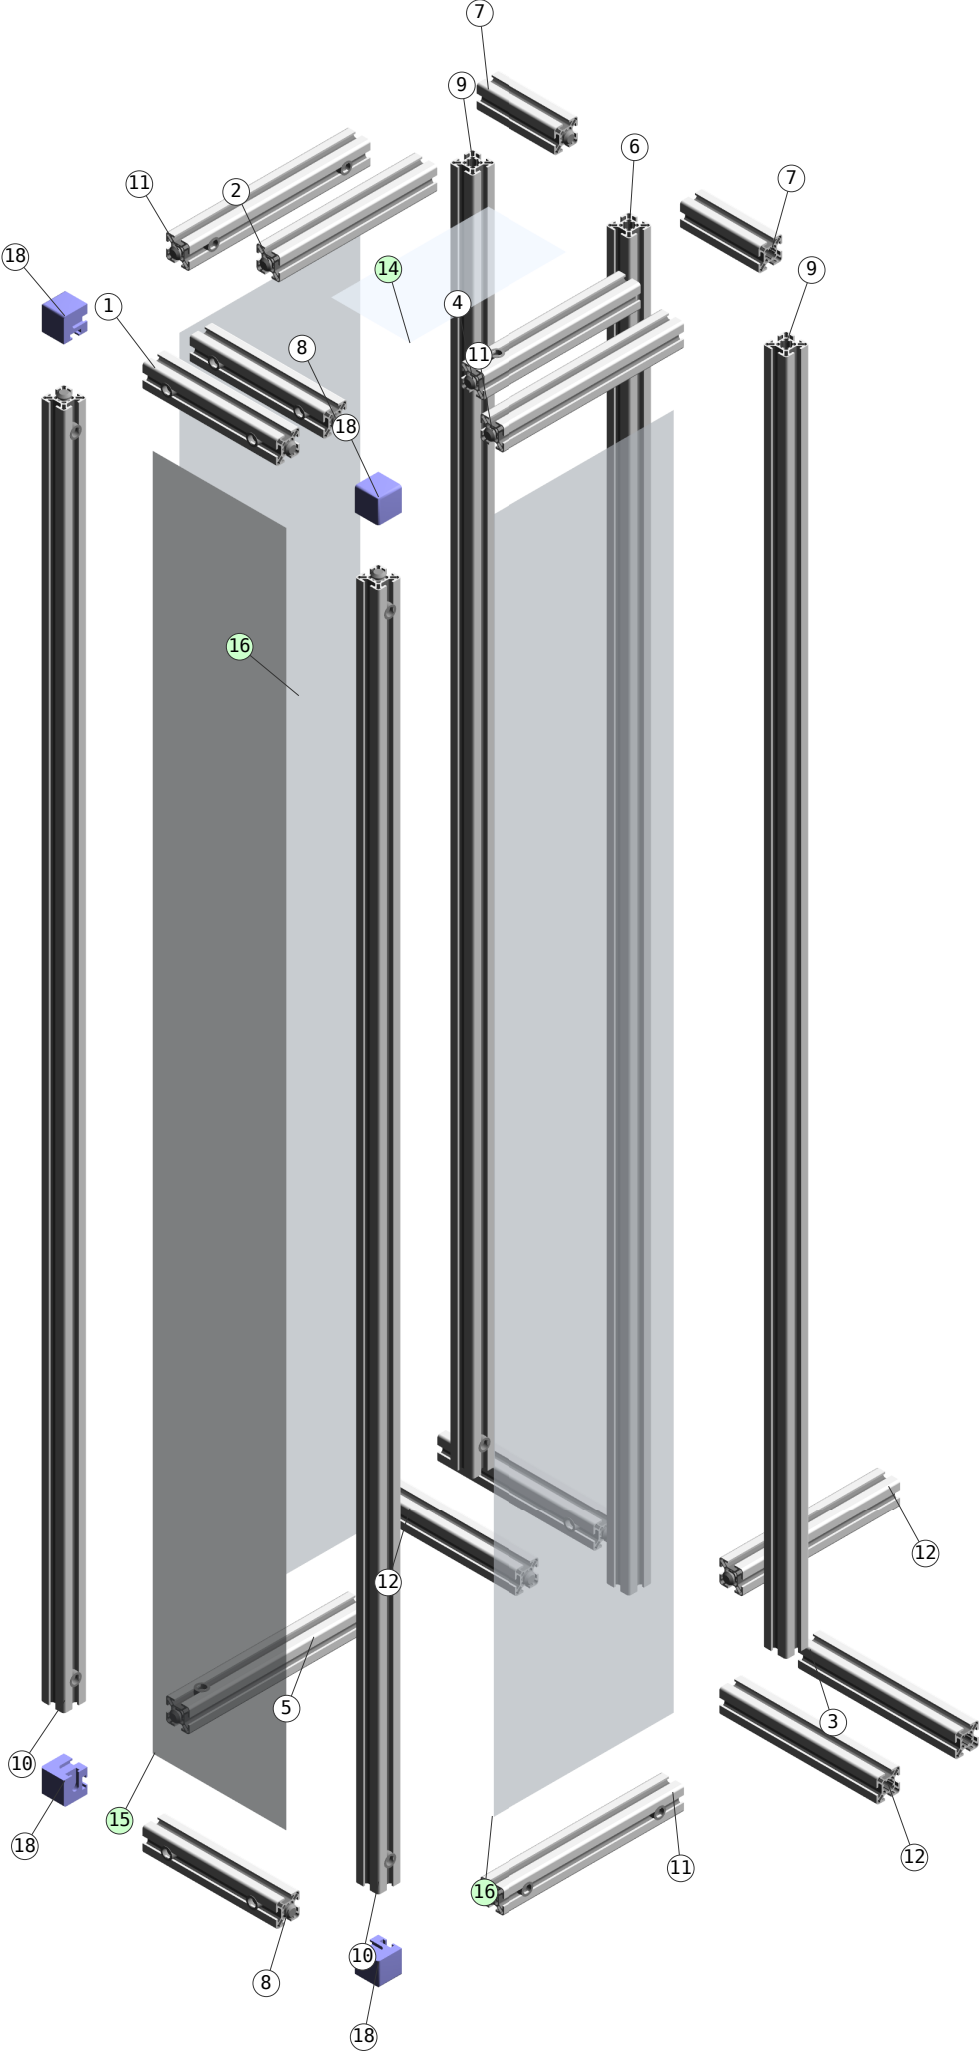


Assembly List

| Pos | Article-No                   | Description                     | Related parts                                                                                                      | Qty    |
|-----|------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------|--------|
| 1   | 1.11.030030.43LP-AA4AA4/170  | Profile 30x30, 4F, light, plain | 1.21.3F5, Connector, parallel-square<br>1.21.3F0, Connector, universal                                             | 2<br>2 |
| 2   | 1.11.030030.43LP-AA1AA1/200  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal                                                                                     | 2      |
| 3   | 1.11.030030.43LP-A00AA4/200  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal                                                                                     | 1      |
| 4   | 1.11.030030.43LP-AA4AA1/200  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal                                                                                     | 2      |
| 5   | 1.11.030030.43LP-AA4AA1/230  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal<br>1.21.3F0, Connector, universal                                                   | 1<br>1 |
| 7   | 1.11.030030.43LP-AA4A00/100  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal                                                                                     | 2      |
| 8   | 1.11.030030.43LP-AA4AA4/170  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal<br>1.21.3F0, Connector, universal                                                   | 2<br>2 |
| 9   | 1.11.030030.43LP-AA4A00/1439 | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal                                                                                     | 2      |
| 10  | 1.11.030030.43LP-AA4AA4/1440 | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal                                                                                     | 4      |
| 11  | 1.11.030030.43LP-AA4AA4/230  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal<br>1.21.3F0, Connector, universal                                                   | 3<br>3 |
| 12  | 1.11.030030.43LP-AA4A00/200  | Profile 30x30, 4F, light, plain | 1.21.3F0, Connector, universal                                                                                     | 4      |
| 17  | 1.47.50758                   | Connection plate 75x80          | 1.32.4FM6, T-Nut for subsequent insertion, w. spring F, M6<br>0.63.D07991.06010, Flat head screw, DIN 7991 - M6x10 | 8<br>8 |


# Profile machining details

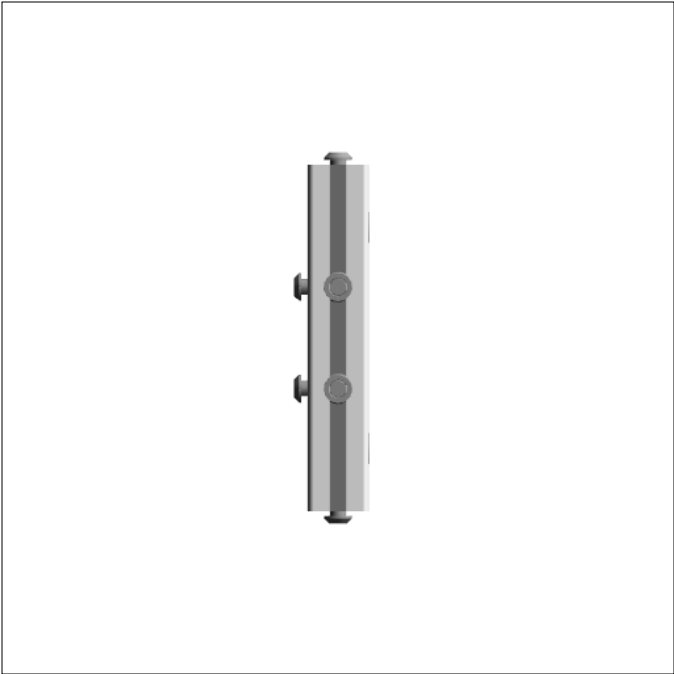

**DRAWING 1, Pos 1**  
**SIDE 1, bar length: 170.0 mm**

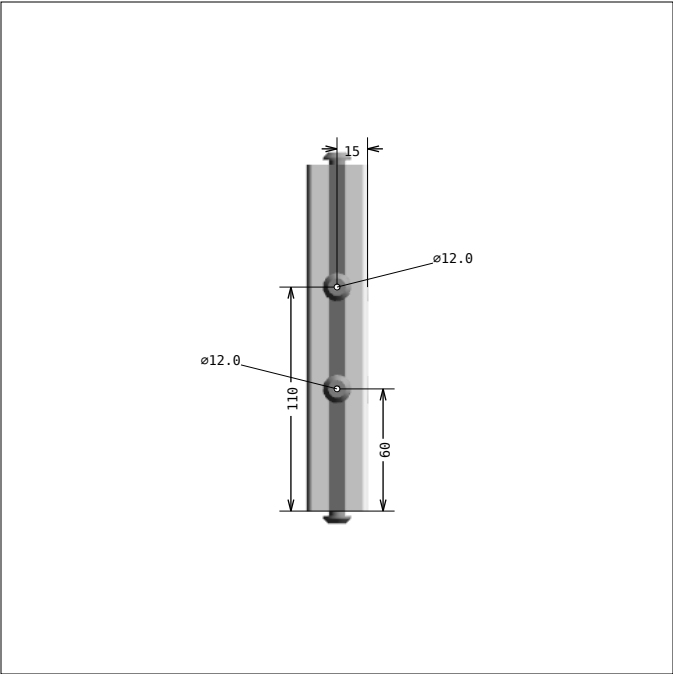

**DRAWING 1, Pos 1**  
**SIDE 2**

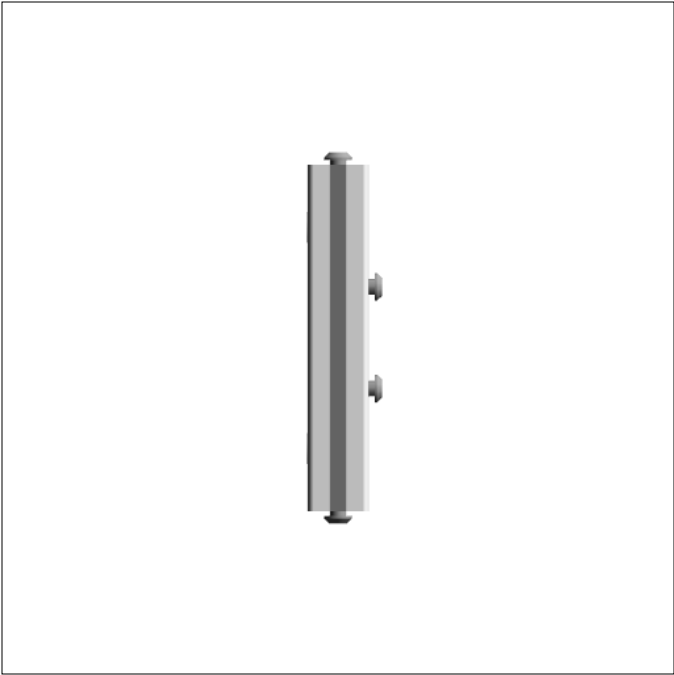


**DRAWING 1, Pos 1**  
**SIDE 3**




**DRAWING 1, Pos 1**  
**SIDE 4**

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


# Panels

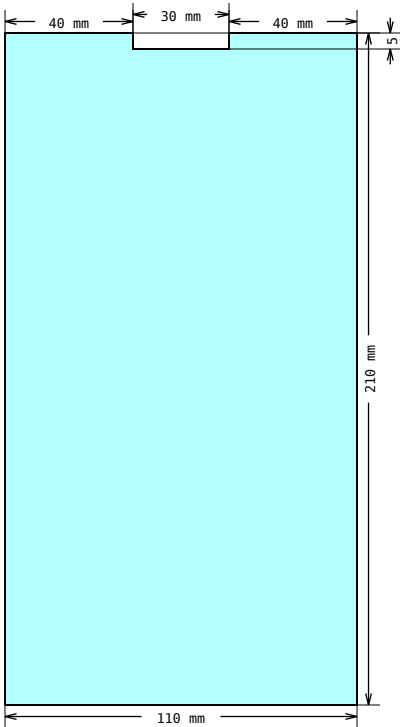

**DRAWING 2, Pos 14**  
Shape measurements

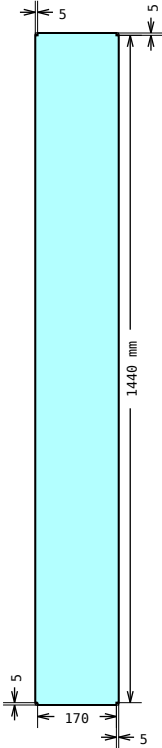

**DRAWING 3, Pos 15**  
Shape measurements





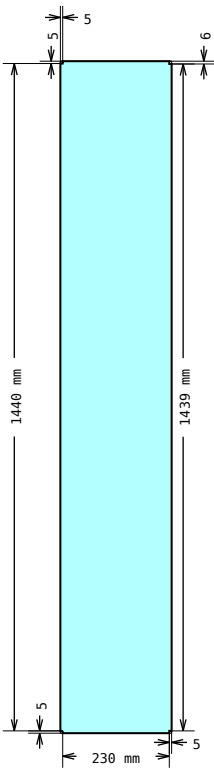


**DRAWING 4, Pos 16**  
Shape measurements



# Suggested profile cuts (incl. kerf: 3.5 mm)

| Article-No       | Cuts                                                                                                                         | Waste (mm) |
|------------------|------------------------------------------------------------------------------------------------------------------------------|------------|
| 1.11.030030.43LP | <div><div><div>7</div><div>9</div><div>10</div><div>10</div><div>6</div></div><div>100.01439.01440.01440.01500.0</div></div> | 63.5 mm    |
|                  | <div><div><div>781812432121211511119</div><div>100.0170.0200.0200.0200.0200.0200.0230.0230.01439.0</div></div></div>         | 1575.0 mm  |

Assembly hints
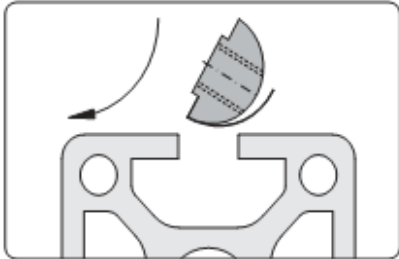
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |           |                                                 |                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACCESSORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1.32.4FM6 | T-Nut for subsequent insertion, w. spring F, M6 |                                                                                                                                                                |
| <div><p>Fixing with leaf spring</p><p><b>Application</b><br/>Fastening element for screw-type connections</p><p>Insert front-sided and rotate</p><p><b>Technical data</b><br/>Design steel:<br/>• material: steel<br/>• surface: galvanised<br/>Design stainless:<br/>• material: stainless steel 1.4305<br/>• surface: pickled and passivated<br/>max. moment of torque: <math>M_{A, max}</math></p></div>                                                                            |           |                                                 | These t-nuts are easily inserted into assembled frames                                                                                                         |
| CONNECTOR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1.21.3F0  | Connector, universal                            |                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.21.3F5  | Connector, parallel-square                      |                                                                                                                                                                |
| <div><p>Insert the cross bushing</p><p>Push in the anchor</p><p>Pretension the anchor</p><p>Neck flush to the profile front side</p><p><b>Comments</b><br/>For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side</p></div> |           |                                                 | Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles. |

# Assembly hints
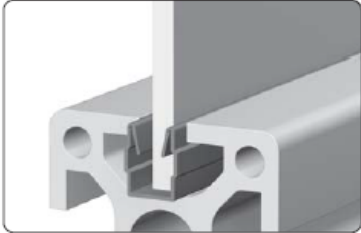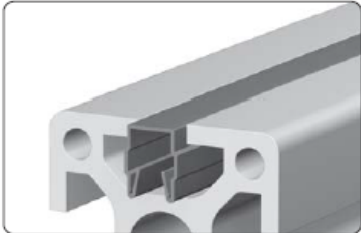
|                                                                                                                                                                                                                                                          |            |                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| None                                                                                                                                                                                                                                                     | 1.41.F14.1 | Combination profile PP, F, 1-4.5, grey (bar 2.5 m)                                                                                                                                                                                                                                                                                                          |
| <div><p>Use as reduction profile</p></div> <div><p>Use as slot-cover profile</p></div> |            | <p><b>Application</b><br/>Combination profiles for use as reduction or cover profiles</p> <p><b>Technical data</b><br/>bar length: 2.5 m<br/>material: PP<br/>• oil and water resistant</p> <p><b>Colours:</b> grey<br/>black<br/>orange<br/>red<br/>blue<br/>green</p> <p>These profiles fill the space between the panel and the walls of the T-slot.</p> |