

Design Title : Lamp 03.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

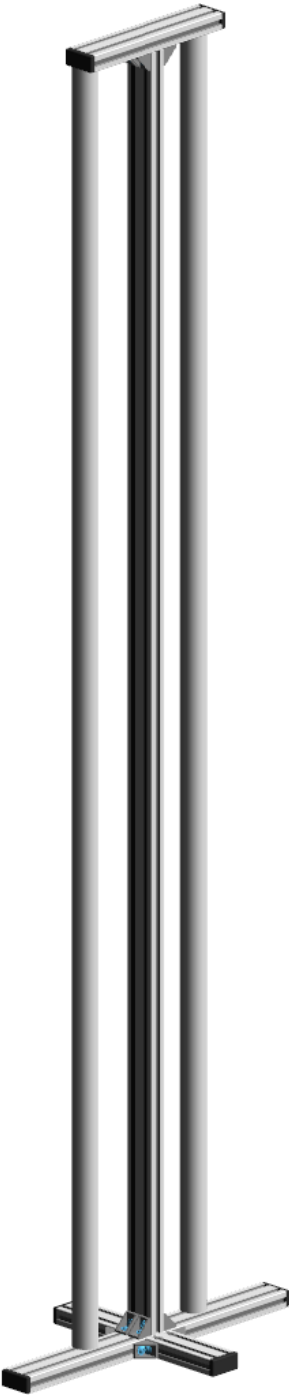


Bill of materials (Number of kits: 1)


Pos	Article-No	Description	Units	Qty
1	1.10.020040.64LP-AB4A00/100	Profile 20x40, 6H, light, plain	MM	1
2	1.10.020040.64LP-AB2A00/100	Profile 20x40, 6H, light, plain	MM	1
3	1.10.020040.64LP-A00A00/200	Profile 20x40, 6H, light, plain	MM	1
4	1.10.020040.64LP-A00A00/400	Profile 20x40, 6H, light, plain	MM	1
5	1.10.020040.64LP-AB2AB2/1500	Profile 20x40, 6H, light, plain	MM	1
6	1.19.16130-A00A00/1500	Tube dia: 30x3	MM	1
7	1.19.16130-A00A00/1500	Tube dia: 30x3	MM	1
8	1.41.H02.2	Combination profile PVC, H, B2, black (bar 2.5 m)	EA	3
9	1.42.10204.2	Cover cap 20x40, black	EA	6
10	1.46.204.1720.2	Angle GD-Zn, 17x20, powder-coated	EA	12
11	0.63.WN7381.05006	Round head flange screw, M5x6, WN7381	EA	24
12	1.20.2H0	Connector, universal	EA	8
13	1.31.HM5	Threaded plate H, M5	EA	24
14	1.46.204.1720A	Cover cap for angle GD-Zn, 17x20	EA	12


Total Weight: 5.97 kg (13.17 lbs)


Isometric view
Some accessories may not be shown





Multiview

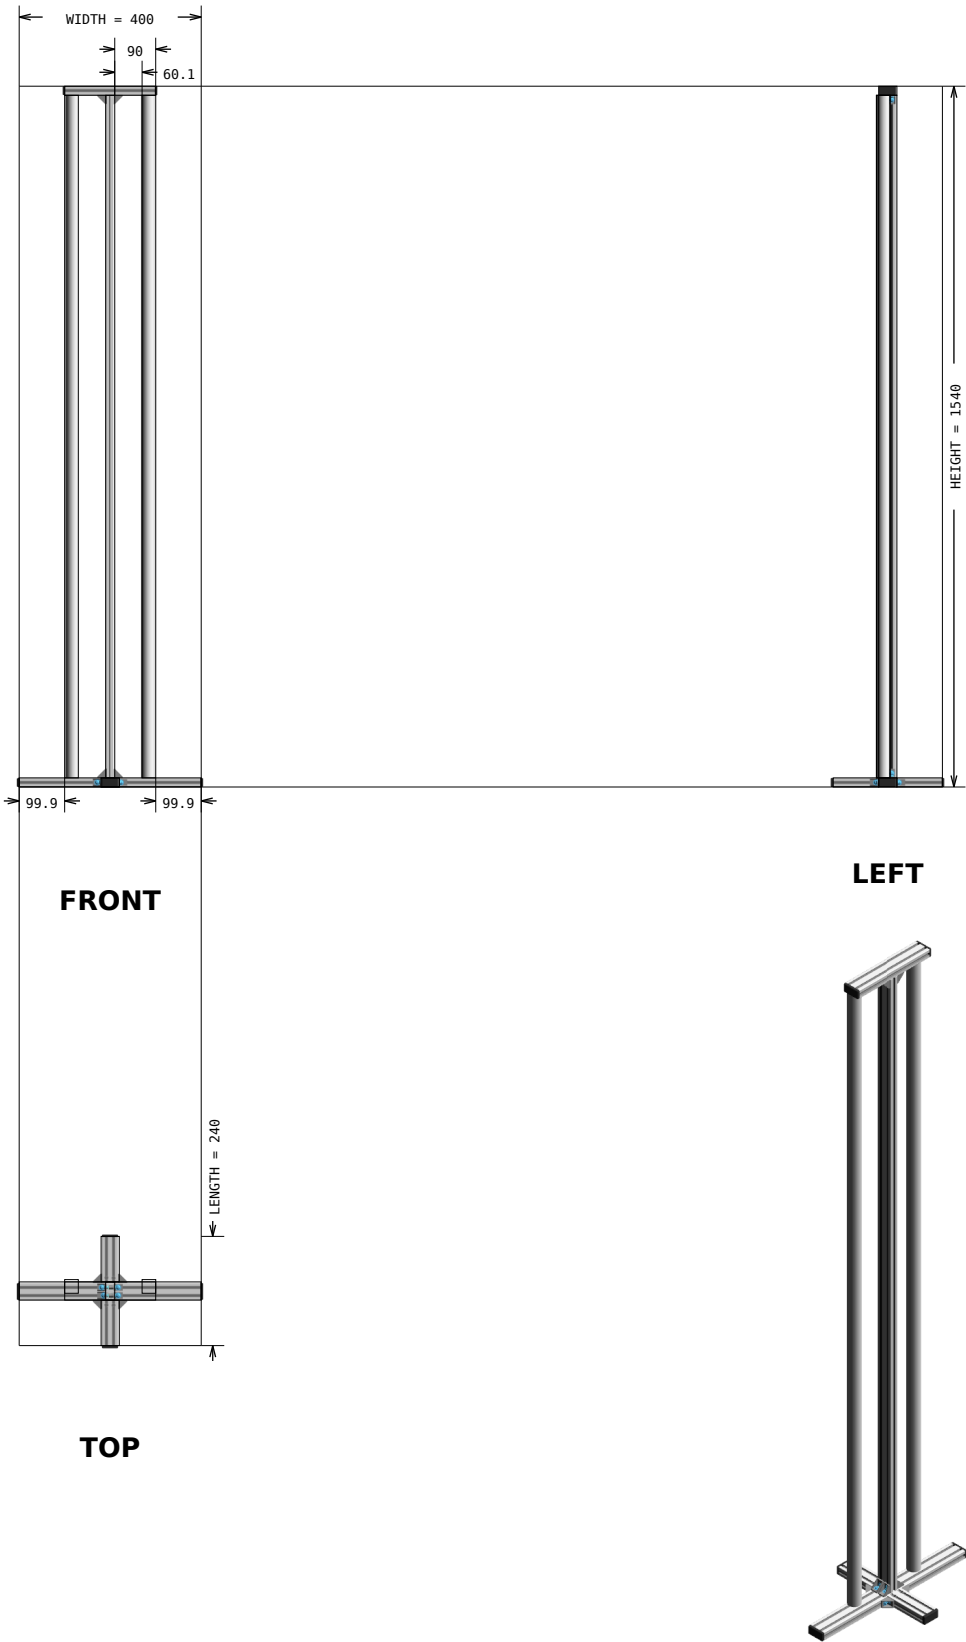

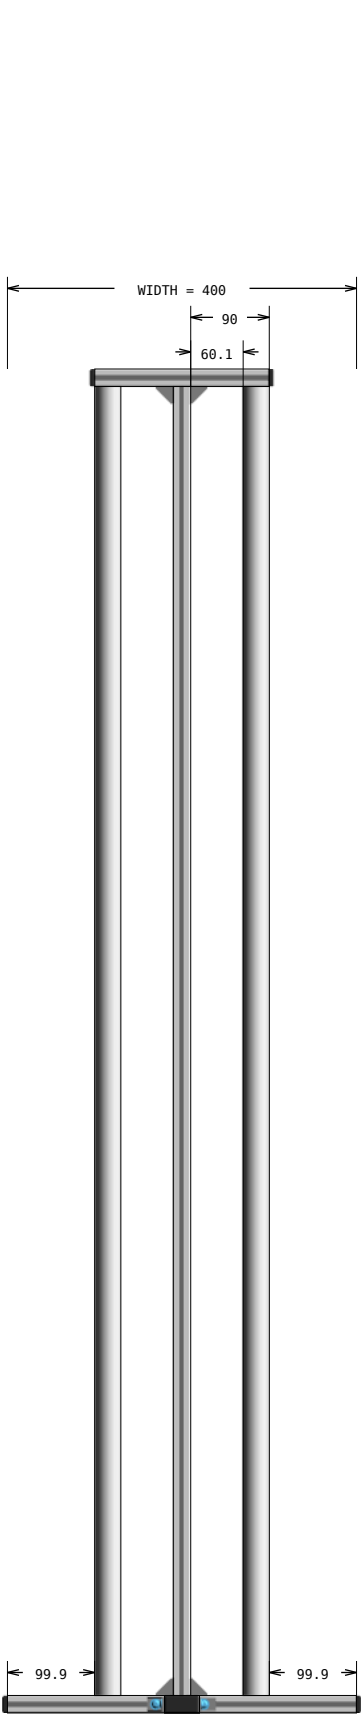

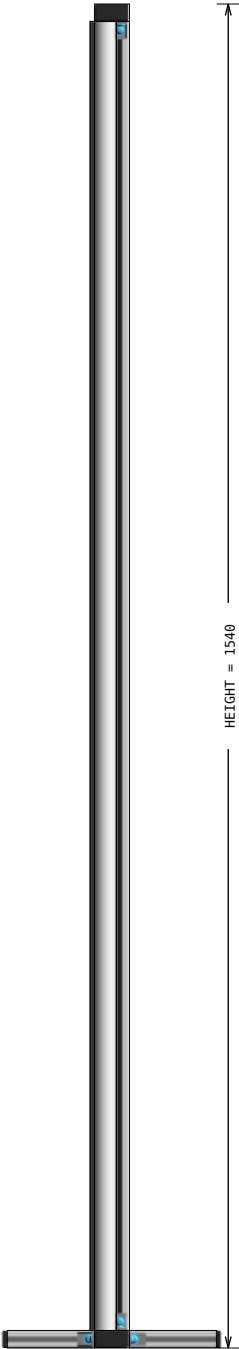


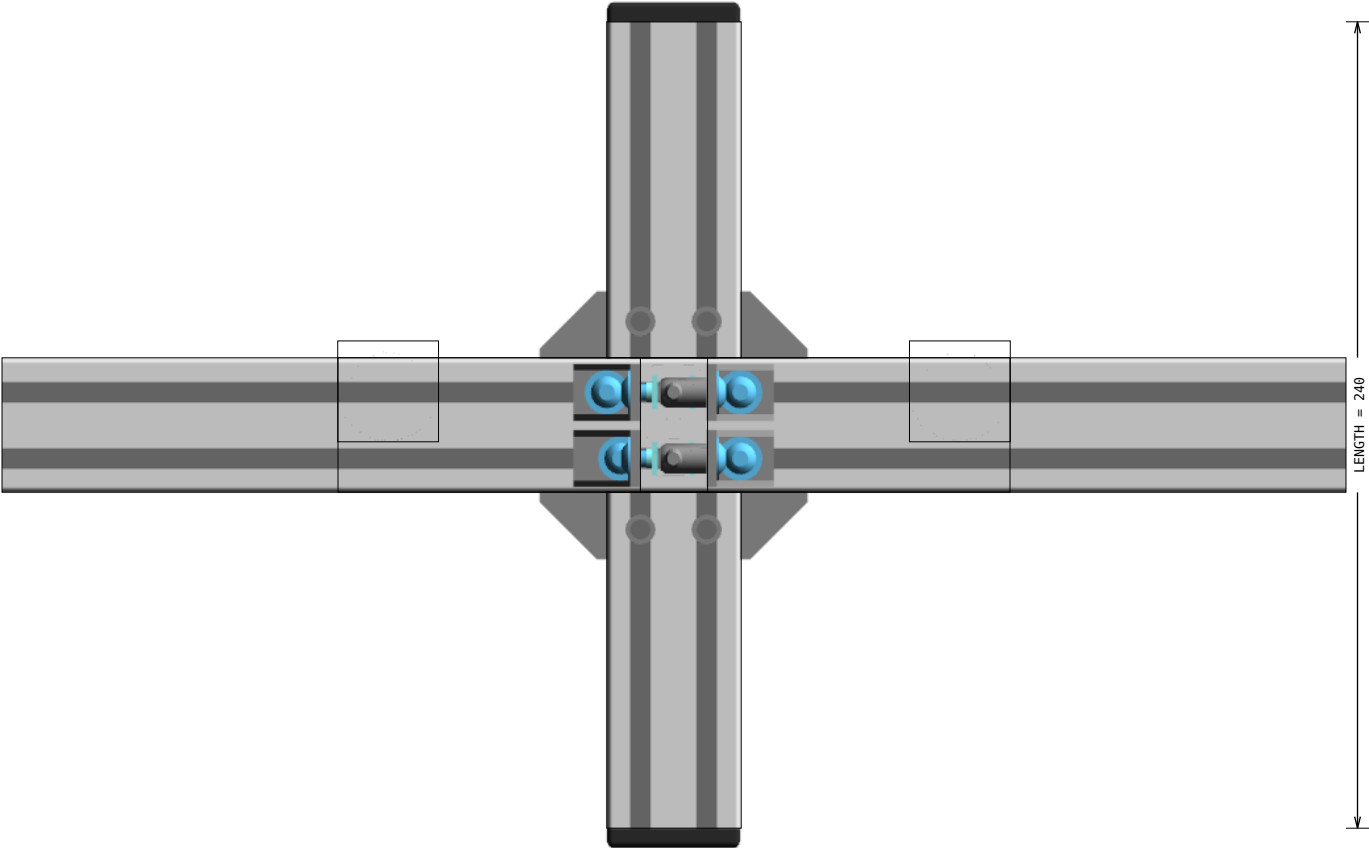


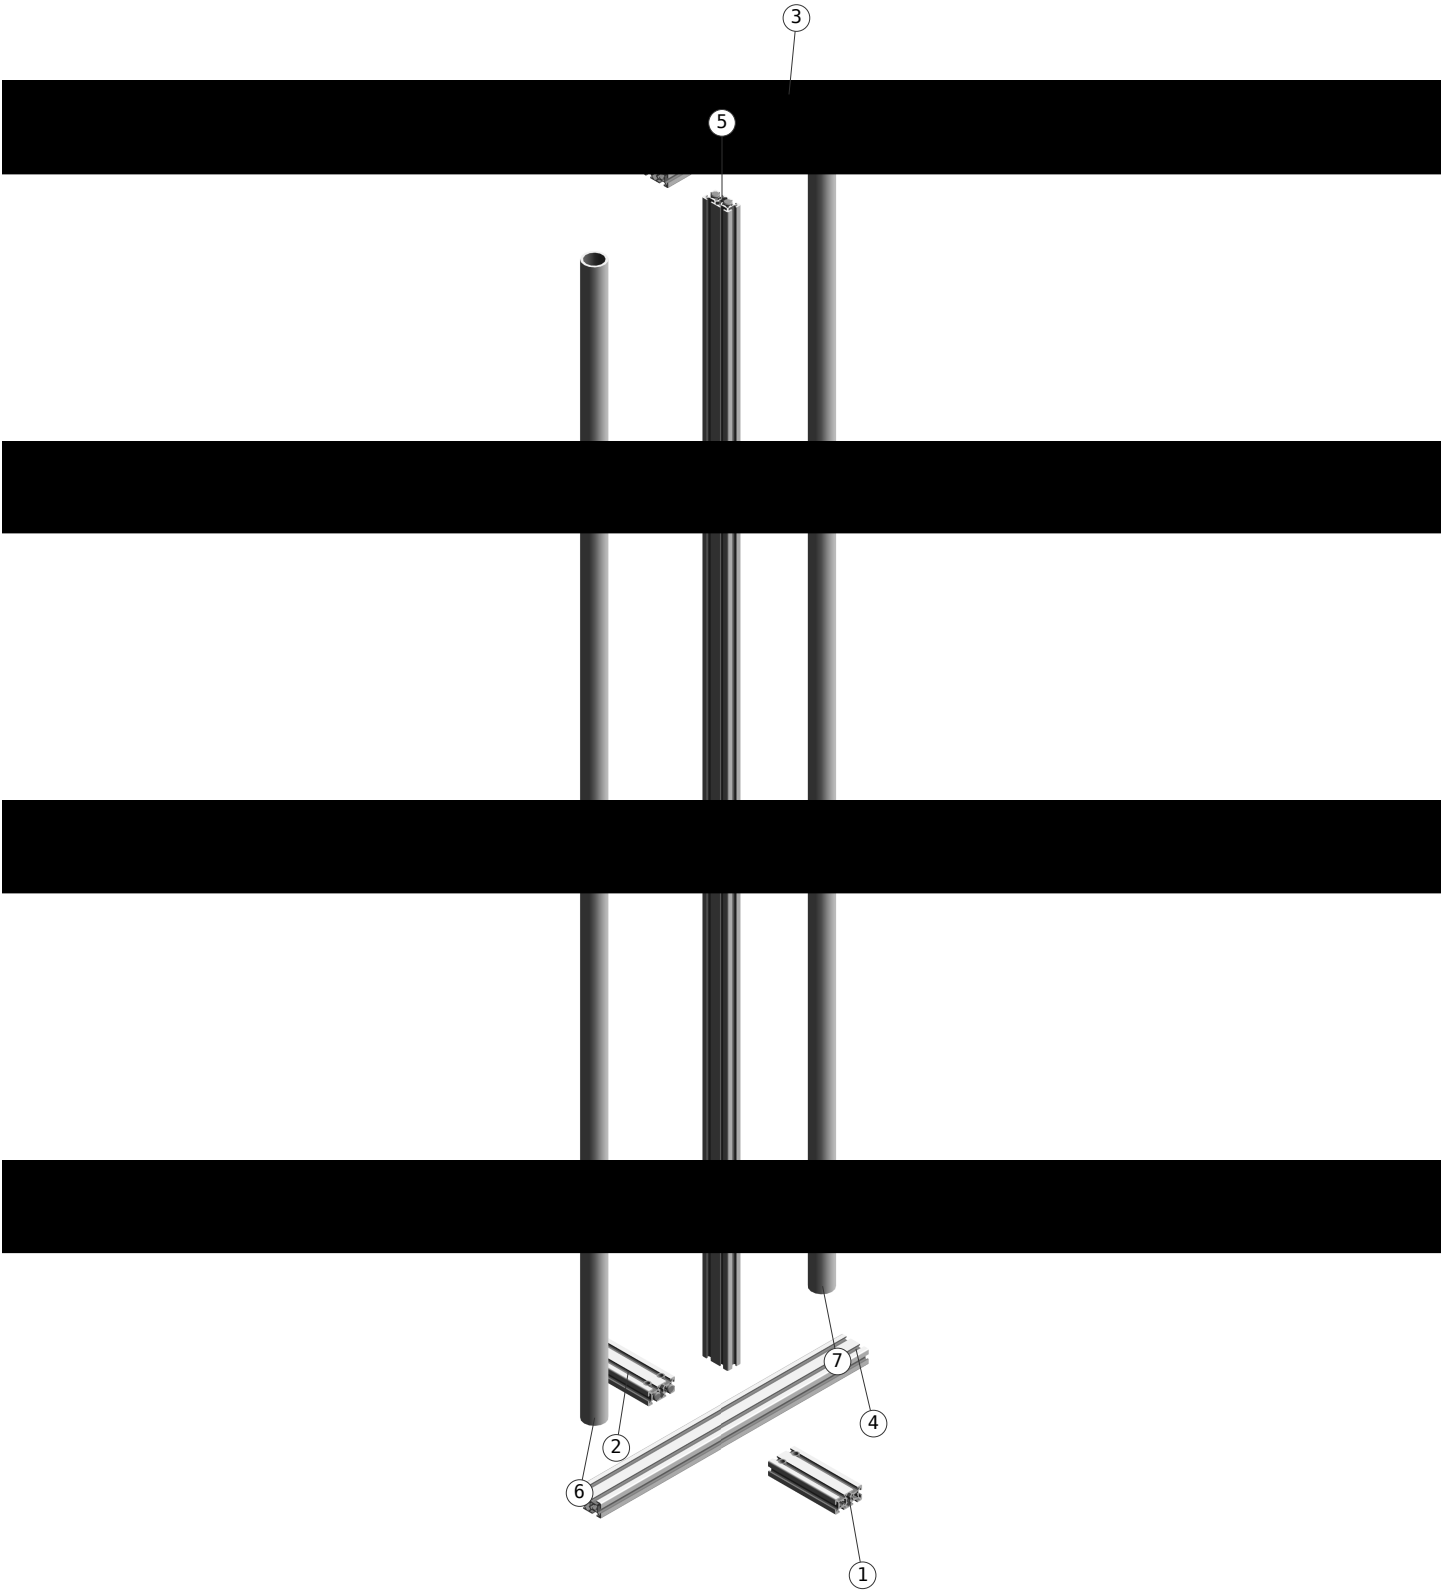







Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020040.64LP-AB4A00/100	Profile 20x40, 6H, light, plain	1.20.2H0, Connector, universal	2
2	1.10.020040.64LP-AB2A00/100	Profile 20x40, 6H, light, plain	1.20.2H0, Connector, universal	2
5	1.10.020040.64LP-AB2AB2/1500	Profile 20x40, 6H, light, plain	1.20.2H0, Connector, universal	4
10	1.46.204.1720.2	Angle GD-Zn, 17x20, powder-coated	1.46.204.1720A, Cover cap for angle GD-Zn, 17x20 1.31.HM5, Threaded plate H, M5 0.63.WN7381.05006, Round head flange screw, M5x6, WN7381	12 24 24



Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.19.16130		2993.0 mm
1.10.020040.64LP		3682.5 mm

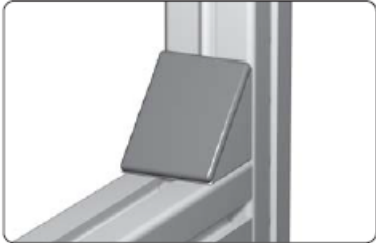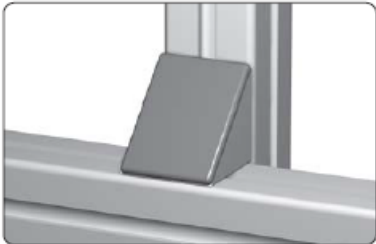Assembly hints

CONNECTOR	1.20.2H0	Connector, universal	 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
ACCESSORY	1.46.204.1720.2	Angle GD-Zn, 17x20, powder-coated	 Application For supporting profiles and mounting various machine components  For mounting cross to the slot the noses can be broken off Technical data material: • angle: GD-Zn • cover cap: PA-GK 30 • T-slot nut: steel, galvanised • screw: steel, galvanised surface: natural or aluminium coloured powder-coated These corner brackets or gussets can be used to reinforce or completely replace the Universal or Standard profile connector, make sure to choos the kit appropriate for your slot type H, F or E. These parts could also be used to mount additional parts and hardware.

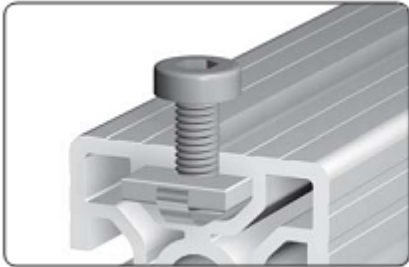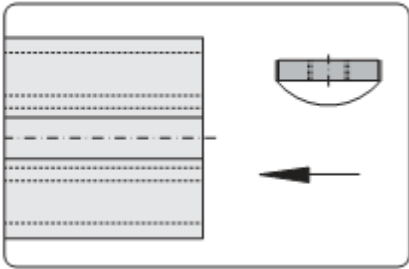Assembly hints

PNL_FASTEN	1.31.HM5	Threaded plate H, M5	
 Fixed into position with leaf spring  Assembly Insert from end			These plates must be inserted from the open side of the profile, prior to final frame assembly