


Design Title : Lamp 04.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

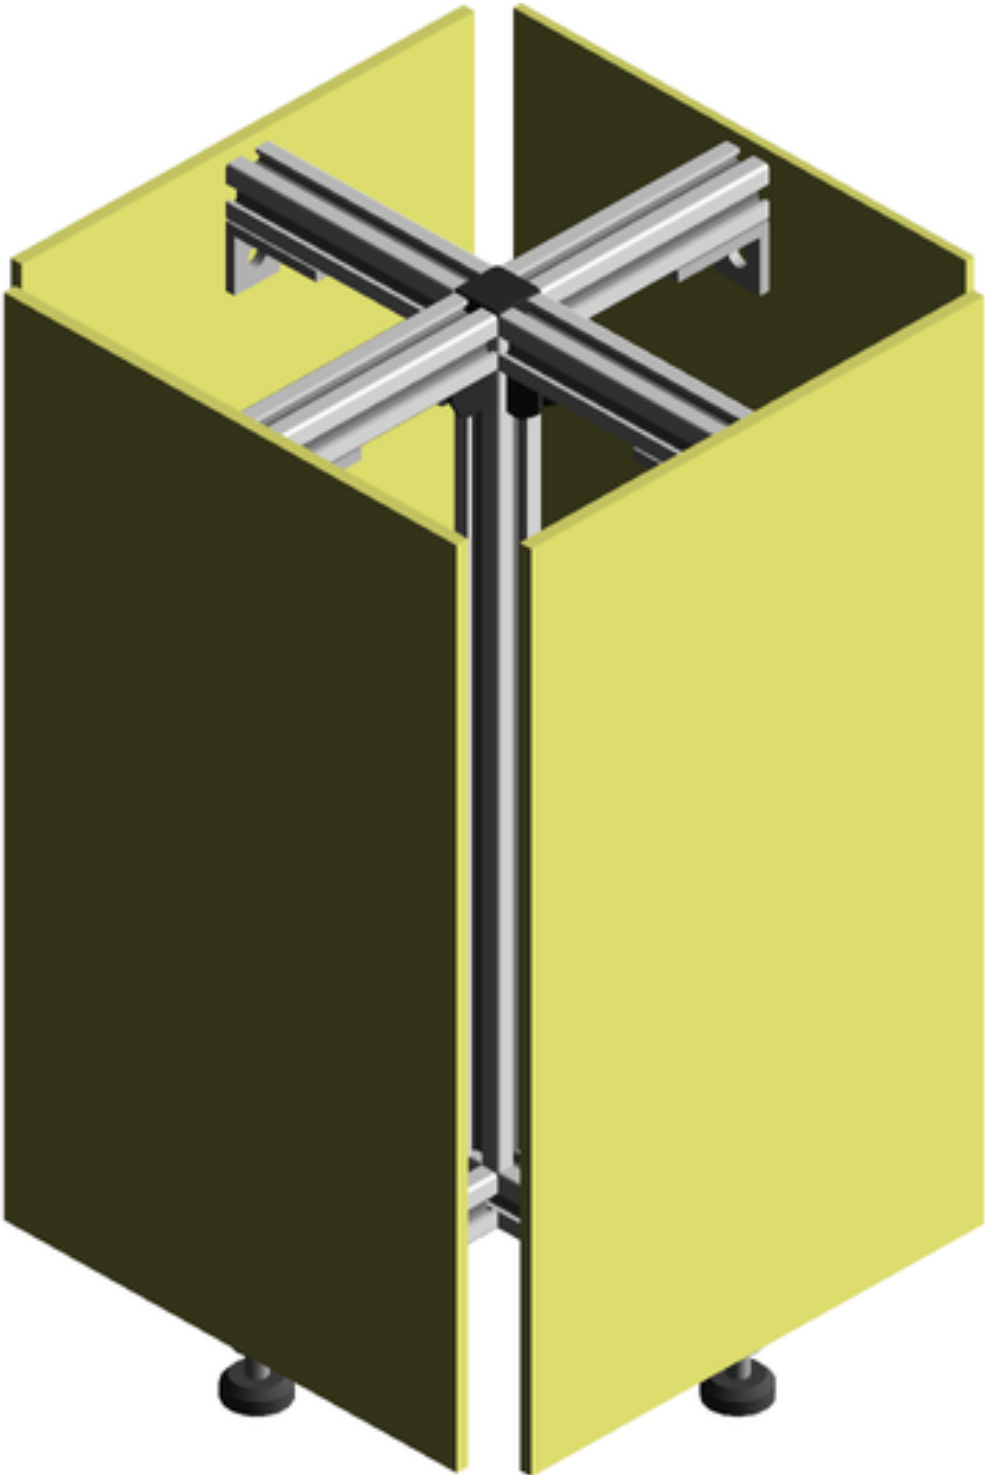


Bill of materials (Number of kits: 1)


Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA4A00/100	Profile 20x20, 4H, light, plain **PER DRAWING 1**	MM	1
1.A	Q10A1I00000-12.0	Cross bore, left Ø 12.0 mm, distance 96.2 mm, Side: 1	EA	1
2	1.10.020020.43LP-AA4A00/100	Profile 20x20, 4H, light, plain **PER DRAWING 2**	MM	1
2.A	Q10A3I00000-12.0	Cross bore, left Ø 12.0 mm, distance 96.2 mm, Side: 3	EA	1
3	1.10.020020.43LP-A00A00/220	Profile 20x20, 4H, light, plain **PER DRAWING 3**	MM	1
3.A	Q10A2I00000-12.0	Cross bore, left Ø 12.0 mm, distance 3.8 mm, Side: 2	EA	1
3.B	Q10A2I00000-12.0	Cross bore, left Ø 12.0 mm, distance 216.2 mm, Side: 2	EA	1
4	1.10.020020.43LP-AA4A00/300	Profile 20x20, 4H, light, plain	MM	1
5	1.10.020020.43LP-AA4A00/100	Profile 20x20, 4H, light, plain	MM	4
6	1.42.10202.2	Cover cap 20x20, black	EA	1
7	1.44.002403	Floor levelling screw, D24, M8x30	EA	4
8	1.46.115	Angle 25x40, dia: 8.7	EA	8
9	1.64.2H2M4.2	Mounting block H, M4, black	EA	4
10	0.63.D06912.05008	Cylindric head screw, DIN 6912 - M5x8	EA	8
11	1.20.2H0	Connector, universal	EA	7
12	1.31.4HM5	Threaded plate subsequent insertion H, M5	EA	8
13	1.35.608195	Press-fit threaded insert dia: 12/M8, L22.5	EA	4


Total Weight: 1.58 kg (3.49 lbs)


Isometric view
Some accessories may not be shown

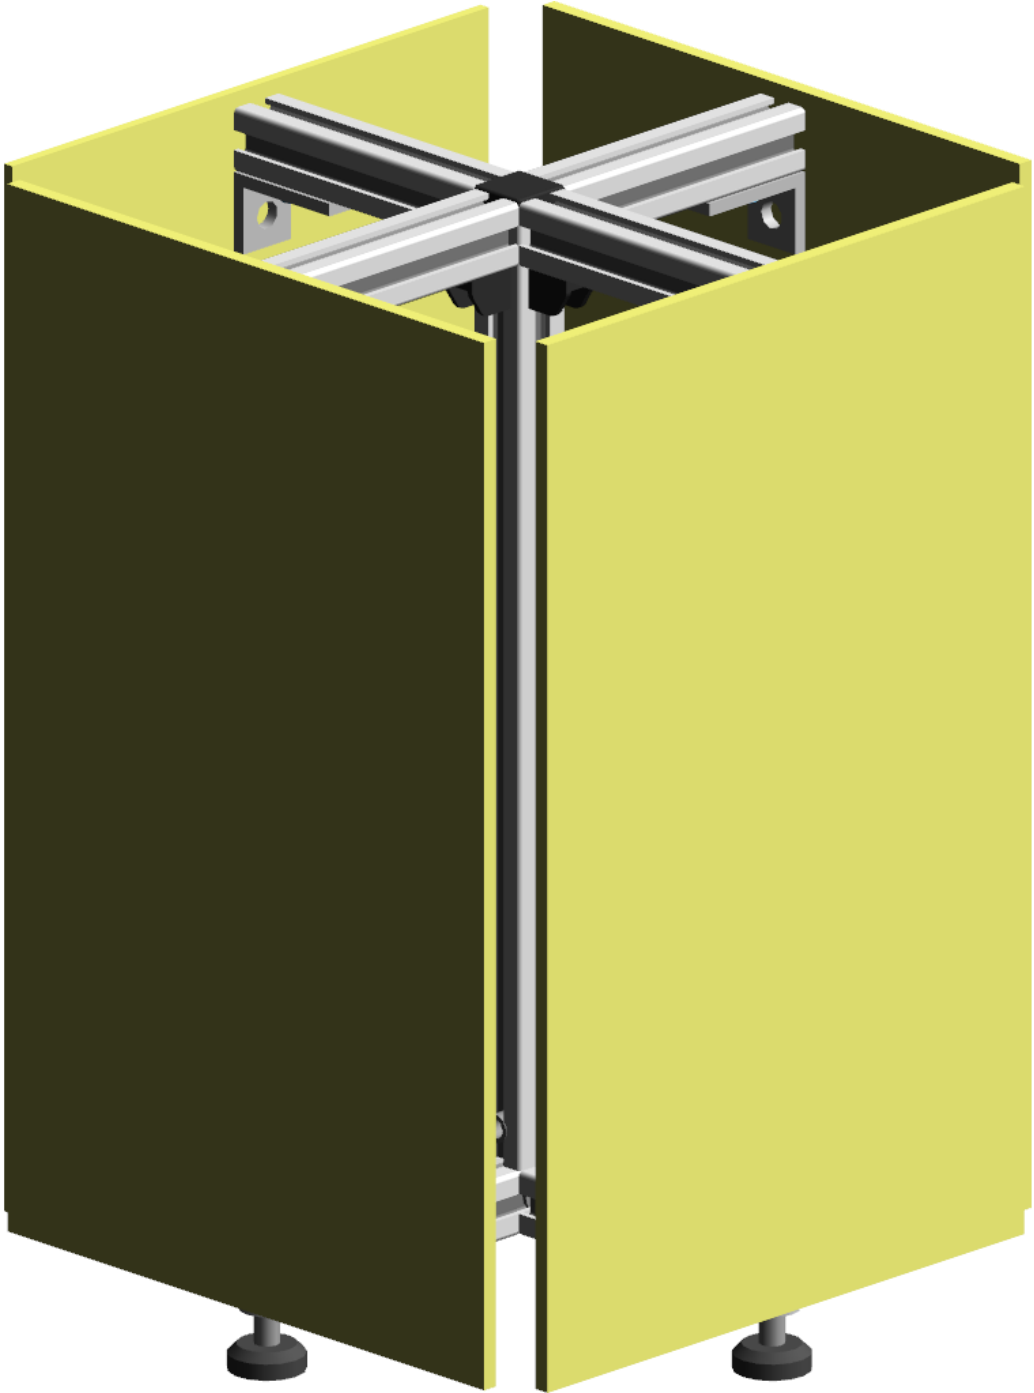


Multiview

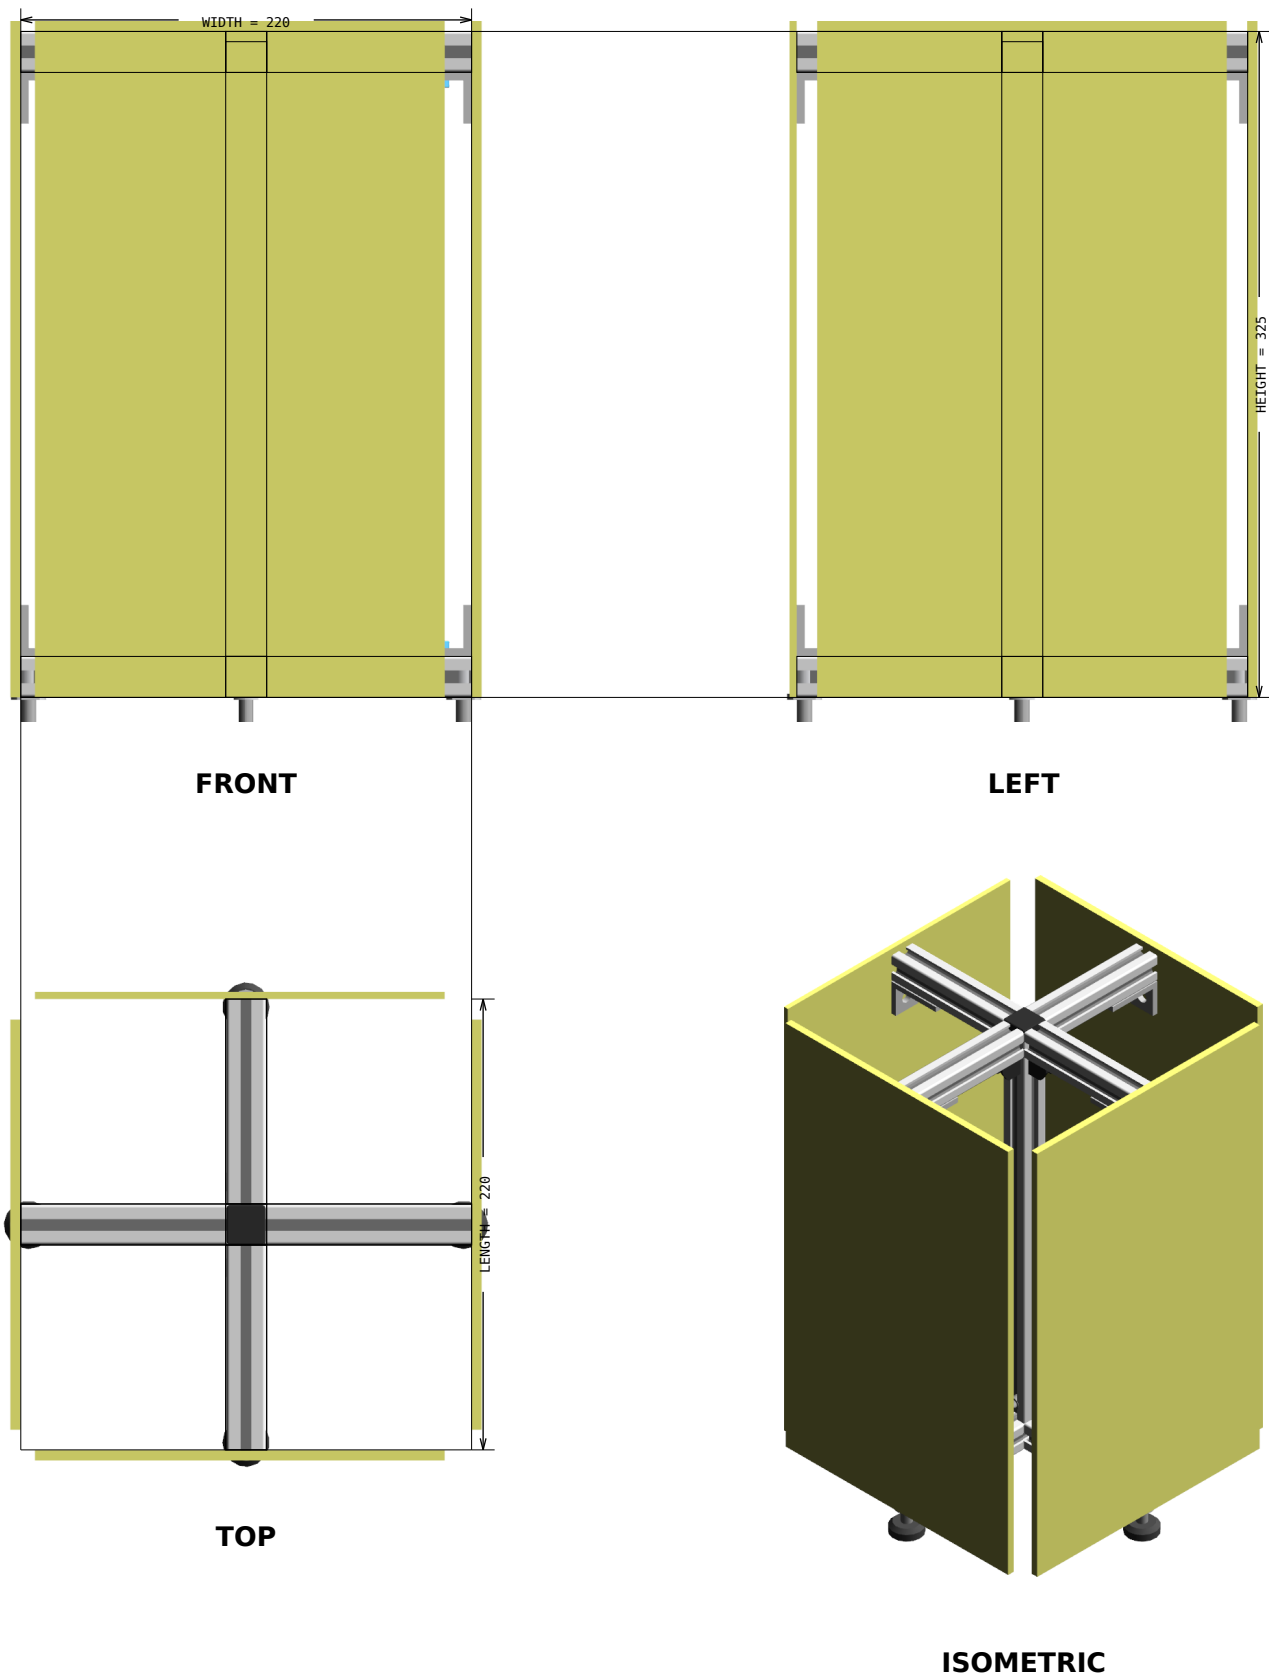


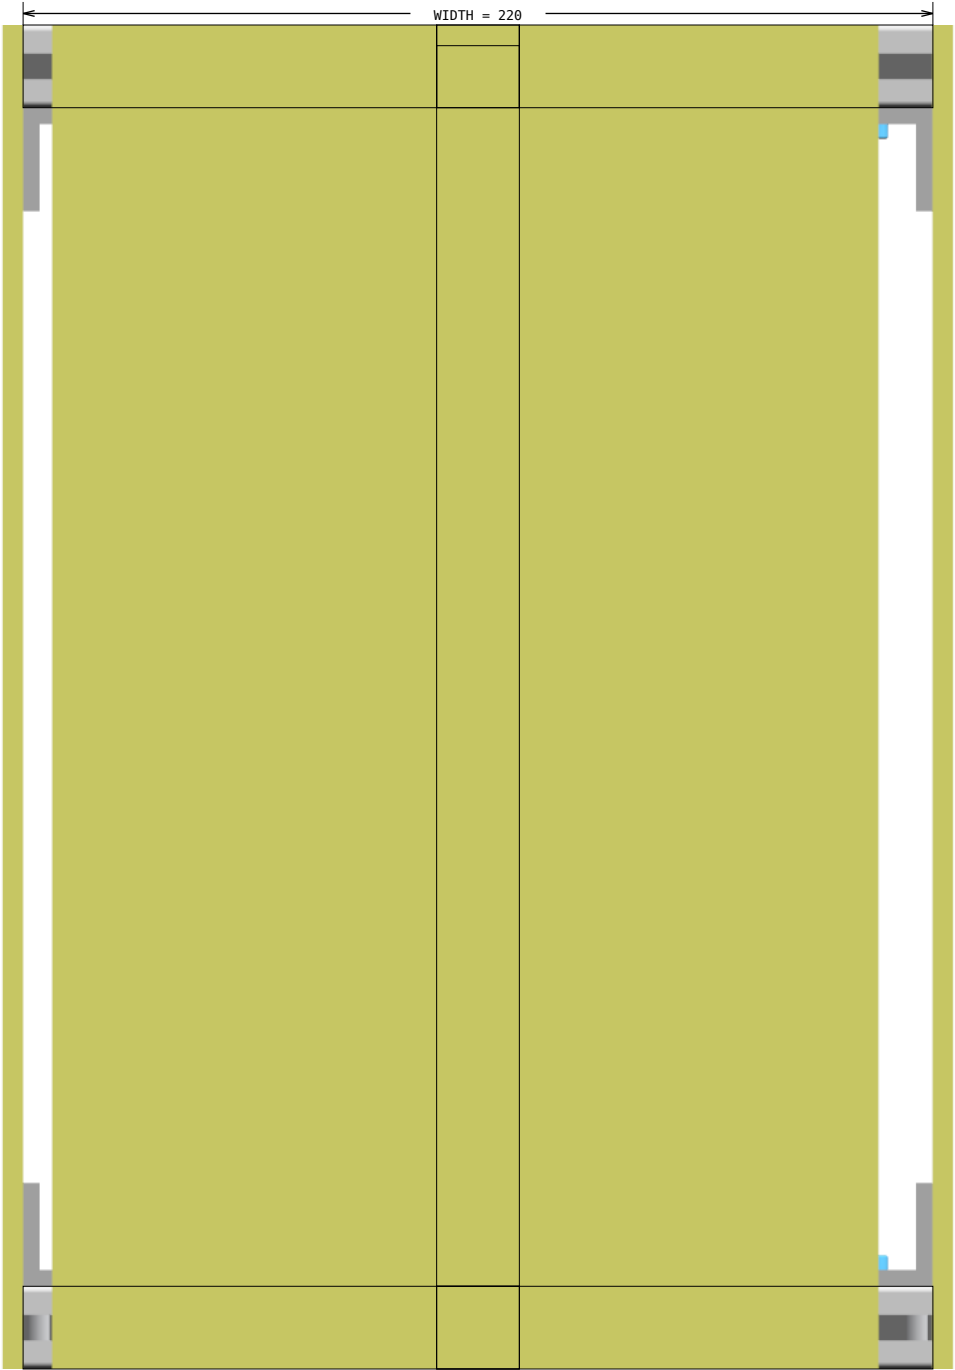

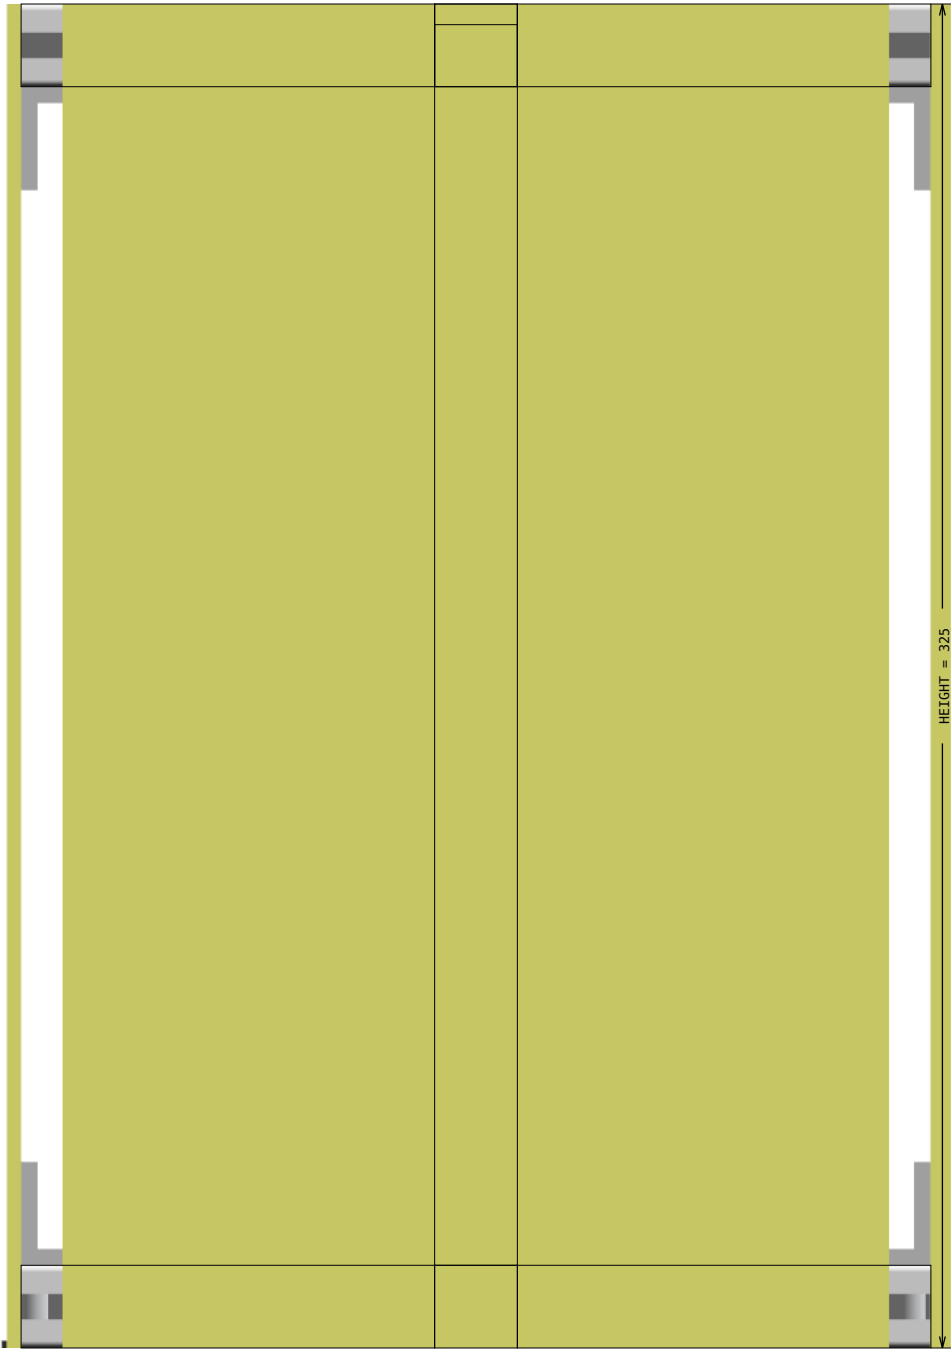

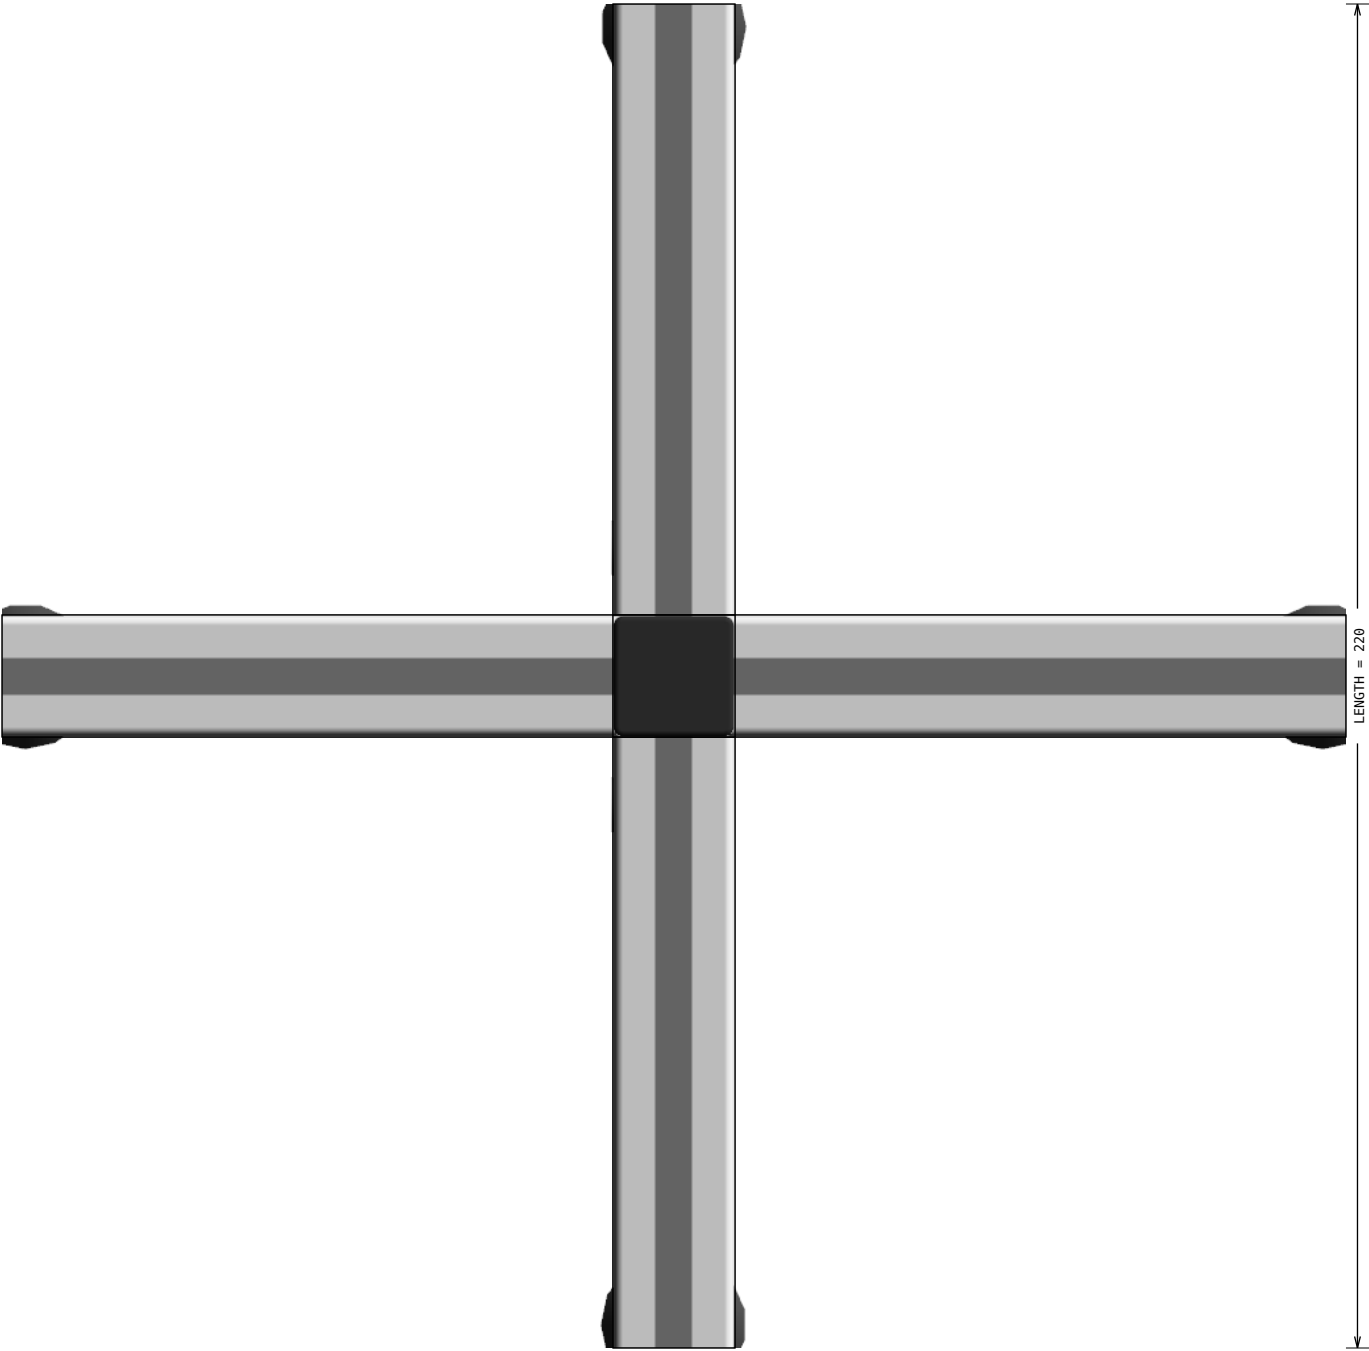


Exploded view

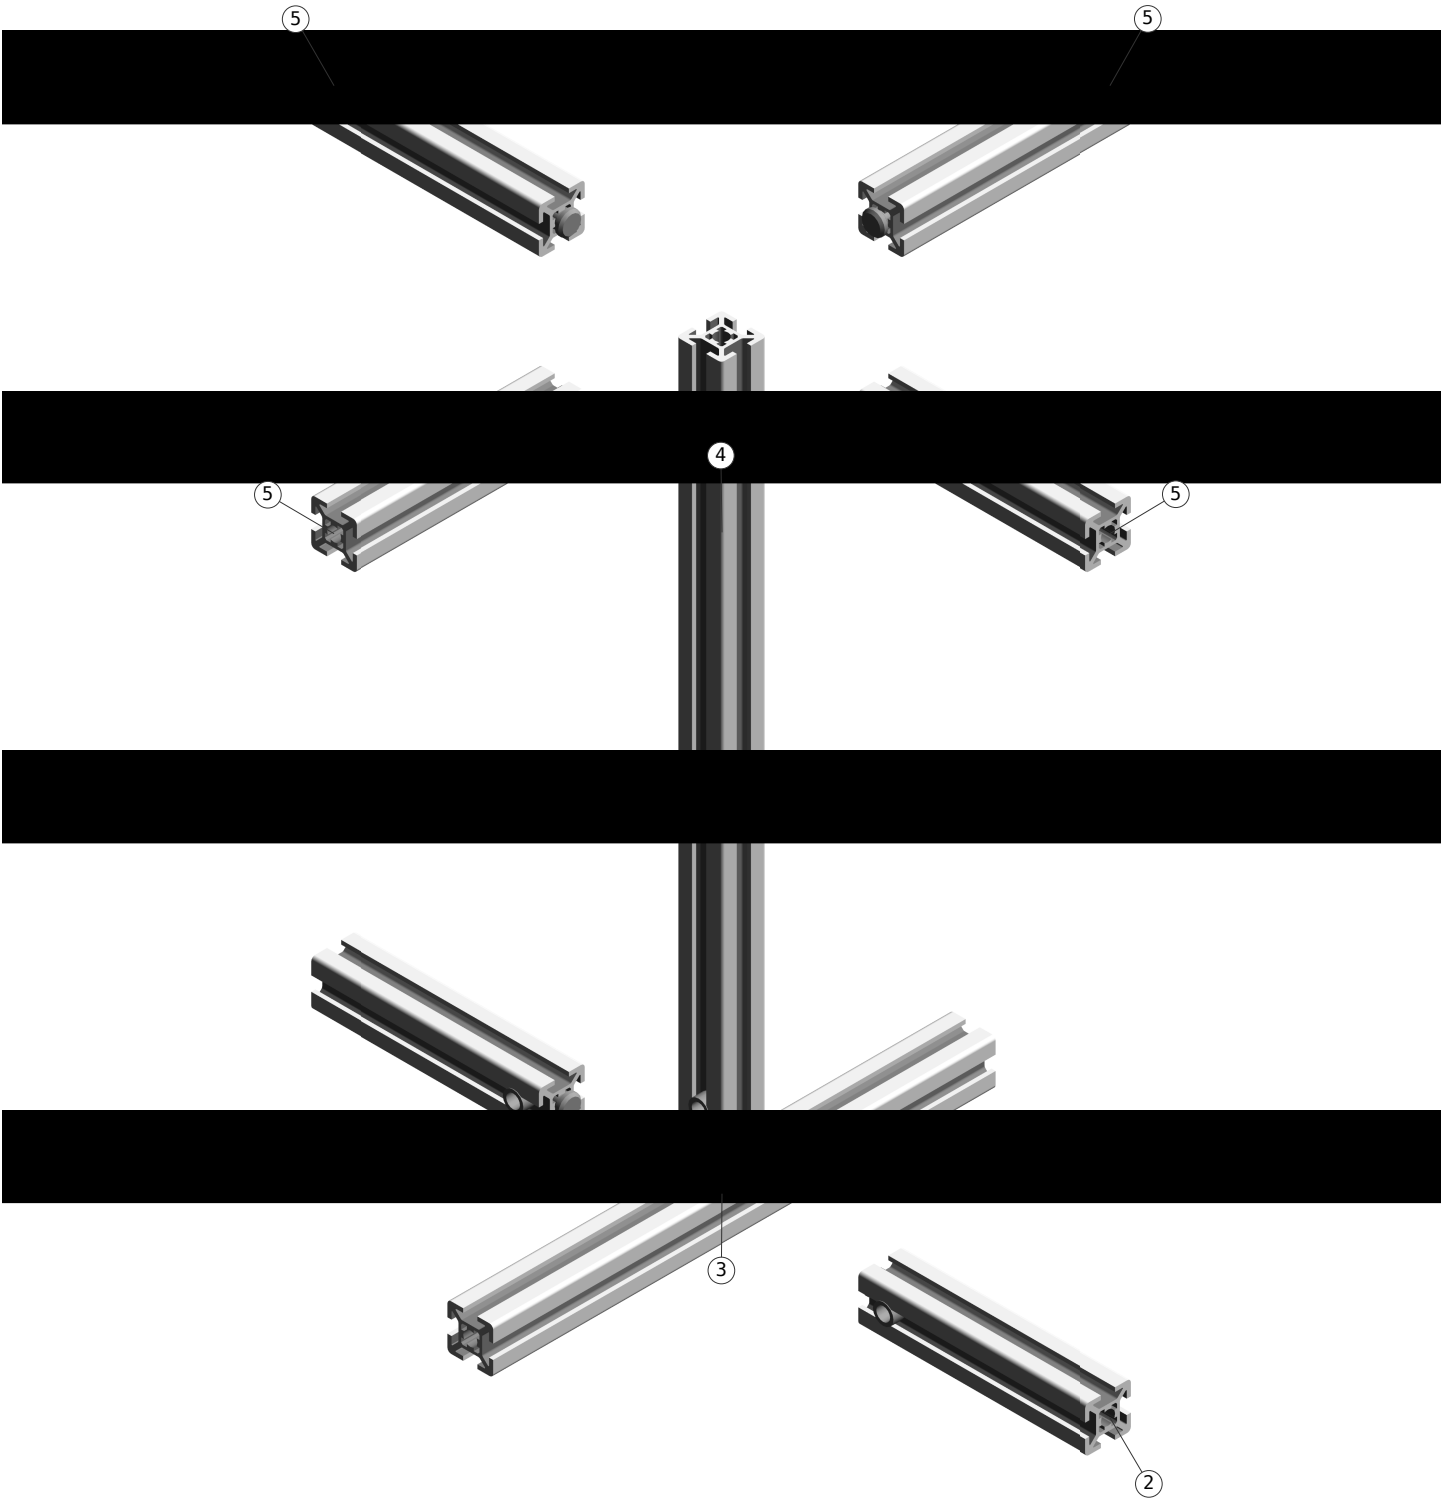


Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA4A00/100	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	1
2	1.10.020020.43LP-AA4A00/100	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	1
4	1.10.020020.43LP-AA4A00/300	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	1
5	1.10.020020.43LP-AA4A00/100	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	4
7	1.44.002403	Floor levelling screw, D24, M8x30	1.35.608195, Press-fit threaded insert dia: 12/M8, L22.5	4
8	1.46.115	Angle 25x40, dia: 8.7	0.63.D06912.05008, Cylindric head screw, DIN 6912 - M5x8 1.31.4HM5, Threaded plate subsequent insertion H, M5	8 8


Profile machining details

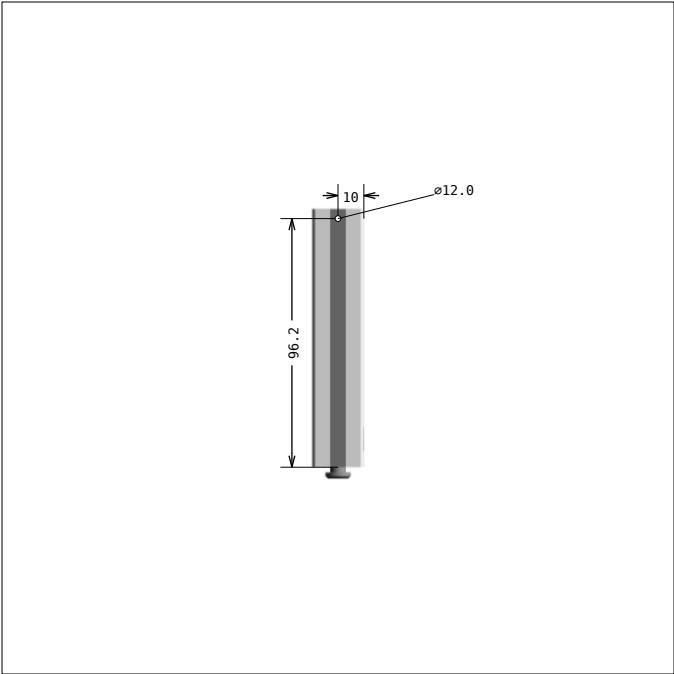


DRAWING 1, Pos 1
SIDE 1, bar length: 100.0 mm

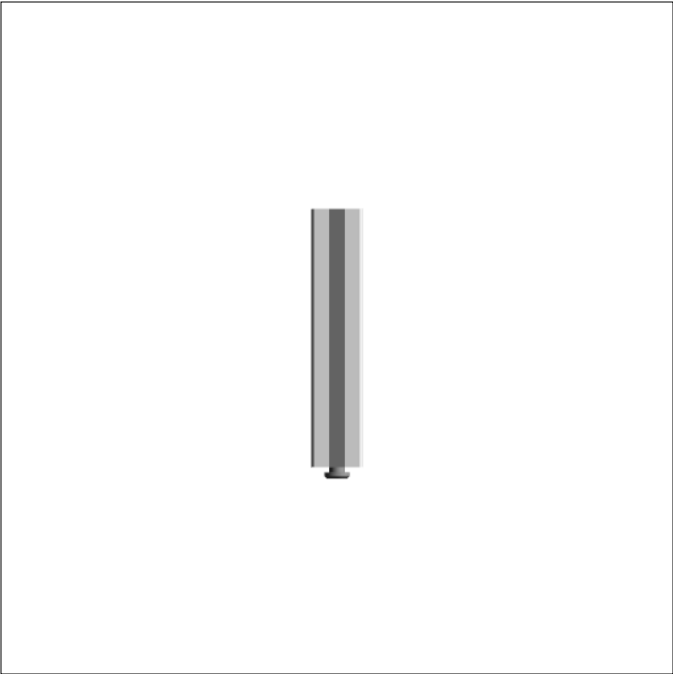

DRAWING 1, Pos 1
SIDE 2

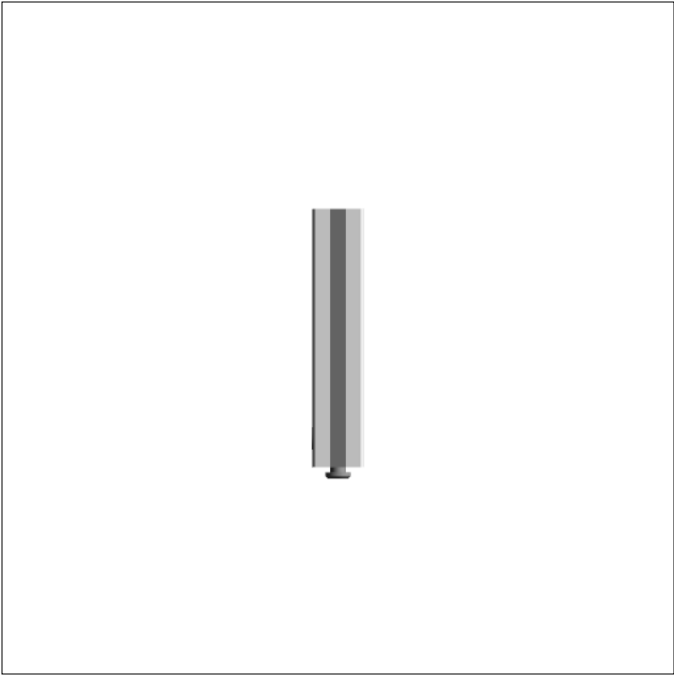


DRAWING 1, Pos 1
SIDE 3

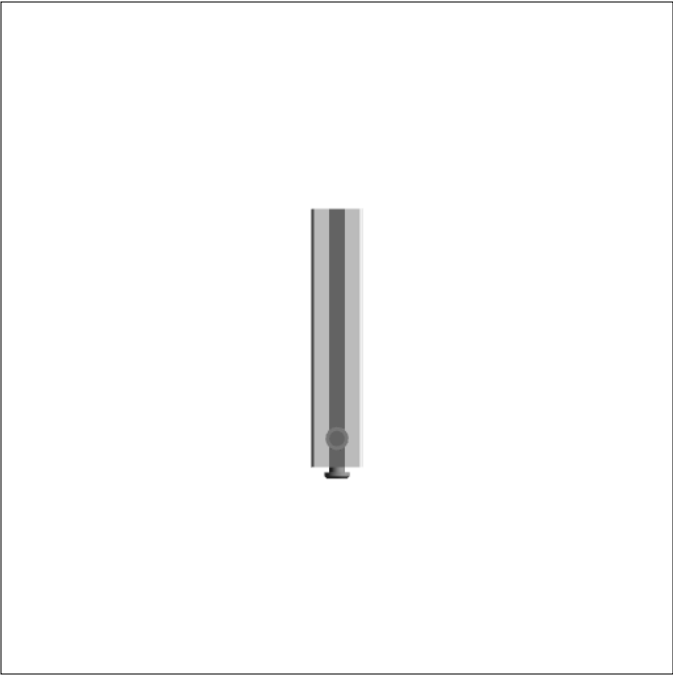


DRAWING 1, Pos 1
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

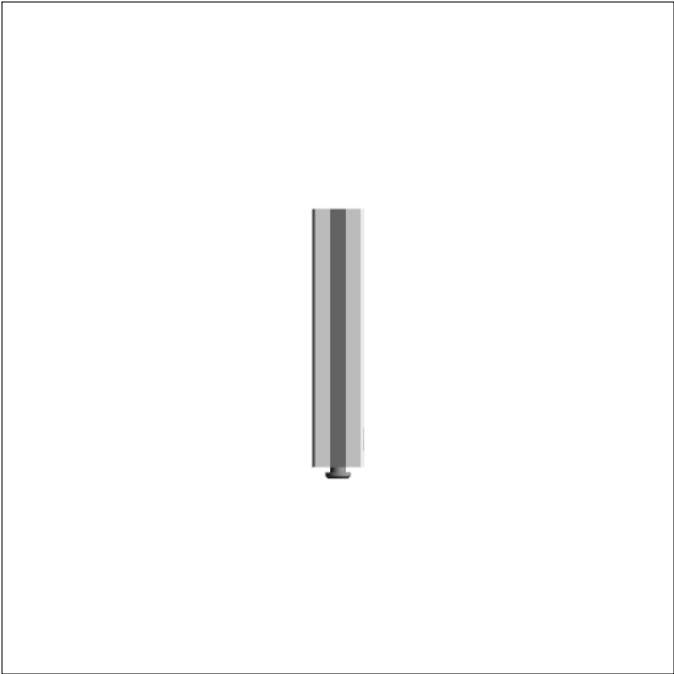


DRAWING 2, Pos 2
SIDE 1, bar length: 100.0 mm

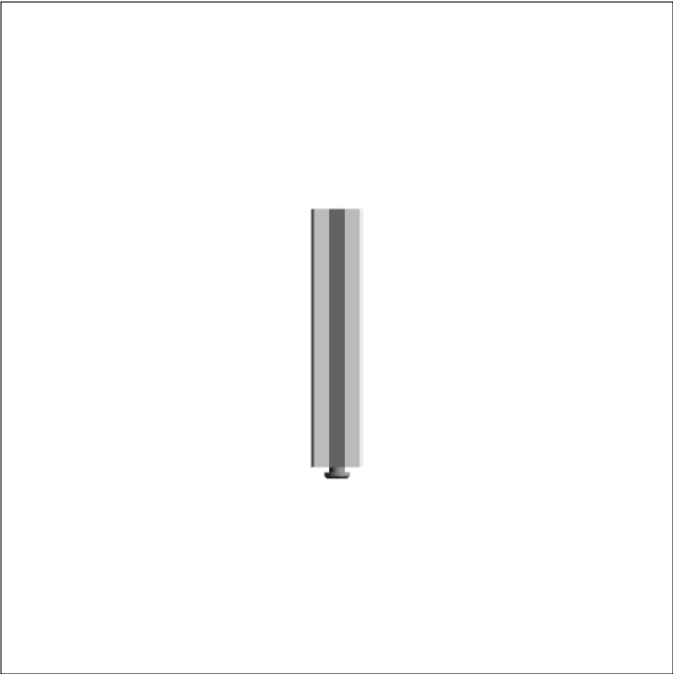

DRAWING 2, Pos 2
SIDE 2

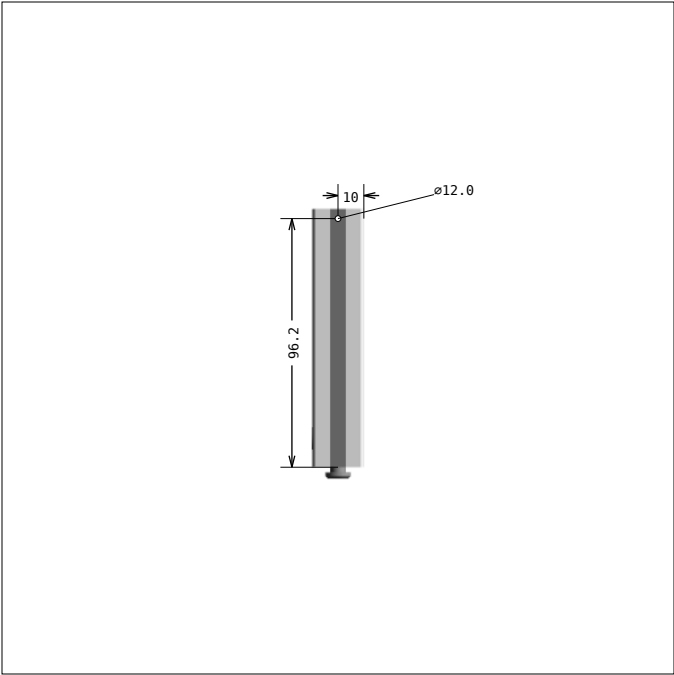


DRAWING 2, Pos 2
SIDE 3

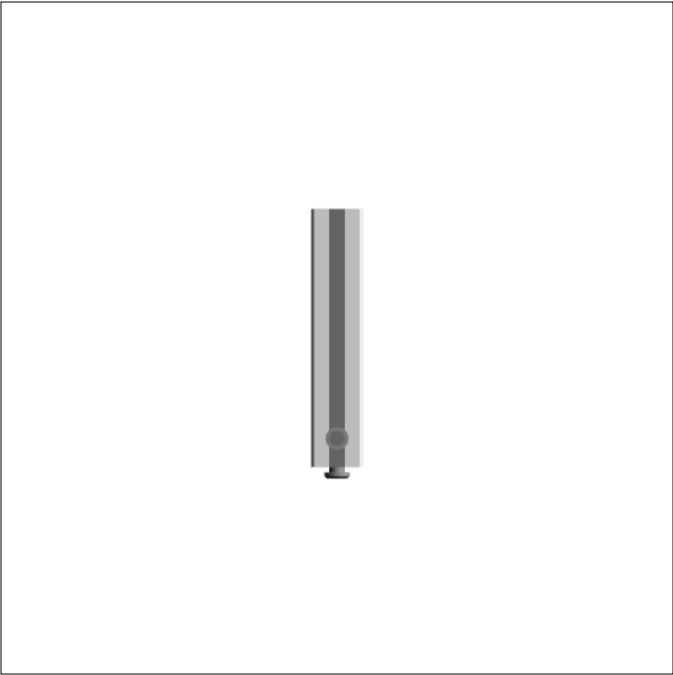


DRAWING 2, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 3, Pos 3
SIDE 1, bar length: 220.0 mm

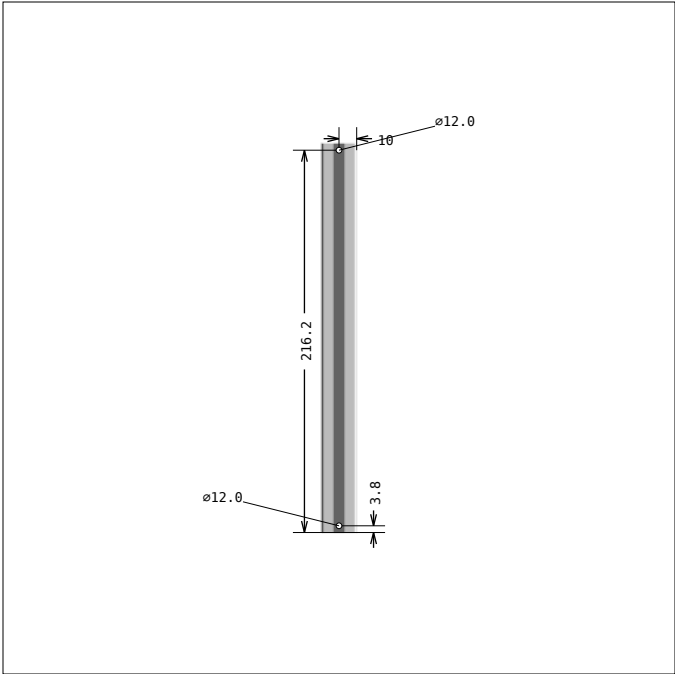

DRAWING 3, Pos 3
SIDE 2




DRAWING 3, Pos 3
SIDE 3




DRAWING 3, Pos 3
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".







Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.10.020020.43LP		4852.0 mm



Assembly hints

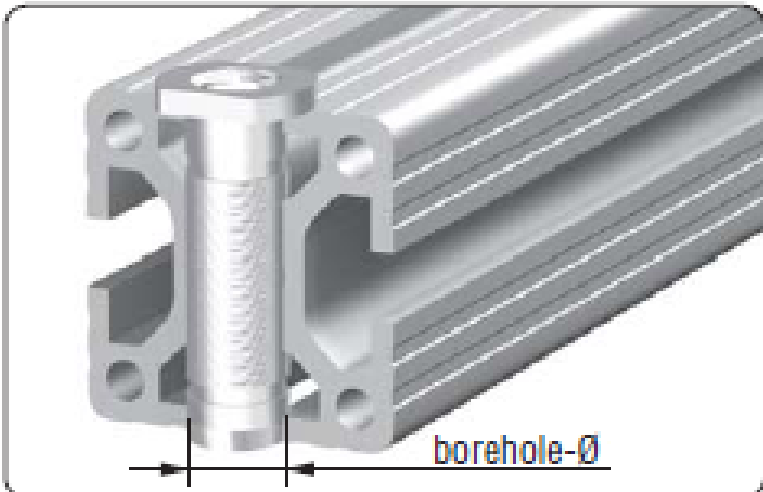FASTENER	1.35.608195	Press-fit threaded insert dia: 12/M8, L22.5
		These inserts are used for mounting feet, casters and other hardware. Ideally, you would use the press to insert them, but in some applications you may use a hammer to place them. To avoid thread damage, temporarily install a scrap screw of appropriate size and hammer on the head of the screw, not the insert itself.
		

Assembly hints

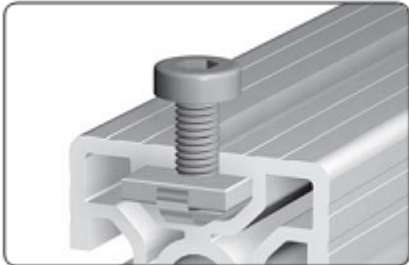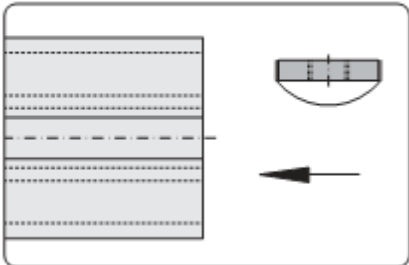CONNECTOR	1.20.2H0	Connector, universal	 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
None	1.31.4HM5	Threaded plate subsequent insertion H, M5	 Fixed into position with leaf spring  Assembly Insert from end These plates must be inserted from the open side of the profile, prior to final frame assembly

Assembly hints

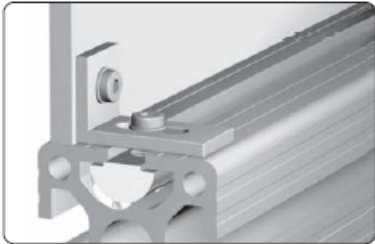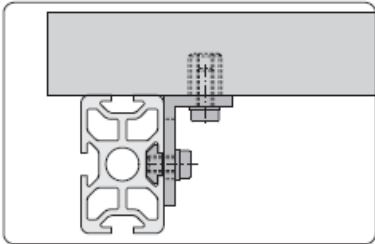ACCESSORY	1.46.115	Angle 25x40, dia: 8.7
 Fastening of panels  Fastening of table tops		Application Angle bracket for the mounting of panels, table tops, switches and accessories These angles can be used to attach panels or thick tops.