



Design Title : patition.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

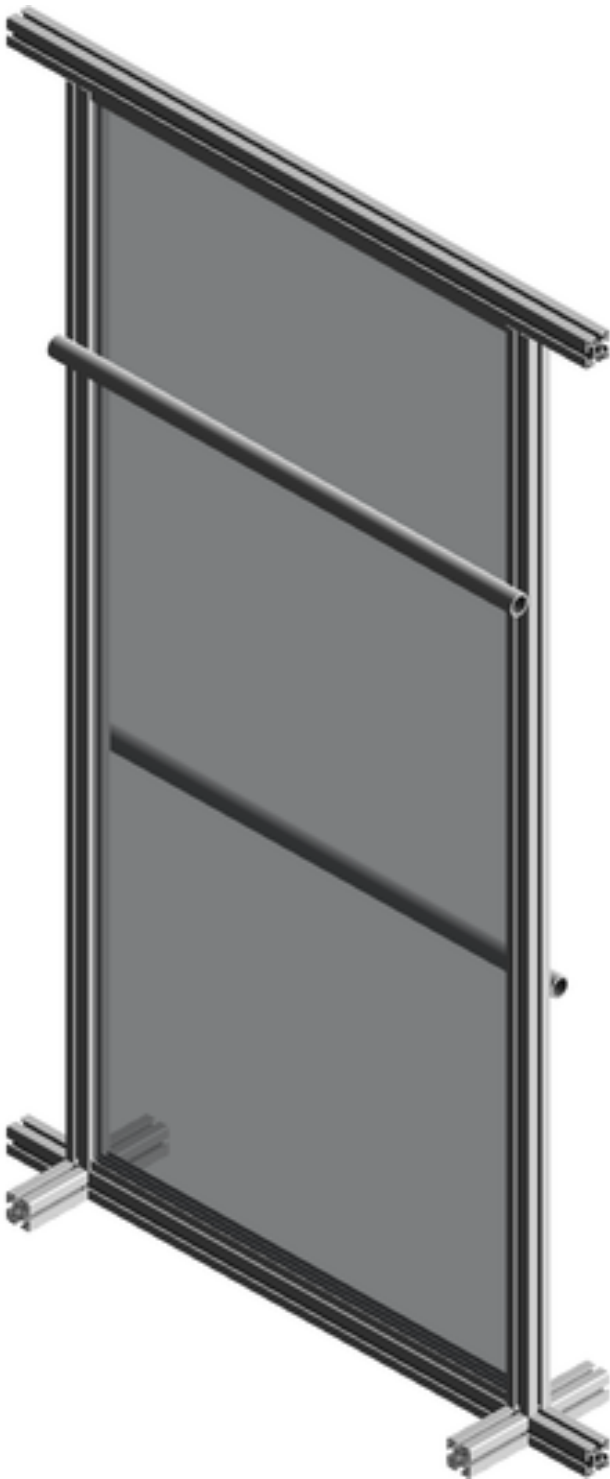




Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.040040.43LP-A00A00/1000	Profile 40x40, 4E, light, plain	MM	2
2	1.11.040040.43LP-AA4AA4/1500	Profile 40x40, 4E, light, plain	MM	2
3	1.11.040040.43LP-AA4A00/100	Profile 40x40, 4E, light, plain	MM	4
4	1.19.15130-A00A00/720	Sliding profile 30x14 **PER DRAWING 1**	MM	2
4.A	Q11A1I10642-4.0	Counter-sink, left M4, distance 60.0 mm, Side: 1	EA	2
4.B	Q11A1I10642-4.0	Counter-sink, left M4, distance 210.0 mm, Side: 1	EA	2
4.C	Q11A1I10642-4.0	Counter-sink, left M4, distance 510.0 mm, Side: 1	EA	2
4.D	Q11A1I10642-4.0	Counter-sink, left M4, distance 660.0 mm, Side: 1	EA	2
5	1.19.16130-A00A00/800	Tube dia: 30x3	MM	1
6	1.19.16130-A00A00/800	Tube dia: 30x3	MM	1
8	0.63.D07991.04012	Flat head screw, DIN 7991 - M4x12	EA	8
9	1.21.4E0	Connector, universal	EA	8
10	1.32.4EM4	T-Nut for subsequent insertion, w. spring E, M4	EA	8
		Frame weight: 10.09 kg (22.24 lbs)		
7	2.87.1571-99	Polycarbonat 4mm, SIZE: 720.00MM x 1492.00MM **PER DRAWING 2**	SM	2
		Panels weight: 9.33 kg (20.56 lbs)		
		Total Weight: 19.41 kg (42.80 lbs)		

Isometric view
Some accessories may not be shown

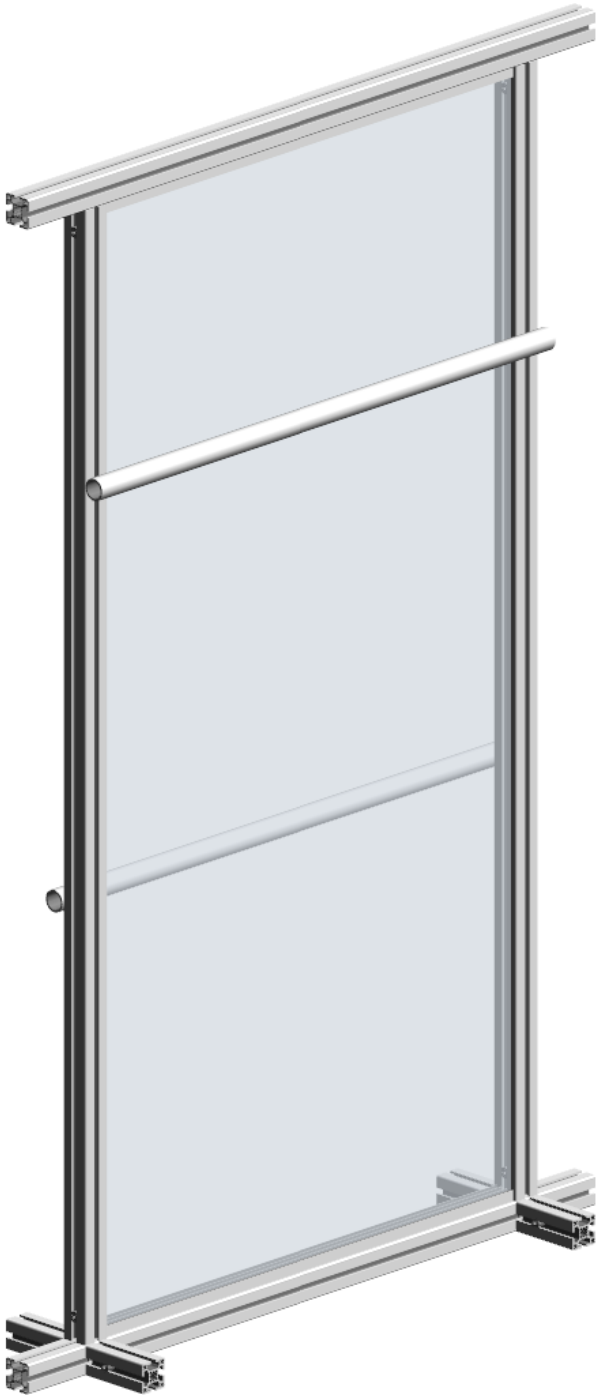


Multiview

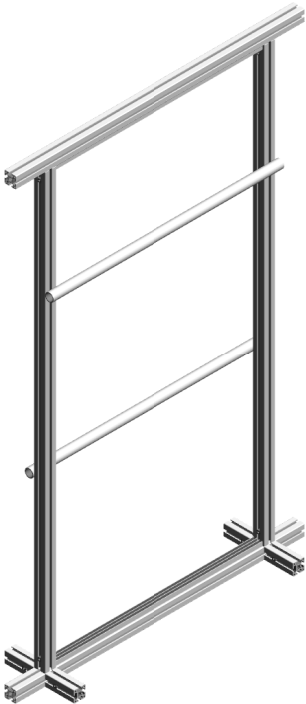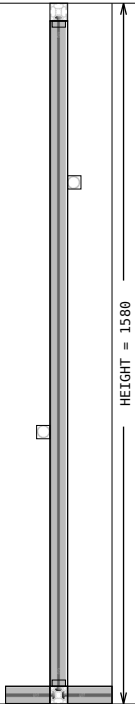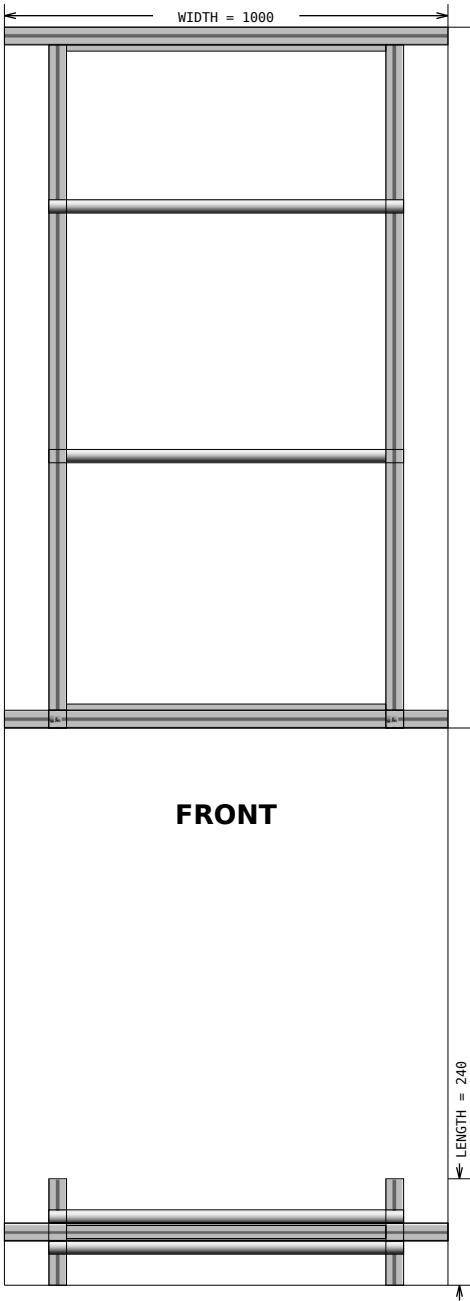


TOP

LEFT


ISOMETRIC

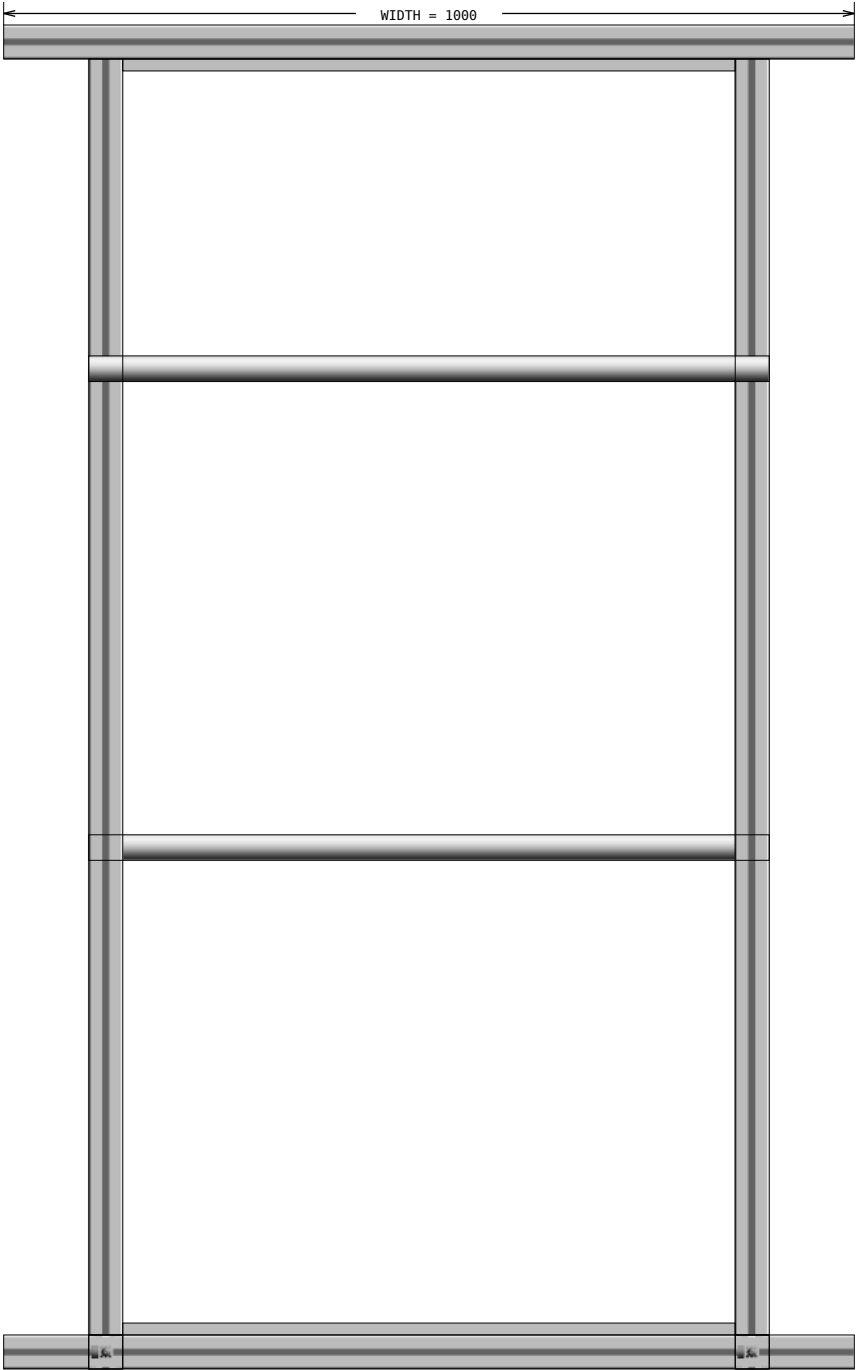


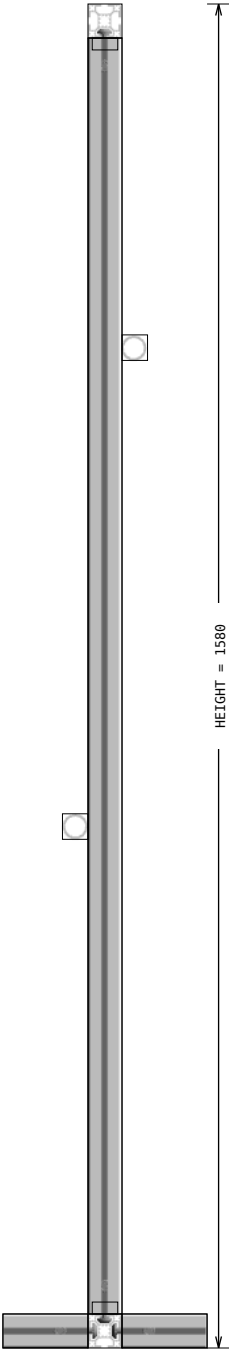

Design Title : patition.scene
Customer Name :
Date : 2025-06-19

TOP VIEW

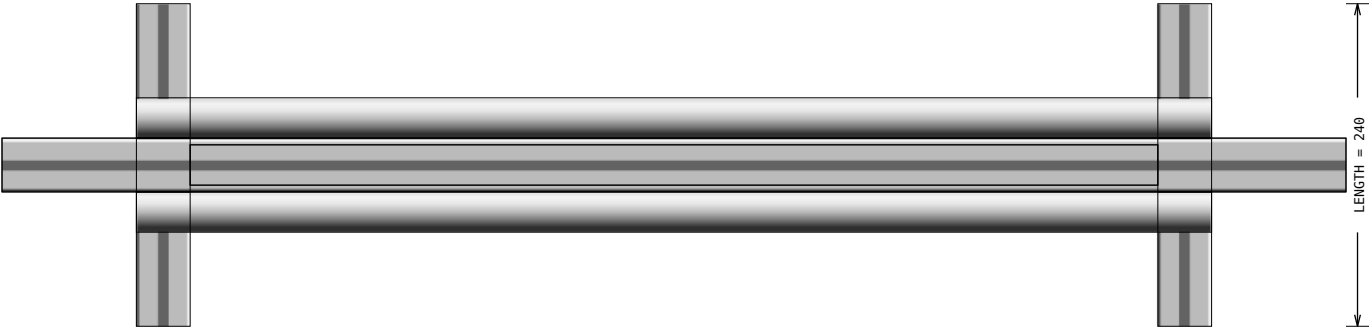


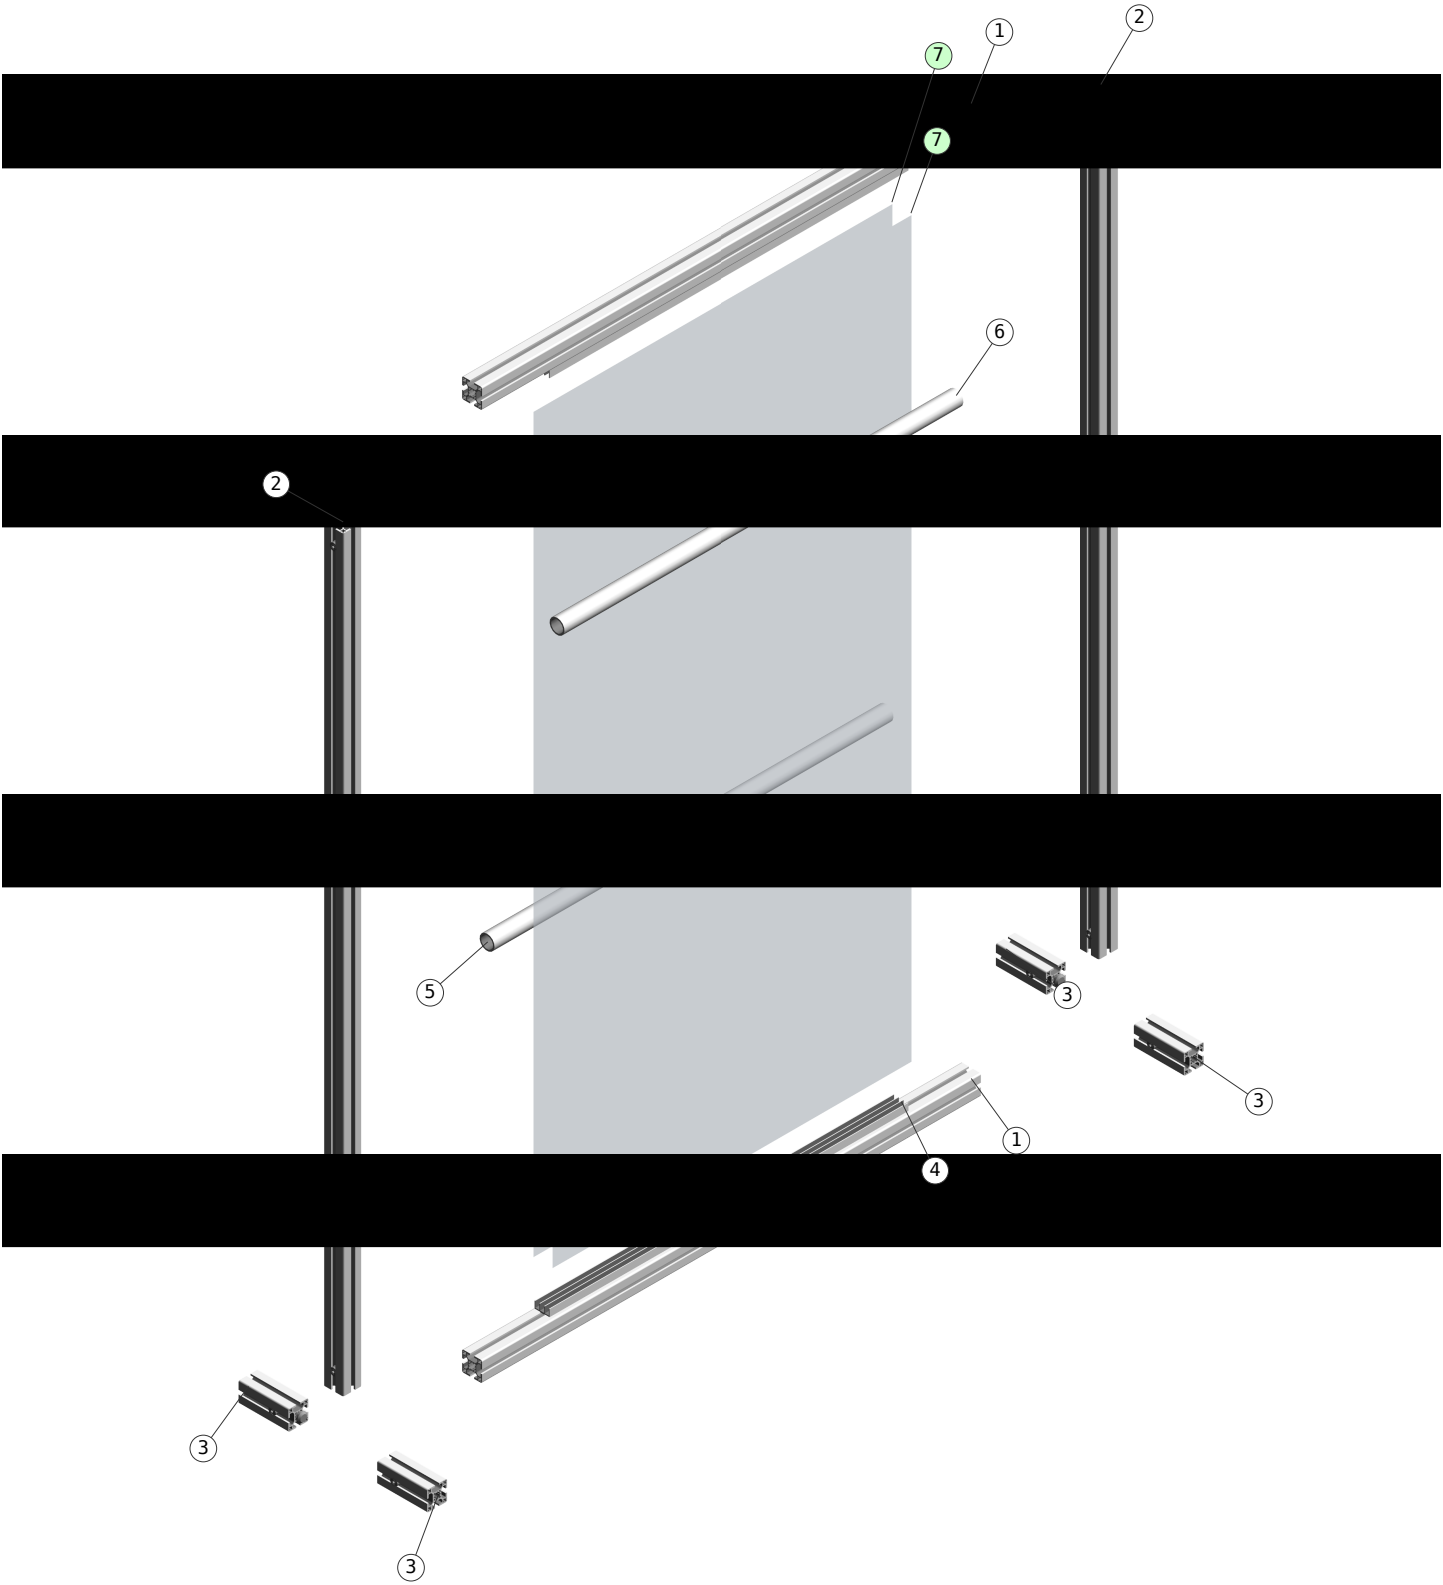


Assembly List

Pos	Article-No	Description	Related parts	Qty
2	1.11.040040.43LP-AA4AA4/1500	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	4
3	1.11.040040.43LP-AA4A00/100	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	4
4	1.19.15130-A00A00/720	Sliding profile 30x14	0.63.D07991.04012, Flat head screw, DIN 7991 - M4x12	8

Profile machining details

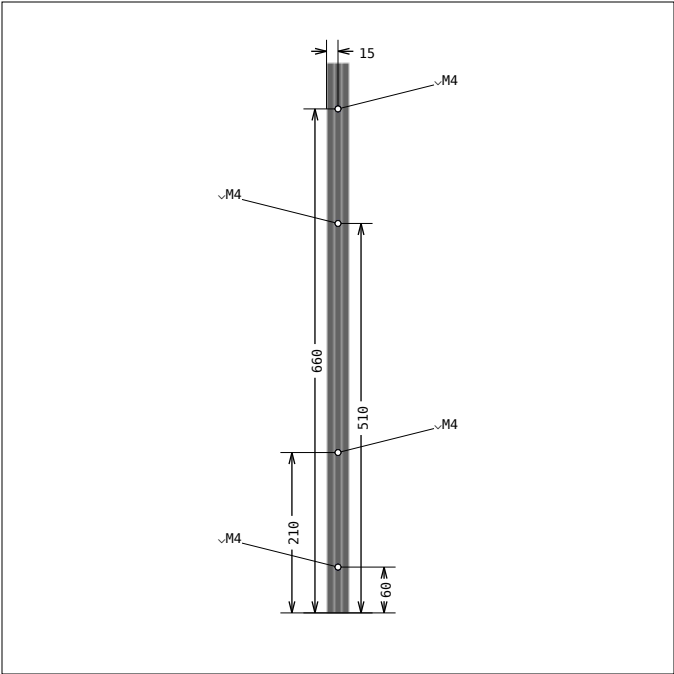


DRAWING 1, Pos 4
SIDE 1, bar length: 720.0 mm

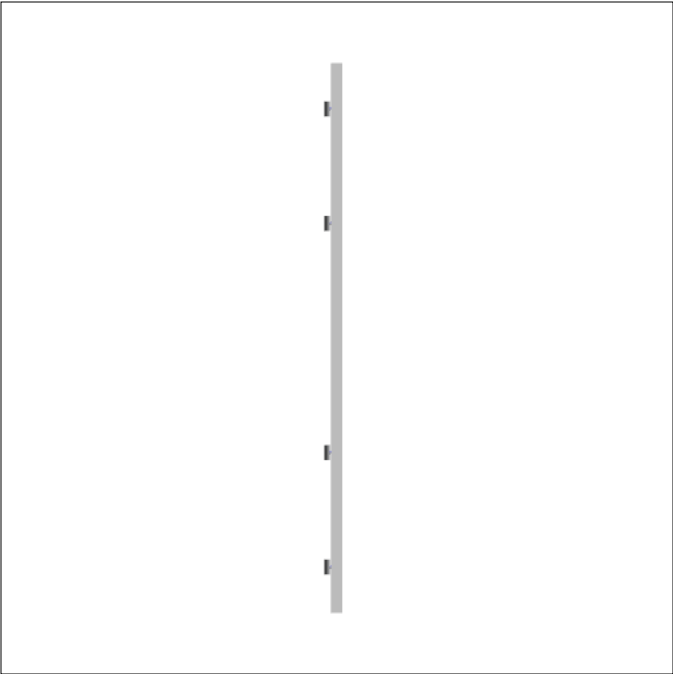

DRAWING 1, Pos 4
SIDE 2




DRAWING 1, Pos 4
SIDE 3

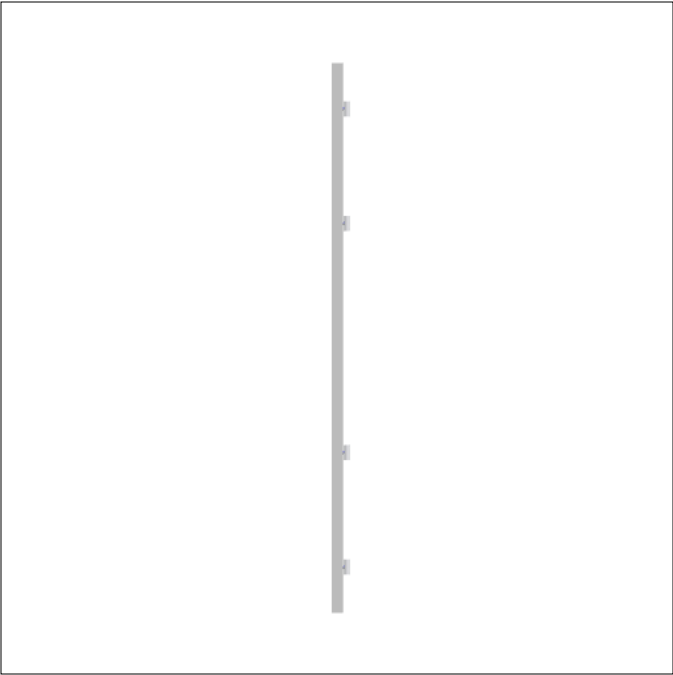

DRAWING 1, Pos 4
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Panels

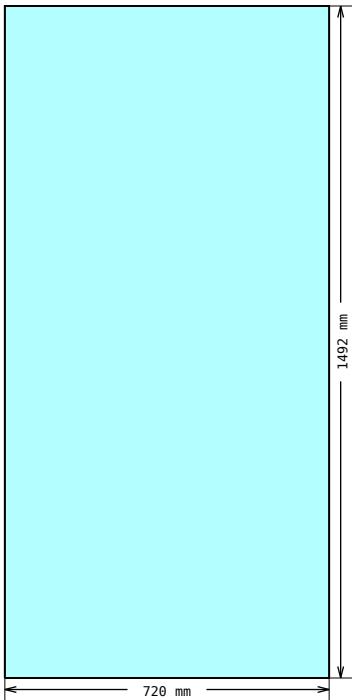

DRAWING 2, Pos 7
Shape measurements



Connectors for profiles with core hole-Ø 12 mm

1.21.4E0

Connection	Connector	Finished dimension	PG	Article-No. for connector with E-head		
				steel standard	E	VA
Universal			40	1.21.4E0	E	V

Connector types and materials

Technical data				
Connector	Article-No.	Material	Strength	Surface
Standard ground	1.21.4E0 1.21.4E0 E	steel	≥ 650 N/mm²	galvanised
Standard VA	1.21.4E0 V	stainless steel 1.4305	490 - 685 N/mm²	pickled and passivated


Strength values for profile connections with MayTec-Connectors

Torque tightening values for connector setscrew

PG	Slot	Setscrew special execution	Torque value	
			recommended	max.
40	E	M10×12	30.0 Nm	40.0 Nm

Comments
The max. tightening values are only valid for the MayTec setscrew and can not be reached by the usual commercial quality standard.


Tension load




PG	Slot	Connector	max. Tensile strength
40	E	Universal	12,000 N

Comments
All values given have been tested with pretension of the connectors and maximum torque value and refer to the connection of two identical profiles.

Slide load



Flexure load






PG	Slot	Profile	Pcs	max. Slide strength		max. Flexure strength		
				Connector, Universal		E-connector		
40	E	40×40	1	6,000 N	9,000 N	250 Nm		
		40×80	2	12,000 N	18,000 N		500 Nm	1,000 Nm
		80×80, 8E	4	24,000 N	36,000 N	2,000 Nm		






The listed values are valid for all light and heavy profiles

E = ground-connector, VA = stainless steel 1.4305

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.040040.43LP		572.0 mm
1.19.16130		4393.0 mm
1.19.15130		4553.0 mm

Assembly hints

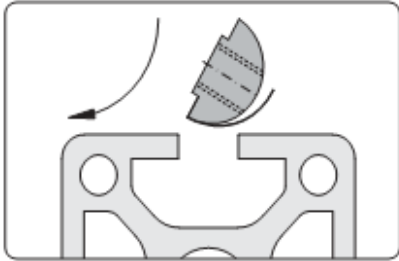ACCESSORY	1.32.4EM4	T-Nut for subsequent insertion, w. spring E, M4
 Fixing with leaf spring  Insert front-sided and rotate Application Fastening element for screw-type connections Technical data Design steel: • material: steel • surface: galvanised Design stainless: • material: stainless steel 1.4305 • surface: pickled and passivated max. moment of torque: $M_{A, max}$		These t-nuts are easily inserted into assembled frames
CONNECTOR	1.21.4E0	Connector, universal
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side		Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.