

Design Title : Provide chair with integrated tabletop structure..scene

Revision Level :

Approved by :

Designer :


Company :

Address :

E-Mail :

Phone :

Date : 2025-06-19

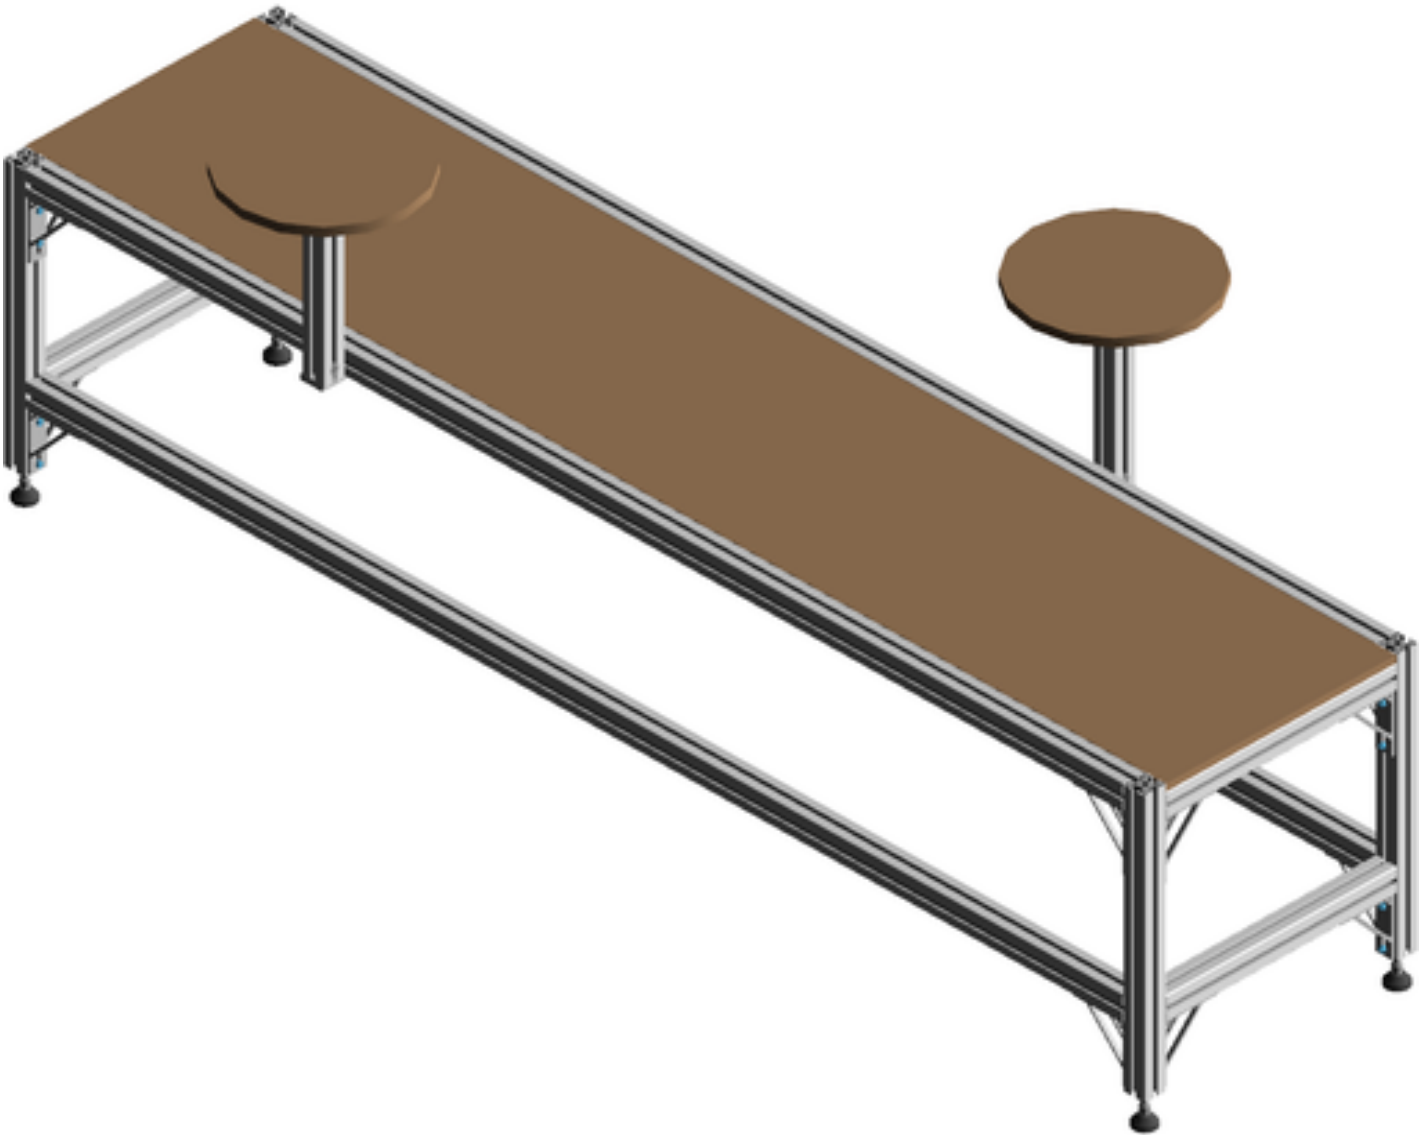


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.040040.43LP-AM0A00/300	Profile 40x40, 4E, light, plain Depth of thread, left: 16.0 mm (M14) Depth of thread, left: 16.0 mm (M14) **PER DRAWING 1**	MM	1
1.A	ZA4/20.0	Parallel-connector distance left: 20.0 mm, anchor on side: 1	EA	1
2	1.11.040040.43LP-A00A00/300	Profile 40x40, 4E, light, plain **PER DRAWING 2**	MM	1
2.A	ZA4/20.0	Parallel-connector distance left: 20.0 mm, anchor on side: 3	EA	1
3	1.11.040040.43LP-AA4AA4/420	Profile 40x40, 4E, light, plain	MM	4
4	1.11.040040.43LP-AL0A00/450	Profile 40x40, 4E, light, plain Depth of thread, left: 100.0 mm (M14)	MM	4
5	1.11.040040.43LP-AA4AA4/2000	Profile 40x40, 4E, light, plain	MM	4
6	1.46.120	Angle 25x40, M6	EA	8
7	1.46.21036	Angle 100x100, dia: 6.6 B30	EA	16
8	1.47.50408	Connection plate 40x80	EA	4
9	1.64.2E3M5.1	Mounting block E3, M5, grey	EA	6
10	0.63.D06912.06014	Cylindric head screw, DIN 6912 - M6x14	EA	72
11	0.63.D07991.08014	Flat head screw, DIN 7991, M8x14	EA	4
12	0.63.D07991.08016	Flat head screw, DIN 7991 - M8x16	EA	2
13	0.63.D07991.08020	Flat head screw, DIN 7991 - M8x20	EA	4
14	1.21.4E0	Connector, universal	EA	16
15	1.21.4E5	Connector, parallel-square	EA	2
16	0.61.D06923.08	Hexagonal nut with flange DIN 6923 - M8	EA	4
17	1.32.4EM6	T-Nut for subsequent insertion, w. spring E, M6	EA	72
18	1.32.4EM8	T-Nut for subsequent insertion, w. spring E, M8	EA	4
19	1.35.1140815	Threaded insert M14/M8, L15	EA	2
20	1.44.411040	Adjustable tilt-foot plate PA, 40	EA	4
21	1.44.4614066	Adjustable tilt-foot spindle steel, M14x66	EA	4
22	1.44.46M14	Nut M14	EA	4


Total Weight: 23.06 kg (50.85 lbs)


Isometric view

Some accessories may not be shown

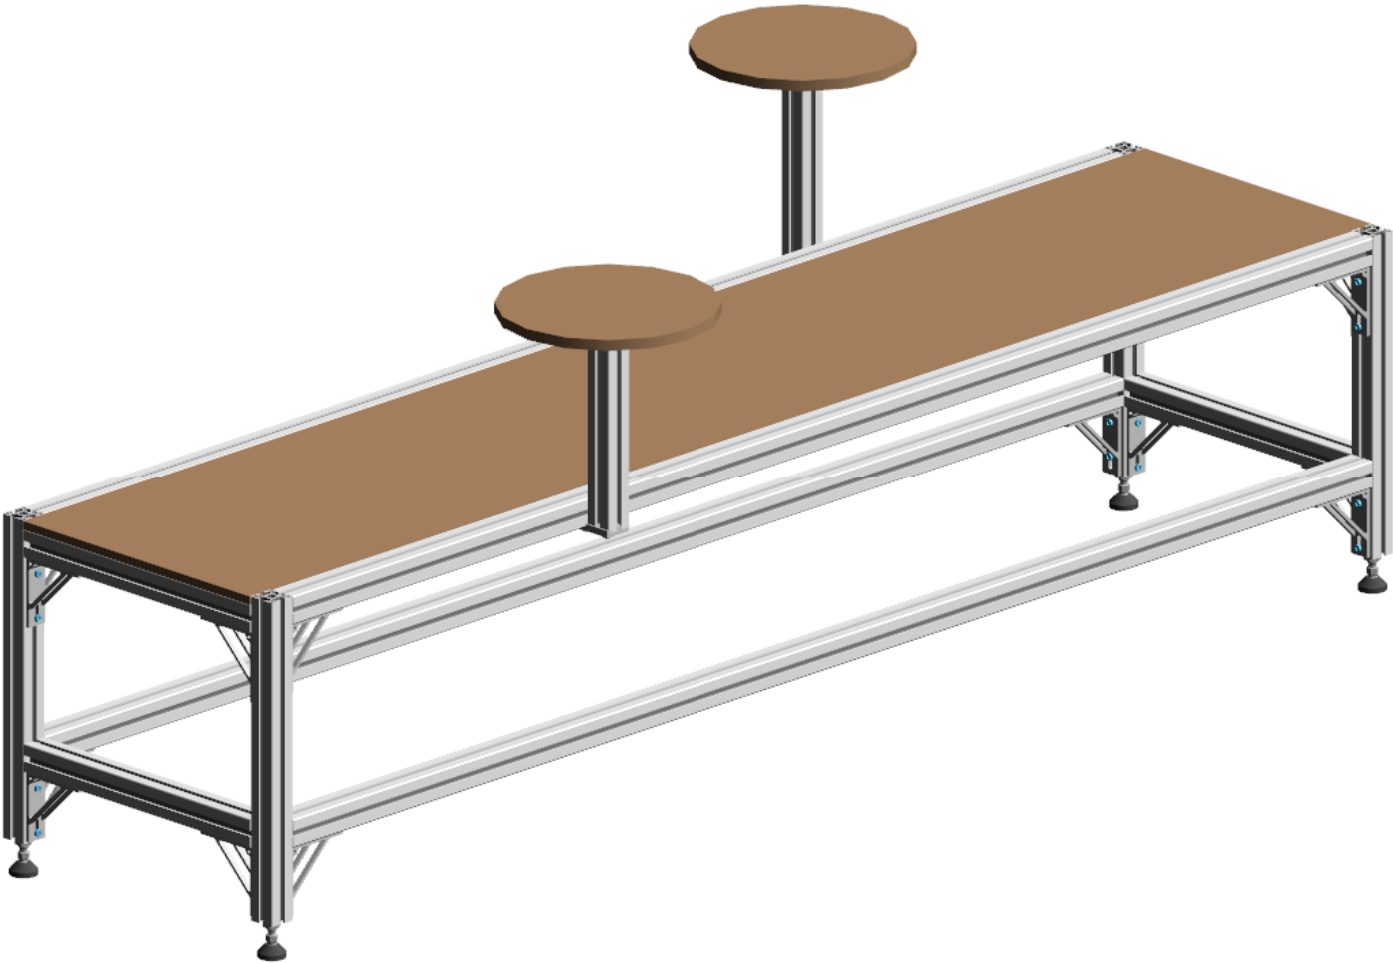


Multiview

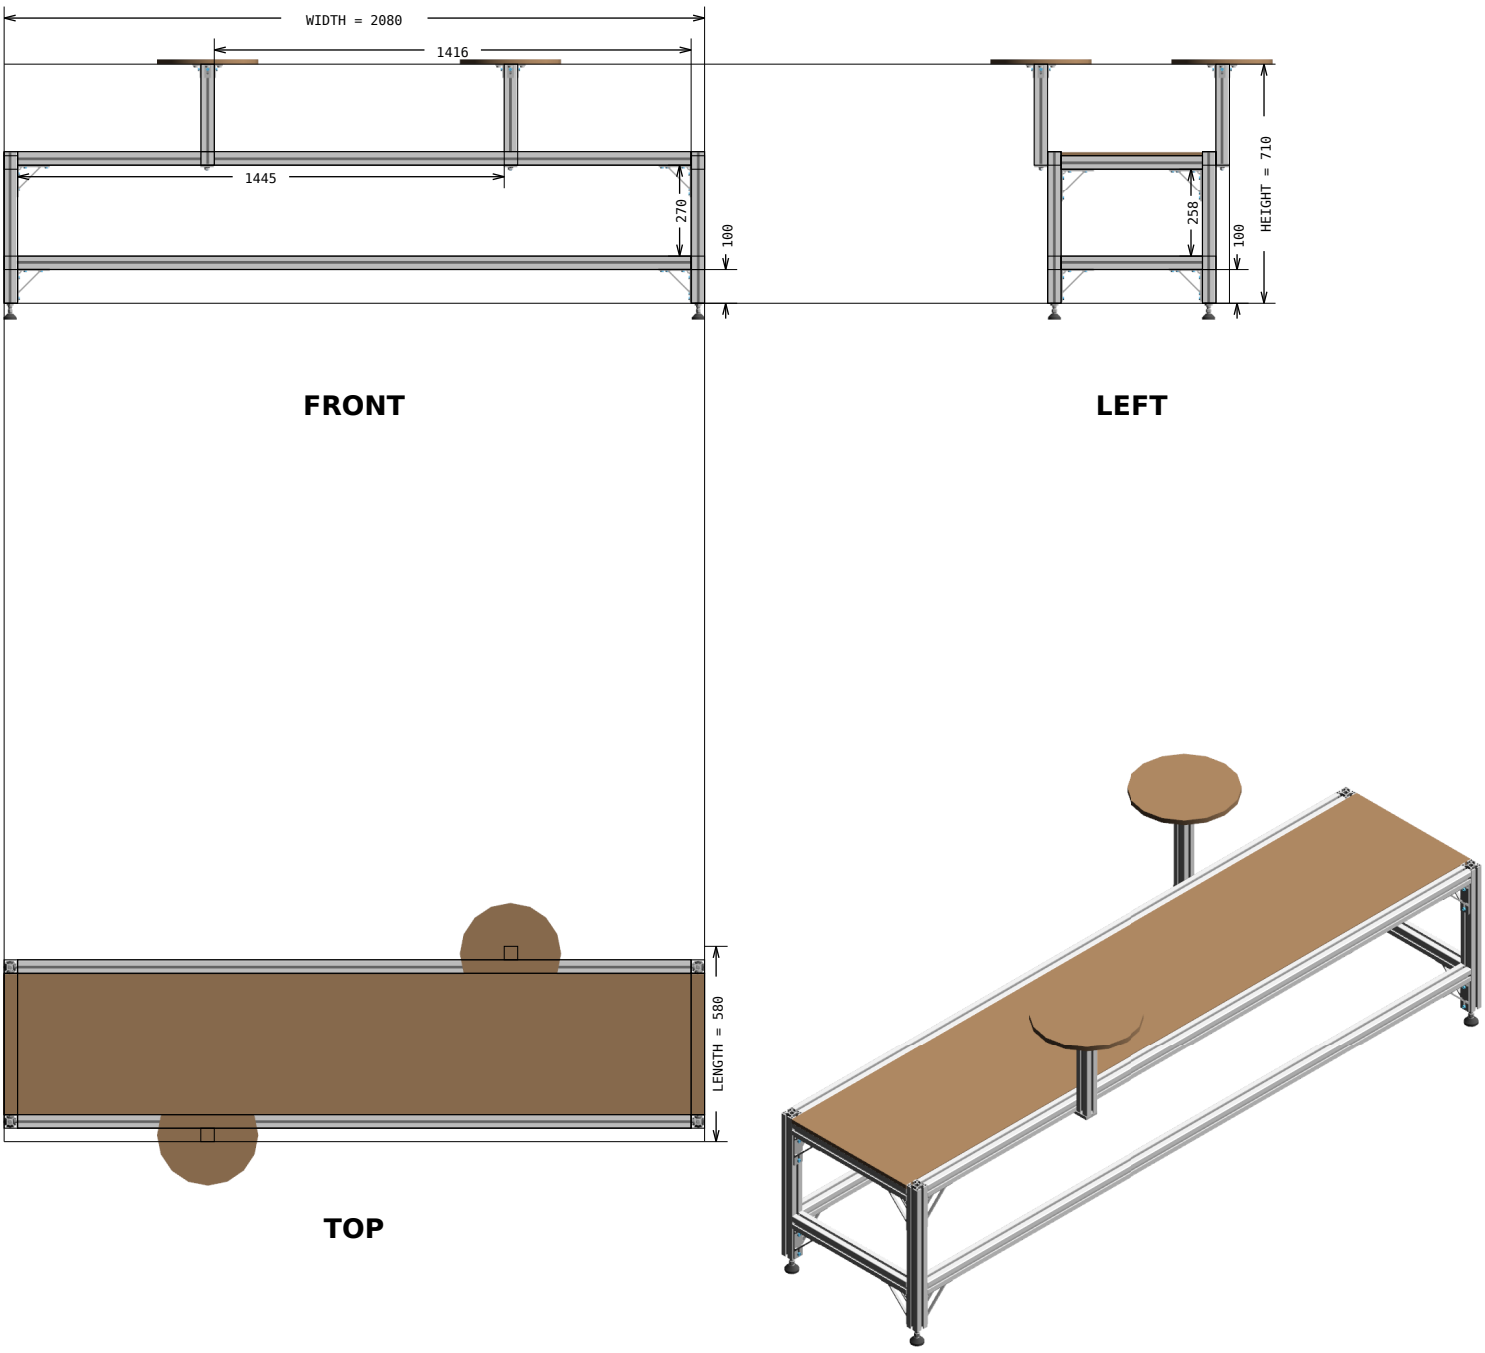

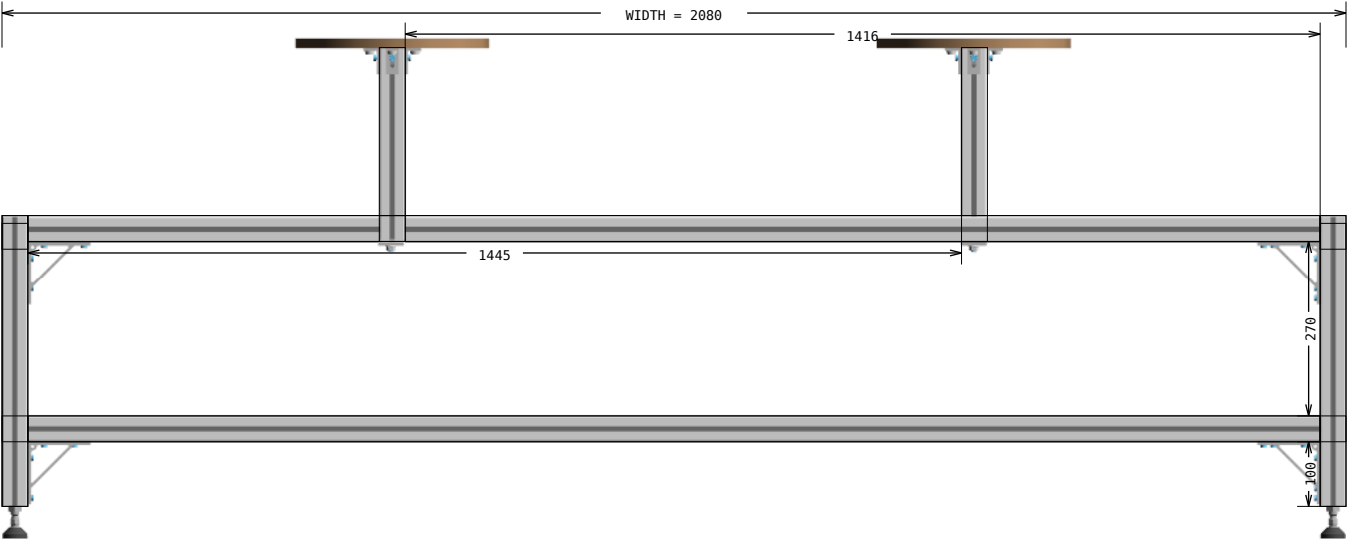


LEFT VIEW

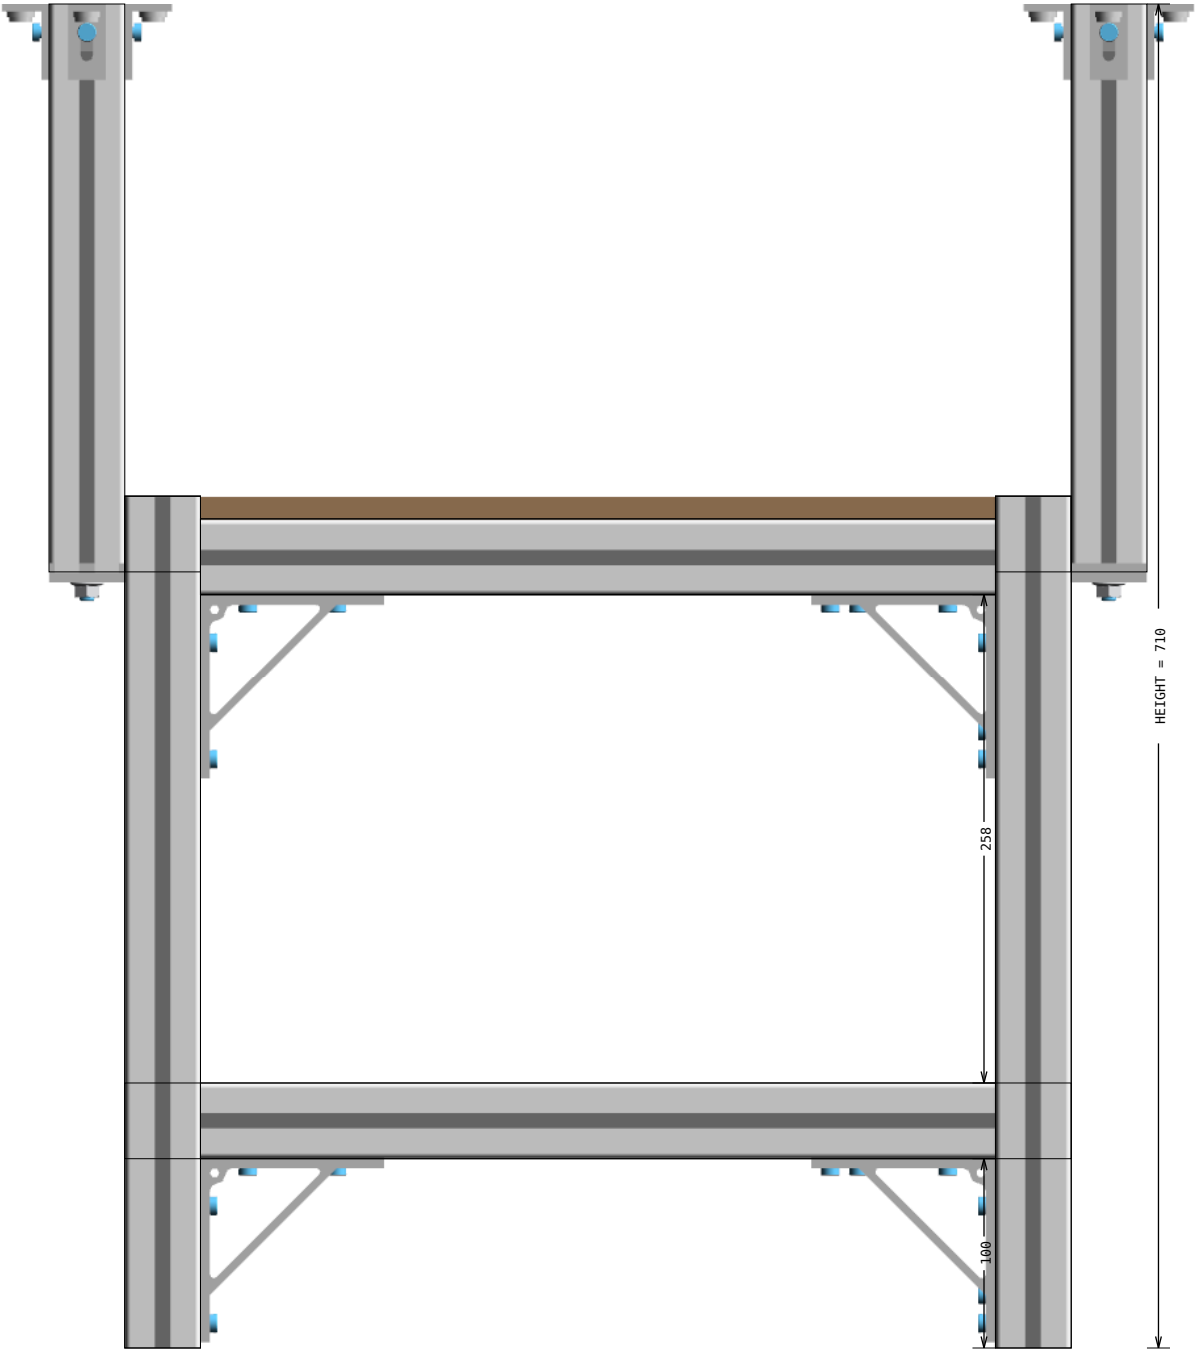


Design Title : Provide chair with integrated tabletop structure..scene
Customer Name :
Date : 2025-06-19

TOP VIEW

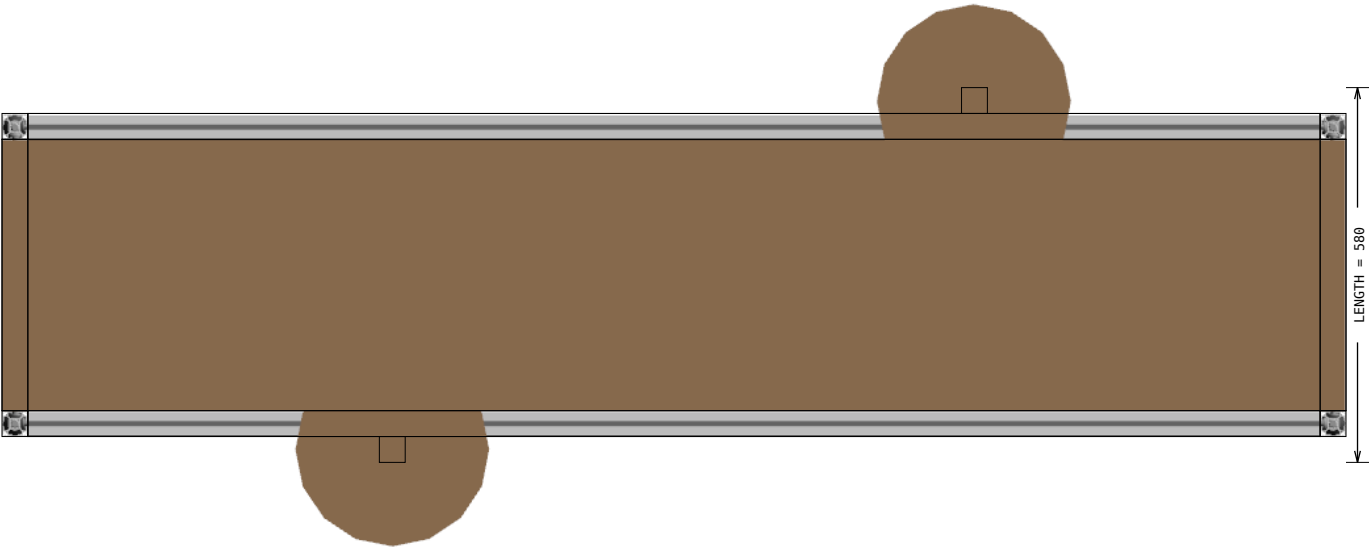

Exploded view

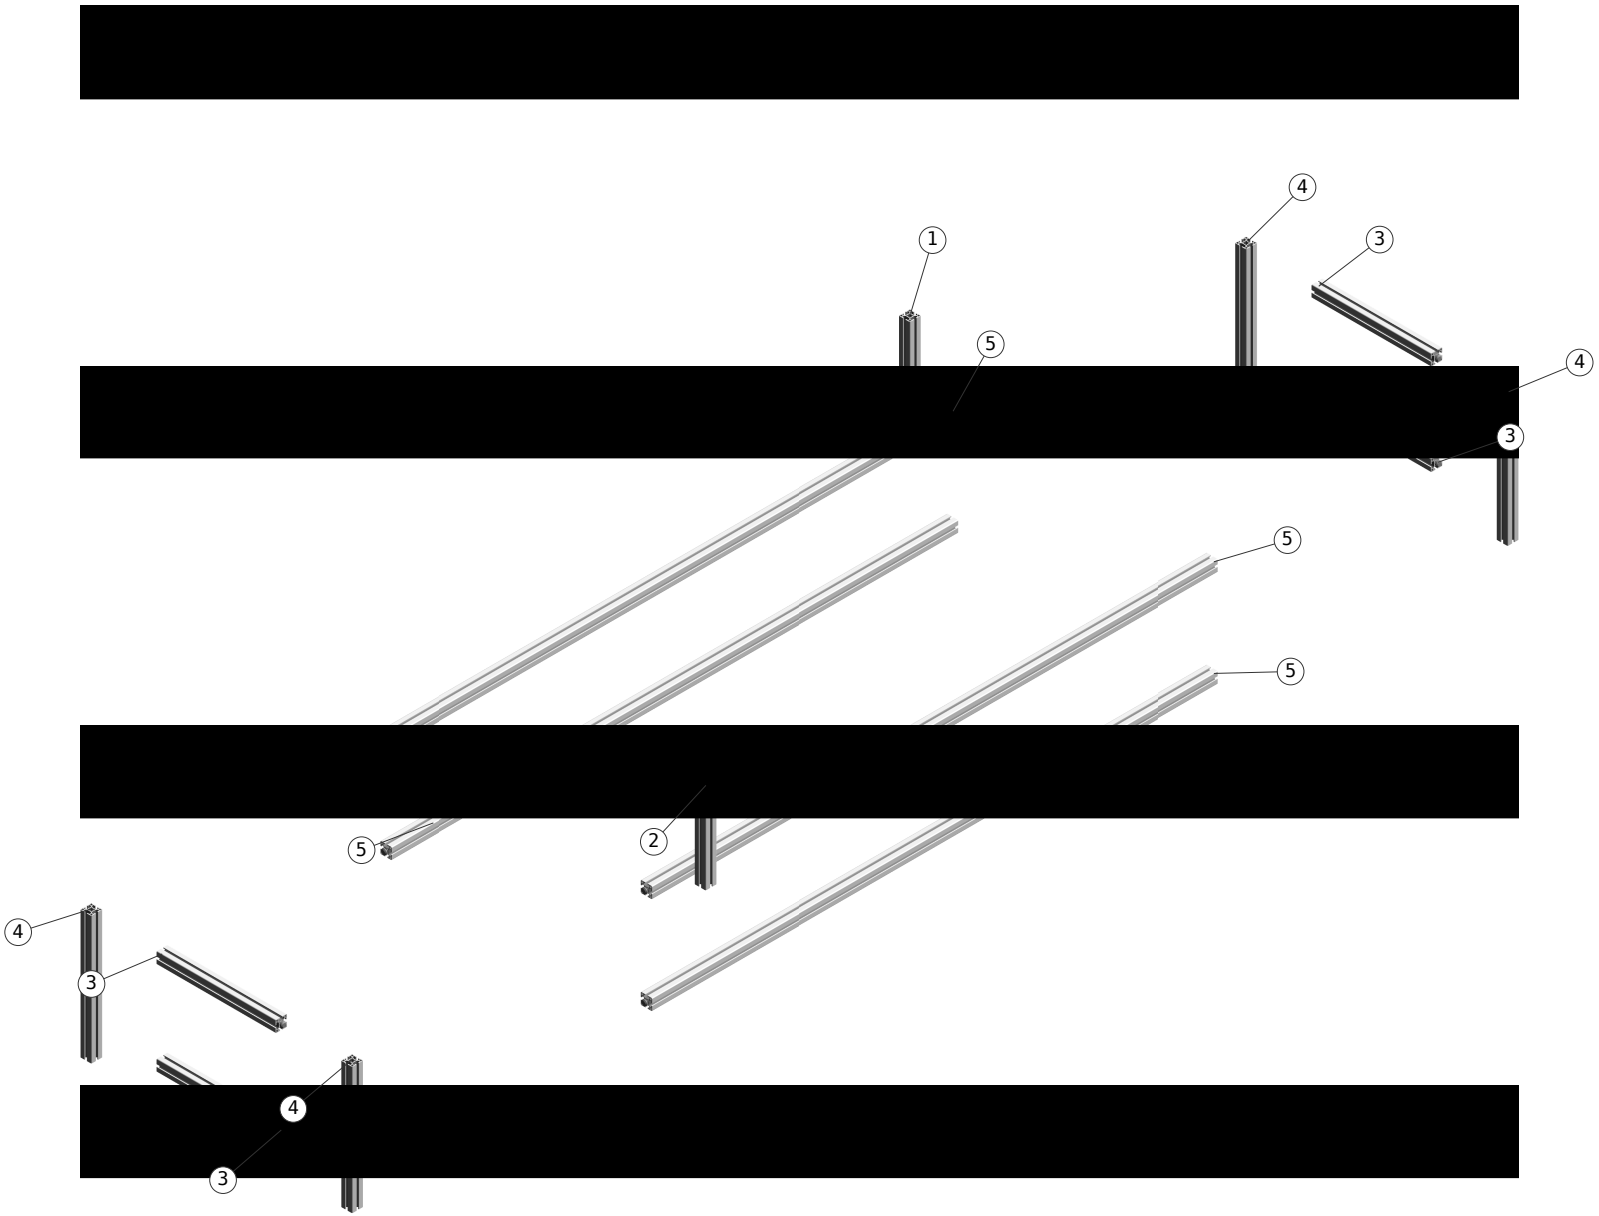

Components of group: dfhdah


Panels are not shown for image clarity, their locations are marked by green balloons




Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.11.040040.43LP-AM0A00/300	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	1
2	1.11.040040.43LP-A00A00/300	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	1
3	1.11.040040.43LP-AA4AAA/420	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	8
5	1.11.040040.43LP-AA4AAA/2000	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	8
6	1.46.120	Angle 25x40, M6	0.63.D06912.06014, Cylindric head screw, DIN 6912 - M6x14 1.32.4EM6, T-Nut for subsequent insertion, w. spring E, M6	8 8
7	1.46.21036	Angle 100x100, dia: 6.6 B30	0.63.D06912.06014, Cylindric head screw, DIN 6912 - M6x14 1.32.4EM6, T-Nut for subsequent insertion, w. spring E, M6	64 64
8	1.47.50408	Connection plate 40x80	1.32.4EM8, T-Nut for subsequent insertion, w. spring E, M8 0.61.D06923.08, Hexagonal nut with flange DIN 6923 - M8 0.63.D07991.08014, Flat head screw, DIN 7991, M8x14 0.63.D07991.08016, Flat head screw, DIN 7991 - M8x16 1.35.1140815, Threaded insert M14/M8, L15 0.63.D07991.08020, Flat head screw, DIN 7991 - M8x20	4 4 4 2 2 4


Profile machining details

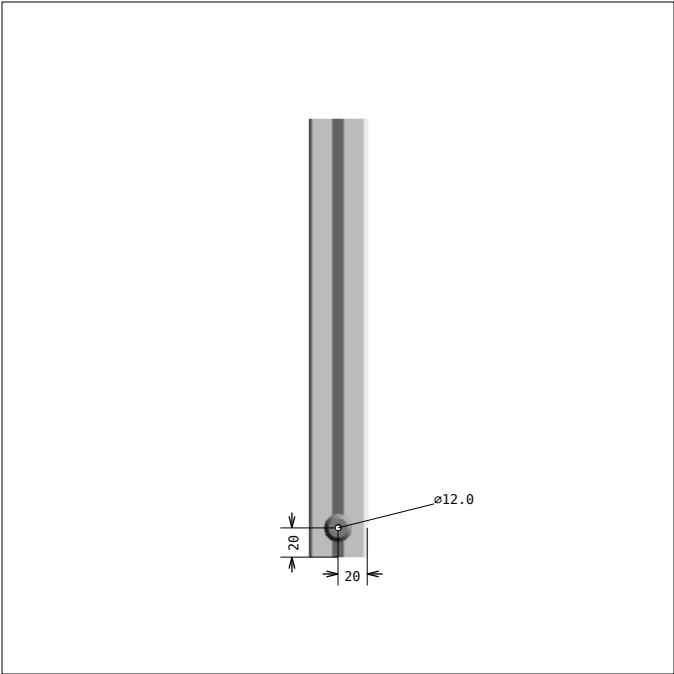


DRAWING 1, Pos 1
SIDE 1, bar length: 300.0 mm

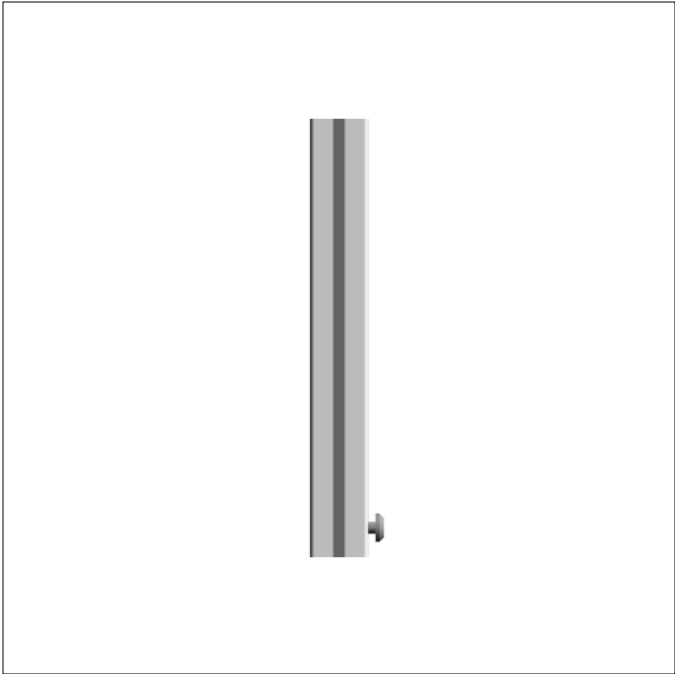

DRAWING 1, Pos 1
SIDE 2




DRAWING 1, Pos 1
SIDE 3

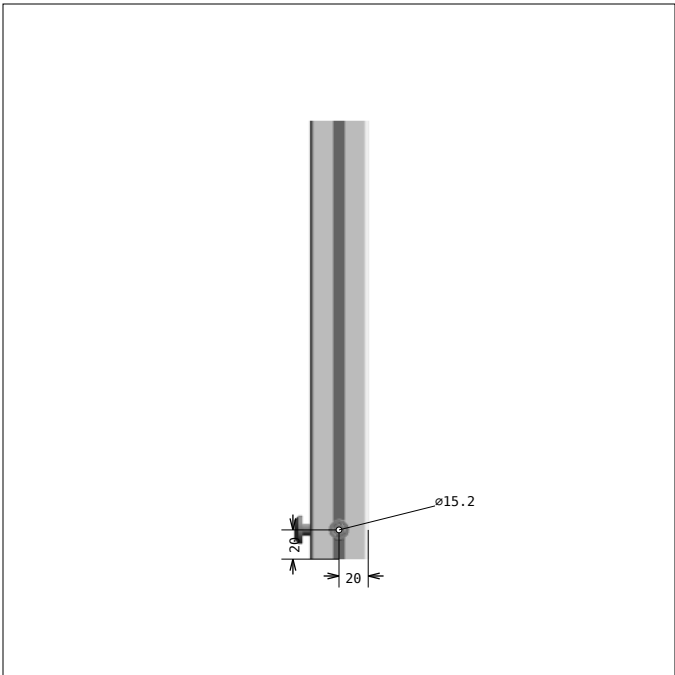


DRAWING 1, Pos 1
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 2, Pos 2
SIDE 1, bar length: 300.0 mm

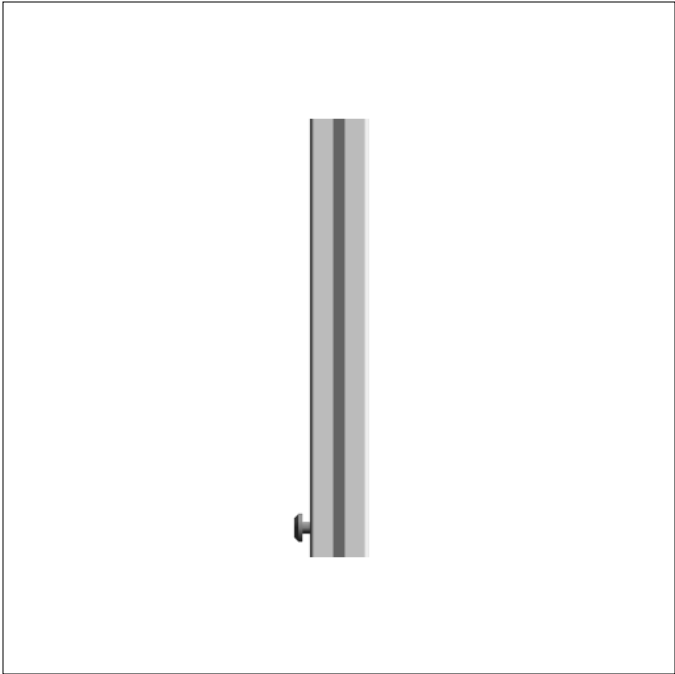

DRAWING 2, Pos 2
SIDE 2

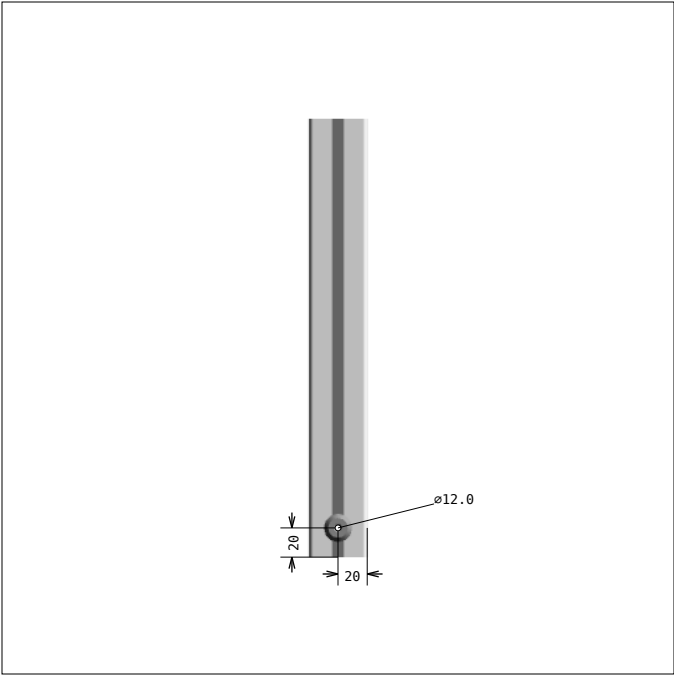

DRAWING 2, Pos 2
SIDE 3

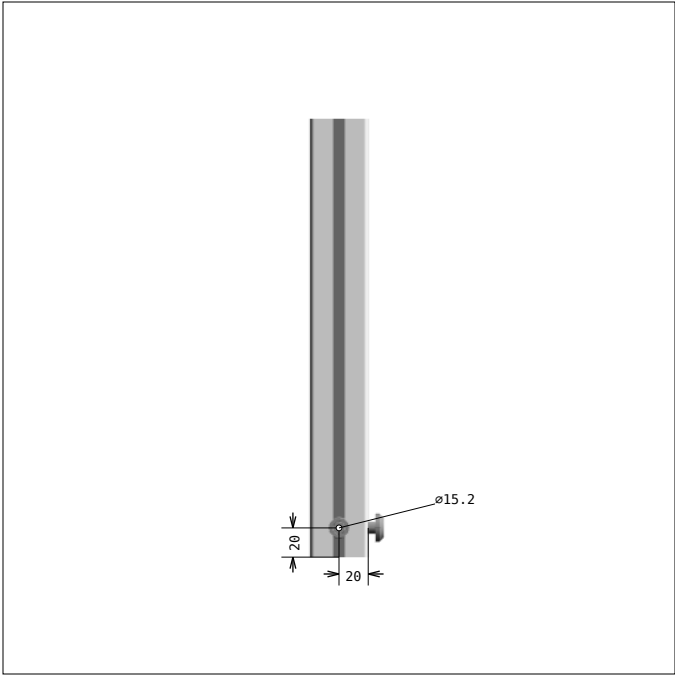

DRAWING 2, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".



Connectors for profiles with core hole-Ø 12 mm

1.21.4E0

Connection	Connector	Finished dimension	PG	Article-No. for connector with E-head		
				steel standard	E	VA
Universal			40	1.21.4E0	E	V

Connector types and materials

Technical data				
Connector	Article-No.	Material	Strength	Surface
Standard ground	1.21.4E0 1.21.4E0 E	steel	≥ 650 N/mm²	galvanised
Standard VA	1.21.4E0 V	stainless steel 1.4305	490 - 685 N/mm²	pickled and passivated


Strength values for profile connections with MayTec-Connectors

Torque tightening values for connector setscrew

PG	Slot	Setscrew special execution	Torque value	
			recommended	max.
40	E	M10×12	30.0 Nm	40.0 Nm

Comments
The max. tightening values are only valid for the MayTec setscrew and can not be reached by the usual commercial quality standard.


Tension load




PG	Slot	Connector	max. Tensile strength
40	E	Universal	12,000 N

Comments
All values given have been tested with pretension of the connectors and maximum torque value and refer to the connection of two identical profiles.

Slide load



Flexure load



PG	Slot	Profile	Pcs	max. Slide strength		max. Flexure strength		
				Connector, Universal	E-connector			
40	E	40×40	1	6,000 N	9,000 N	250 Nm		
		40×80	2	12,000 N	18,000 N		500 Nm	1,000 Nm
		80×80, 8E	4	24,000 N	36,000 N	2,000 Nm		


The listed values are valid for all light and heavy profiles

E = ground-connector, VA = stainless steel 1.4305







Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.040040.43LP	④ ④ ④ ④ ⑤ ⑤ 450.0450.0450.0450.02000.02000.0	179.0 mm
	③ ③ ③ ③ ⑤ ⑤ 420.0420.0420.0420.02000.02000.0	299.0 mm
	② ① 300.0300.0	5393.0 mm

Assembly hints

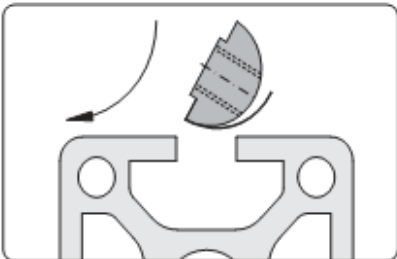ACCESSORY	1.46.21036	Angle 100x100, dia: 6.6 B30	 Mounting of cover panels  Support across the profile  Support of free-standing profiles Technical data material: aluminium strength: F22 surface: natural anodised Application For supporting of profiles and mounting of cover panels Comments Angles Alu are made from the angle profiles → 1.19.141... The angles serve not only as reinforcements, but as mounting points panel elements or other parts.
ACCESSORY	1.32.4EM6	T-Nut for subsequent insertion, w. spring E, M6	 Fixing with leaf spring  Insert front-sided and rotate Technical data Design steel: • material: steel • surface: galvanised Design stainless: • material: stainless steel 1.4305 • surface: pickled and passivated max. moment of torque: $M_{A, max}$
	1.32.4EM8	T-Nut for subsequent insertion, w. spring E, M8	

Assembly hints

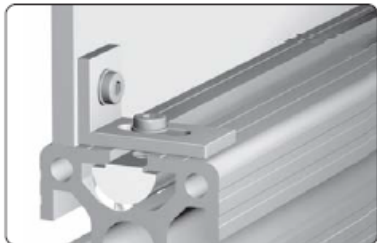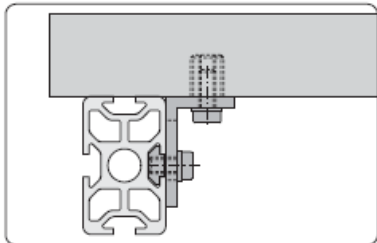CONNECTOR	1.21.4E0	Connector, universal
	1.21.4E5	Connector, parallel-square
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side <td> Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles. </td>		Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
ACCESSORY	1.46.120	Angle 25x40, M6
 Fastening of panels  Fastening of table tops Application Angle bracket for the mounting of panels, table tops, switches and accessories		These angles can be used to attach panels or thick tops.