

Design Title : SUPER TABLE 4.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19



Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.030030.43LP-AA4A00/100	Profile 30x30, 4F, light, plain	MM	1
2	1.11.030030.43LP-DA3DA3/200	Profile 30x30, 4F, light, plain Special angle, Right: 60.0°; Special angle, Left: 30.0°; **PER DRAWING 1**	MM	1
3	1.11.030030.43LP-DA1DA1/200	Profile 30x30, 4F, light, plain Special angle, Right: 60.0°; Special angle, Left: 30.0°; **PER DRAWING 2**	MM	1
4	1.11.030030.43LP-AA4AA4/205	Profile 30x30, 4F, light, plain	MM	1
5	1.11.030030.43LP-AA4A00/205	Profile 30x30, 4F, light, plain	MM	1
6	1.11.030030.43LP-EA3DA3/368.3	Profile 30x30, 4F, light, plain Special angle, Right: 52.5°; Special angle, Left: 12.5°; **PER DRAWING 3**	MM	1
7	1.11.030030.43LP-DA3DA3/372.7	Profile 30x30, 4F, light, plain Special angle, Right: 50.0°; Special angle, Left: 40.0°; **PER DRAWING 4**	MM	1
8	1.11.030030.43LP-EA3EA3/372.7	Profile 30x30, 4F, light, plain Special angle, Right: 50.0°; Special angle, Left: 40.0°; **PER DRAWING 5**	MM	1
9	1.11.030030.43LP-EA3DA3/372.8	Profile 30x30, 4F, light, plain Special angle, Right: 53.0°; Special angle, Left: 13.0°; **PER DRAWING 6**	MM	1
10	1.11.030030.43LP-AA4A00/440	Profile 30x30, 4F, light, plain	MM	1
11	1.11.030030.43LP-A00A00/500	Profile 30x30, 4F, light, plain	MM	1
12	1.11.030030.43LP-AA1AA1/535	Profile 30x30, 4F, light, plain	MM	1
13	1.11.030030.43LP-AA4AA4/535	Profile 30x30, 4F, light, plain	MM	1
14	1.11.030030.43LP-A00AA4/205.1	Profile 30x30, 4F, light, plain	MM	2
15	1.11.030030.43LP-AA4AA4/220	Profile 30x30, 4F, light, plain	MM	2
16	1.11.030030.43LP-EA3A00/235.1	Profile 30x30, 4F, light, plain **PER DRAWING 7**	MM	2
17	1.11.030030.43LP-AA4DA1/250	Profile 30x30, 4F, light, plain **PER DRAWING 8**	MM	2
18	1.11.030030.43LP-DA3A00/428	Profile 30x30, 4F, light, plain Special angle, Left: 60.0°; **PER DRAWING 9**	MM	2
19	1.11.030030.43LP-EA3A00/500	Profile 30x30, 4F, light, plain Special angle, Left: 30.0°; **PER DRAWING 10**	MM	2
20	1.11.030030.43LP-DA3A00/500	Profile 30x30, 4F, light, plain Special angle, Left: 30.0°; **PER DRAWING 11**	MM	2
21	1.11.030030.43LP-DA3DA3/527.7	Profile 30x30, 4F, light, plain Special angle, Right: 30.0°; Special angle, Left: 30.0°; **PER DRAWING 12**	MM	2
22	1.11.030030.43LP-AA4AA4/175	Profile 30x30, 4F, light, plain	MM	4
23	1.11.030030.43LP-AA4AA4/425	Profile 30x30, 4F, light, plain	MM	4
24	1.11.030030.43LP-A00A00/470	Profile 30x30, 4F, light, plain	MM	5
25	1.11.030030.43LP-AA4AA4/440	Profile 30x30, 4F, light, plain	MM	6
28	1.64.5101	Mounting angle	EA	8
29	0.63.D06912.04008	Cylindric head screw, DIN 6912 - M4x8	EA	4
30	0.63.D06912.04008	Cylindric head screw, DIN 6912 - M4x8	EA	4
31	0.63.D07991.04008	Flat head screw, DIN 7991 - M4x8	EA	28
32	0.63.D07991.06014	Flat head screw, DIN 7991 - M6x14	EA	9

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
33	1.21.3F0	Connector, universal	EA	45
34	1.21.3FK1	Connector, oblique-hinge l. + r.	EA	22
35	1.21.3G1	Connector, miter-hinge l. + r.	EA	2
36	1.31.FM4	Threaded plate F, M4	EA	28
37	1.31.FM6	Threaded plate F, M6	EA	9
38	1.32.4F2M4.25	T-Nut for subsequent insertion, w. spring F, 2xM4	EA	4


Frame weight: 18.53 kg (40.84 lbs)

26	2.87.1571-99	Polycarbonat 4mm, SIZE: 469.00MM x 484.00MM **PER DRAWING 13**	SM	2
27	2.87.3751-99	Polycarbonate 9,5 mm **NOTE: Non-stock, purchased as needed, SIZE: 499.00MM x 500.00MM **PER DRAWING 14**	SM	1


Panels weight: 4.85 kg (10.69 lbs)

Total Weight: 23.37 kg (51.53 lbs)


Isometric view
Some accessories may not be shown

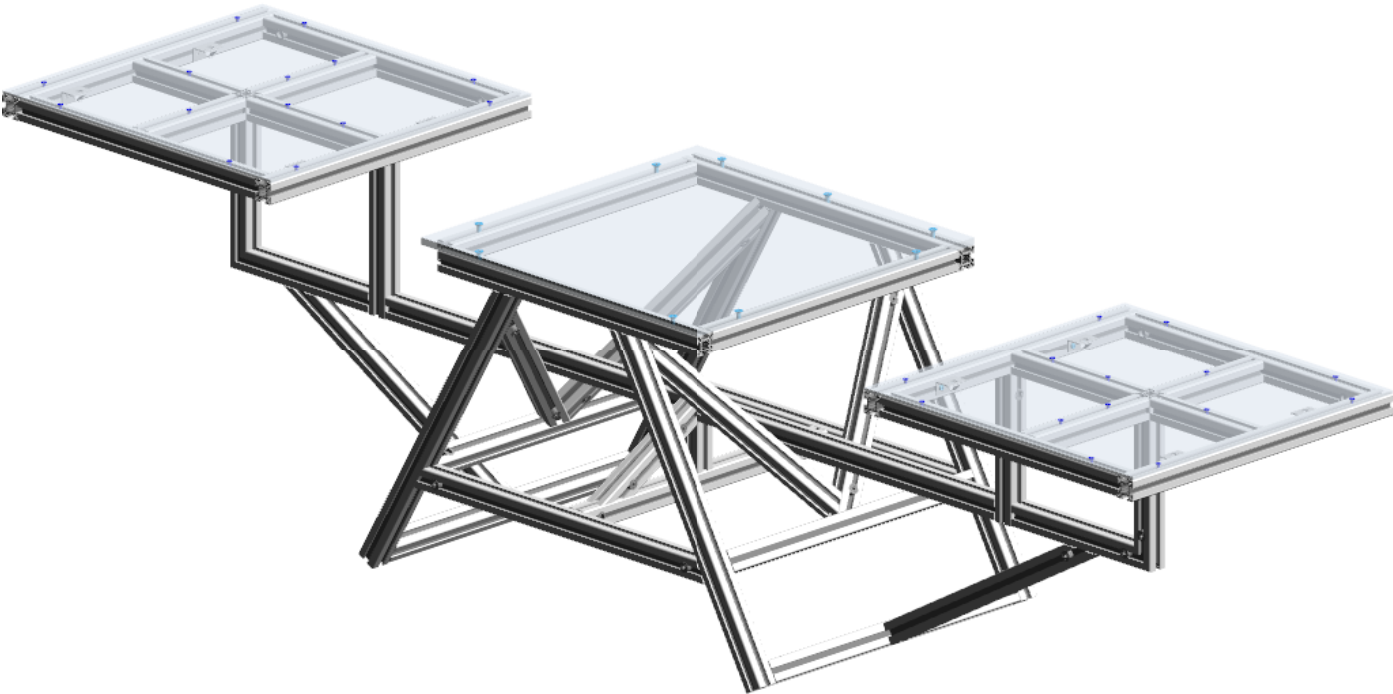



Multiview

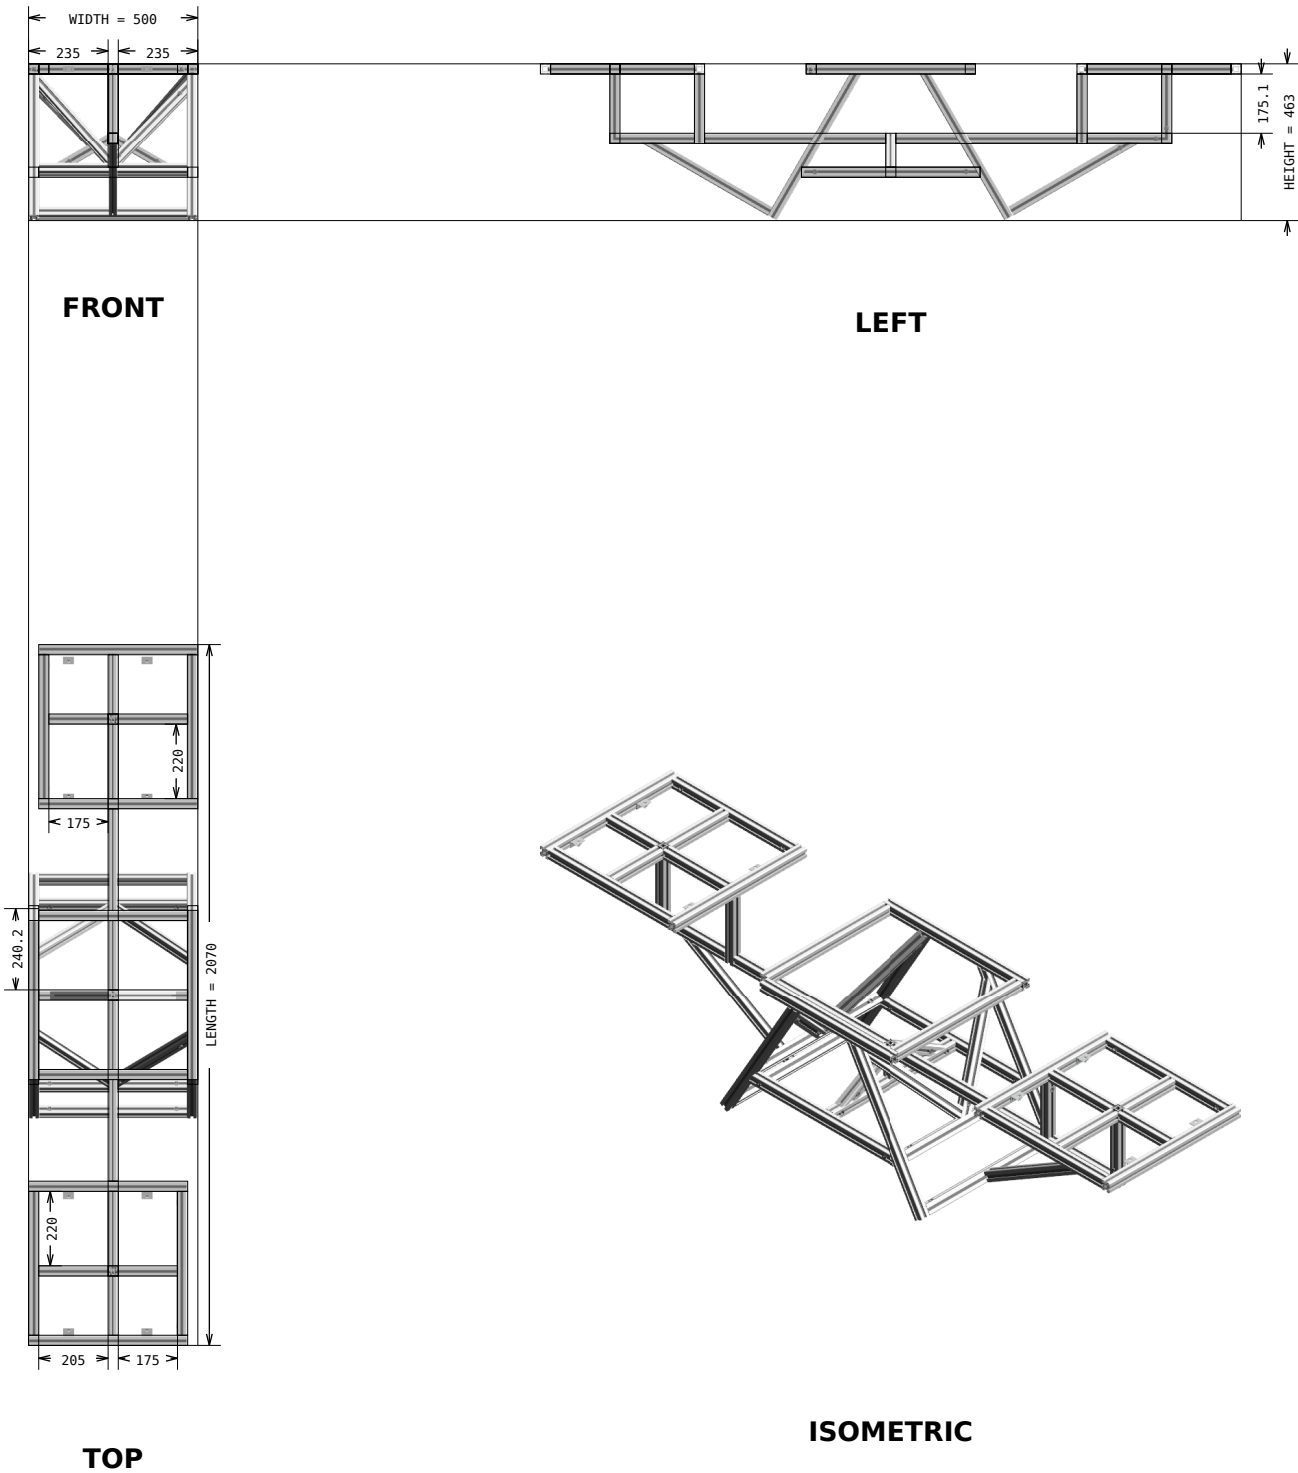



FRONT VIEW

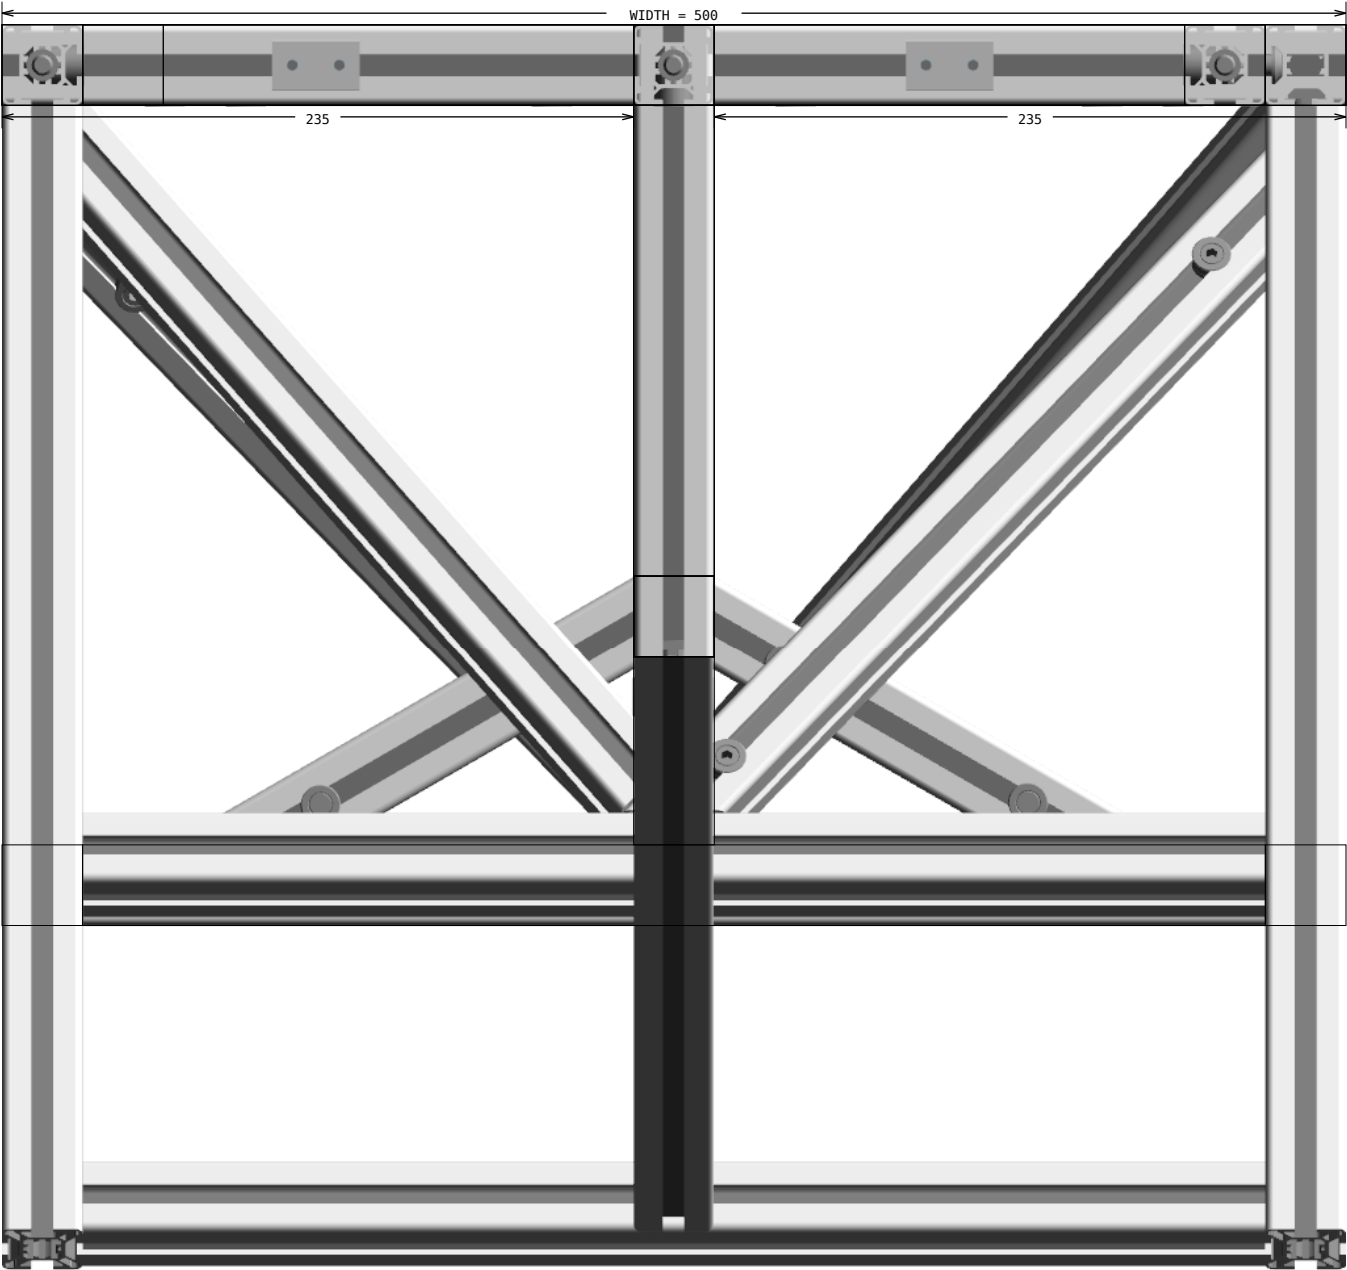

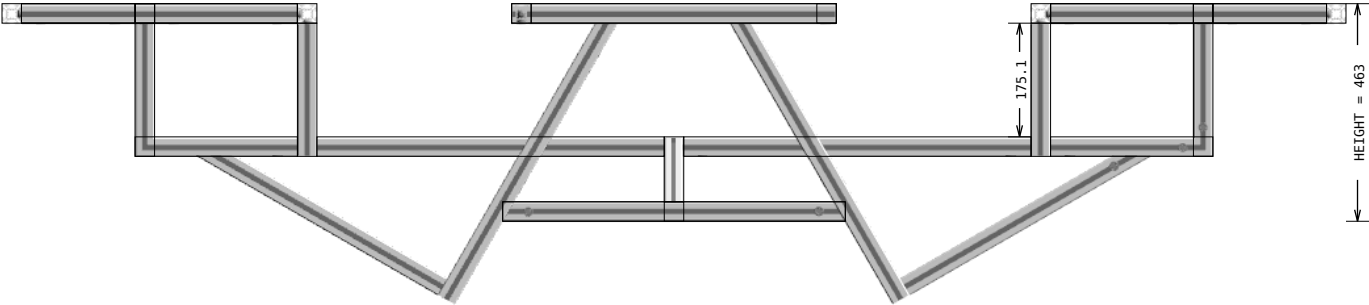

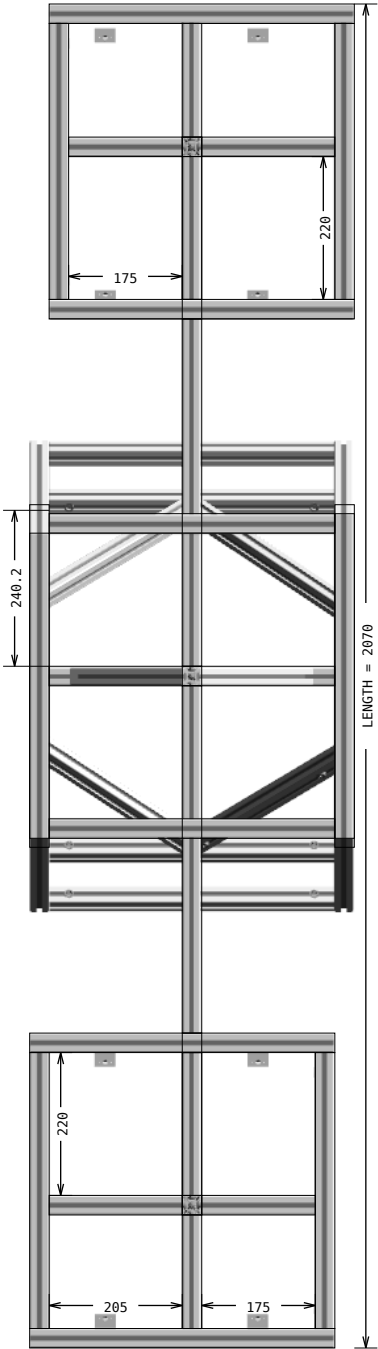

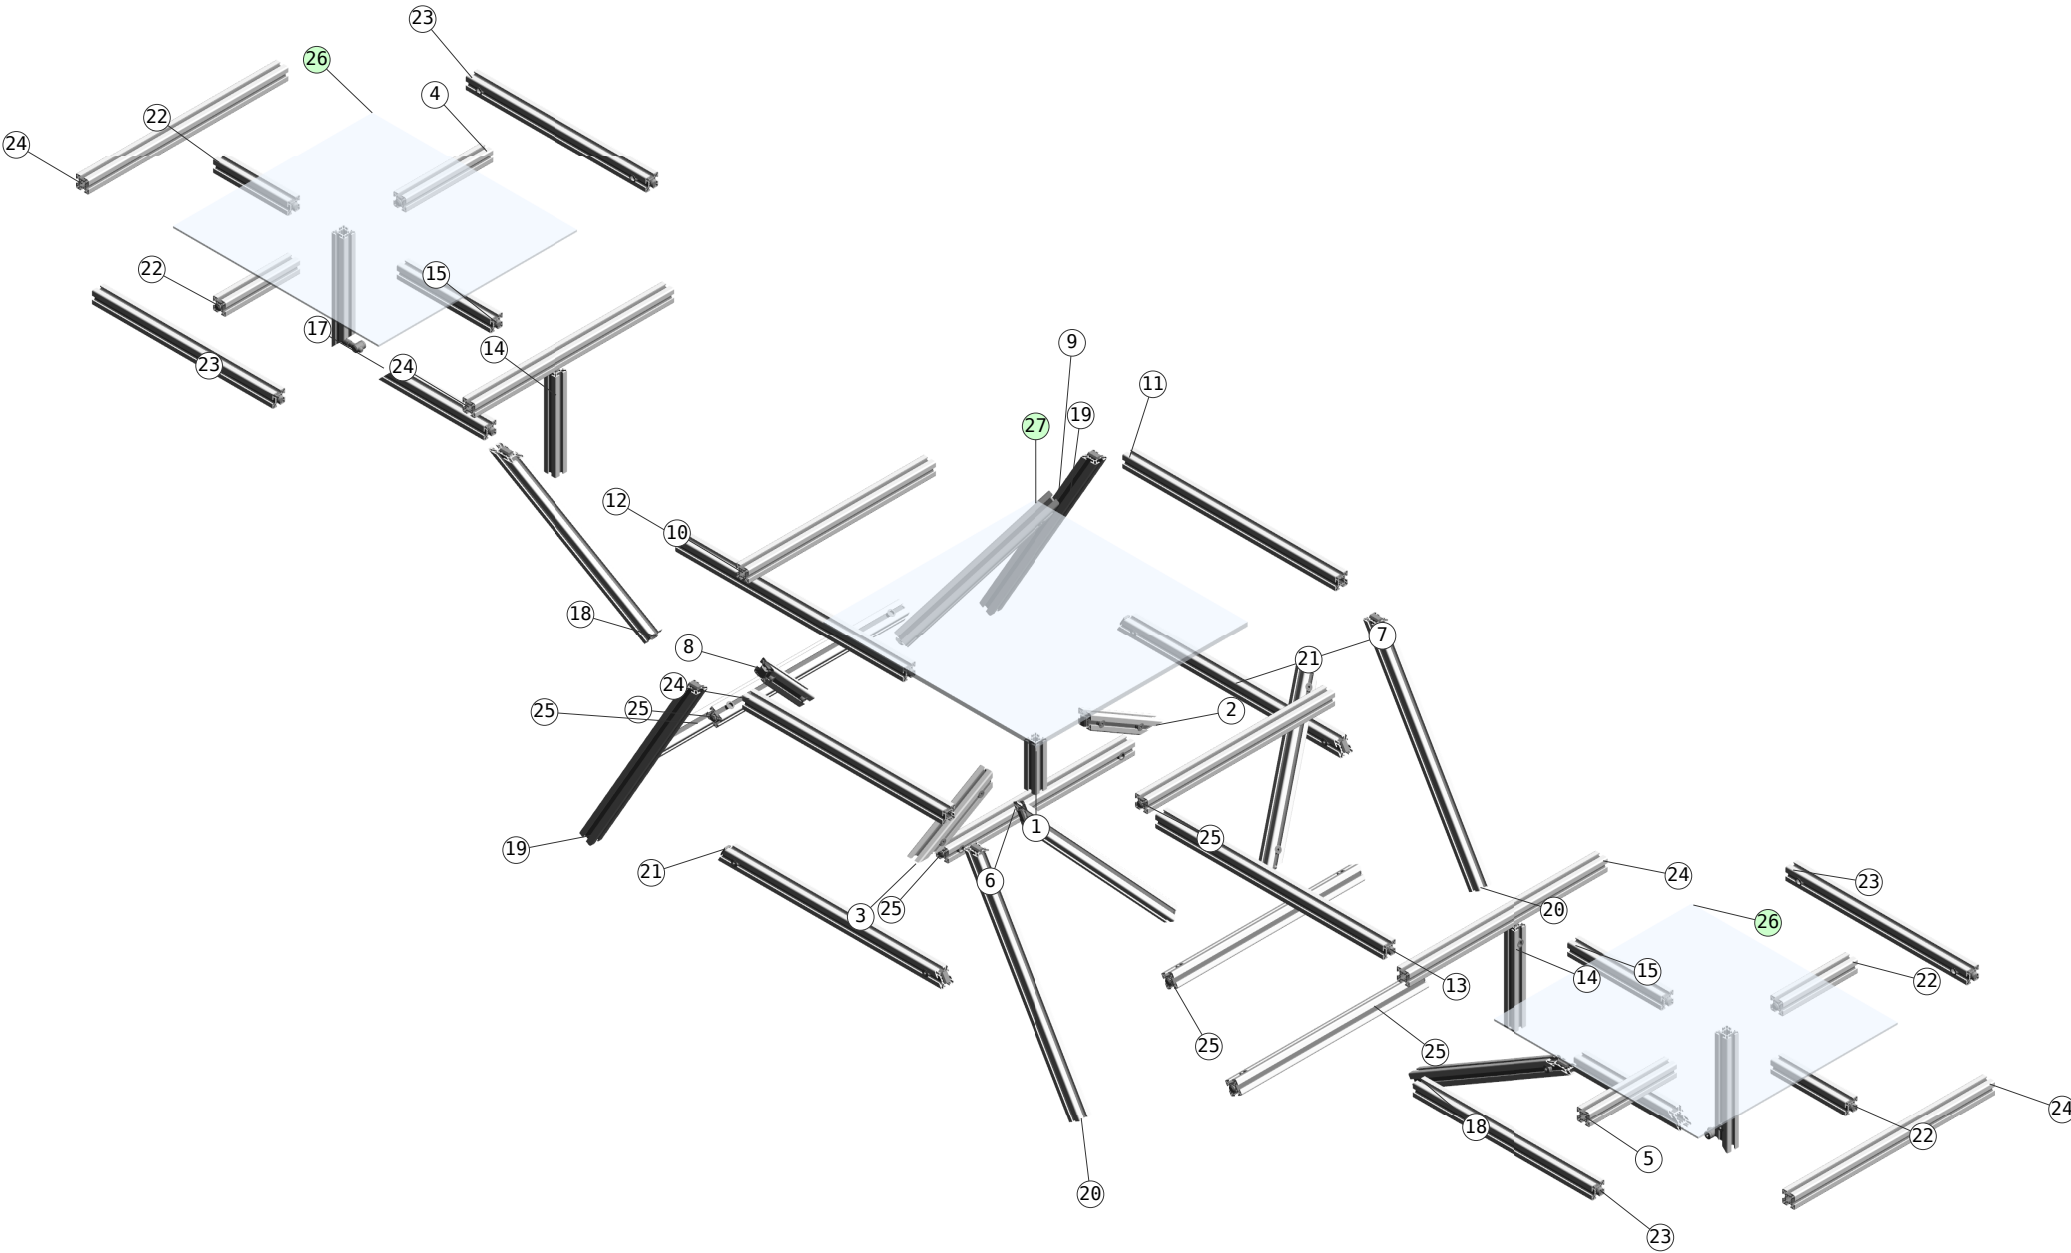

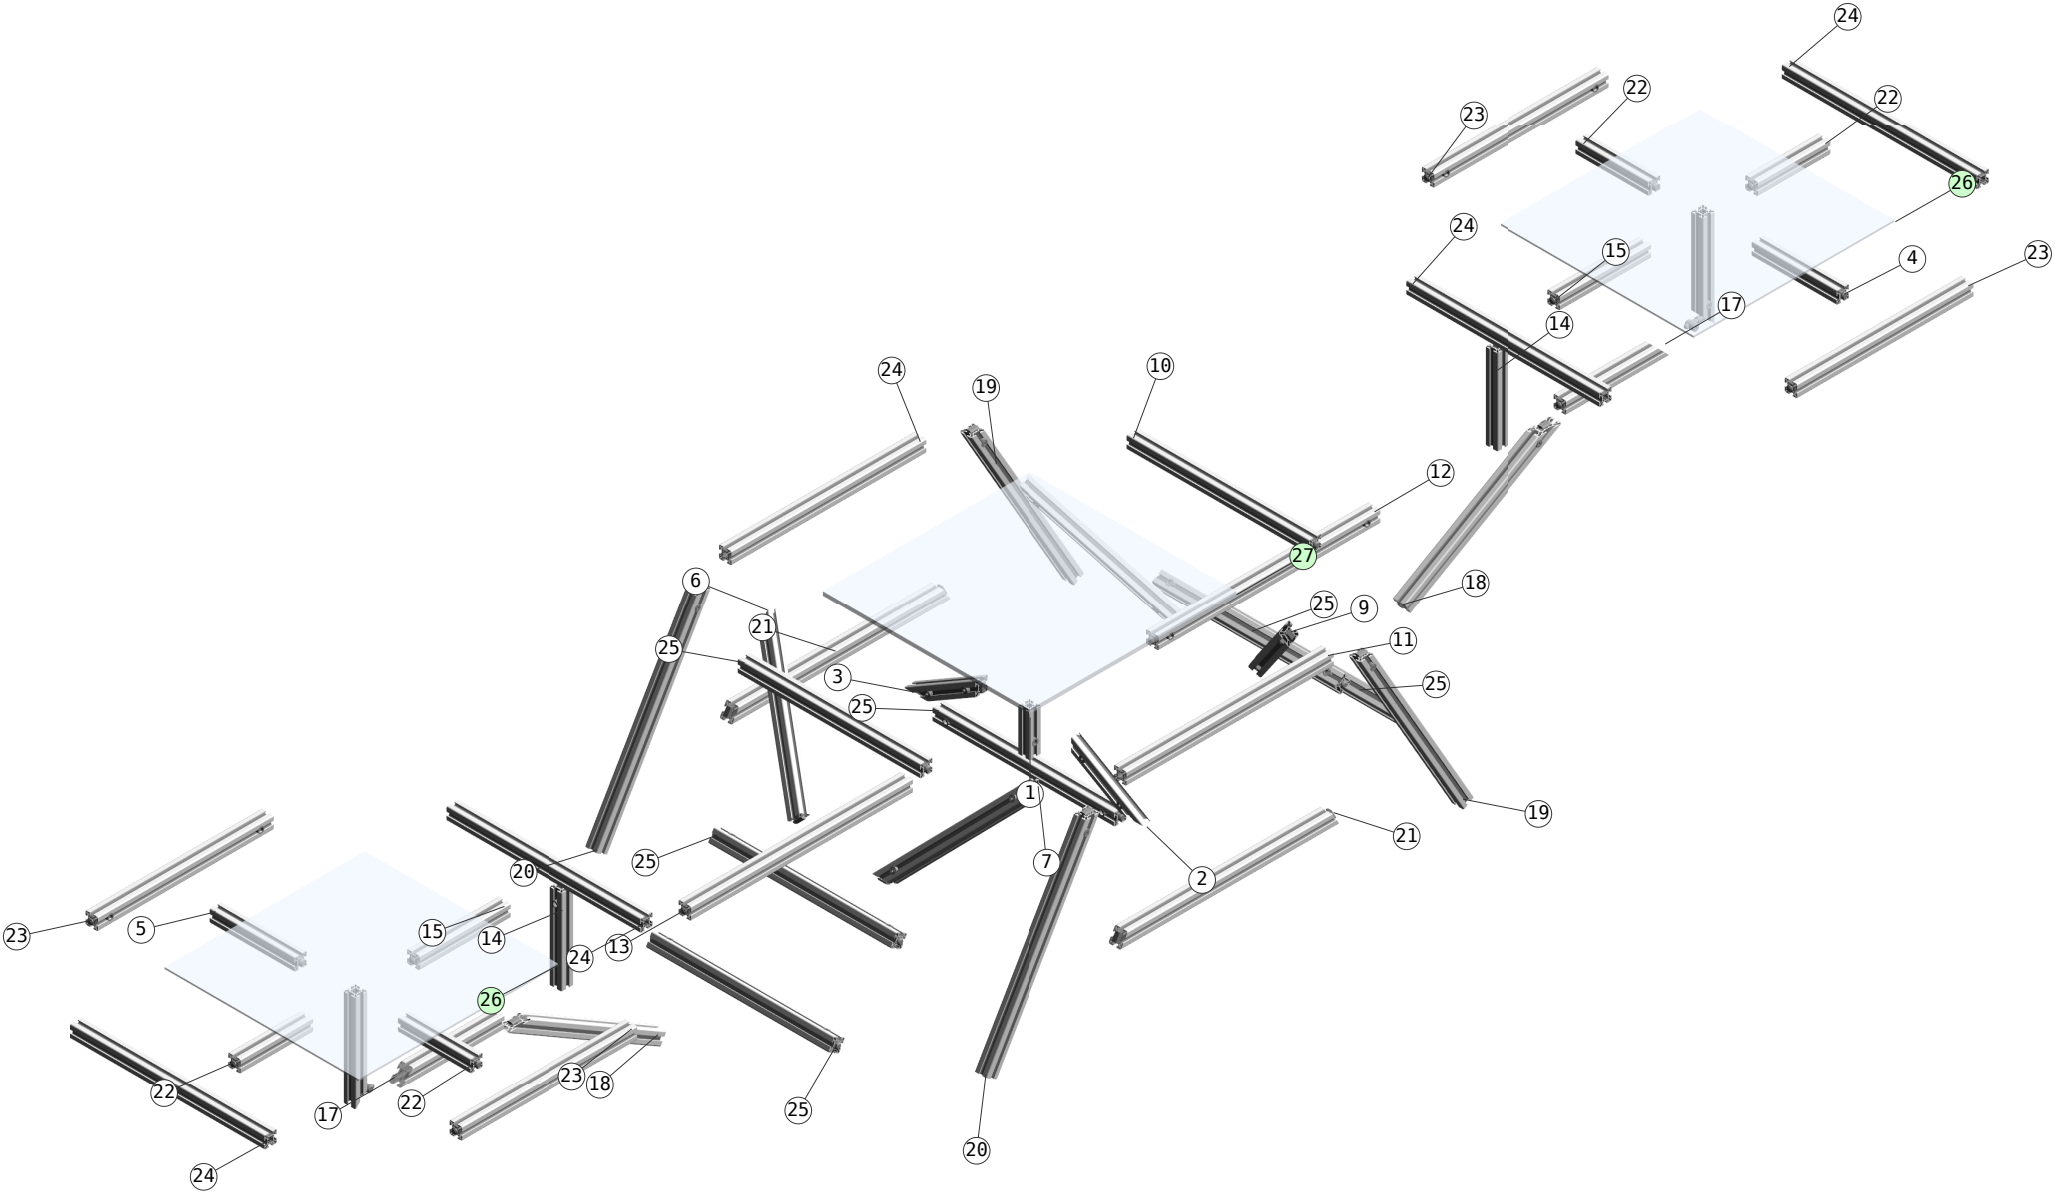


Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.11.030030.43LP-AA4A00/100	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
2	1.11.030030.43LP-DA3DA3/200	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
3	1.11.030030.43LP-DA1DA1/200	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
4	1.11.030030.43LP-AA4AA4/205	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
5	1.11.030030.43LP-AA4A00/205	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
6	1.11.030030.43LP-EA3DA3/368.3	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
7	1.11.030030.43LP-DA3DA3/372.7	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
8	1.11.030030.43LP-EA3EA3/372.7	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
9	1.11.030030.43LP-EA3DA3/372.8	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
10	1.11.030030.43LP-AA4A00/440	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
12	1.11.030030.43LP-AA1AA1/535	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
13	1.11.030030.43LP-AA4AA4/535	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
14	1.11.030030.43LP-A00AA4/205.1	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
15	1.11.030030.43LP-AA4AA4/220	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	4
16	1.11.030030.43LP-EA3A00/235.1	Profile 30x30, 4F, light, plain	1.21.3G1, Connector, miter-hinge l. + r.	2
17	1.11.030030.43LP-AA4DA1/250	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
18	1.11.030030.43LP-DA3A00/428	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
19	1.11.030030.43LP-EA3A00/500	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
20	1.11.030030.43LP-DA3A00/500	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	2
21	1.11.030030.43LP-DA3DA3/527.7	Profile 30x30, 4F, light, plain	1.21.3FK1, Connector, oblique-hinge l. + r.	4
22	1.11.030030.43LP-AA4AA4/175	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	8
23	1.11.030030.43LP-AA4AA4/425	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	8
25	1.11.030030.43LP-AA4AA4/440	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	12
26	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8 1.31.FM4, Threaded plate F, M4	28 28
27	2.87.3751-99	Polycarbonate 9,5 mm **NOTE: Non-stock, purchased as needed	1.31.FM6, Threaded plate F, M6 0.63.D07991.06014, Flat head screw, DIN 7991 - M6x14	9 9
28	1.64.5101	Mounting angle	1.32.4F2M4.25, T-Nut for subsequent insertion, w. spring F, 2xM4 0.63.D06912.04008, Cylindric head screw, DIN 6912 - M4x8	4 8

Sliced profile details


Profile machining details

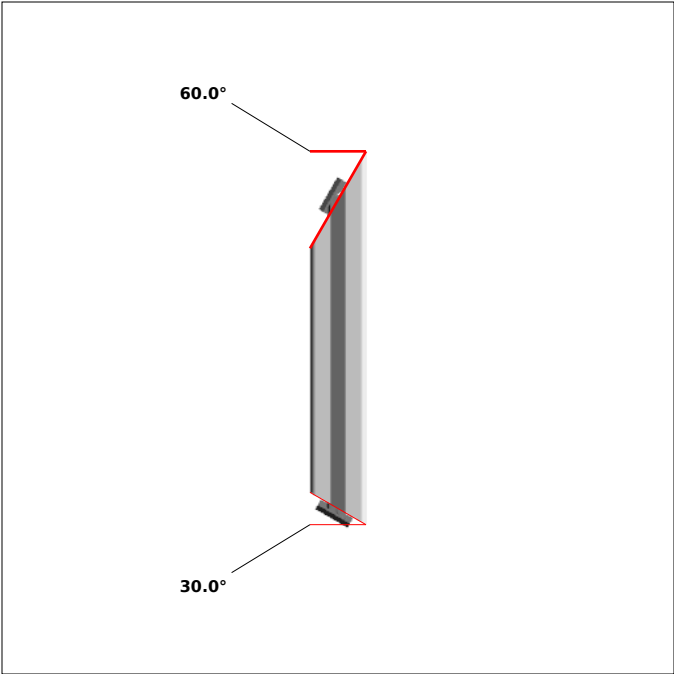


DRAWING 1, Pos 2
SIDE 1, bar length: 200.0 mm



DRAWING 1, Pos 2
SIDE 2

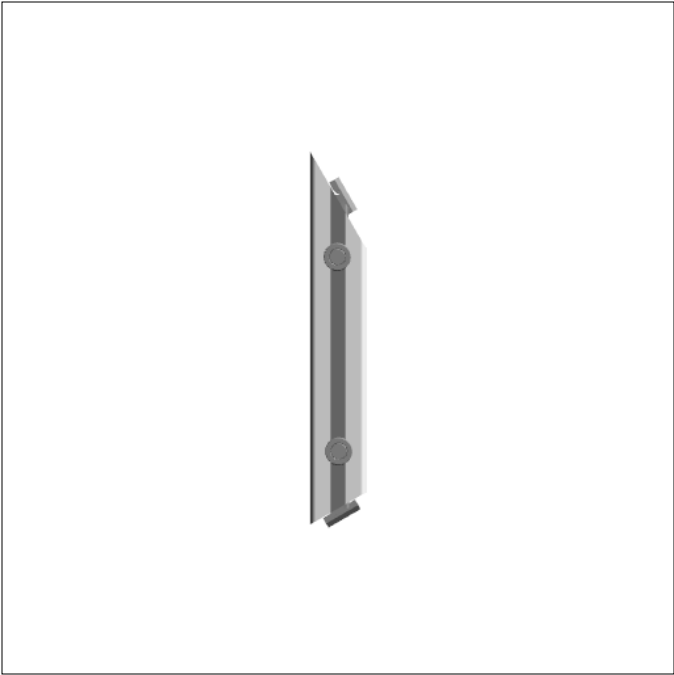


DRAWING 1, Pos 2
SIDE 3

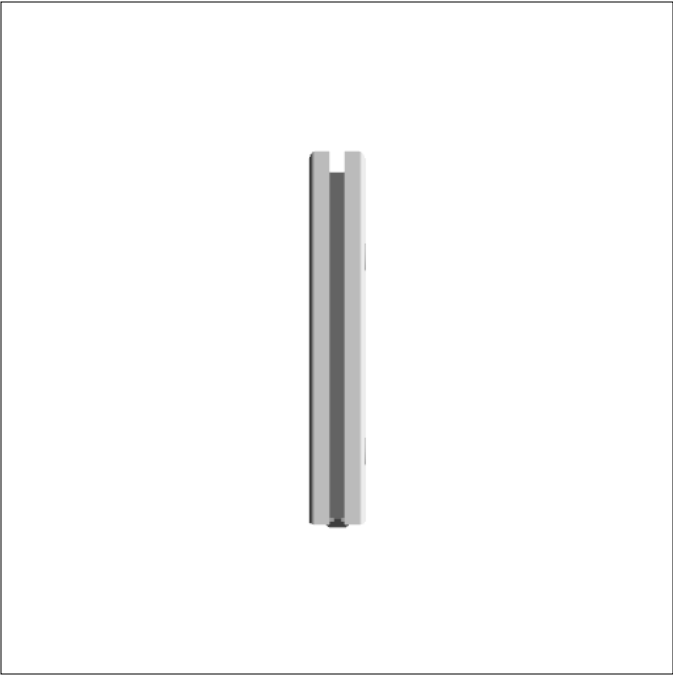

DRAWING 1, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

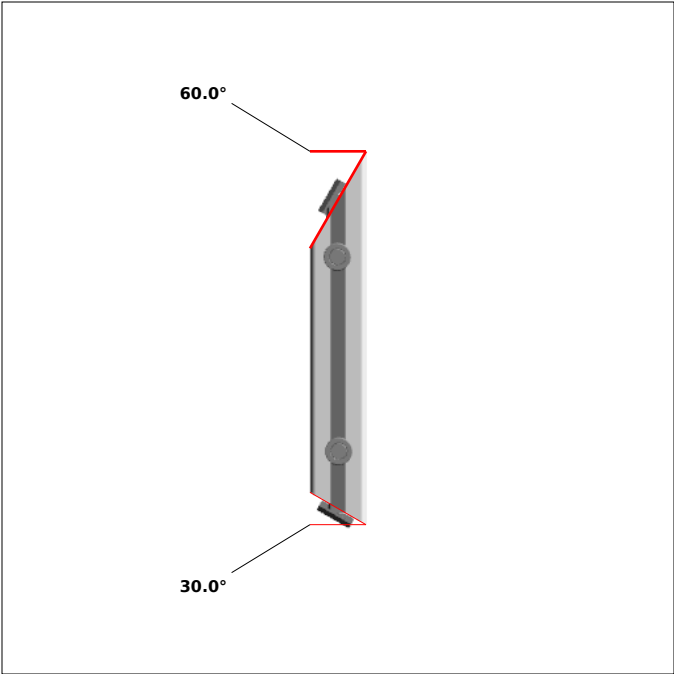


DRAWING 2, Pos 3
SIDE 1, bar length: 200.0 mm



DRAWING 2, Pos 3
SIDE 2

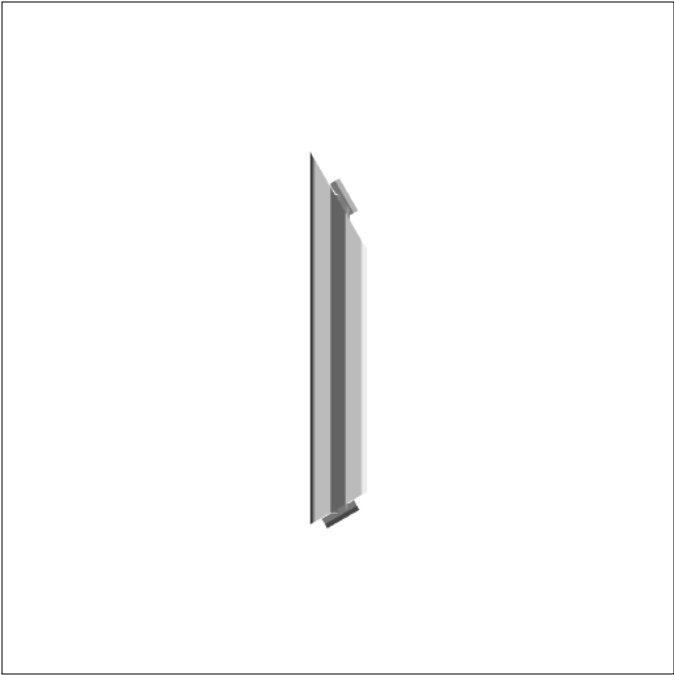


DRAWING 2, Pos 3
SIDE 3

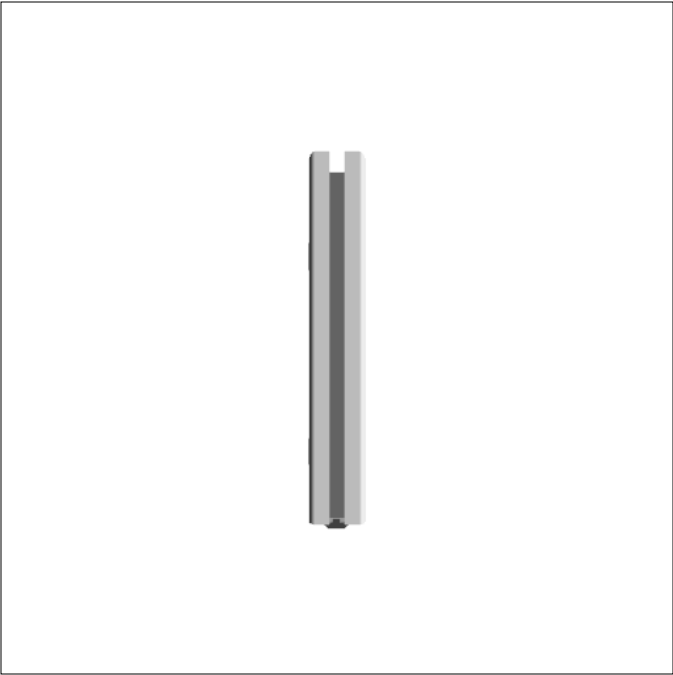

DRAWING 2, Pos 3
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

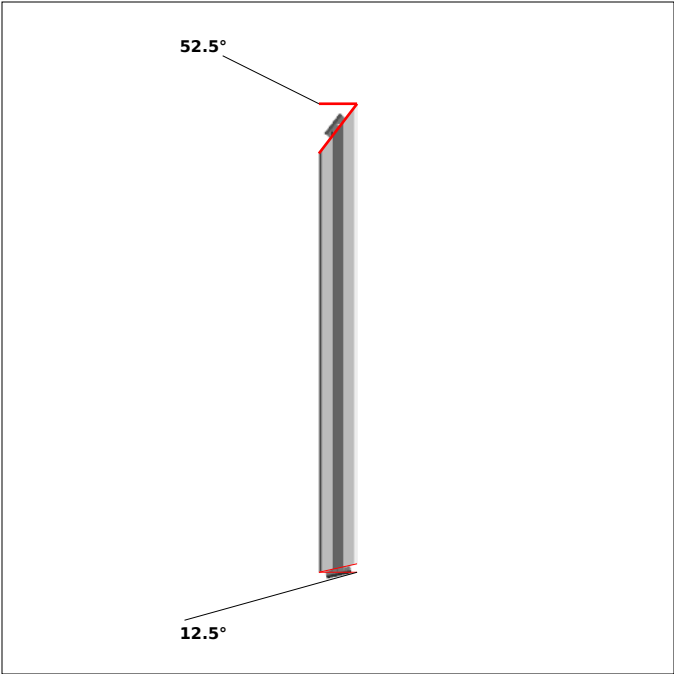


DRAWING 3, Pos 6
SIDE 1, bar length: 368.3 mm



DRAWING 3, Pos 6
SIDE 2

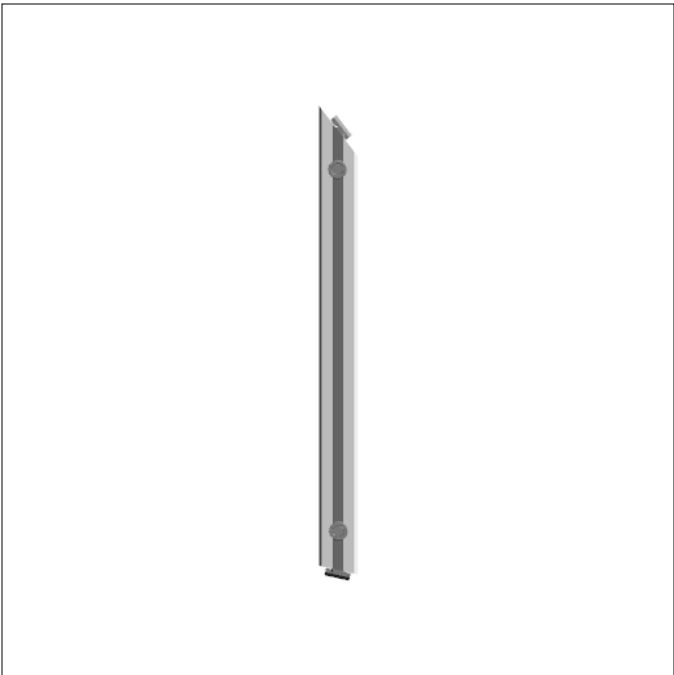


DRAWING 3, Pos 6
SIDE 3

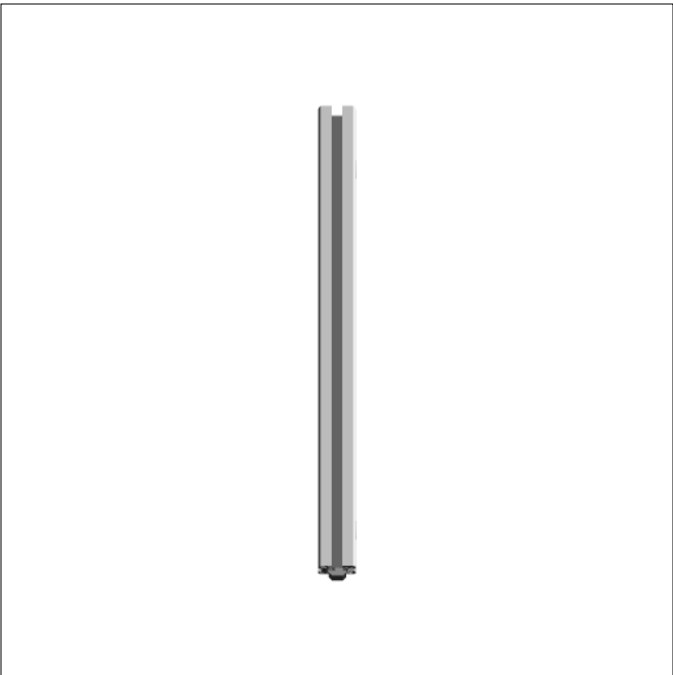

DRAWING 3, Pos 6
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

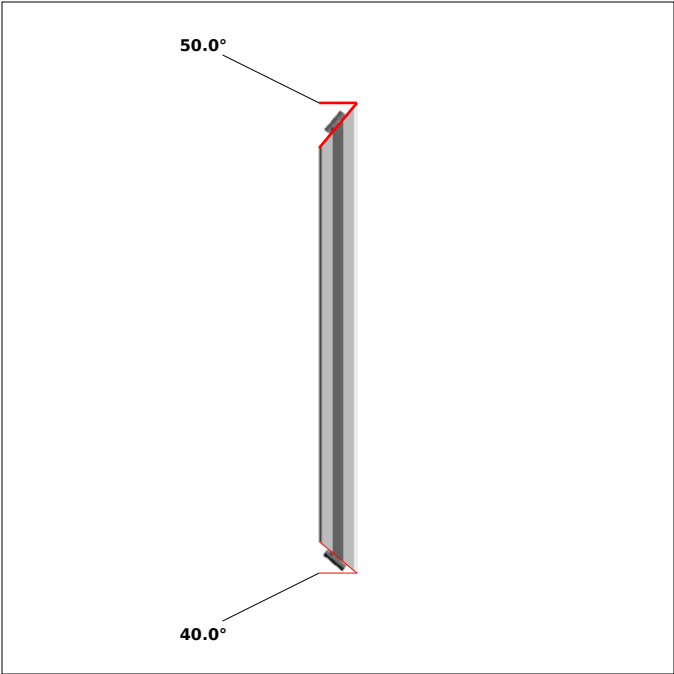


DRAWING 4, Pos 7
SIDE 1, bar length: 372.7 mm



DRAWING 4, Pos 7
SIDE 2

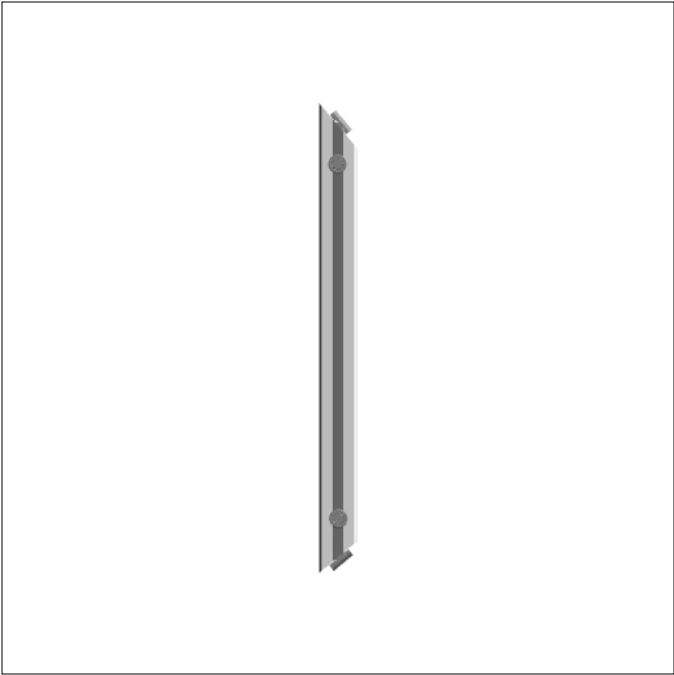


DRAWING 4, Pos 7
SIDE 3

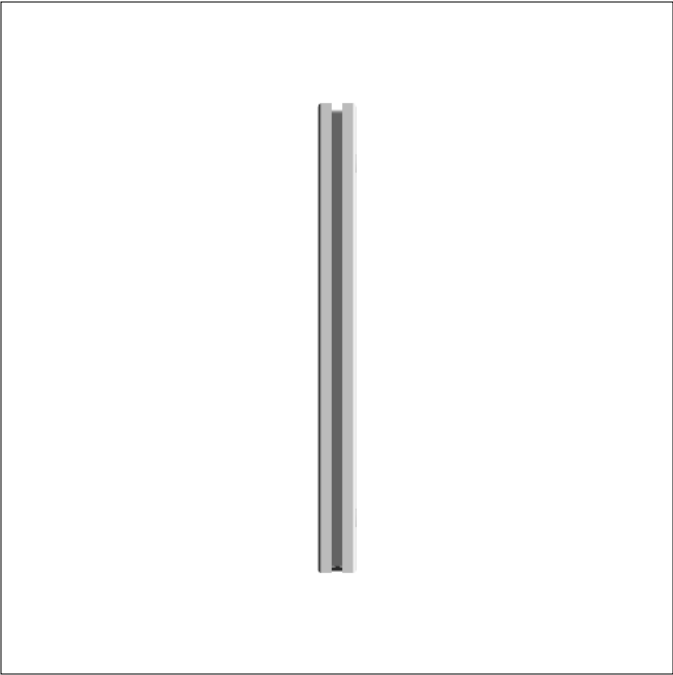


DRAWING 4, Pos 7
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

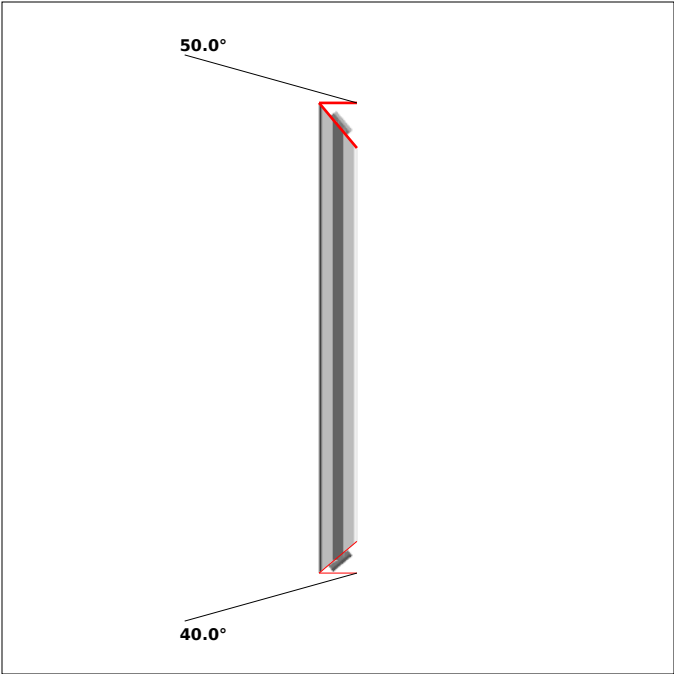

DRAWING 5, Pos 8
SIDE 1, bar length: 372.7 mm

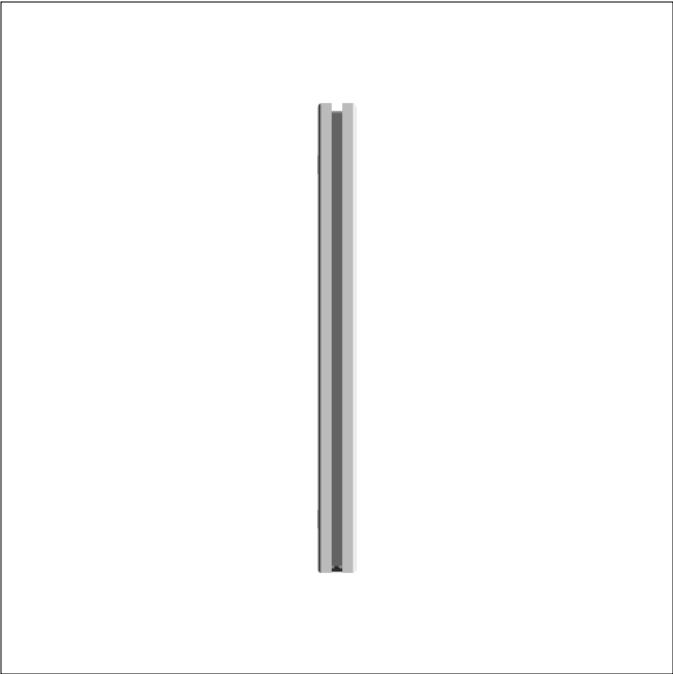

DRAWING 5, Pos 8
SIDE 2

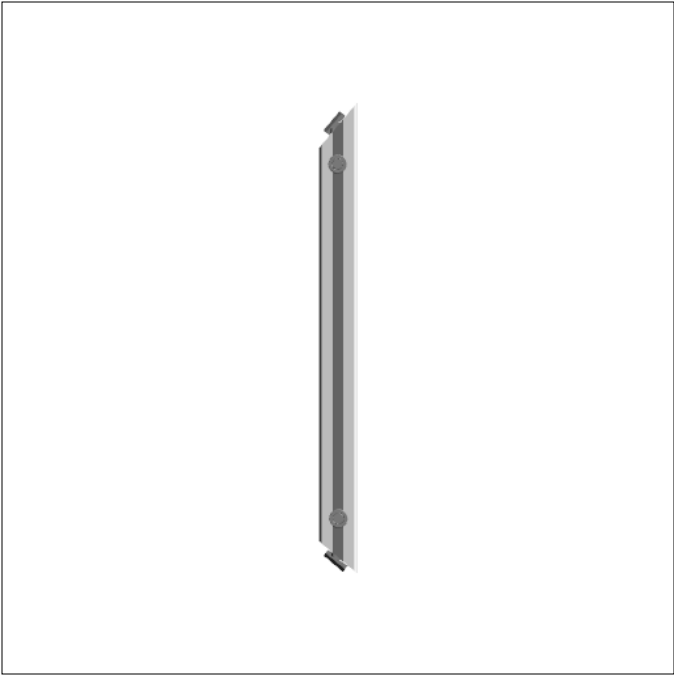


DRAWING 5, Pos 8
SIDE 3



DRAWING 5, Pos 8
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

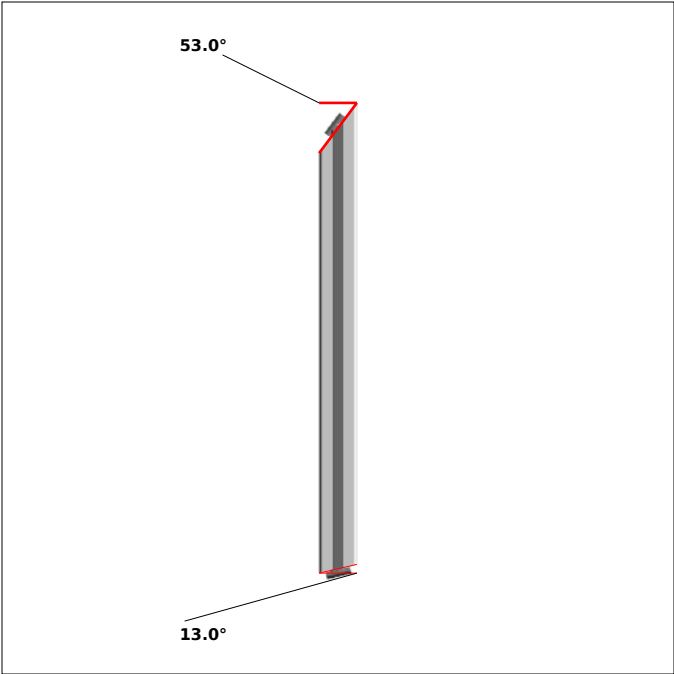


DRAWING 6, Pos 9
SIDE 1, bar length: 372.8 mm



DRAWING 6, Pos 9
SIDE 2

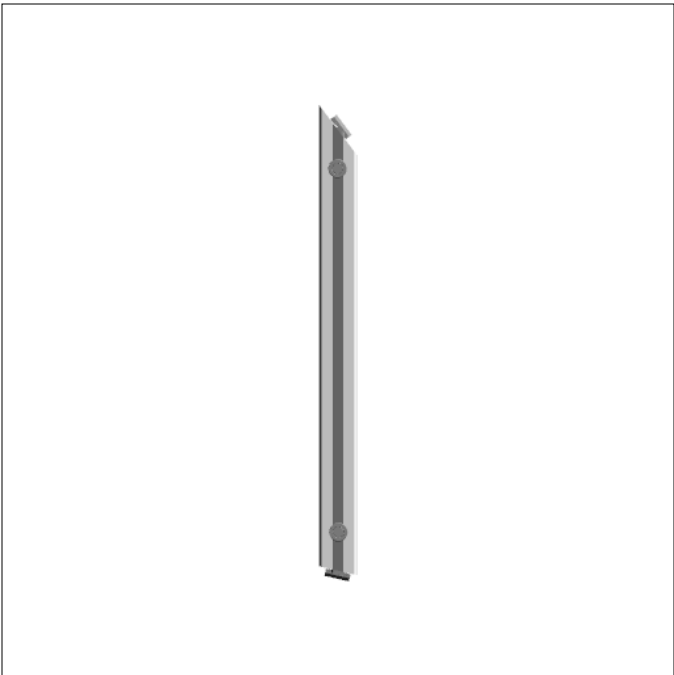


DRAWING 6, Pos 9
SIDE 3

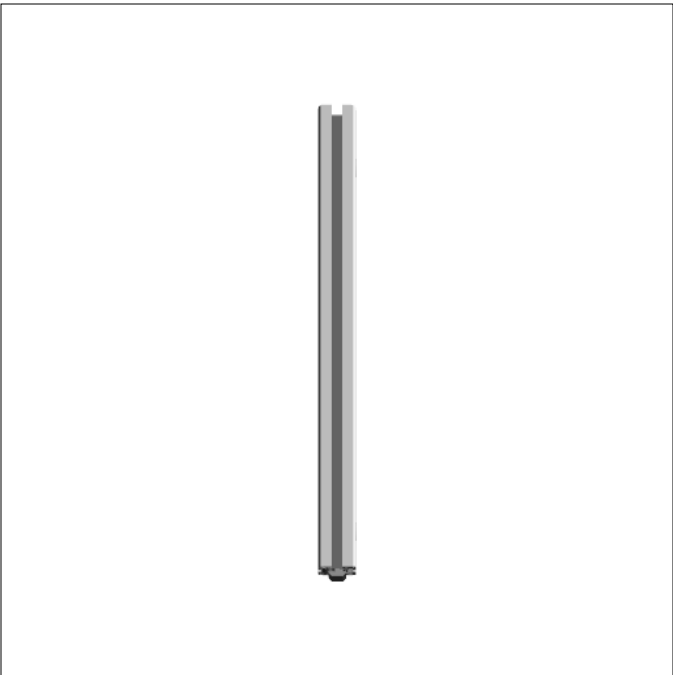


DRAWING 6, Pos 9
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

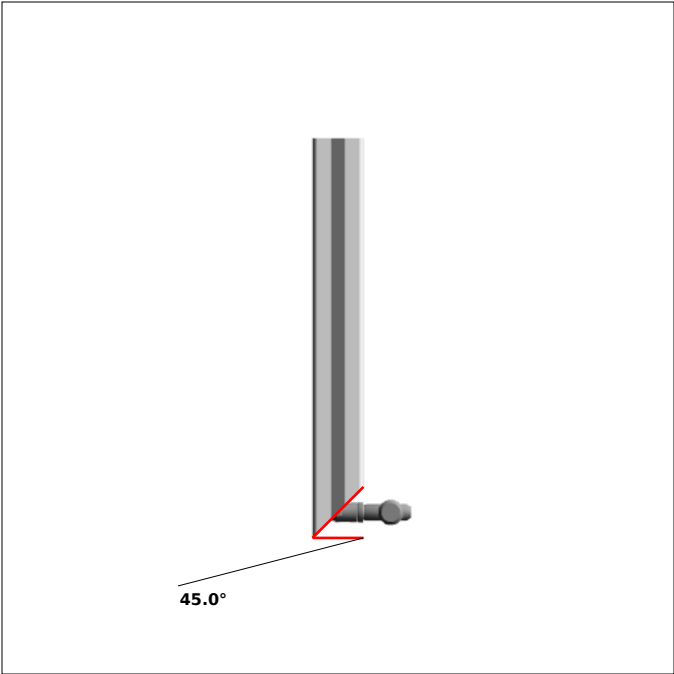

DRAWING 7, Pos 16
SIDE 1, bar length: 235.1 mm



DRAWING 7, Pos 16
SIDE 2




DRAWING 7, Pos 16
SIDE 3




DRAWING 7, Pos 16
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

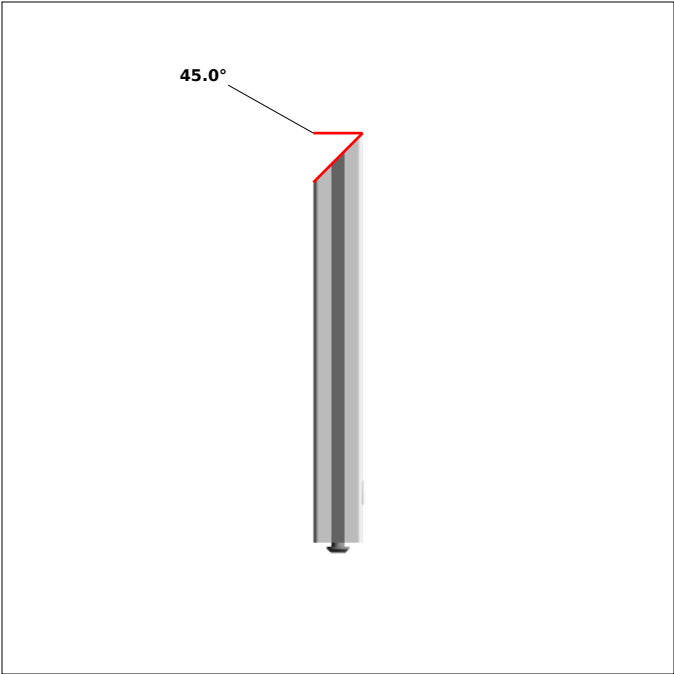


DRAWING 8, Pos 17
SIDE 1, bar length: 250.0 mm

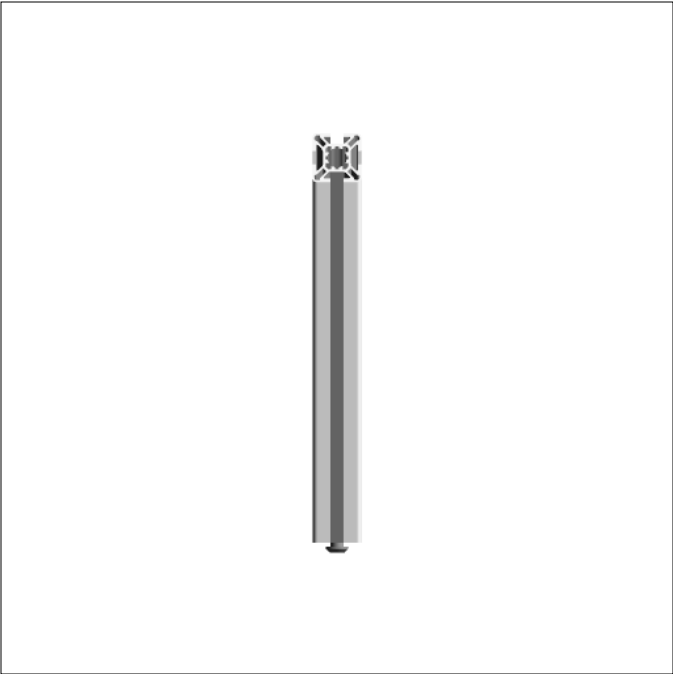

DRAWING 8, Pos 17
SIDE 2

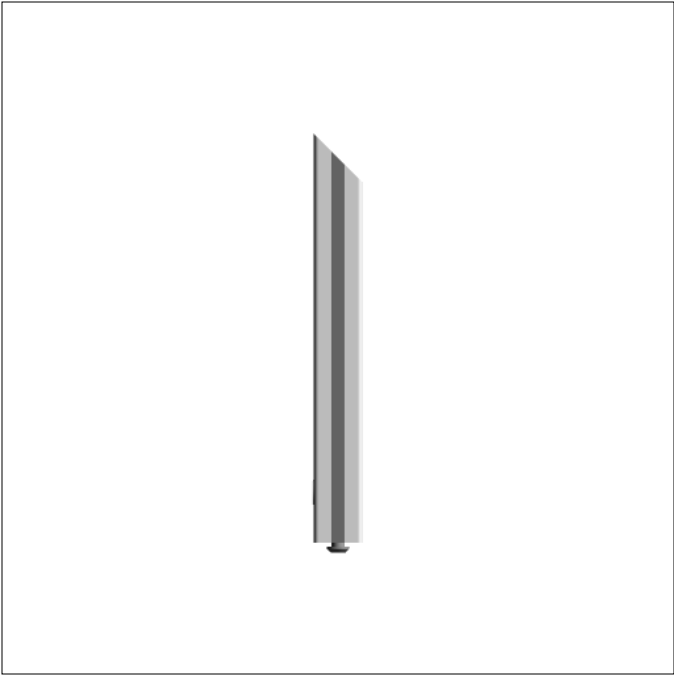


DRAWING 8, Pos 17
SIDE 3

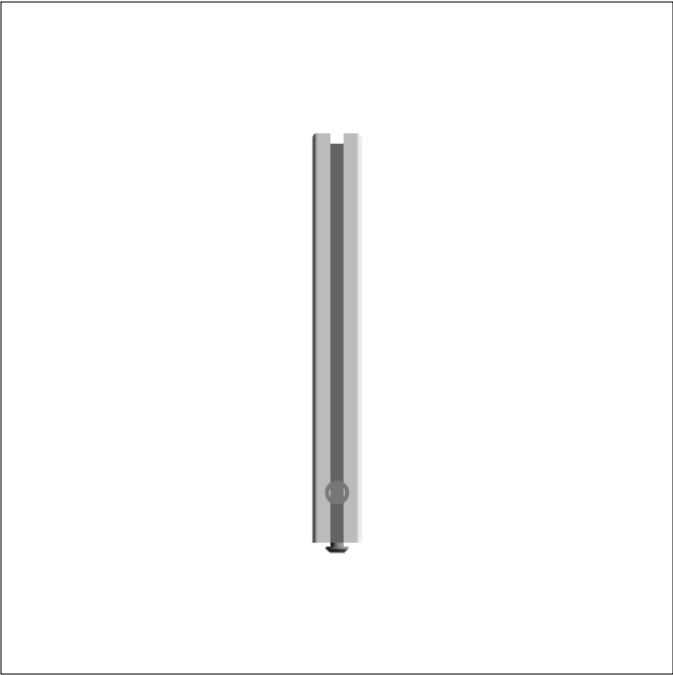

DRAWING 8, Pos 17
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

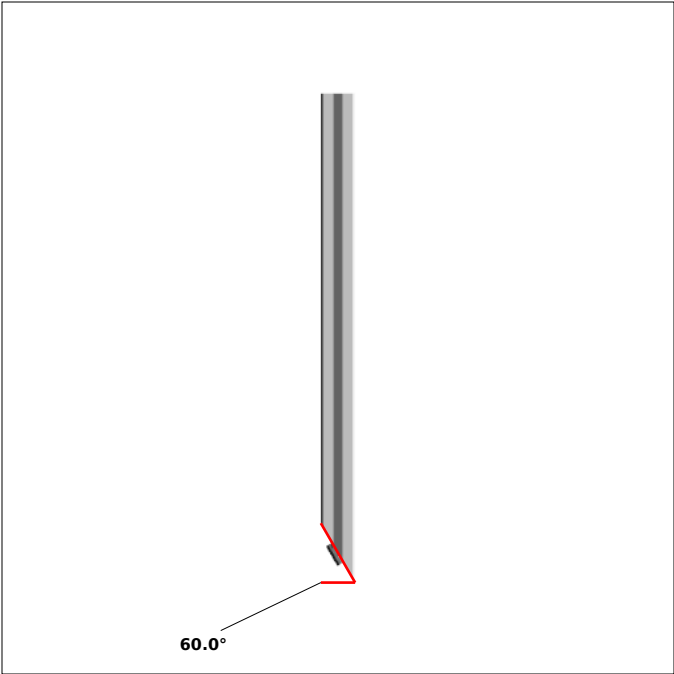


DRAWING 9, Pos 18
SIDE 1, bar length: 428.0 mm



DRAWING 9, Pos 18
SIDE 2

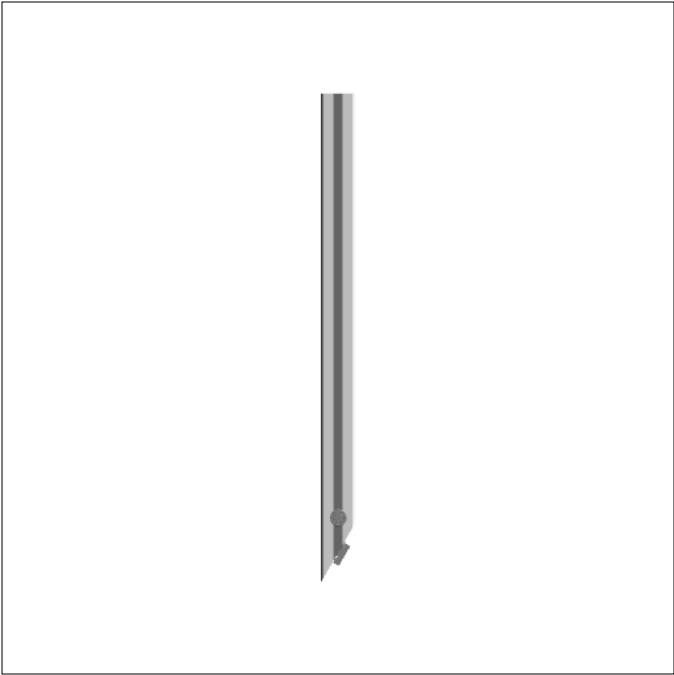


DRAWING 9, Pos 18
SIDE 3

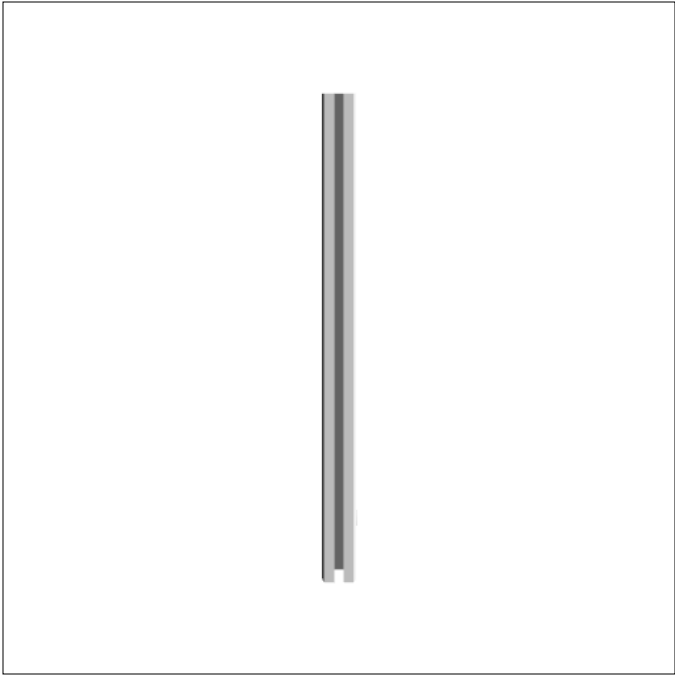


DRAWING 9, Pos 18
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

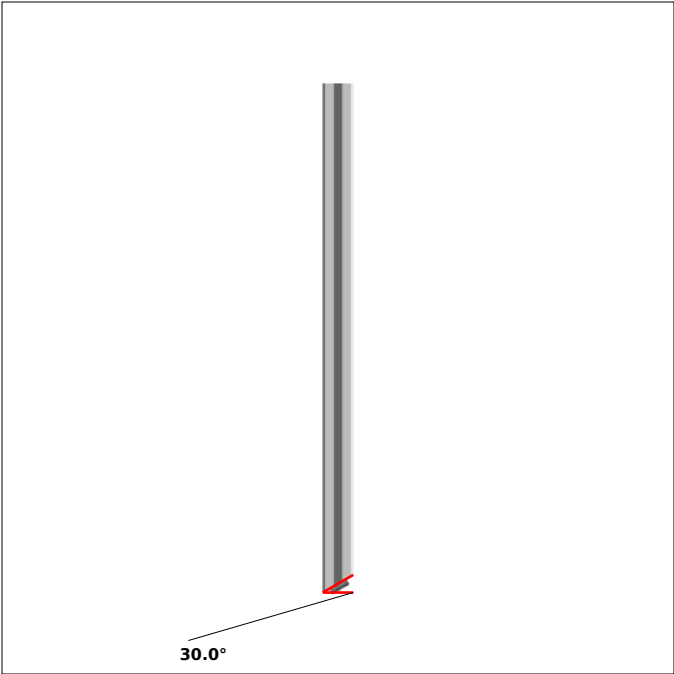

DRAWING 10, Pos 19
SIDE 1, bar length: 500.0 mm



DRAWING 10, Pos 19
SIDE 2




DRAWING 10, Pos 19
SIDE 3



DRAWING 10, Pos 19
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

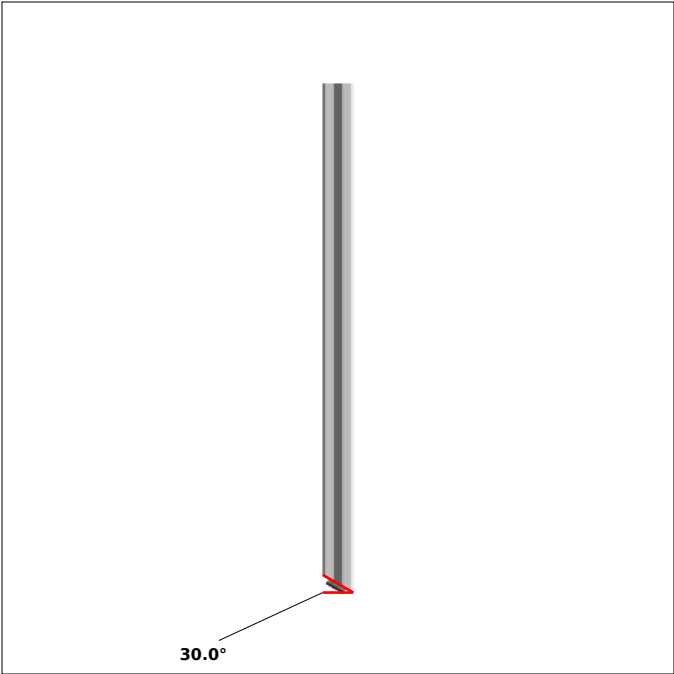


DRAWING 11, Pos 20
SIDE 1, bar length: 500.0 mm



DRAWING 11, Pos 20
SIDE 2




DRAWING 11, Pos 20
SIDE 3

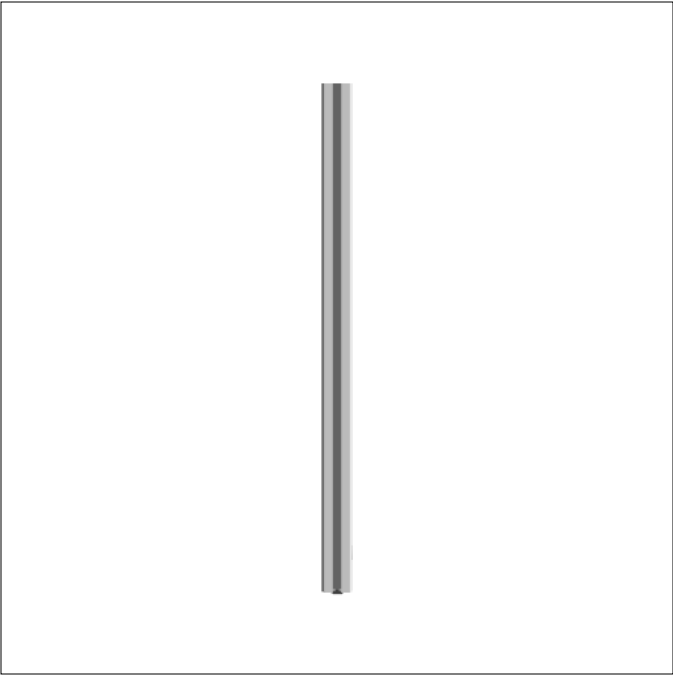

DRAWING 11, Pos 20
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

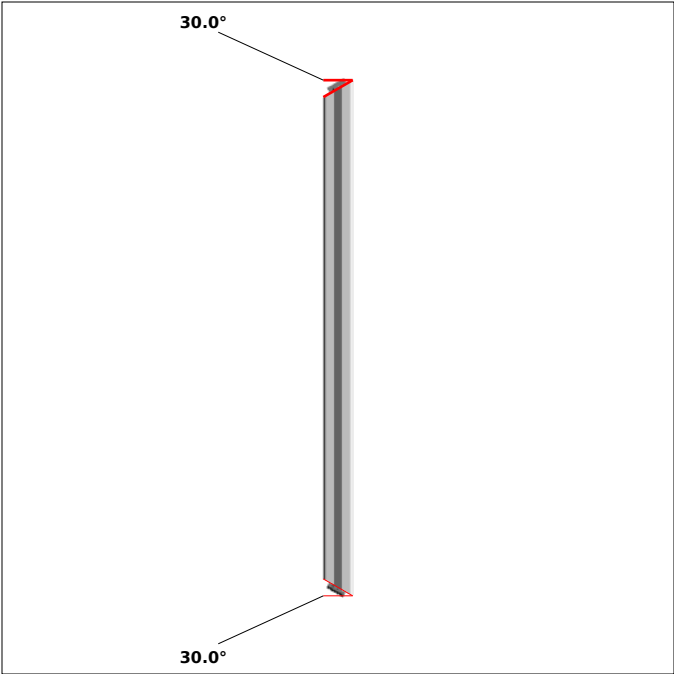


DRAWING 12, Pos 21
SIDE 1, bar length: 527.7 mm



DRAWING 12, Pos 21
SIDE 2




DRAWING 12, Pos 21
SIDE 3

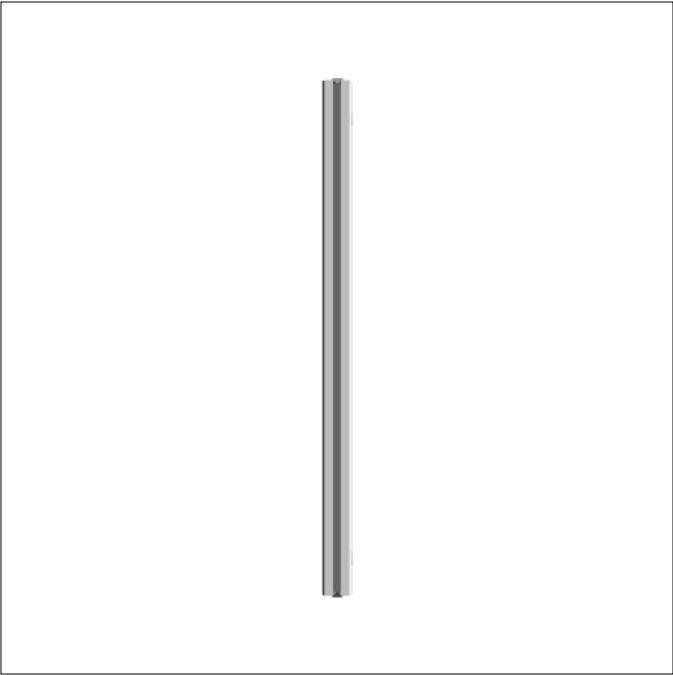


DRAWING 12, Pos 21
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Panels

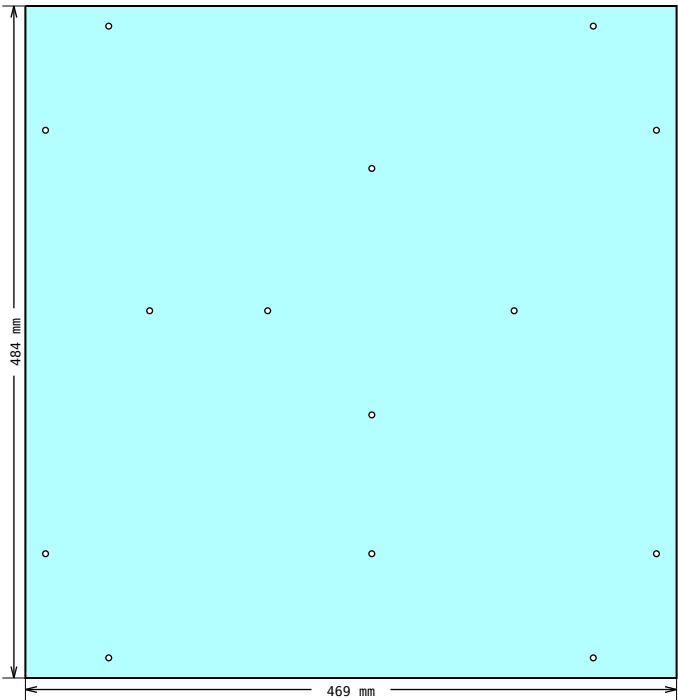


DRAWING 13, Pos 26
Shape measurements

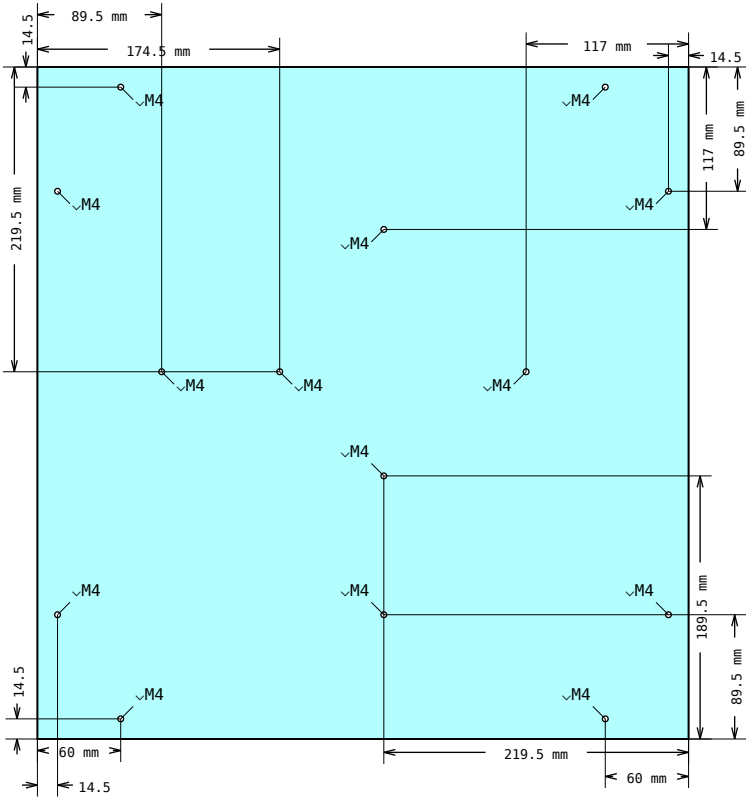

DRAWING 13, Pos 26
Hole placement

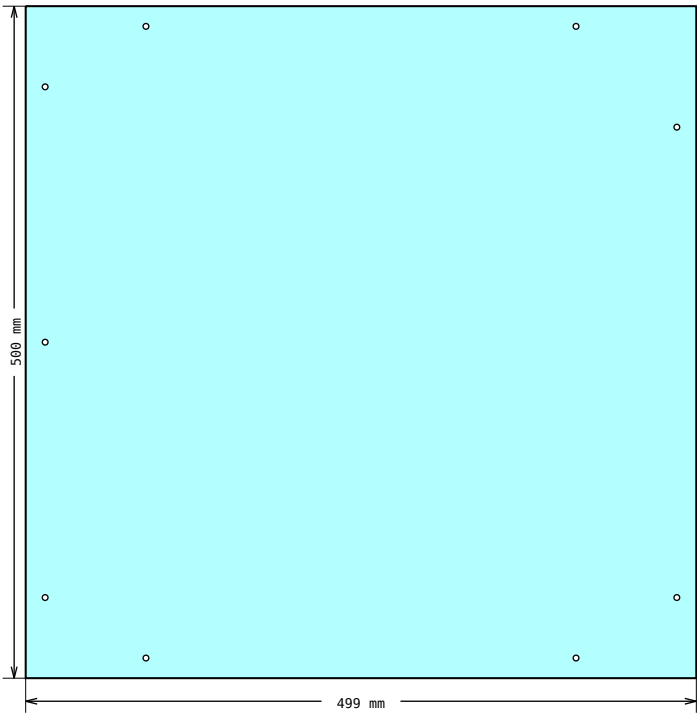

DRAWING 14, Pos 27
Shape measurements





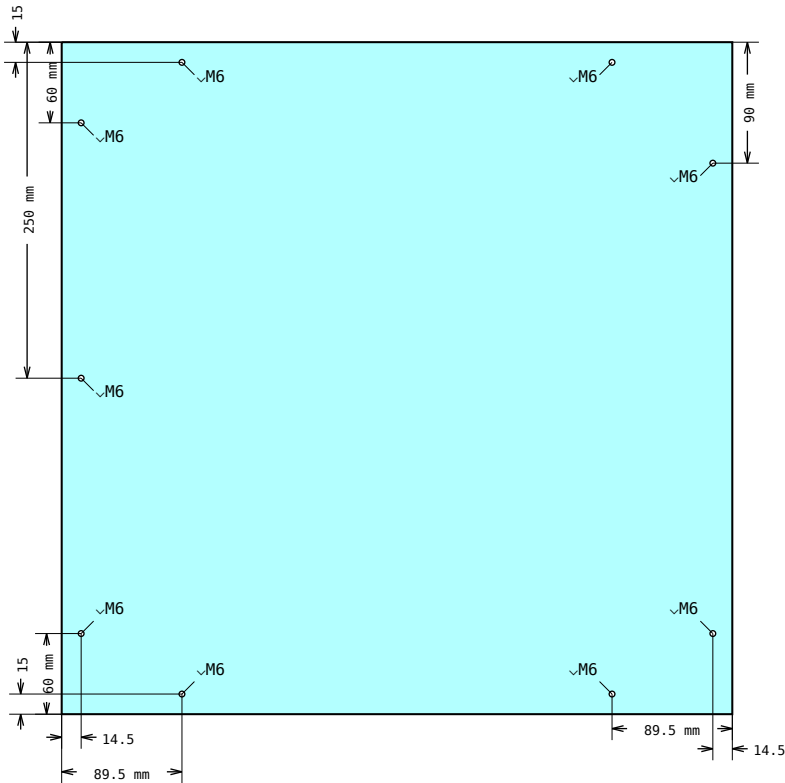


DRAWING 14, Pos 27
Hole placement



Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts																		Waste (mm)
1.11.030030.43LP	9 24 24 20 19 20 19 11 21 21 13 12																		19.8 mm
	372.8 470.0 470.0 500.0 500.0 500.0 500.0 500.0 527.7 527.7 535.0 535.0																		
	22 23 18 18 25 25 25 25 25 10 25 24 24 24																		4.9 mm
	175.0 425.0 428.0 428.0 440.0 440.0 440.0 440.0 440.0 440.0 440.0 470.0 470.0 470.0																		
	1 22 22 22 3 2 5 4 14 14 15 15 16 16 17 17 6 8 7 23 23 23																		278.8 mm
	100.0 175.0 200.0 205.0 205.1 220.0 235.1 235.1 250.0 250.0 368.3 372.7 372.7 425.0 425.0 425.0																		




Assembly hints

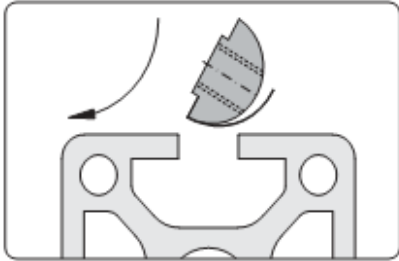None	1.32.4F2M4.25	T-Nut for subsequent insertion, w. spring F, 2xM4	
 Fixing with leaf spring  Insert front-sided and rotate Application Fastening element for screw-type connections Technical data Design steel: • material: steel • surface: galvanised Design stainless: • material: stainless steel 1.4305 • surface: pickled and passivated max. moment of torque: $M_{A, max}$			These t-nuts are easily inserted into assembled frames
CONNECTOR	1.21.3F0	Connector, universal	
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side			Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.

Assembly hints

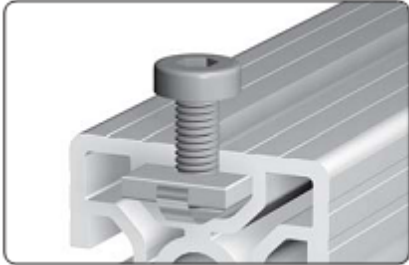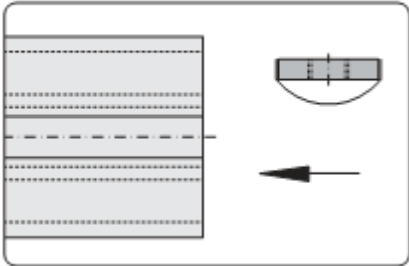CONNECTOR	1.21.3FK1	Connector, oblique-hinge l. + r.	
			This type of connector assembles similar to universal connector
None	1.31.FM4	Threaded plate F, M4	
	1.31.FM6	Threaded plate F, M6	
 Fixed into position with leaf spring  Application Fastening element for screw-type connections Assembly Insert from end			These plates must be inserted from the open side of the profile, prior to final frame assembly

Assembly hints

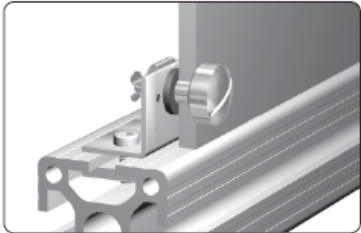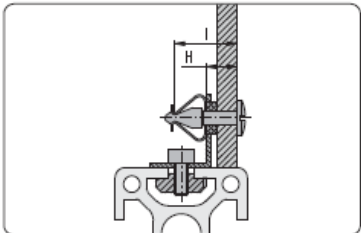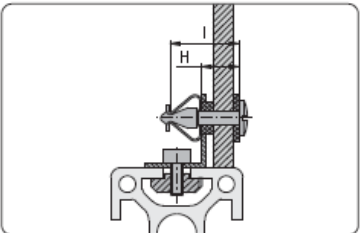ACCESSORY	1.64.5101	Mounting angle	
 Application Mounting element for quick mounting and dismantling of covers Comments open: by 1/4-turn close: by push in			Allows for quick mounting and dismantling of panels, requires a 7mm hole in the panel
 Fastening without washer $H_{max} = S_{retaining\ ring} + \text{panel thickness}$  Fastening with washer $H_{max} = S_{retaining\ ring} + \text{panel thickness} + S_{washer}$			