


Design Title : TABLE 1.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

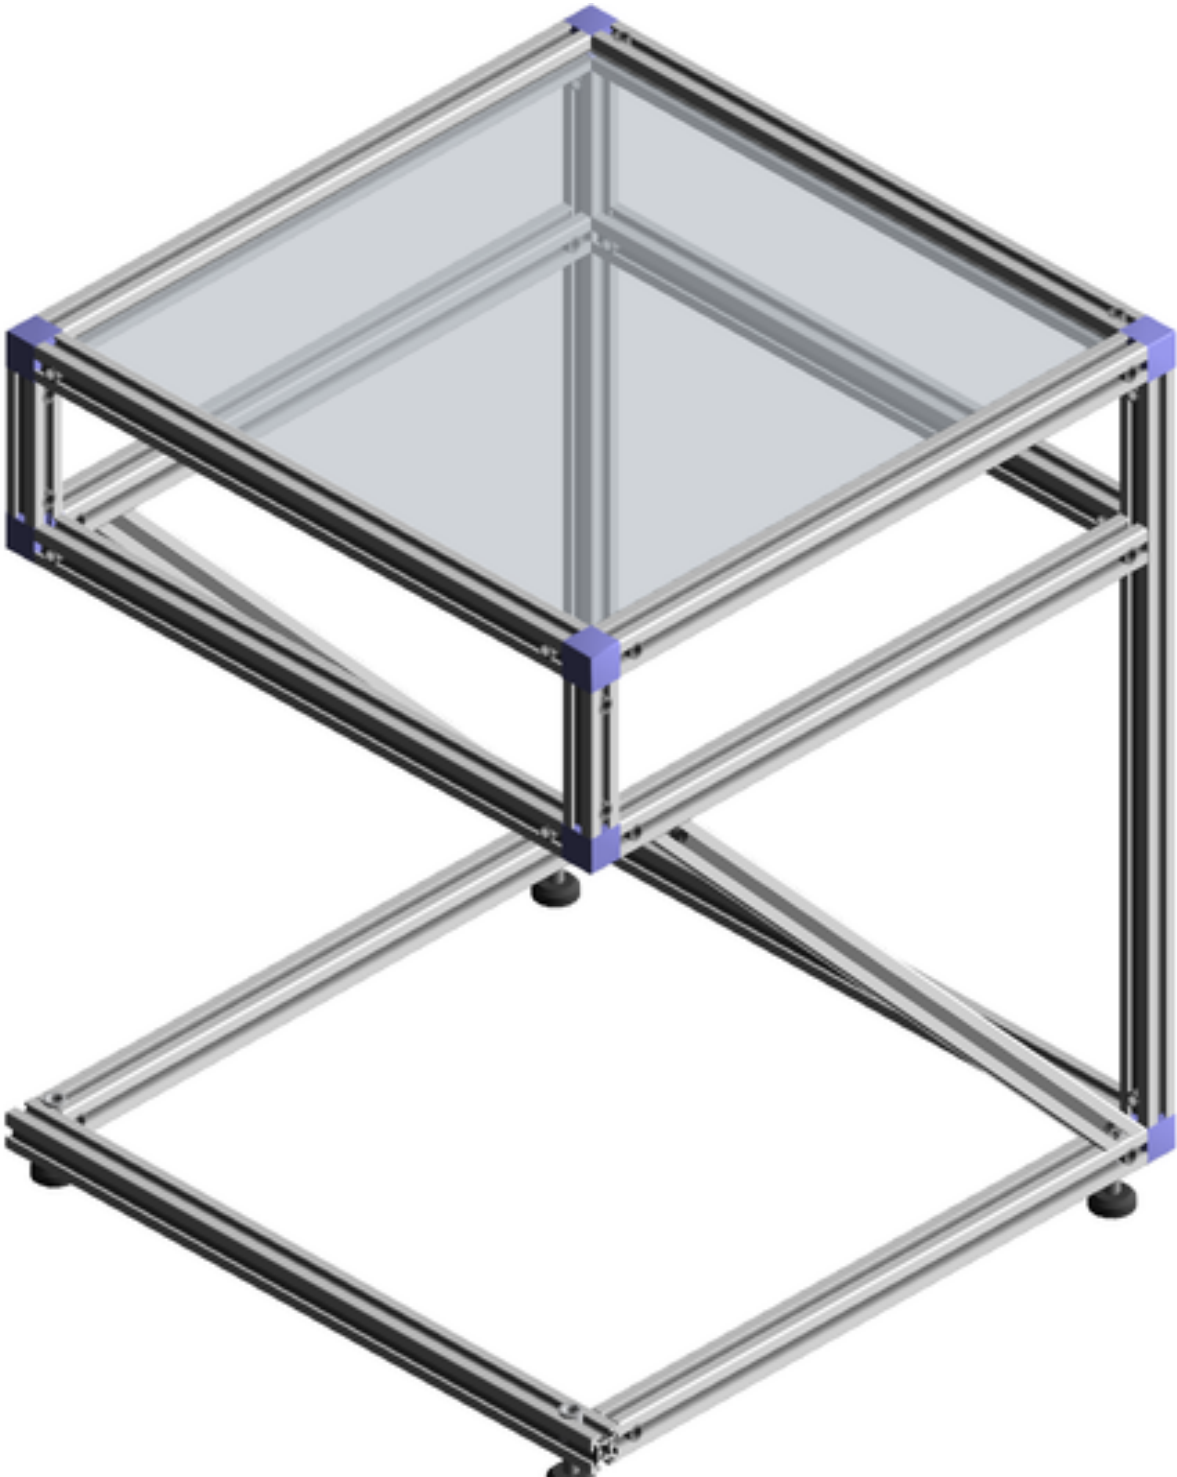

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain **PER DRAWING 1**	MM	1
1.A	Q10A1I00000-12.0	Cross bore, left Ø 12.0 mm, distance 14.1 mm, Side: 1	EA	1
2	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain **PER DRAWING 2**	MM	1
2.A	Q10A1I00000-12.0	Cross bore, left Ø 12.0 mm, distance 14.1 mm, Side: 1	EA	1
2.B	Q10A1I00000-12.0	Cross bore, left Ø 12.0 mm, distance 356.2 mm, Side: 1	EA	1
3	1.10.020020.43LP-A00A00/400	Profile 20x20, 4H, light, plain **PER DRAWING 3**	MM	1
3.A	Q10A3I00000-12.0	Cross bore, left Ø 12.0 mm, distance 376.2 mm, Side: 3	EA	1
4	1.10.020020.43LP-EA3DA3/458.4	Profile 20x20, 4H, light, plain **PER DRAWING 4**	MM	1
5	1.10.020020.43LP-EA1DA1/458.4	Profile 20x20, 4H, light, plain **PER DRAWING 5**	MM	1
6	1.10.020020.43LP-AA4AA4/80	Profile 20x20, 4H, light, plain	MM	2
7	1.10.020020.43LP-AA1AA1/360	Profile 20x20, 4H, light, plain	MM	2
8	1.10.020020.43LP-AA4AA4/410	Profile 20x20, 4H, light, plain	MM	2
9	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain	MM	7
10	1.41.H04.1	Combination profile PVC, H, B4, grey (bar 2.5 m)	EA	1
12	1.44.002403	Floor levelling screw, D24, M8x30	EA	4
13	1.48.221	Corner piece cubic 20, anodized	EA	8
14	1.20.2H0	Connector, universal	EA	30
15	1.20.2HK1	Connector, oblique-hinge l. + r.	EA	4
16	1.35.608195	Press-fit threaded insert dia: 12/M8, L22.5	EA	4


Frame weight: 4.67 kg (10.29 lbs)

11	2.87.1571-99	Polycarbonat 4mm, SIZE: 368.00MM x 368.00MM **PER DRAWING 6**	SM	1
----	--------------	---	----	---


Panels weight: 0.57 kg (1.26 lbs)

Total Weight: 5.24 kg (11.55 lbs)


Isometric view
Some accessories may not be shown

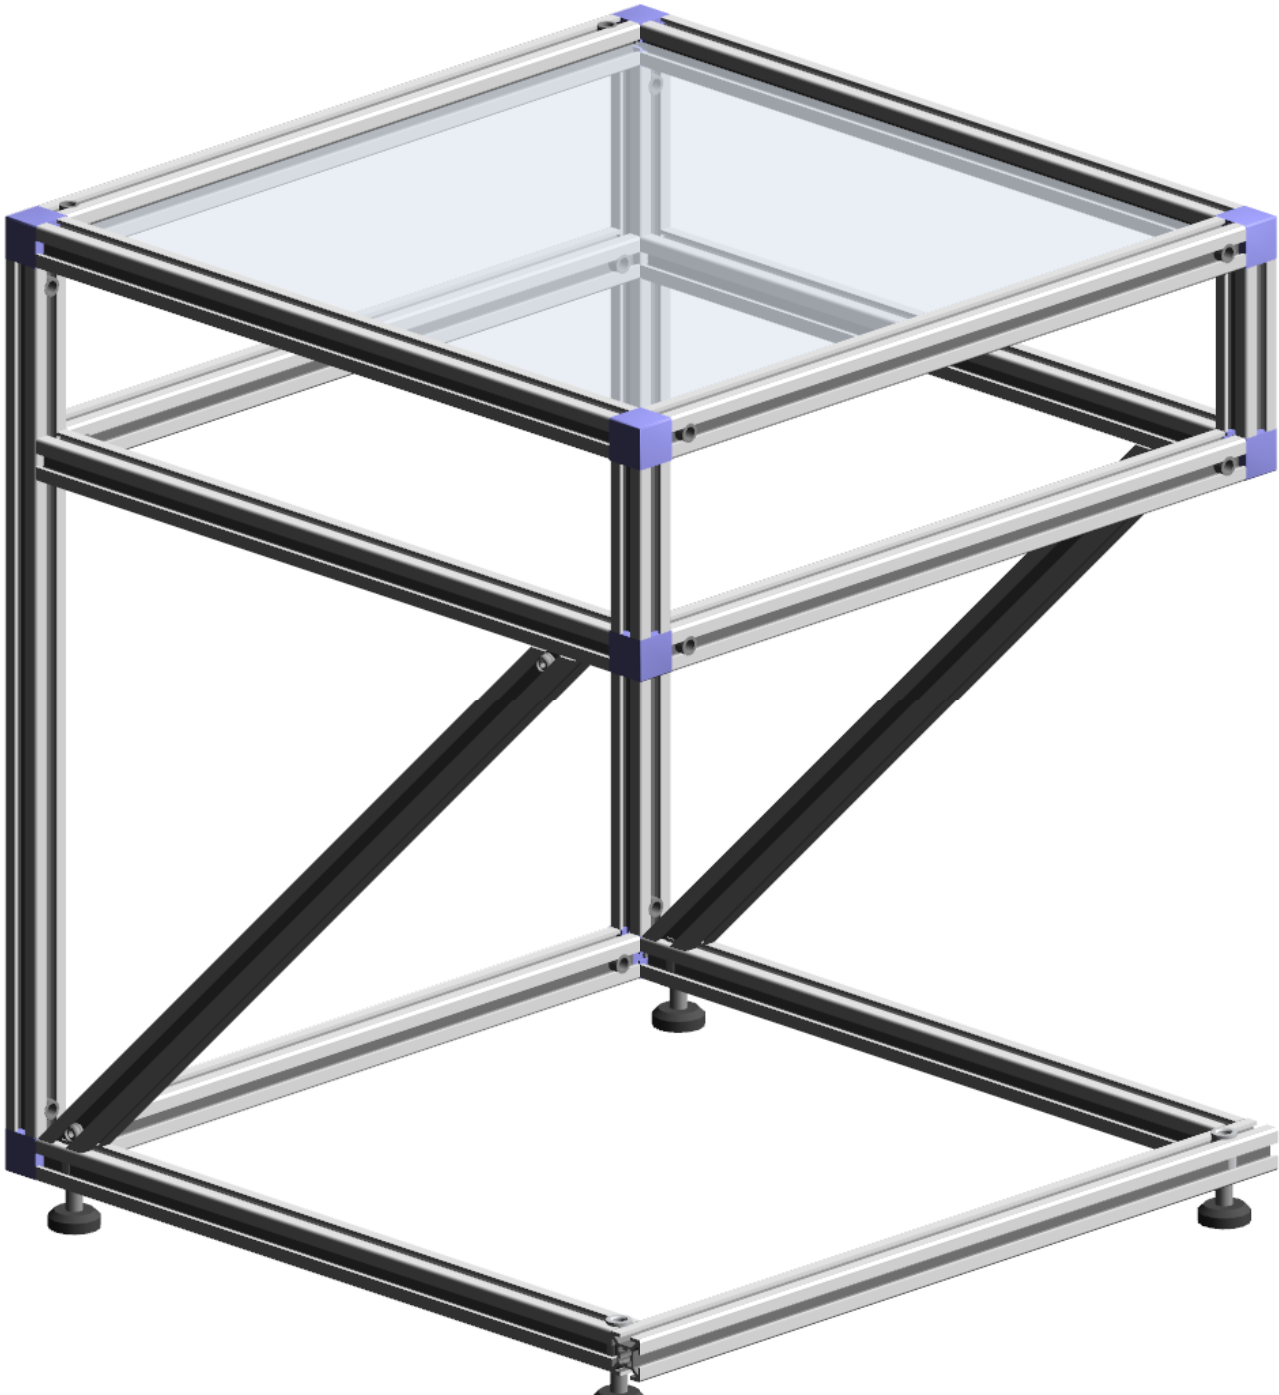


Multiview

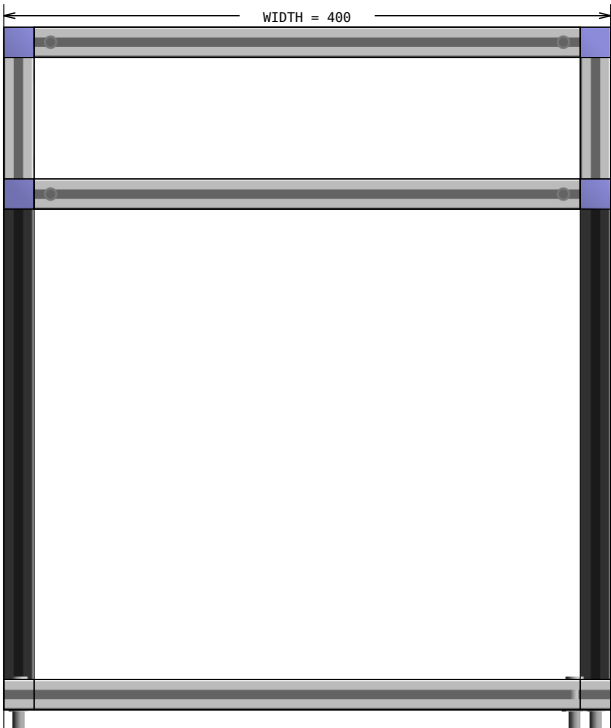


FRONT

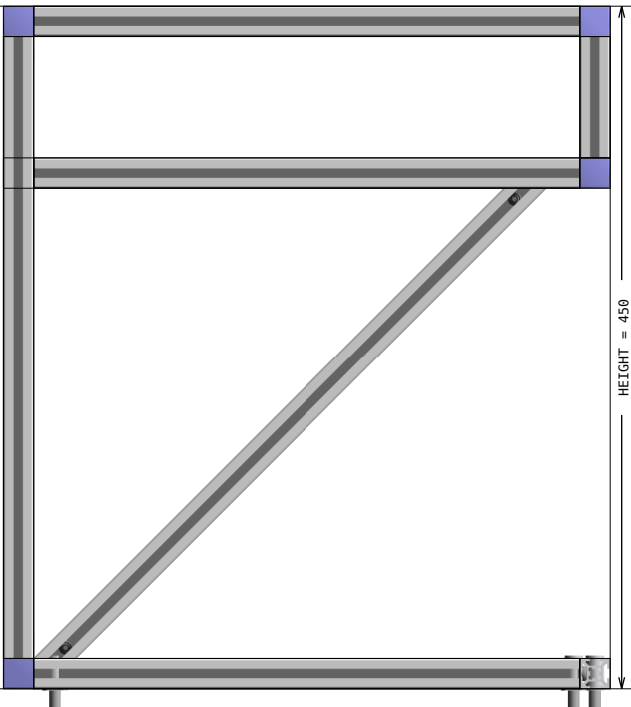


LEFT

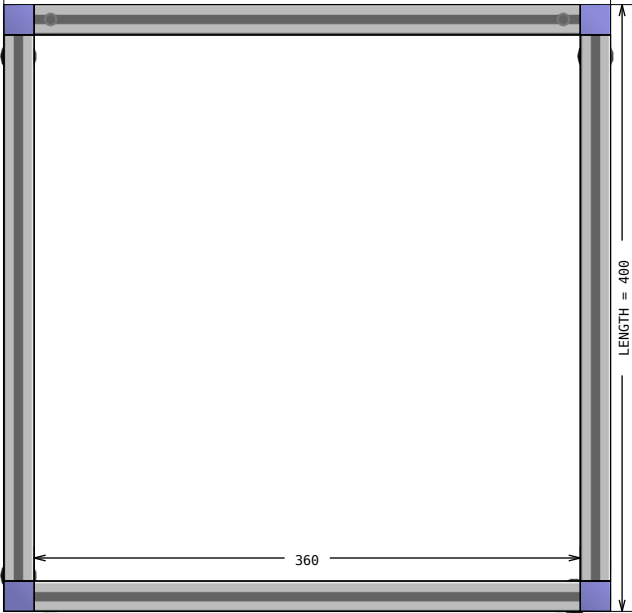



TOP

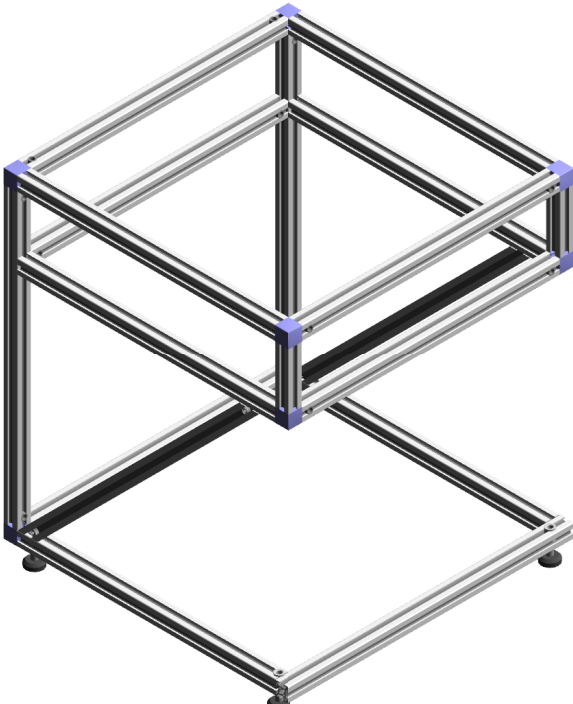


ISOMETRIC

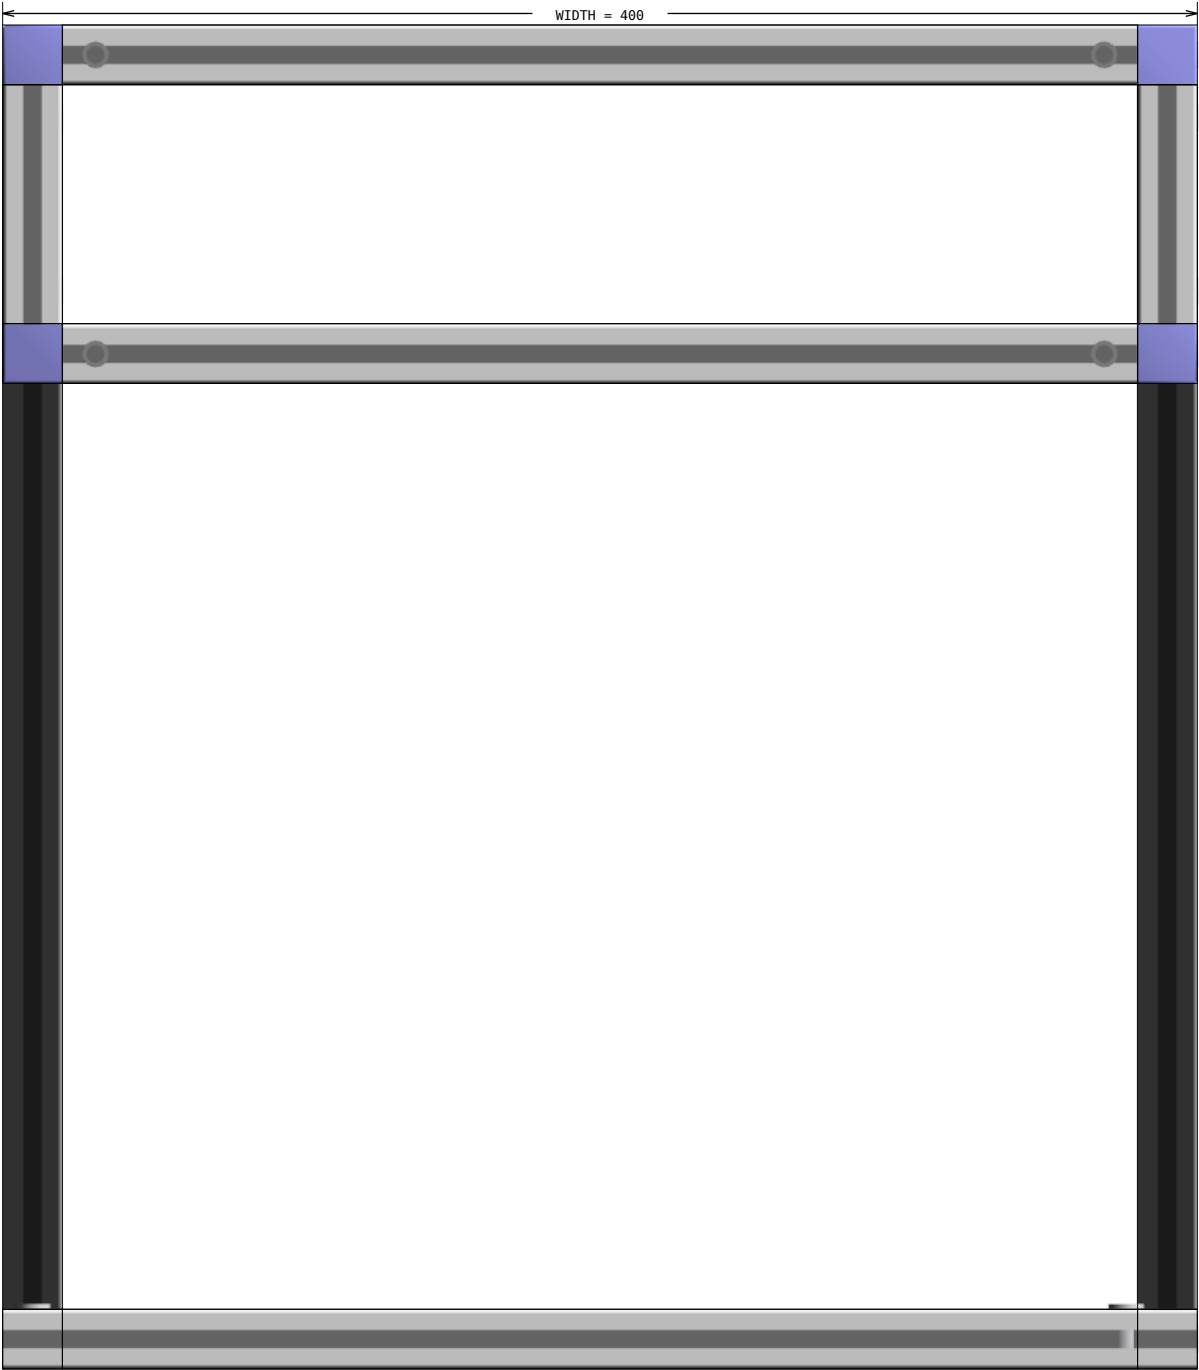

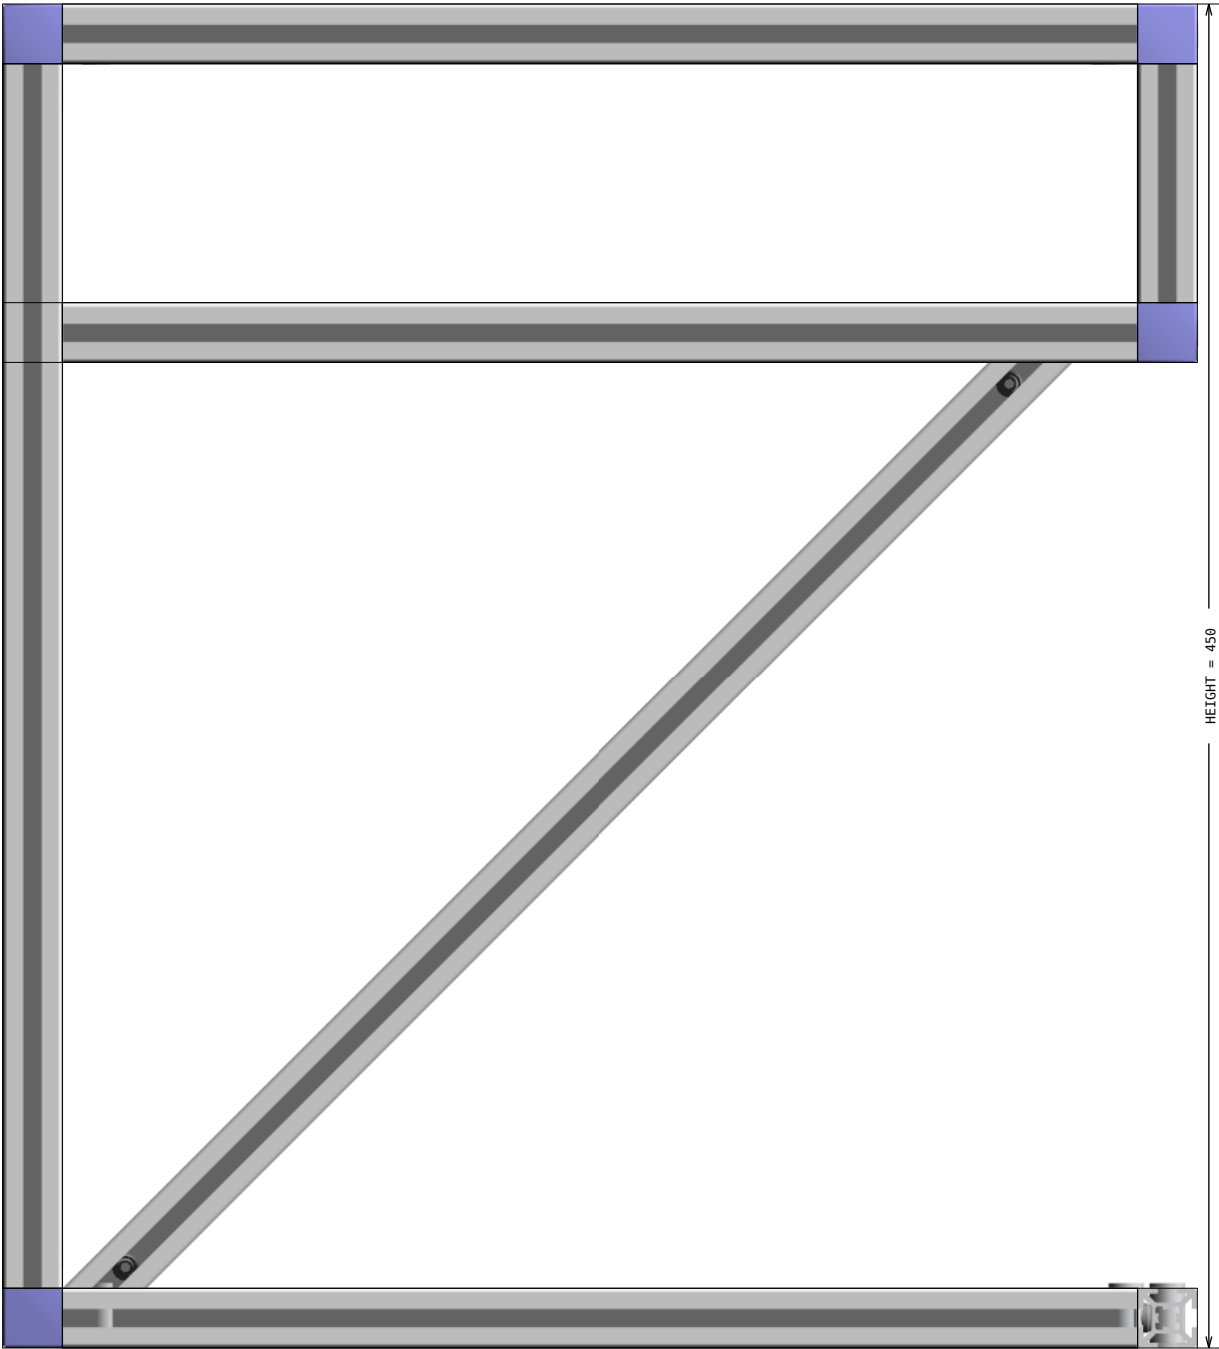

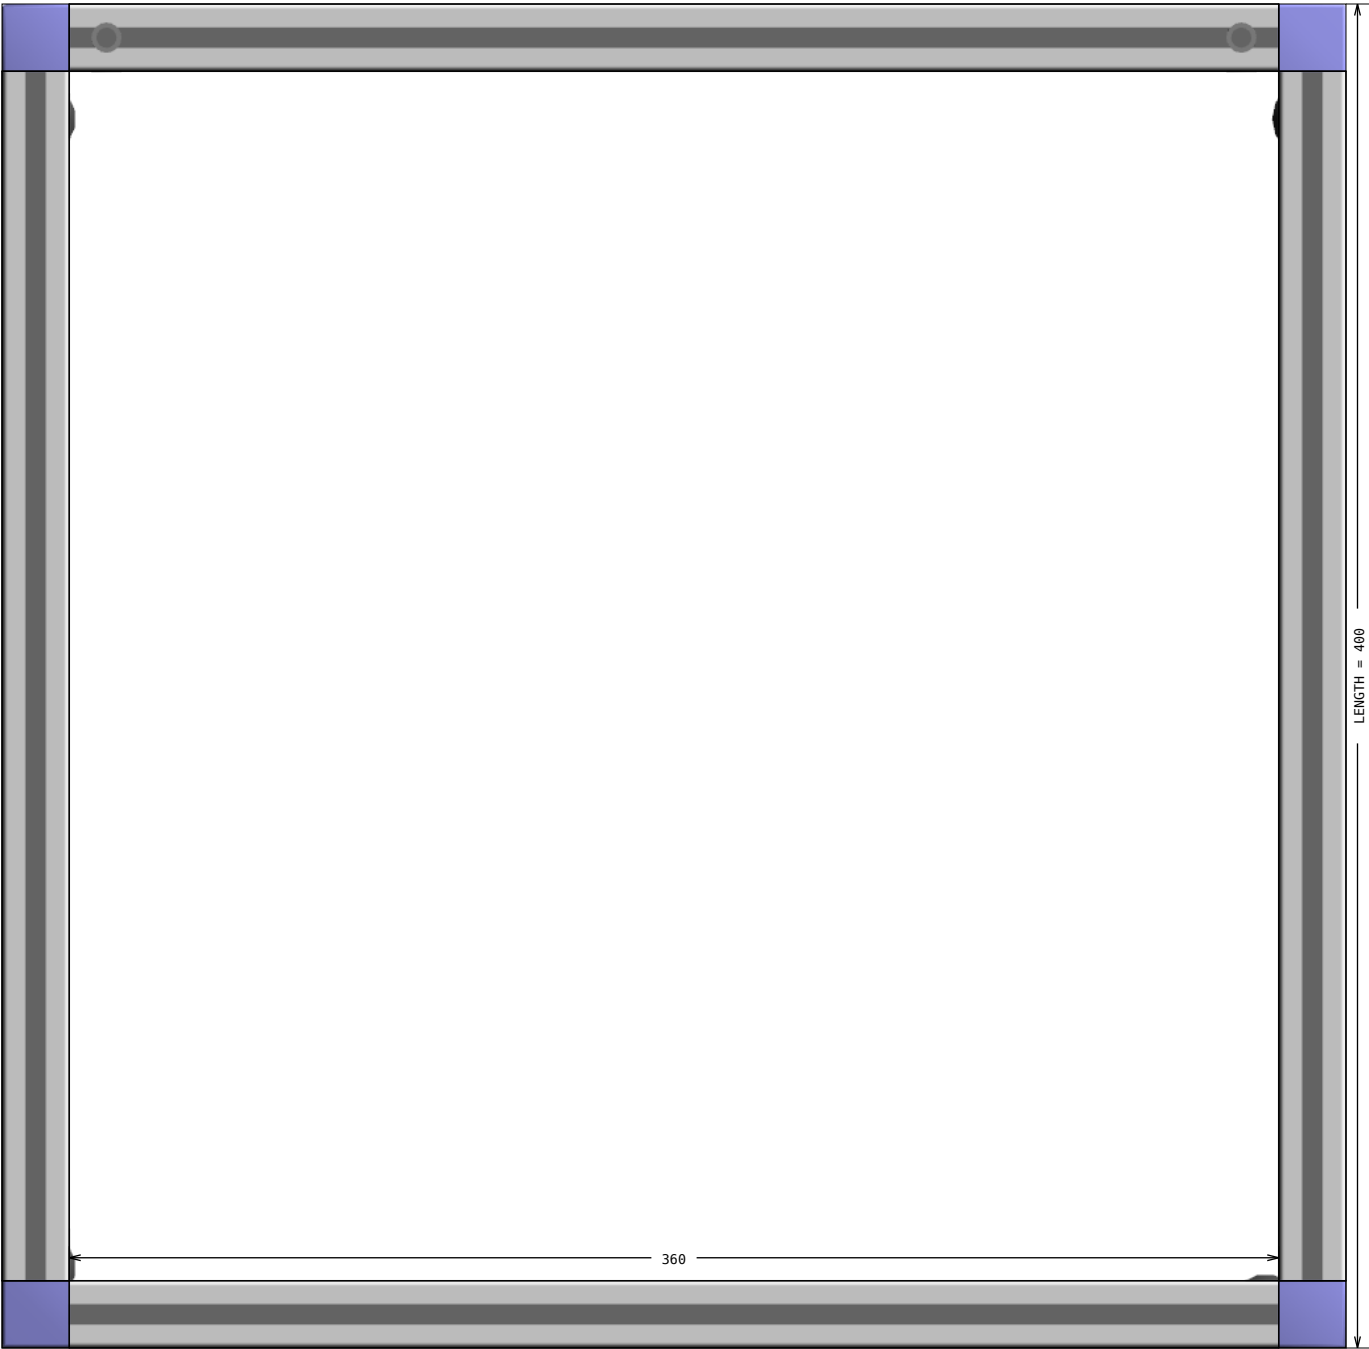


Exploded view

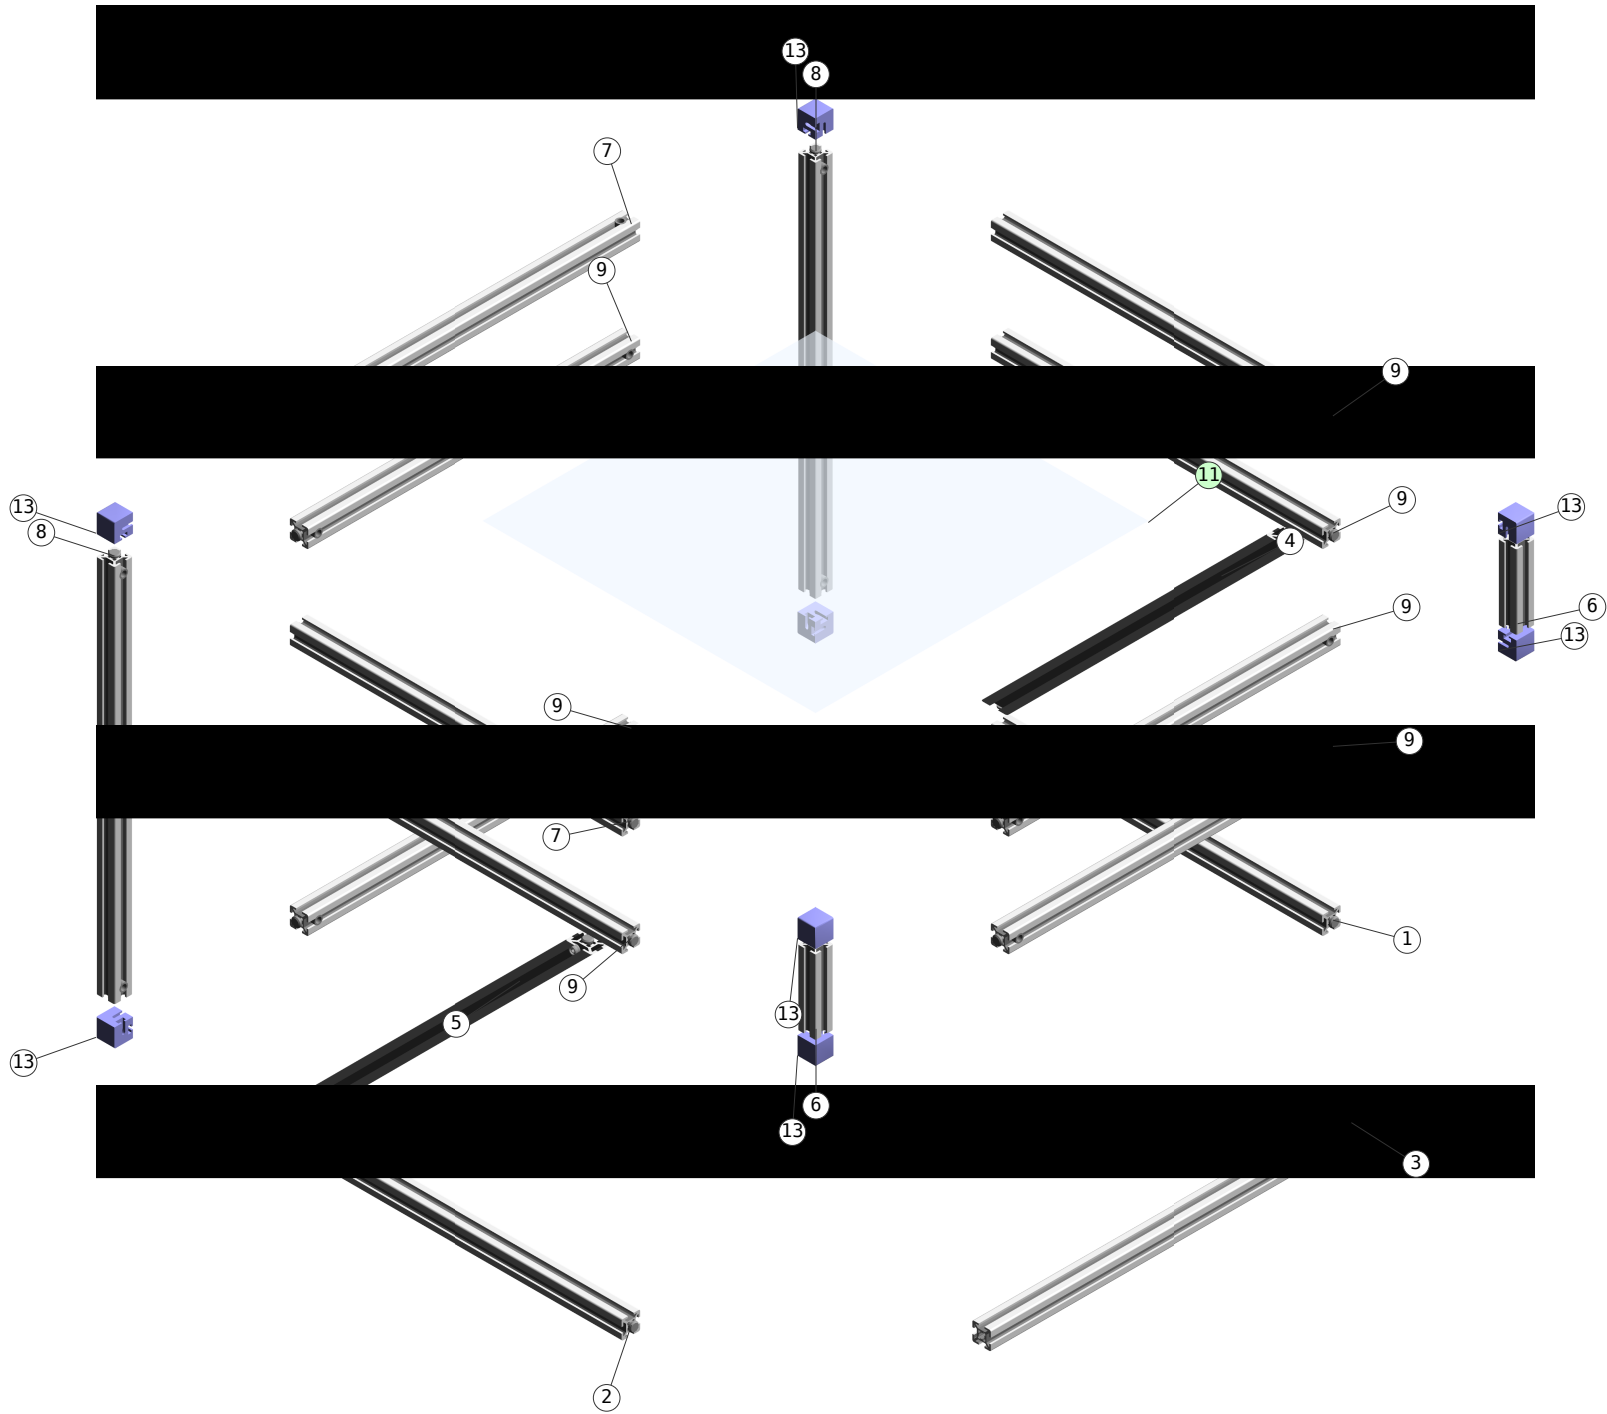


Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal 1.20.2H0, Connector, universal	1 1
2	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal 1.20.2H0, Connector, universal	1 1
4	1.10.020020.43LP-EA3DA3/458.4	Profile 20x20, 4H, light, plain	1.20.2HK1, Connector, oblique-hinge l. + r.	2
5	1.10.020020.43LP-EA1DA1/458.4	Profile 20x20, 4H, light, plain	1.20.2HK1, Connector, oblique-hinge l. + r.	2
6	1.10.020020.43LP-AA4AA4/80	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	4
7	1.10.020020.43LP-AA1AA1/360	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	4
8	1.10.020020.43LP-AA4AA4/410	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	4
9	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal 1.20.2H0, Connector, universal	10 4
12	1.44.002403	Floor levelling screw, D24, M8x30	1.35.608195, Press-fit threaded insert dia: 12/M8, L22.5	4


Profile machining details

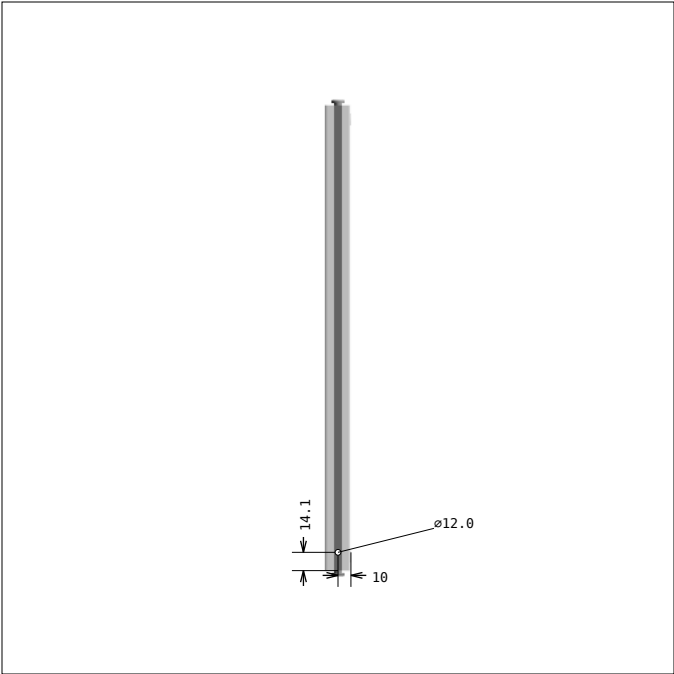


DRAWING 1, Pos 1
SIDE 1, bar length: 360.0 mm

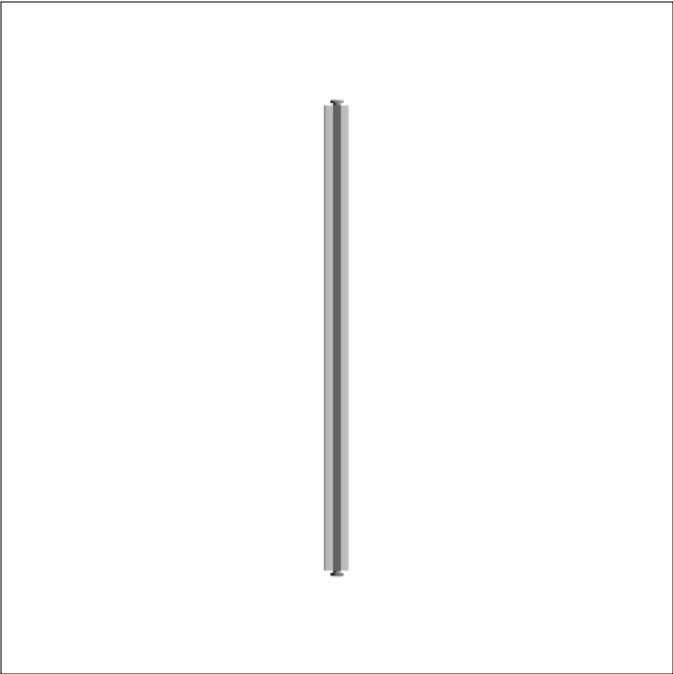

DRAWING 1, Pos 1
SIDE 2

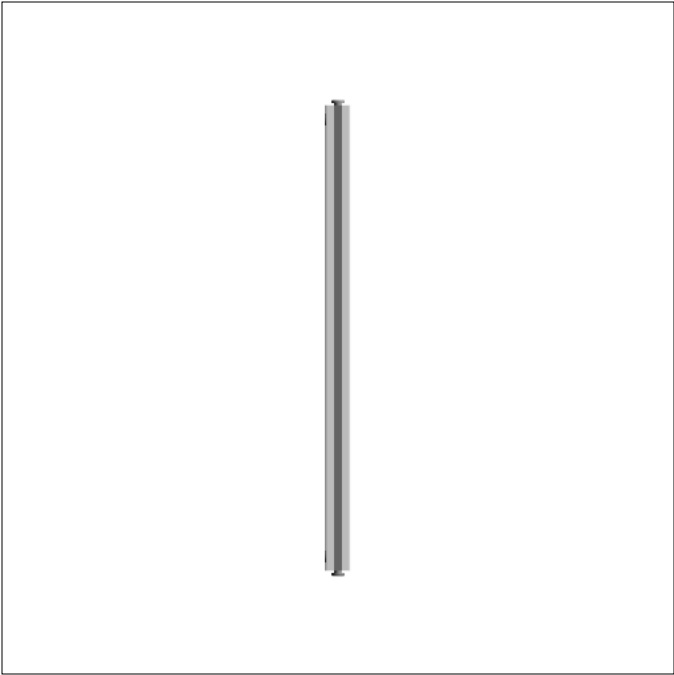


DRAWING 1, Pos 1
SIDE 3

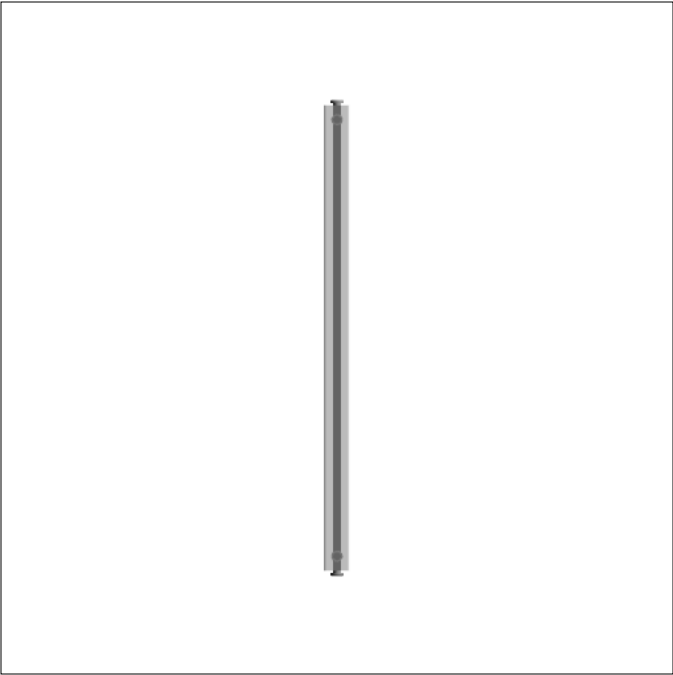


DRAWING 1, Pos 1
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

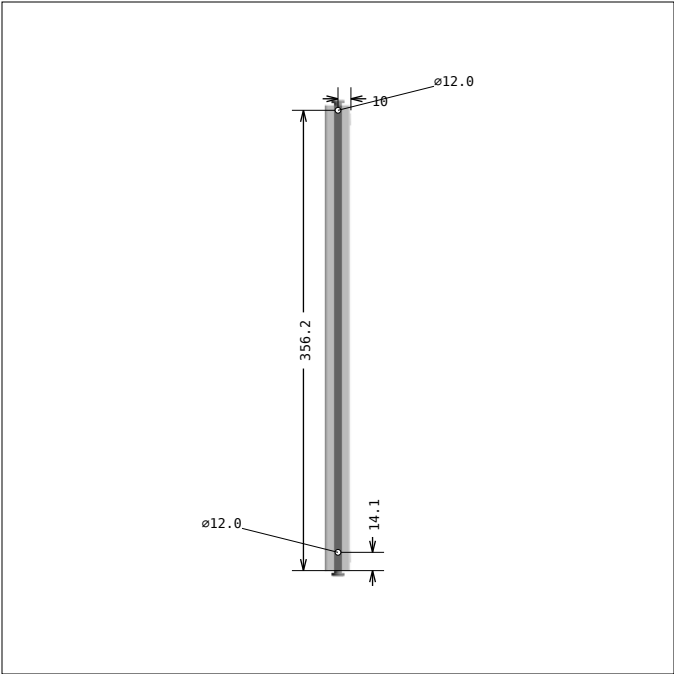


DRAWING 2, Pos 2
SIDE 1, bar length: 360.0 mm

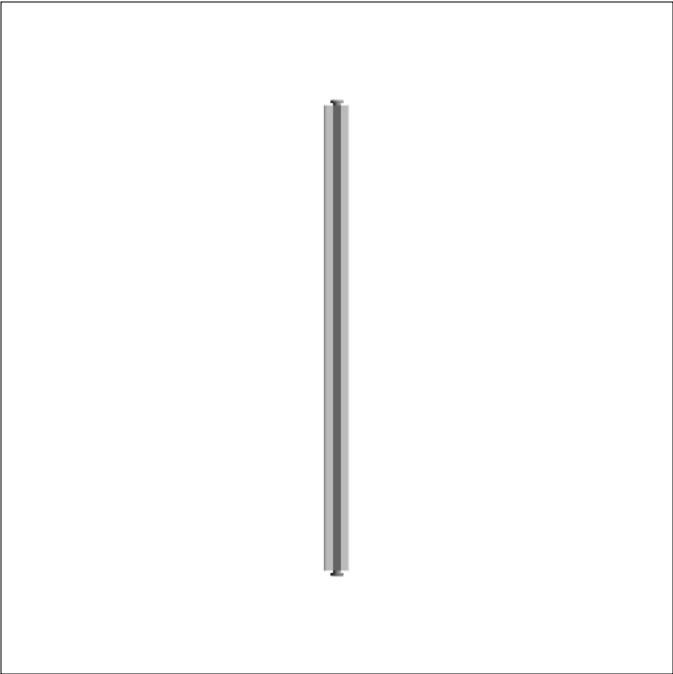

DRAWING 2, Pos 2
SIDE 2

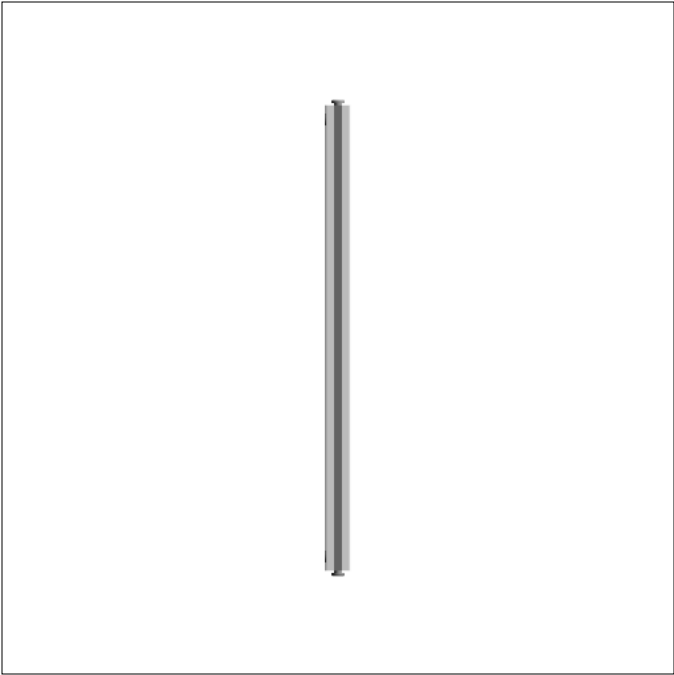


DRAWING 2, Pos 2
SIDE 3

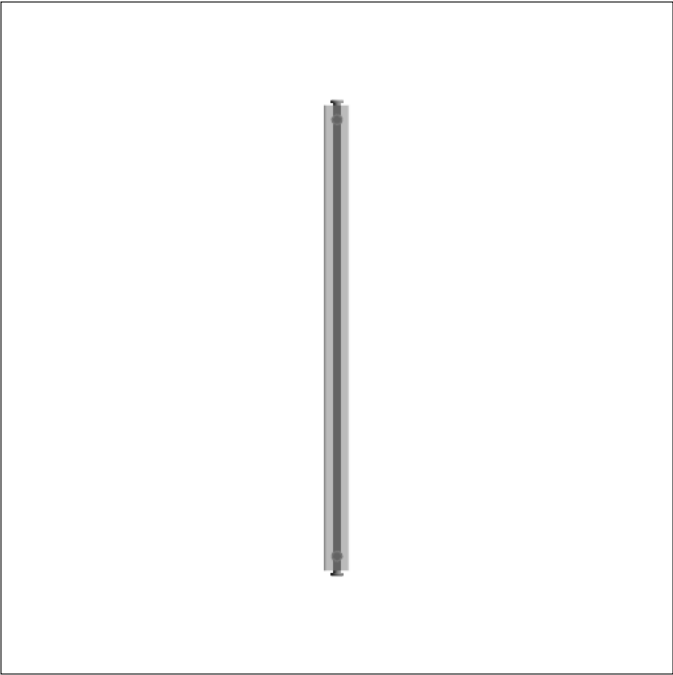


DRAWING 2, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 3, Pos 3
SIDE 1, bar length: 400.0 mm



DRAWING 3, Pos 3
SIDE 2

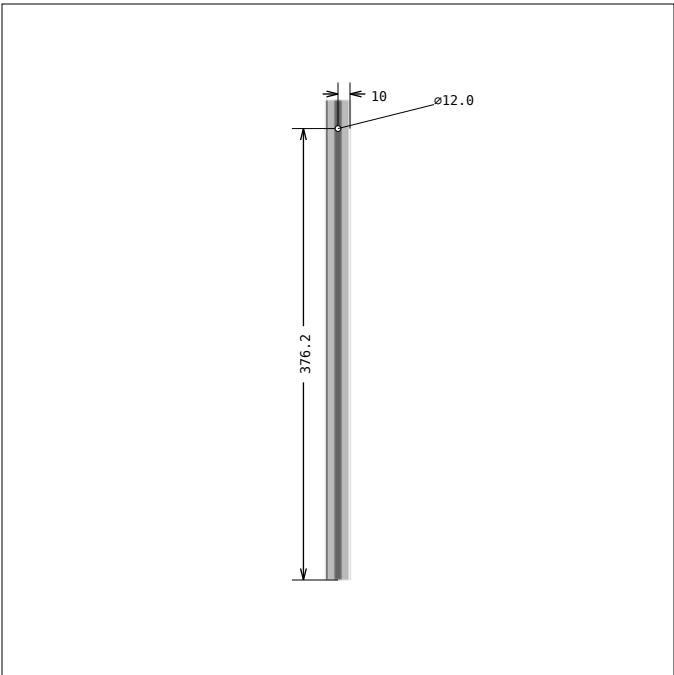


DRAWING 3, Pos 3
SIDE 3



DRAWING 3, Pos 3
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

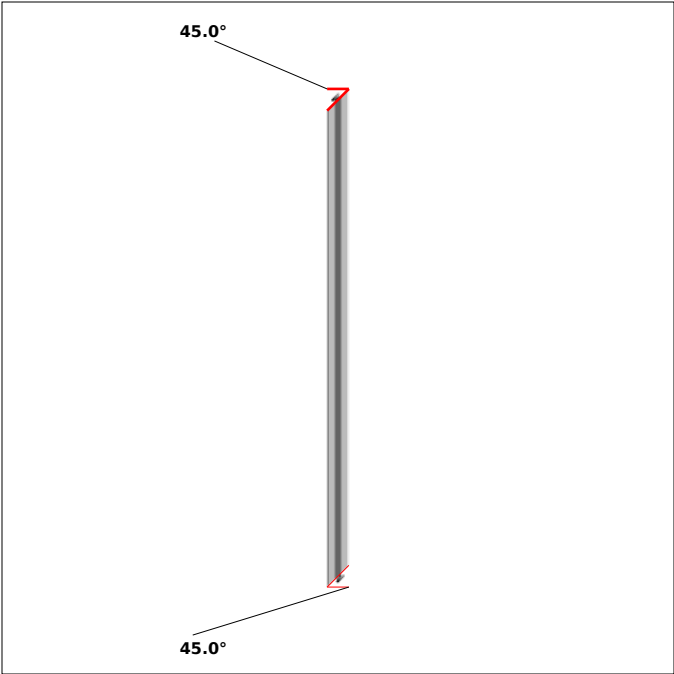

DRAWING 4, Pos 4
SIDE 1, bar length: 458.4 mm



DRAWING 4, Pos 4
SIDE 2




DRAWING 4, Pos 4
SIDE 3



DRAWING 4, Pos 4
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

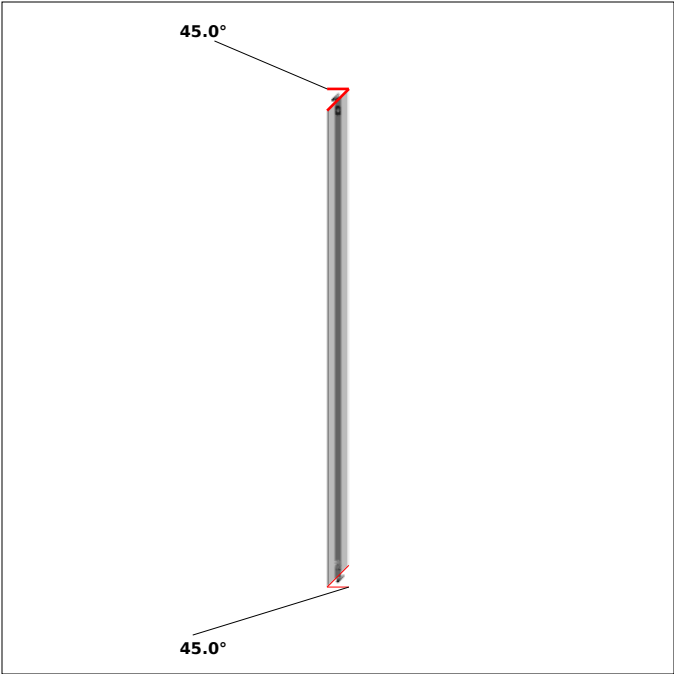

DRAWING 5, Pos 5
SIDE 1, bar length: 458.4 mm



DRAWING 5, Pos 5
SIDE 2




DRAWING 5, Pos 5
SIDE 3



DRAWING 5, Pos 5
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Panels

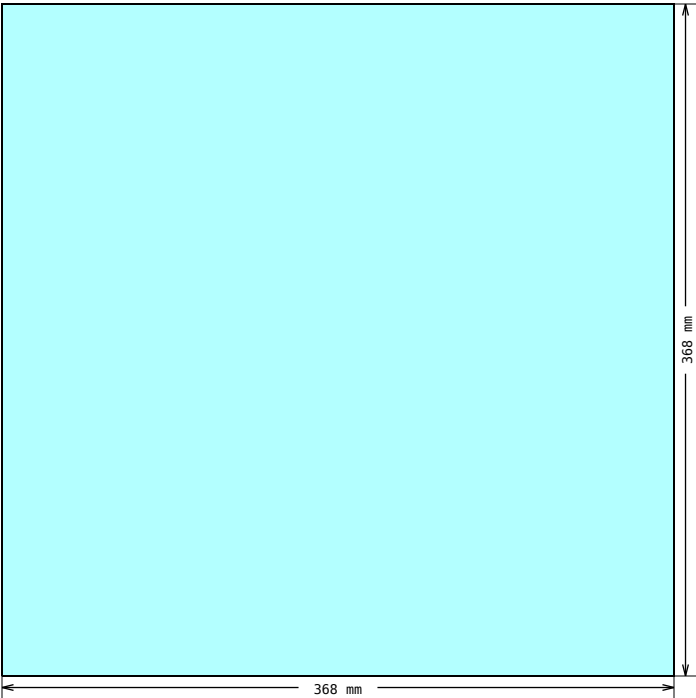


DRAWING 6, Pos 11
Shape measurements







Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.10.020020.43LP	6 6 9 9 9 7 2 9 1 9 7 9 3 8 8 5 4 80.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 400.0 410.0 410.0 458.4 458.4 80.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 410.0 410.0 458.4	43.7 mm
	9 360.0	5636.5 mm


Assembly hints

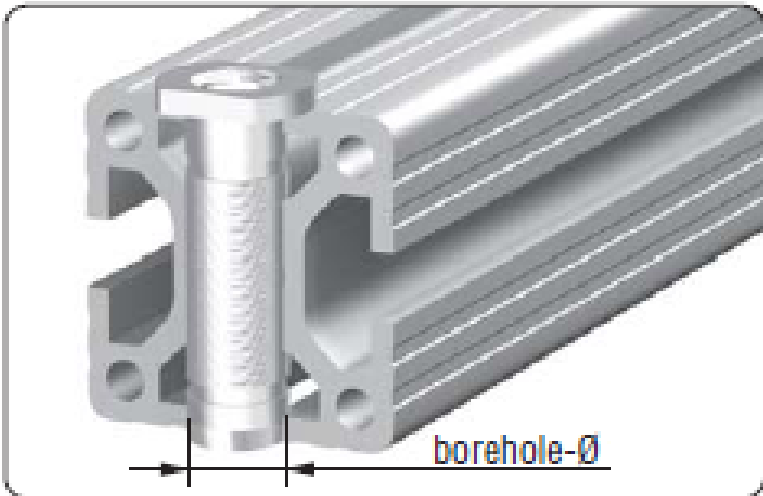FASTENER	1.35.608195	Press-fit threaded insert dia: 12/M8, L22.5
		These inserts are used for mounting feet, casters and other hardware. Ideally, you would use the press to insert them, but in some applications you may use a hammer to place them. To avoid thread damage, temporarily install a scrap screw of appropriate size and hammer on the head of the screw, not the insert itself.
		

Assembly hints

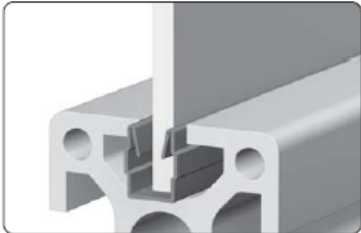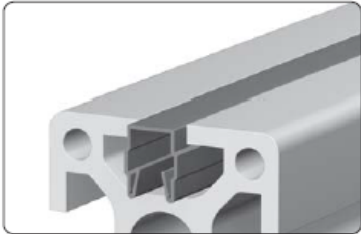CONNECTOR	1.20.2H0	Connector, universal	 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side	Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
None	1.41.H04.1	Combination profile PVC, H, B4, grey (bar 2.5 m)	 Use as reduction profile  Use as slot-cover profile Application Combination profiles for use as reduction or cover profiles Technical data bar length: 2.5 m material: PP • oil and water resistant Colours: grey black orange red blue green	These profiles fill the space between the panel and the walls of the T-slot.

Assembly hints

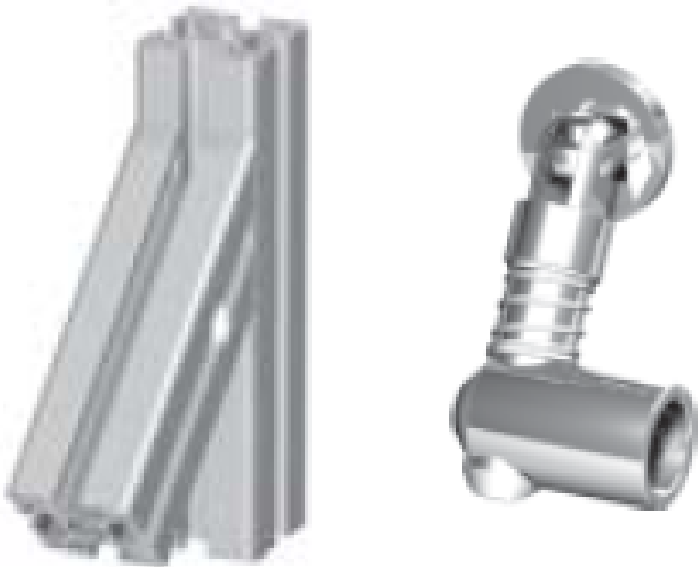CONNECTOR	1.20.2HK1	Connector, oblique-hinge l. + r.
		This type of connector assembles similar to universal connector