


Design Title : TABLE 2.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

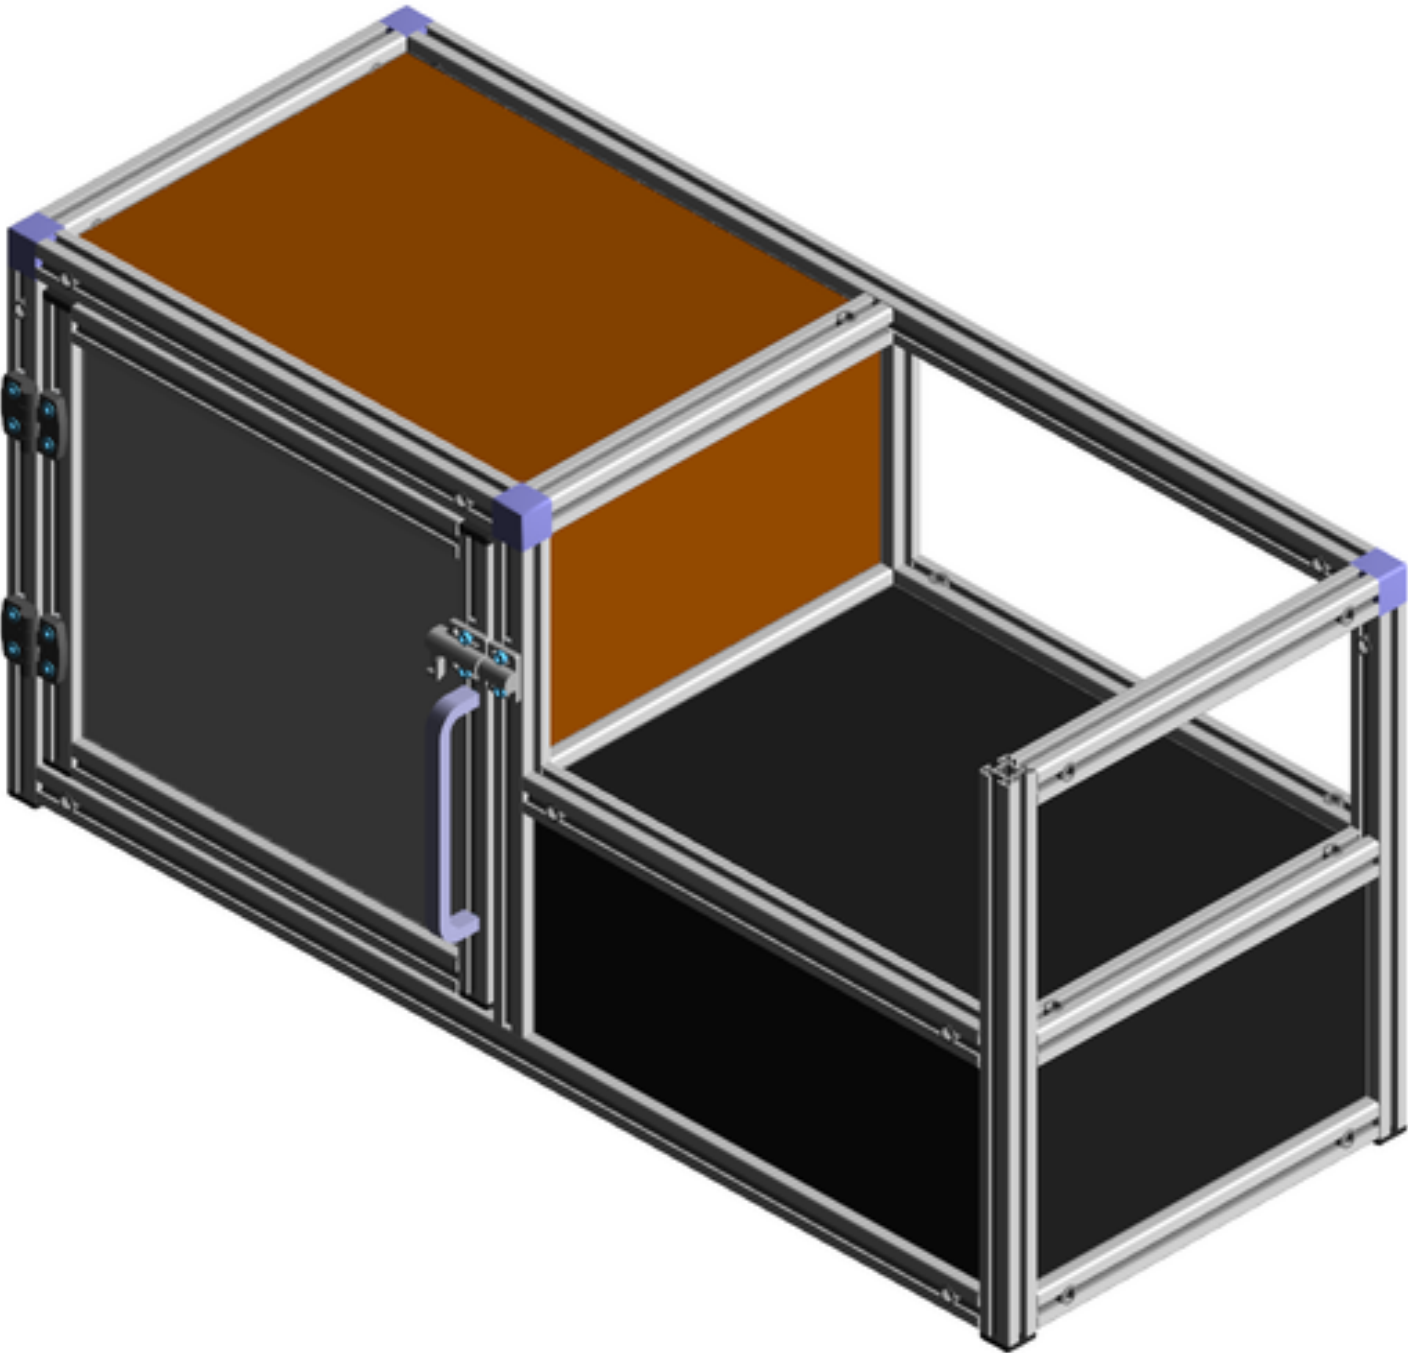

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.030030.43LP-AA3AA3/340	Profile 30x30, 4F, light, plain	MM	1
2	1.11.030030.43LP-AA1AA4/340	Profile 30x30, 4F, light, plain	MM	1
3	1.11.030030.43LP-AA2AA2/340	Profile 30x30, 4F, light, plain	MM	1
4	1.11.030030.43LP-A00A00/368	Profile 30x30, 4F, light, plain	MM	1
5	1.11.030030.43LP-A00A00/368	Profile 30x30, 4F, light, plain **PER DRAWING 1**	MM	1
5.A	Q11A4I07161-5.5	Counterbore, left Ø 5.5 mm, distance 62.0 mm, Side: 4	EA	1
5.B	Q11A4I07161-5.5	Counterbore, left Ø 5.5 mm, distance 242.0 mm, Side: 4	EA	1
6	1.11.030030.43LP-AA1AA1/390	Profile 30x30, 4F, light, plain	MM	1
7	1.11.030030.43LP-AA4AA4/390	Profile 30x30, 4F, light, plain	MM	1
8	1.11.030030.43LP-A00A00/450	Profile 30x30, 4F, light, plain	MM	1
9	1.11.030030.43LP-AA4AA4/455	Profile 30x30, 4F, light, plain	MM	1
10	1.11.030030.43LP-AA1AA1/455	Profile 30x30, 4F, light, plain	MM	1
11	1.11.030030.43LP-AA2AA2/455	Profile 30x30, 4F, light, plain	MM	1
12	1.11.030030.43LP-AA2AA2/940	Profile 30x30, 4F, light, plain	MM	1
13	1.11.030030.43LP-AA1AA1/340	Profile 30x30, 4F, light, plain	MM	2
14	1.11.030030.43LP-AA4AA4/385	Profile 30x30, 4F, light, plain	MM	2
15	1.11.030030.43LP-AA4AA4/940	Profile 30x30, 4F, light, plain	MM	2
16	1.11.030030.43LP-AA4AA4/340	Profile 30x30, 4F, light, plain	MM	3
17	1.11.030030.43LP-A00AA4/420	Profile 30x30, 4F, light, plain	MM	3
18	1.41.F14.1	Combination profile PP, F, 1-4.5, grey (bar 2.5 m)	EA	4
19	1.41.F46.1	Combination profile PP, F, 4.5-6, grey (bar 2.5 m)	EA	3
30	1.42.20303.2	Cover cap 30x30, black	EA	8
31	1.48.331	Corner piece cubic 30, anodized	EA	4
32	1.61.210	Handle light	EA	1
33	1.65.2538078	Lock GD-ZN	EA	1
34	0.63.D06912.05035	Cylindric head screw, DIN 6912 - M5x35	EA	2
35	0.63.D06912.06012	Cylindric head screw, DIN 6912 - M6x12	EA	4
36	0.63.D07991.06010	Flat head screw, DIN 7991 - M6x10	EA	8
37	1.21.3F0	Connector, universal	EA	39
38	1.32.4FM6	T-Nut for subsequent insertion, w. spring F, M6	EA	12
39	1.62.448.17/17	Hinge 48 fixed, A 17.5	EA	2
		Frame weight:	11.62 kg (25.62 lbs)	
20	2.83.0236.02-99	PVC expanded foam 6mm, Grey. **NOTE: Non-stock, purchased as needed, SIZE: 190.00MM x 350.00MM **PER DRAWING 2**	SM	1
21	2.83.0236.02-99	PVC expanded foam 6mm, Grey. **NOTE: Non-stock, purchased as needed, SIZE: 350.00MM x 465.00MM **PER DRAWING 3**	SM	1
22	2.83.0236.02-99	PVC expanded foam 6mm, Grey. **NOTE: Non-stock, purchased as needed, SIZE: 350.00MM x 465.00MM **PER DRAWING 4**	SM	1

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
23	2.83.0236.02-99	PVC expanded foam 6mm, Grey. **NOTE: Non-stock, purchased as needed, SIZE: 190.00MM x 465.00MM **PER DRAWING 5**	SM	2
24	2.87.1571-99	Polycarbonat 4mm, SIZE: 330.00MM x 395.00MM **PER DRAWING 6**	SM	1
25	2.87.1571-99	Polycarbonat 4mm, SIZE: 350.00MM x 400.00MM **PER DRAWING 7**	SM	1
26	2.87.1571-99	Polycarbonat 4mm, SIZE: 350.00MM x 465.00MM **PER DRAWING 8**	SM	1
27	2.87.1571-99	Polycarbonat 4mm, SIZE: 350.00MM x 465.00MM **PER DRAWING 9**	SM	1
28	2.87.1571-99	Polycarbonat 4mm, SIZE: 400.00MM x 465.00MM **PER DRAWING 10**	SM	1
29	2.87.1571-99	Polycarbonat 4mm, SIZE: 190.00MM x 350.00MM **PER DRAWING 11**	SM	2


Panels weight:

6.16 kg (13.58 lbs)


Total Weight:

17.78 kg (39.19 lbs)

Isometric view
Some accessories may not be shown

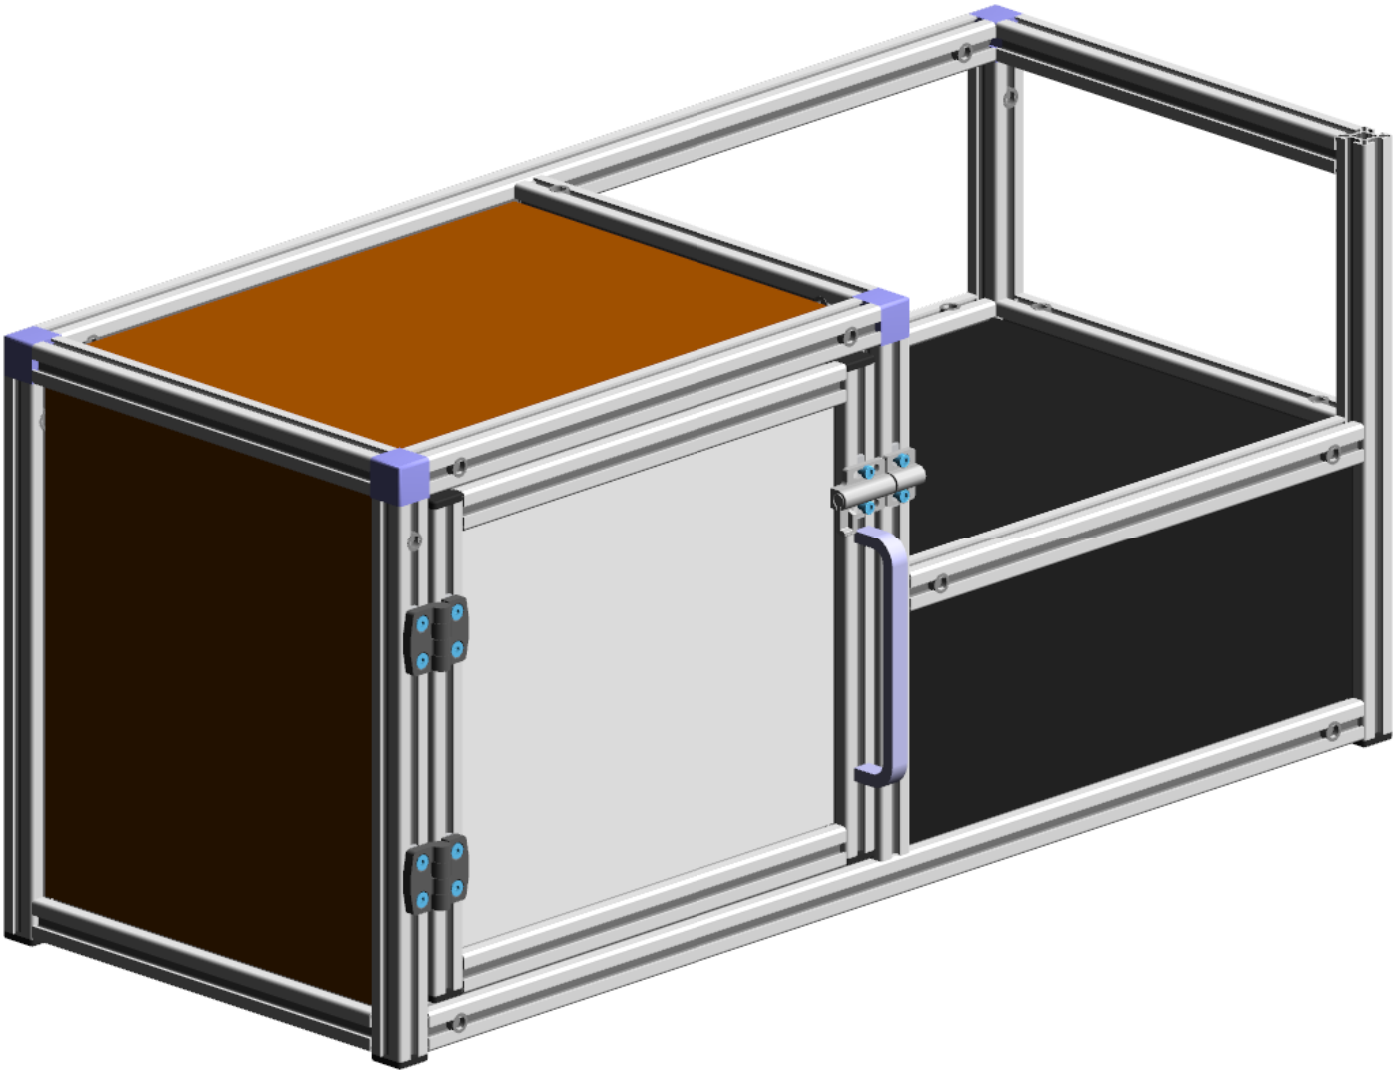


Multiview

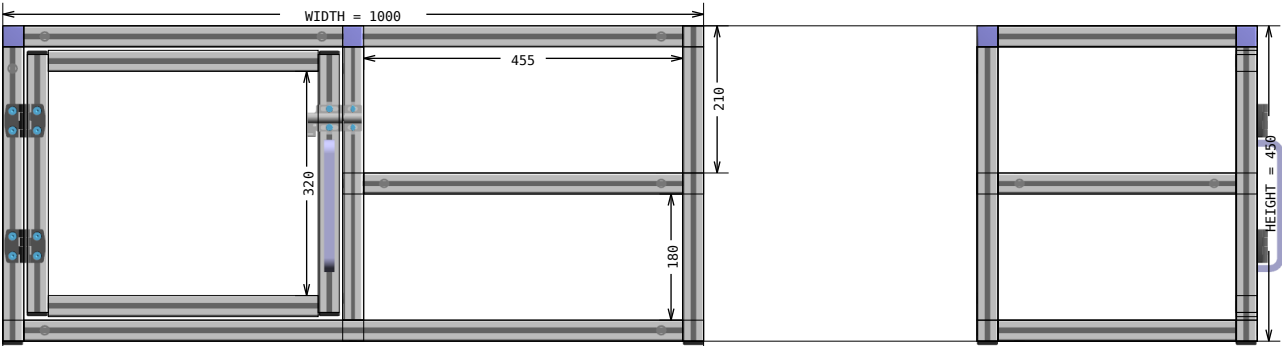


FRONT


LEFT

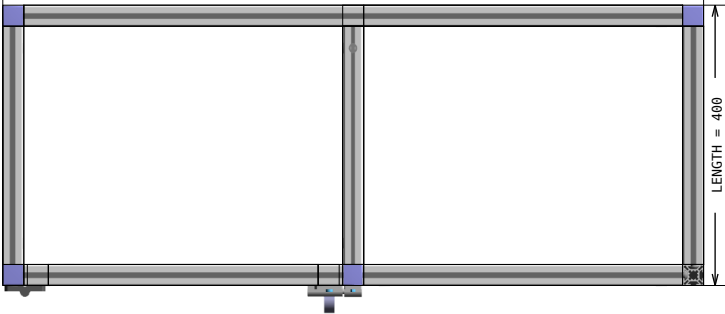



TOP

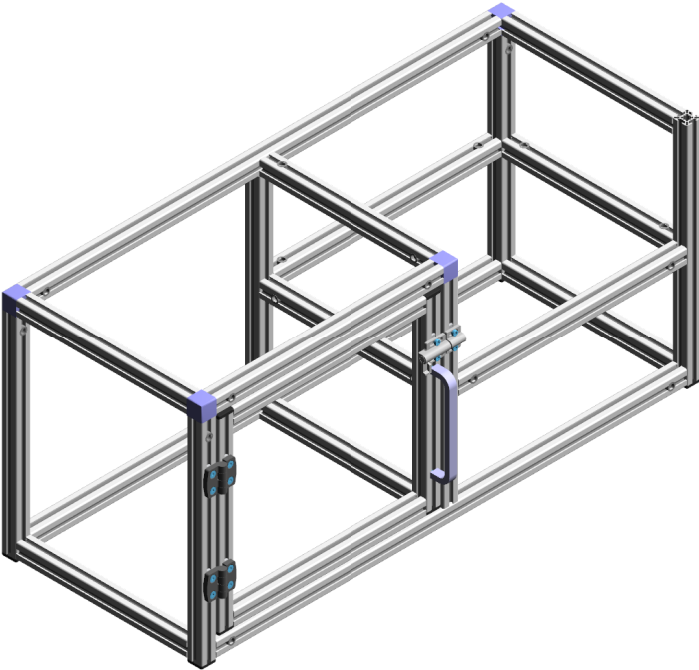


ISOMETRIC

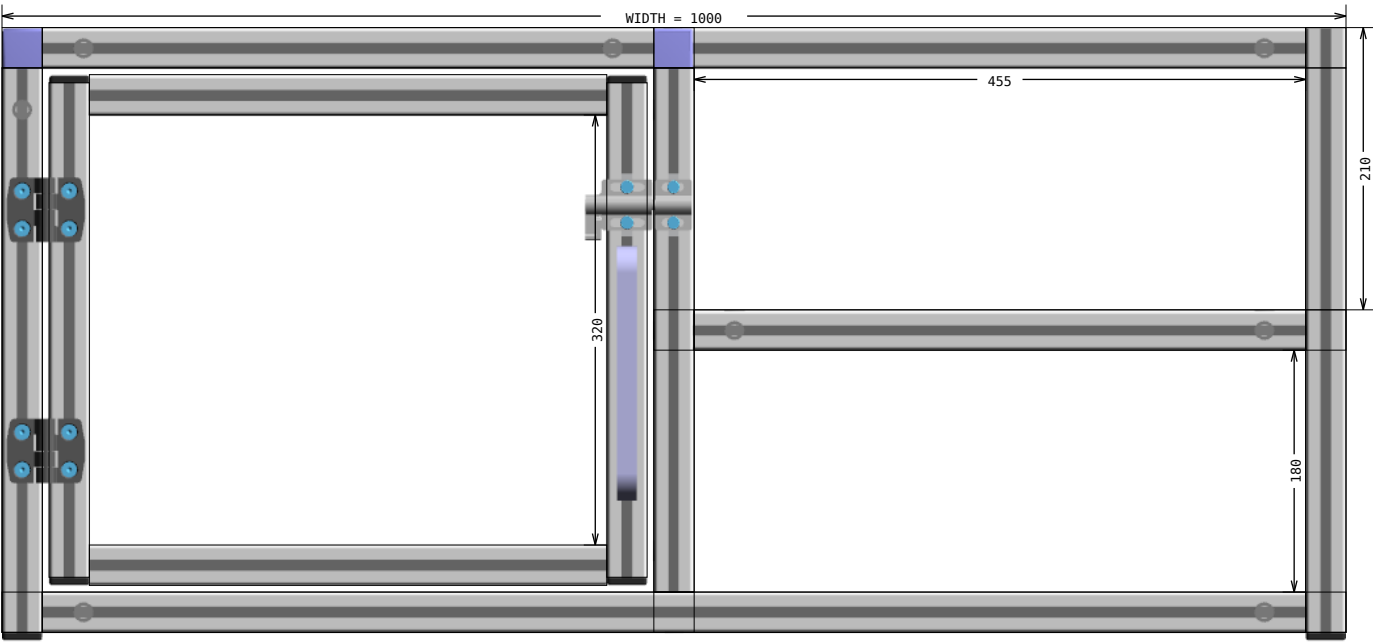


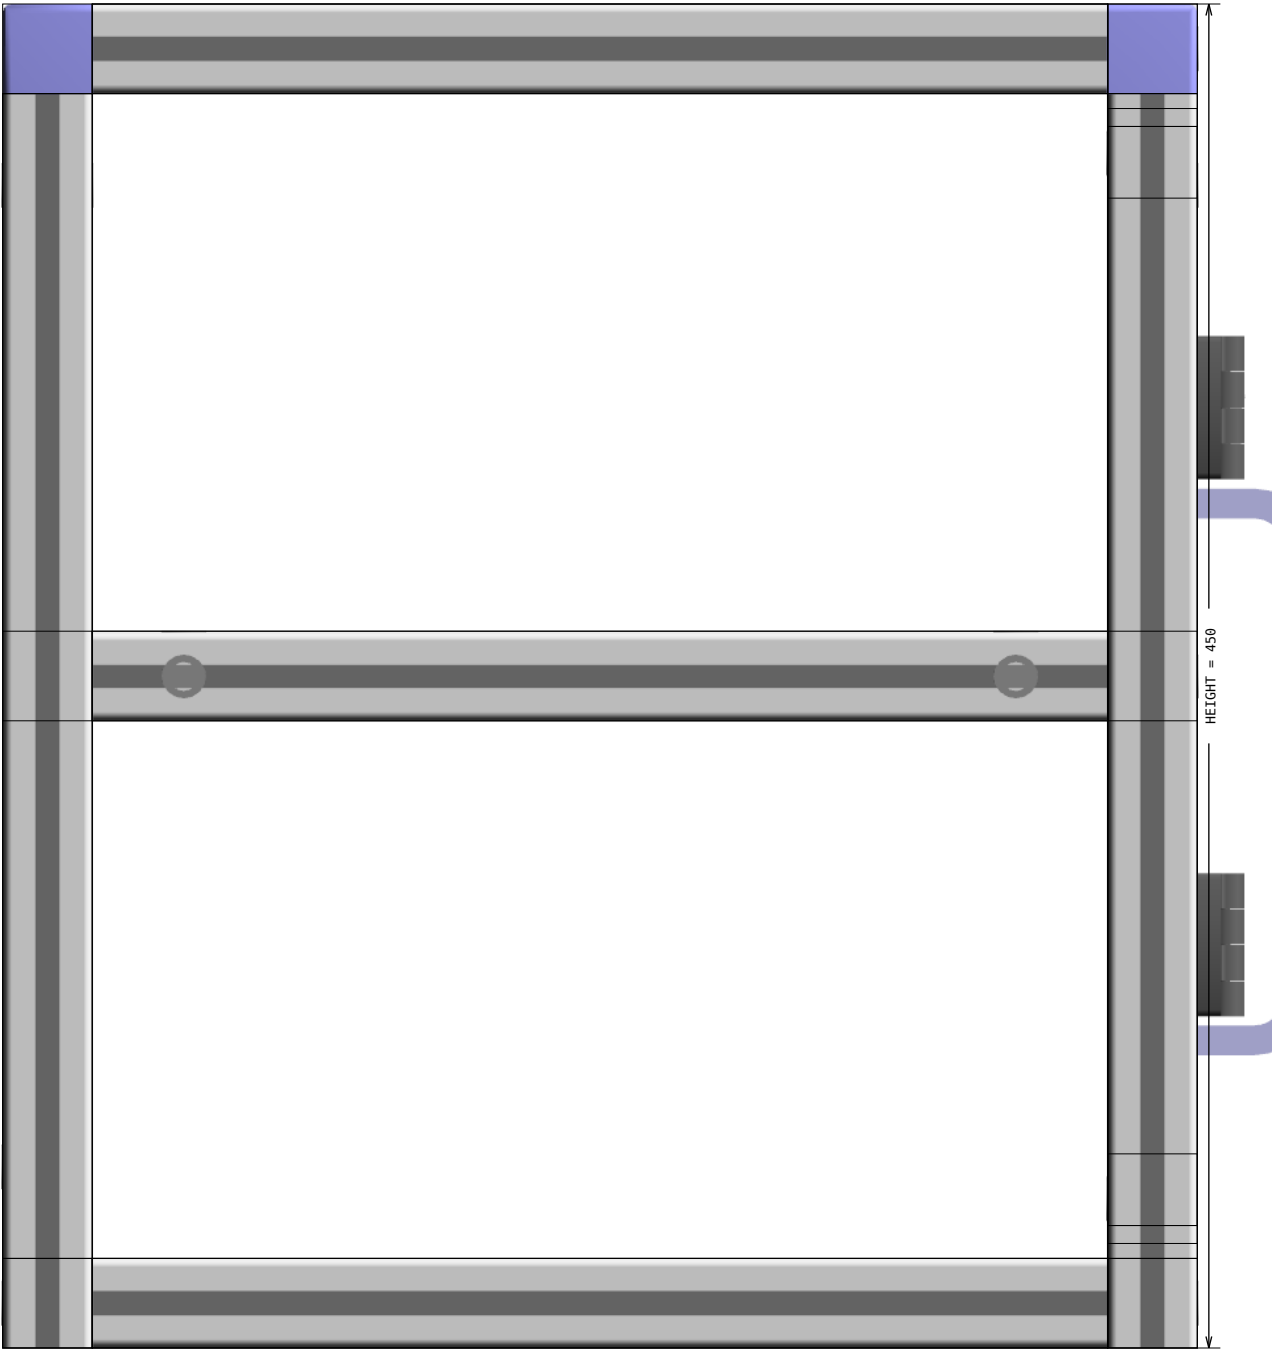

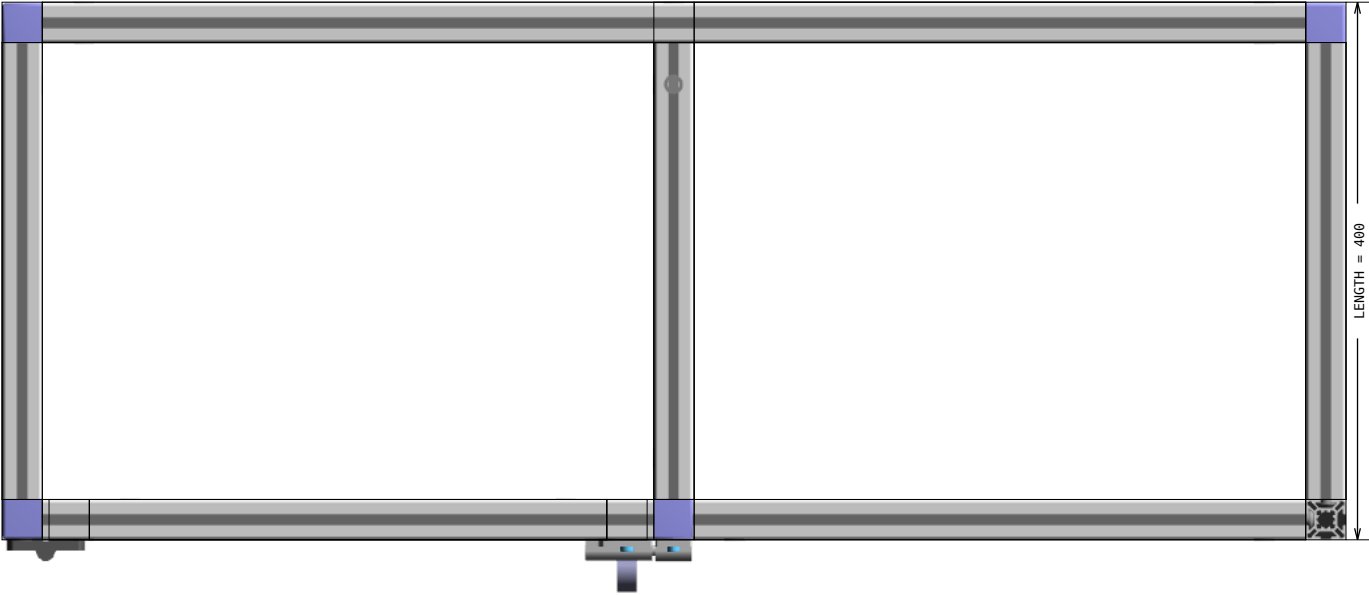


Exploded view

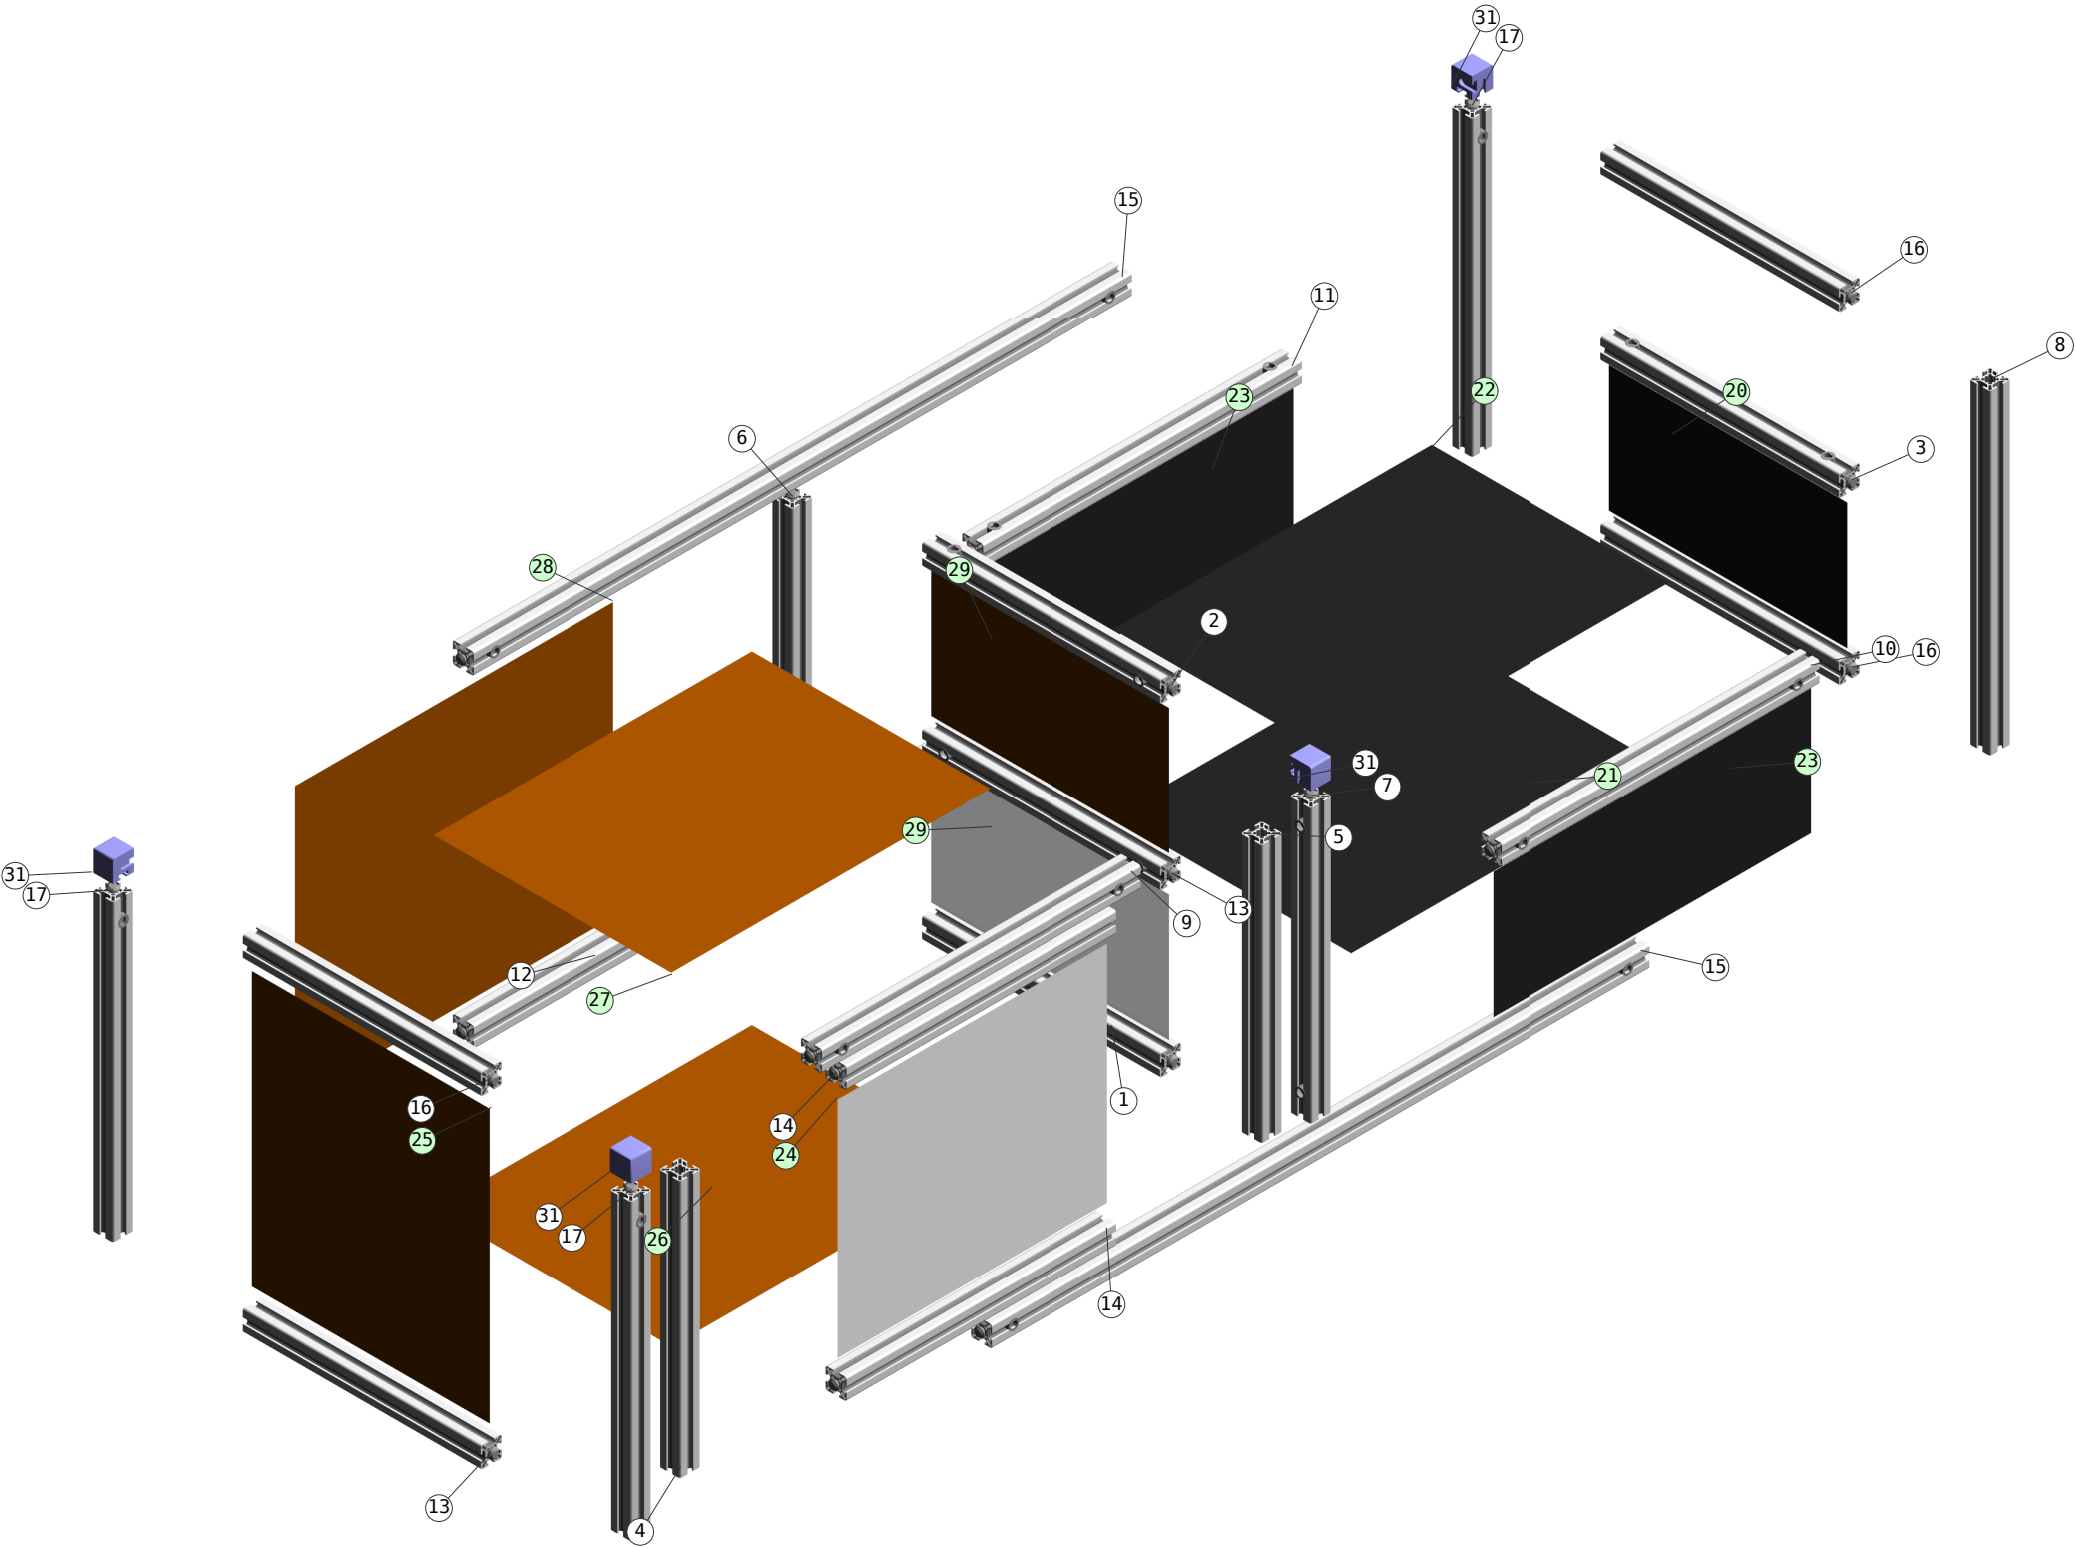

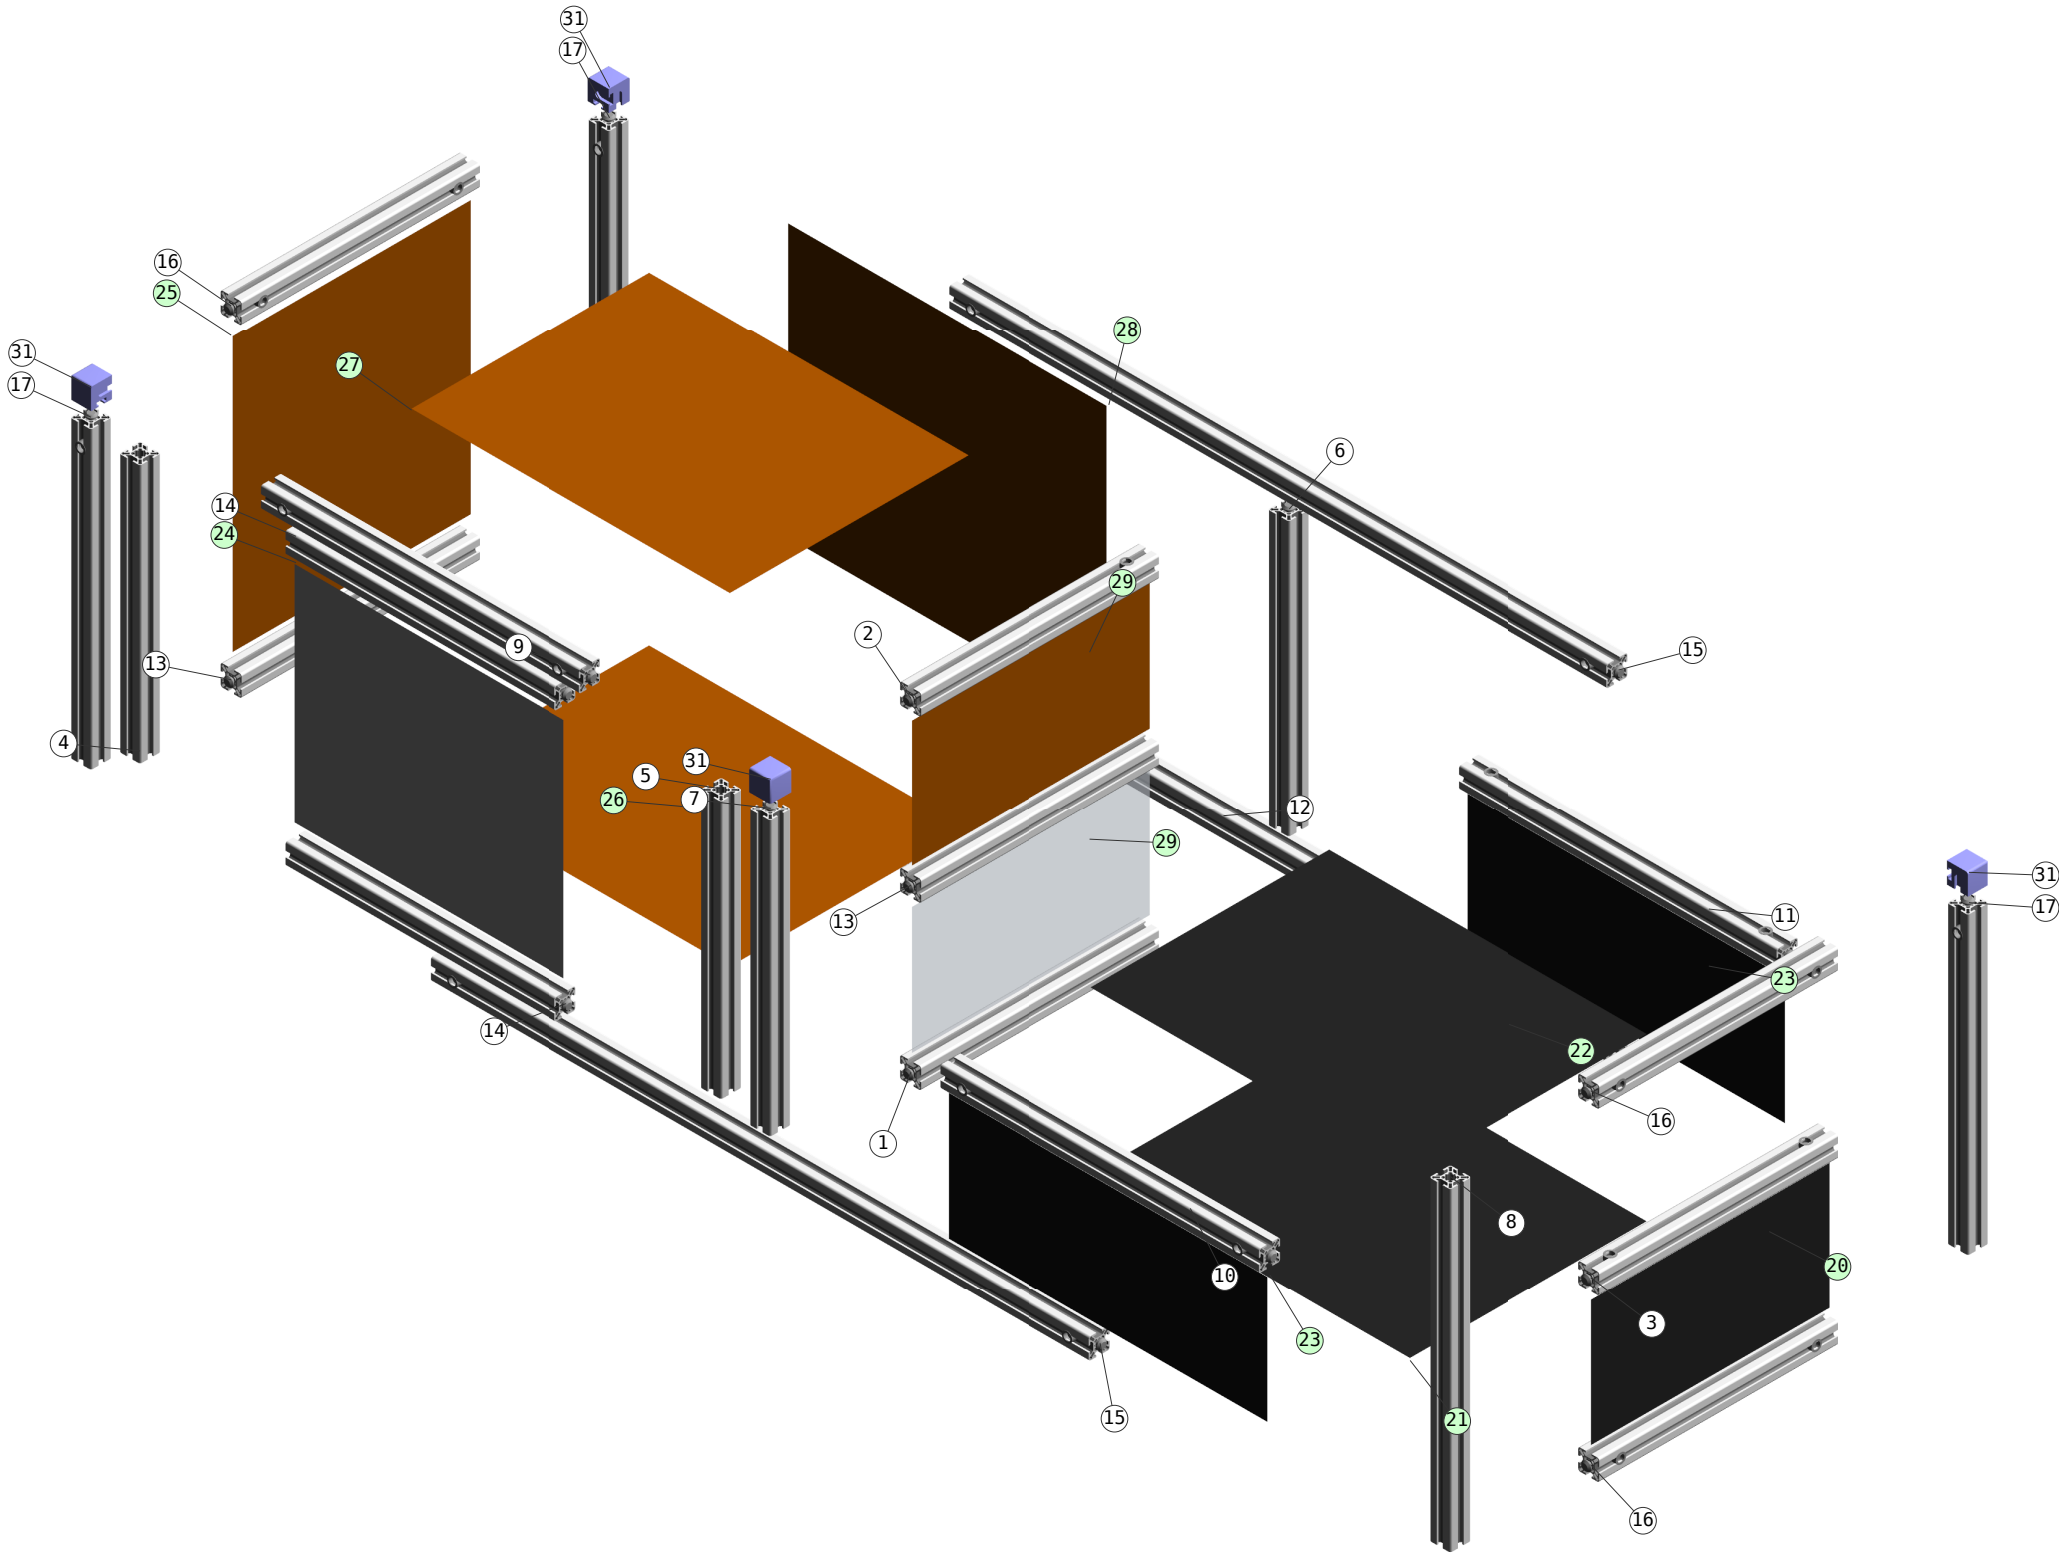

Components of group: Door


Panels are not shown for image clarity, their locations are marked by green balloons

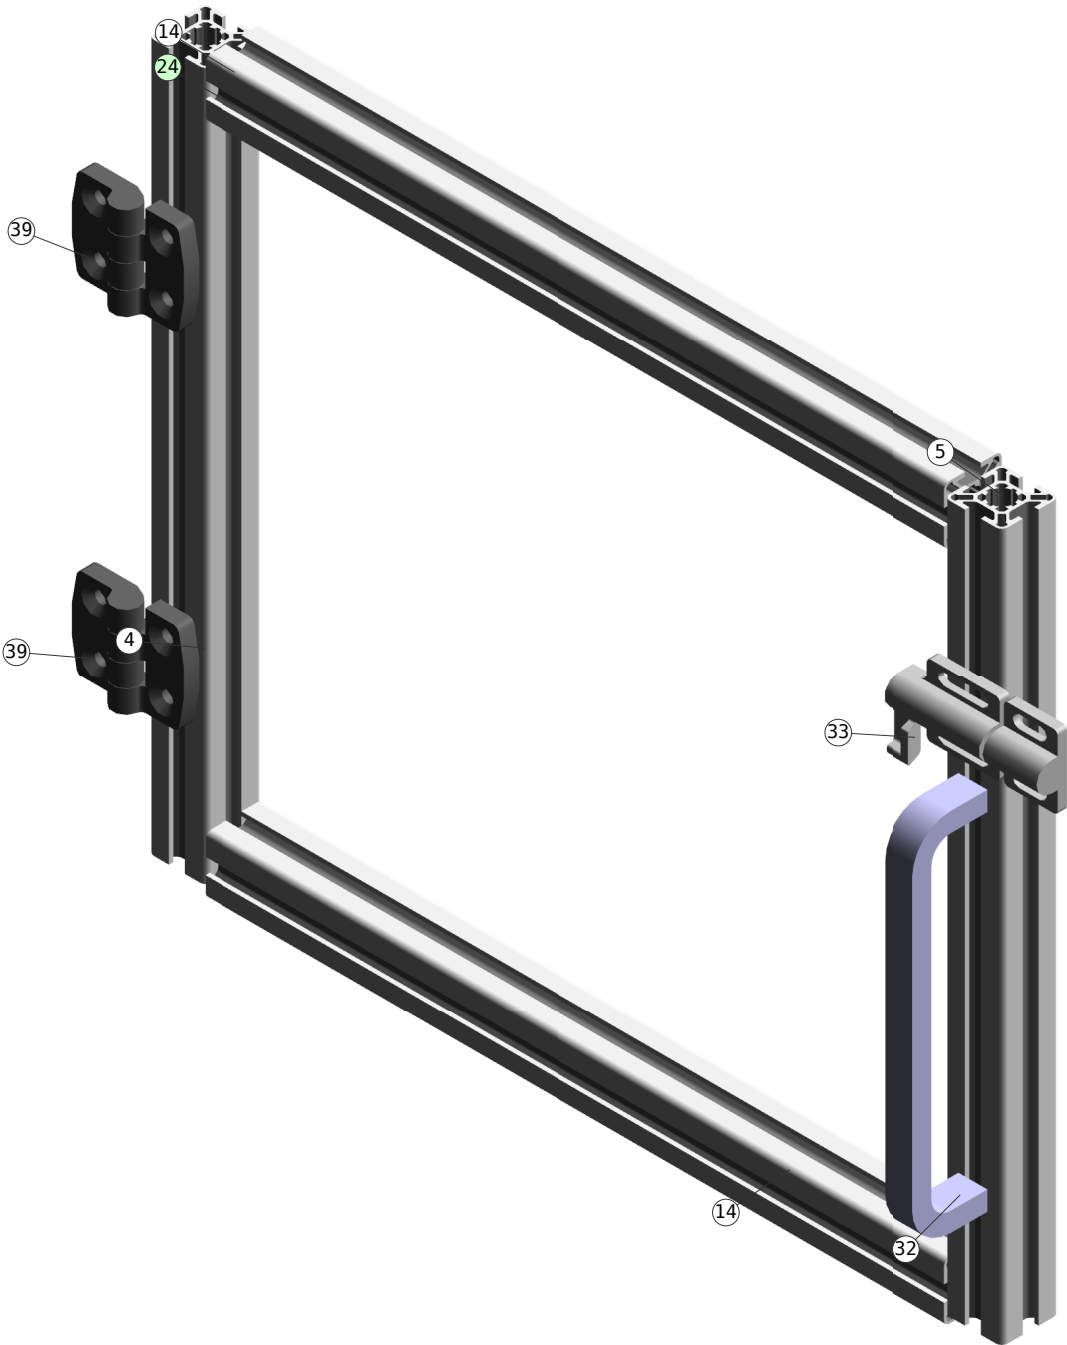


Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.11.030030.43LP-AA3AA3/340	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
2	1.11.030030.43LP-AA1AA4/340	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
			1.21.3F0, Connector, universal	1
3	1.11.030030.43LP-AA2AA2/340	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
6	1.11.030030.43LP-AA1AA1/390	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
7	1.11.030030.43LP-AA4AA4/390	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
			1.21.3F0, Connector, universal	1
9	1.11.030030.43LP-AA4AA4/455	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
10	1.11.030030.43LP-AA1AA1/455	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
11	1.11.030030.43LP-AA2AA2/455	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
12	1.11.030030.43LP-AA2AA2/940	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
13	1.11.030030.43LP-AA1AA1/340	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	4
14	1.11.030030.43LP-AA4AA4/385	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	4
15	1.11.030030.43LP-AA4AA4/940	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
			1.21.3F0, Connector, universal	2
16	1.11.030030.43LP-AA4AA4/340	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	3
			1.21.3F0, Connector, universal	3
17	1.11.030030.43LP-A00AA4/420	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	3
32	1.61.210	Handle light	0.63.D06912.05035, Cylindric head screw, DIN 6912 - M5x35	2
33	1.65.2538078	Lock GD-ZN	0.63.D06912.06012, Cylindric head screw, DIN 6912 - M6x12	4
			1.32.4FM6, T-Nut for subsequent insertion, w. spring F, M6	4
39	1.62.448.17/17	Hinge 48 fixed, A 17.5	1.32.4FM6, T-Nut for subsequent insertion, w. spring F, M6	8
			0.63.D07991.06010, Flat head screw, DIN 7991 - M6x10	8


Profile machining details




DRAWING 1, Pos 5
SIDE 1, bar length: 368.0 mm



DRAWING 1, Pos 5
SIDE 2




DRAWING 1, Pos 5
SIDE 3

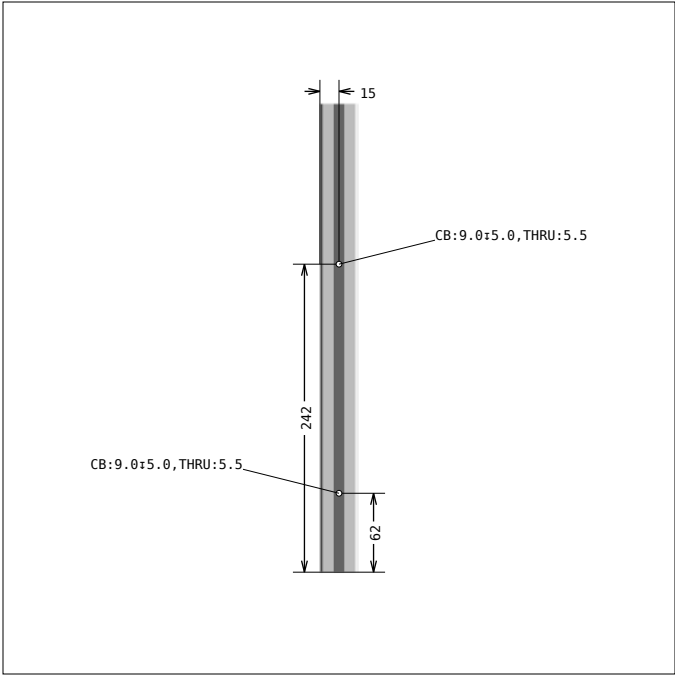


DRAWING 1, Pos 5
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Panels

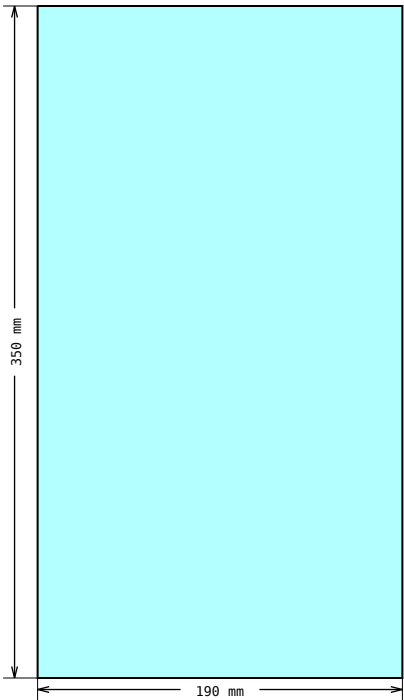


DRAWING 2, Pos 20
Shape measurements

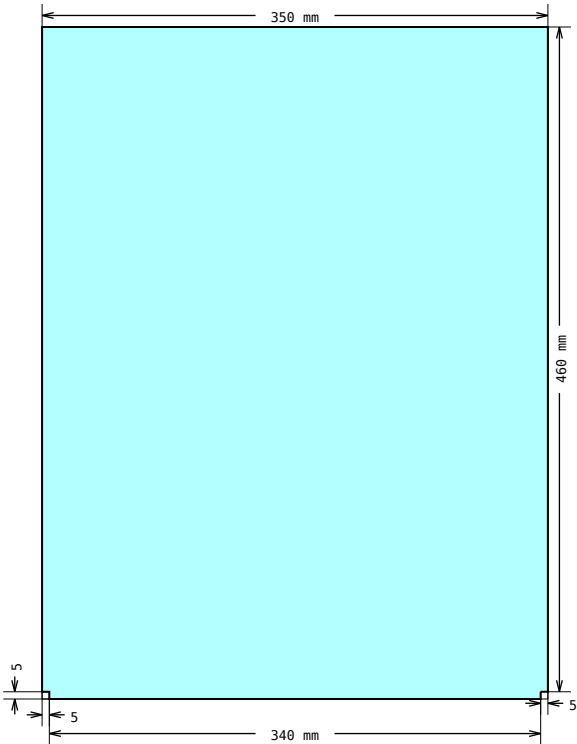

DRAWING 3, Pos 21
Shape measurements

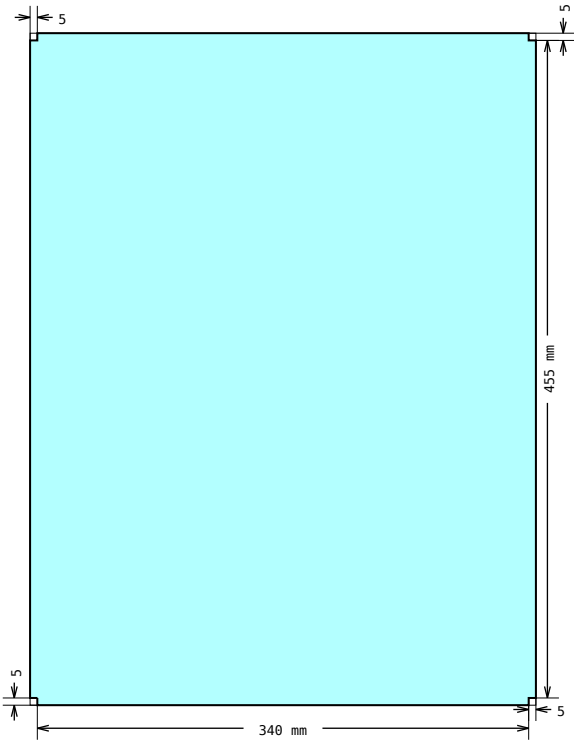


DRAWING 4, Pos 22
Shape measurements

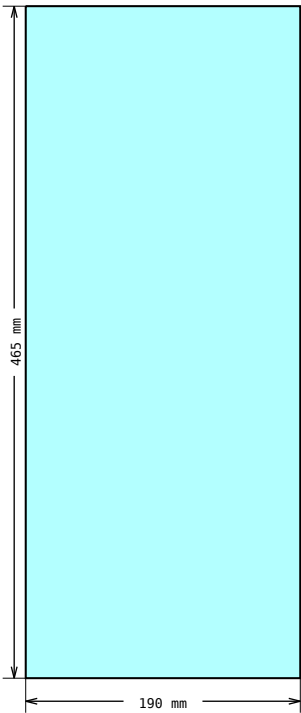


DRAWING 5, Pos 23
Shape measurements


Panels

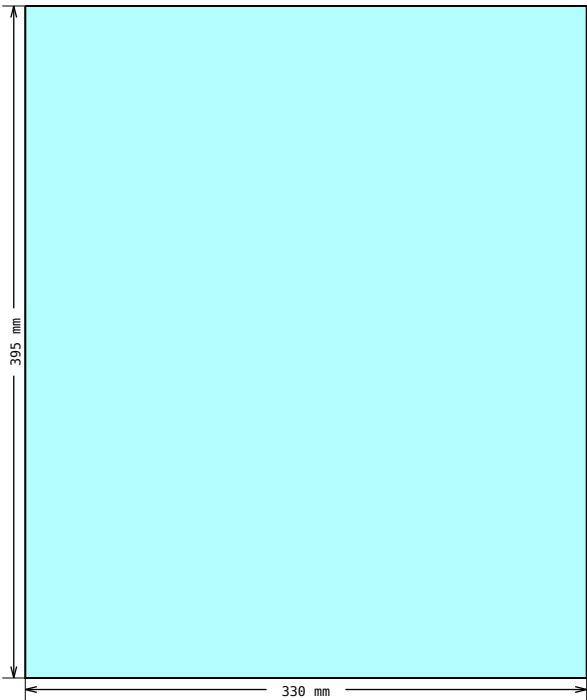


DRAWING 6, Pos 24
Shape measurements

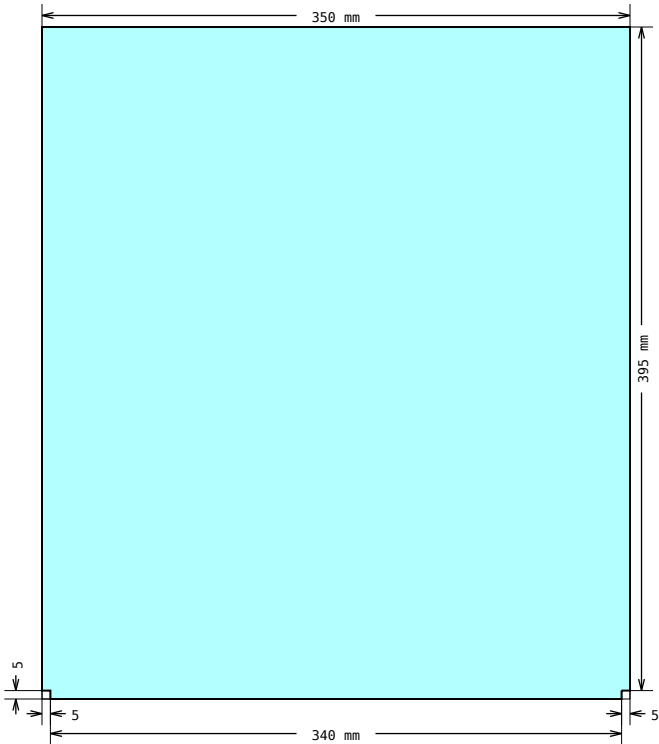

DRAWING 7, Pos 25
Shape measurements

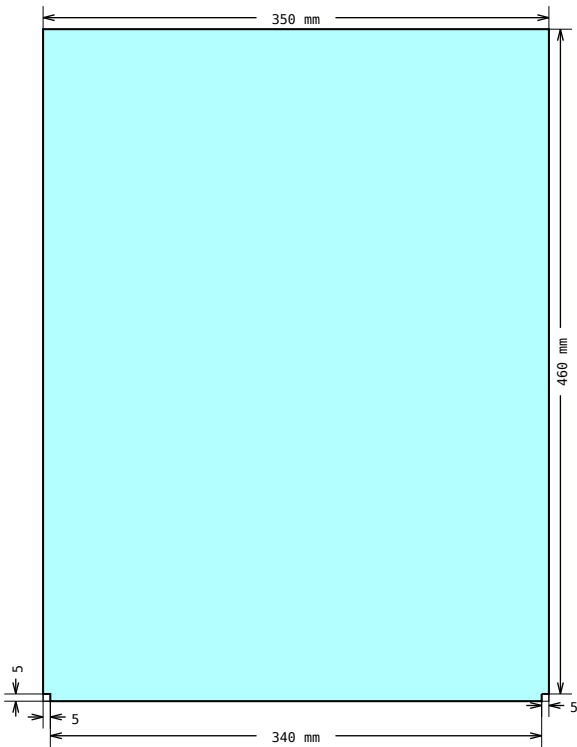


DRAWING 8, Pos 26
Shape measurements

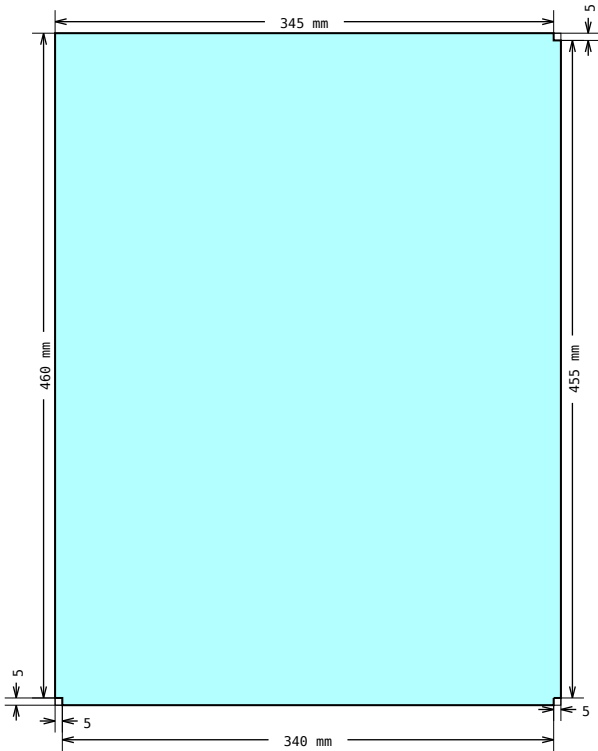


DRAWING 9, Pos 27
Shape measurements

Panels

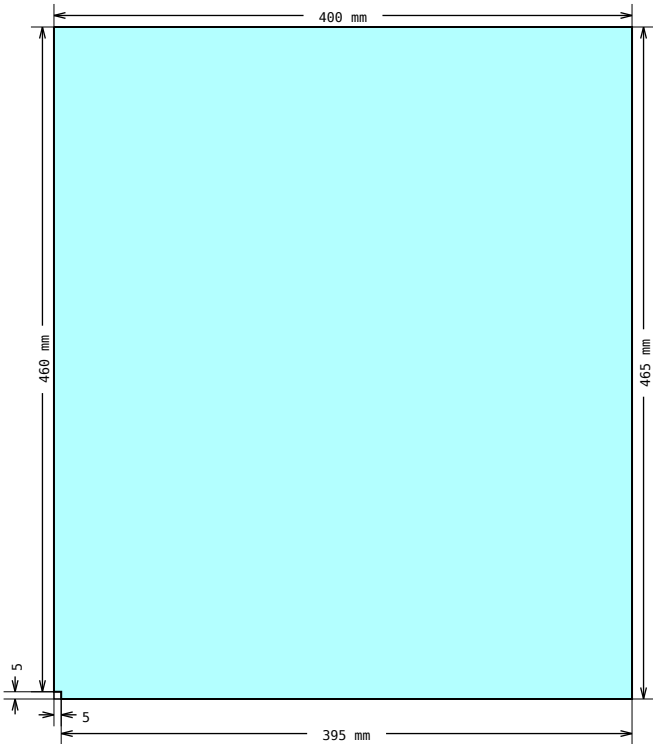

DRAWING 10, Pos 28
Shape measurements





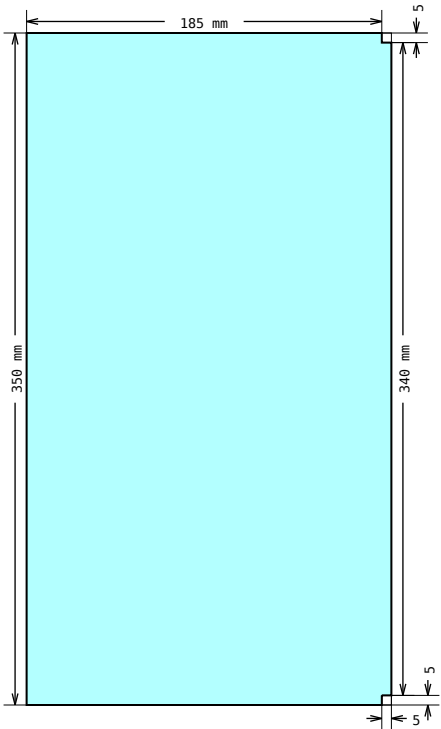


DRAWING 11, Pos 29
Shape measurements



Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts												Waste (mm)
1.11.030030.43LP													
17 17 17 8 11 10 9 15 15 12 420.0420.0420.0450.0455.0455.0940.0940.0940.0													70.0 mm
3 13 2 1 16 13 16 16 5 4 14 14 7 6 340.0340.0340.0340.0340.0340.0340.0368.0368.0385.0385.0390.0390.0													945.0 mm

Assembly hints

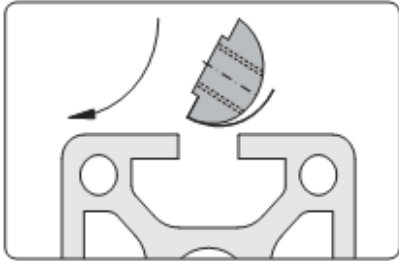ACCESSORY	1.32.4FM6	T-Nut for subsequent insertion, w. spring F, M6
 Fixing with leaf spring  Insert front-sided and rotate Application Fastening element for screw-type connections Technical data Design steel: • material: steel • surface: galvanised Design stainless: • material: stainless steel 1.4305 • surface: pickled and passivated max. moment of torque: $M_{A, max}$		These t-nuts are easily inserted into assembled frames
CONNECTOR	1.21.3F0	Connector, universal
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side		Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.

Assembly hints

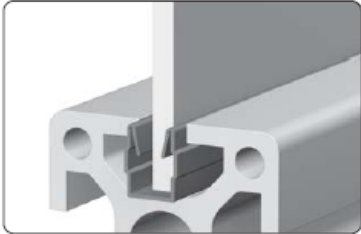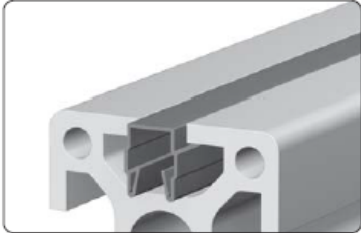None	1.41.F14.1	Combination profile PP, F, 1-4.5, grey (bar 2.5 m)
	1.41.F46.1	Combination profile PP, F, 4.5-6, grey (bar 2.5 m)
 Use as reduction profile  Use as slot-cover profile Application Combination profiles for use as reduction or cover profiles Technical data bar length: 2.5 m material: PP • oil and water resistant Colours: grey black orange red blue green These profiles fill the space between the panel and the walls of the T-slot.		