


Design Title : TABLE 3.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

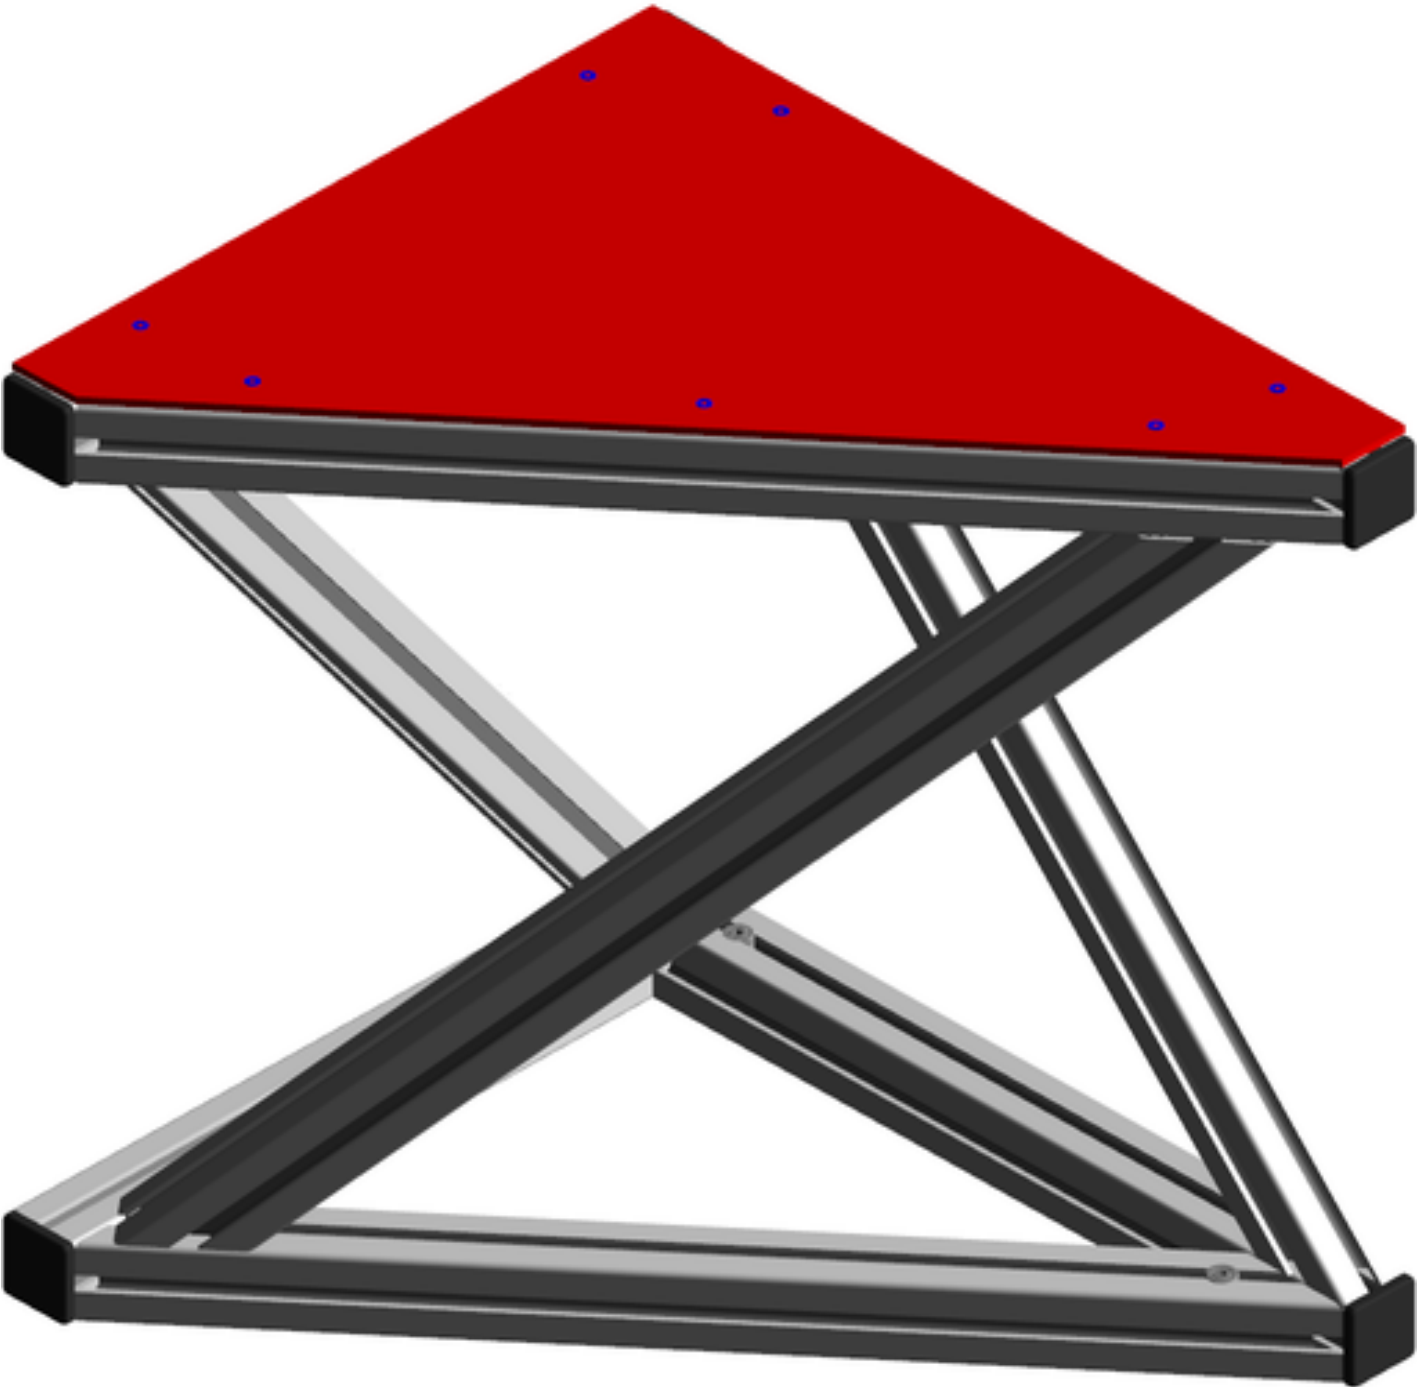


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.040040.43LP-EA1DA1/529.6	Profile 40x40, 4E, light, plain Special angle, Right: 40.0°; Special angle, Left: 40.0°; **PER DRAWING 1**	MM	1
2	1.11.040040.43LP-DA3EA3/577.4	Profile 40x40, 4E, light, plain **PER DRAWING 2**	MM	1
3	1.11.040040.43LP-EA3DA3/638.9	Profile 40x40, 4E, light, plain Special angle, Right: 50.0°; Special angle, Left: 50.0°; **PER DRAWING 3**	MM	1
4	1.11.040040.43LP-A00A00/400	Profile 40x40, 4E, light, plain	MM	2
5	1.11.040040.43LP-AA4A00/430	Profile 40x40, 4E, light, plain	MM	2
6	1.11.040040.43LP-DA1DA1/560.1	Profile 40x40, 4E, light, plain Special angle, Right: 50.0°; Special angle, Left: 40.0°; **PER DRAWING 4**	MM	2
8	1.42.20404.2	Cover cap 40x40, dia: 12, black	EA	5
9	0.63.D07991.04012	Flat head screw, DIN 7991 - M4x12	EA	7
10	1.21.4E0	Connector, universal	EA	2
11	1.21.4EK1	Connector, oblique-hinge l. + r.	EA	10
12	1.31.EM4	Threaded plate E, M4	EA	7
		Frame weight:	7.42 kg (16.37 lbs)	
7	2.87.1571-99	Polycarbonat 4mm, SIZE: 330.42MM x 615.74MM **PER DRAWING 5**	SM	1
		Panels weight:	0.48 kg (1.06 lbs)	
		Total Weight:	7.91 kg (17.43 lbs)	


Isometric view
Some accessories may not be shown




Multiview

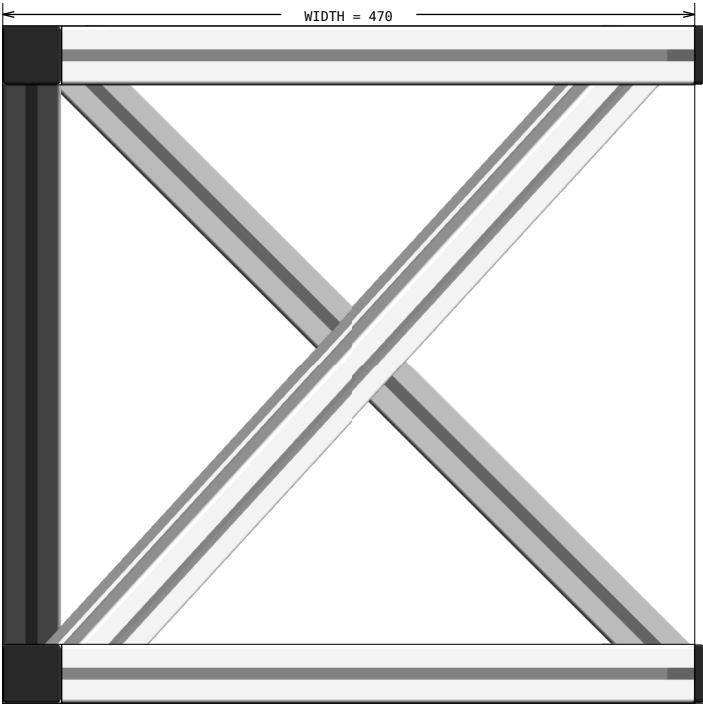

FRONT

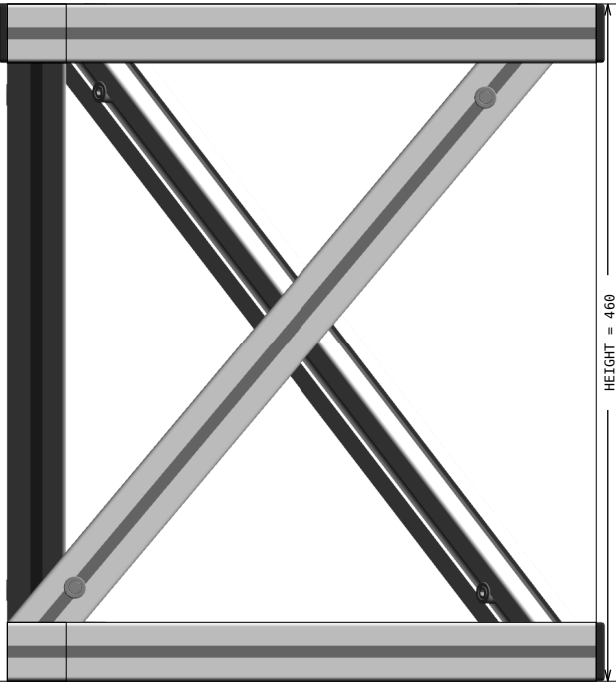

LEFT

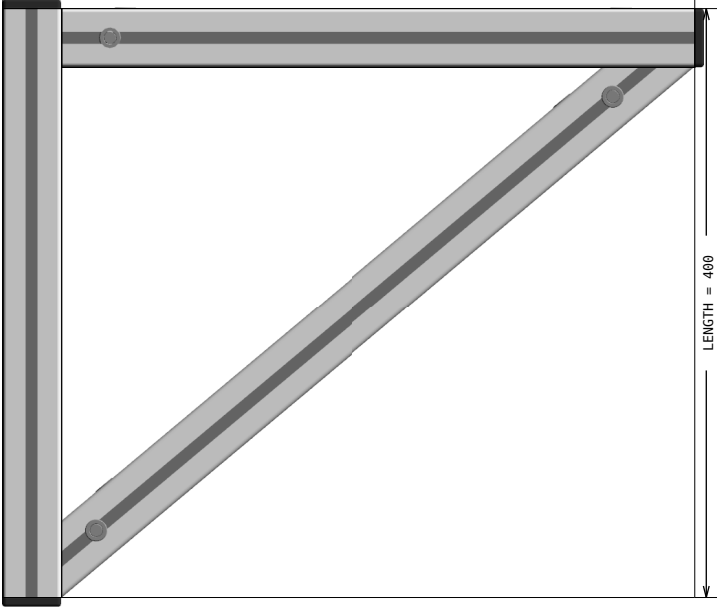



TOP




ISOMETRIC


FRONT VIEW

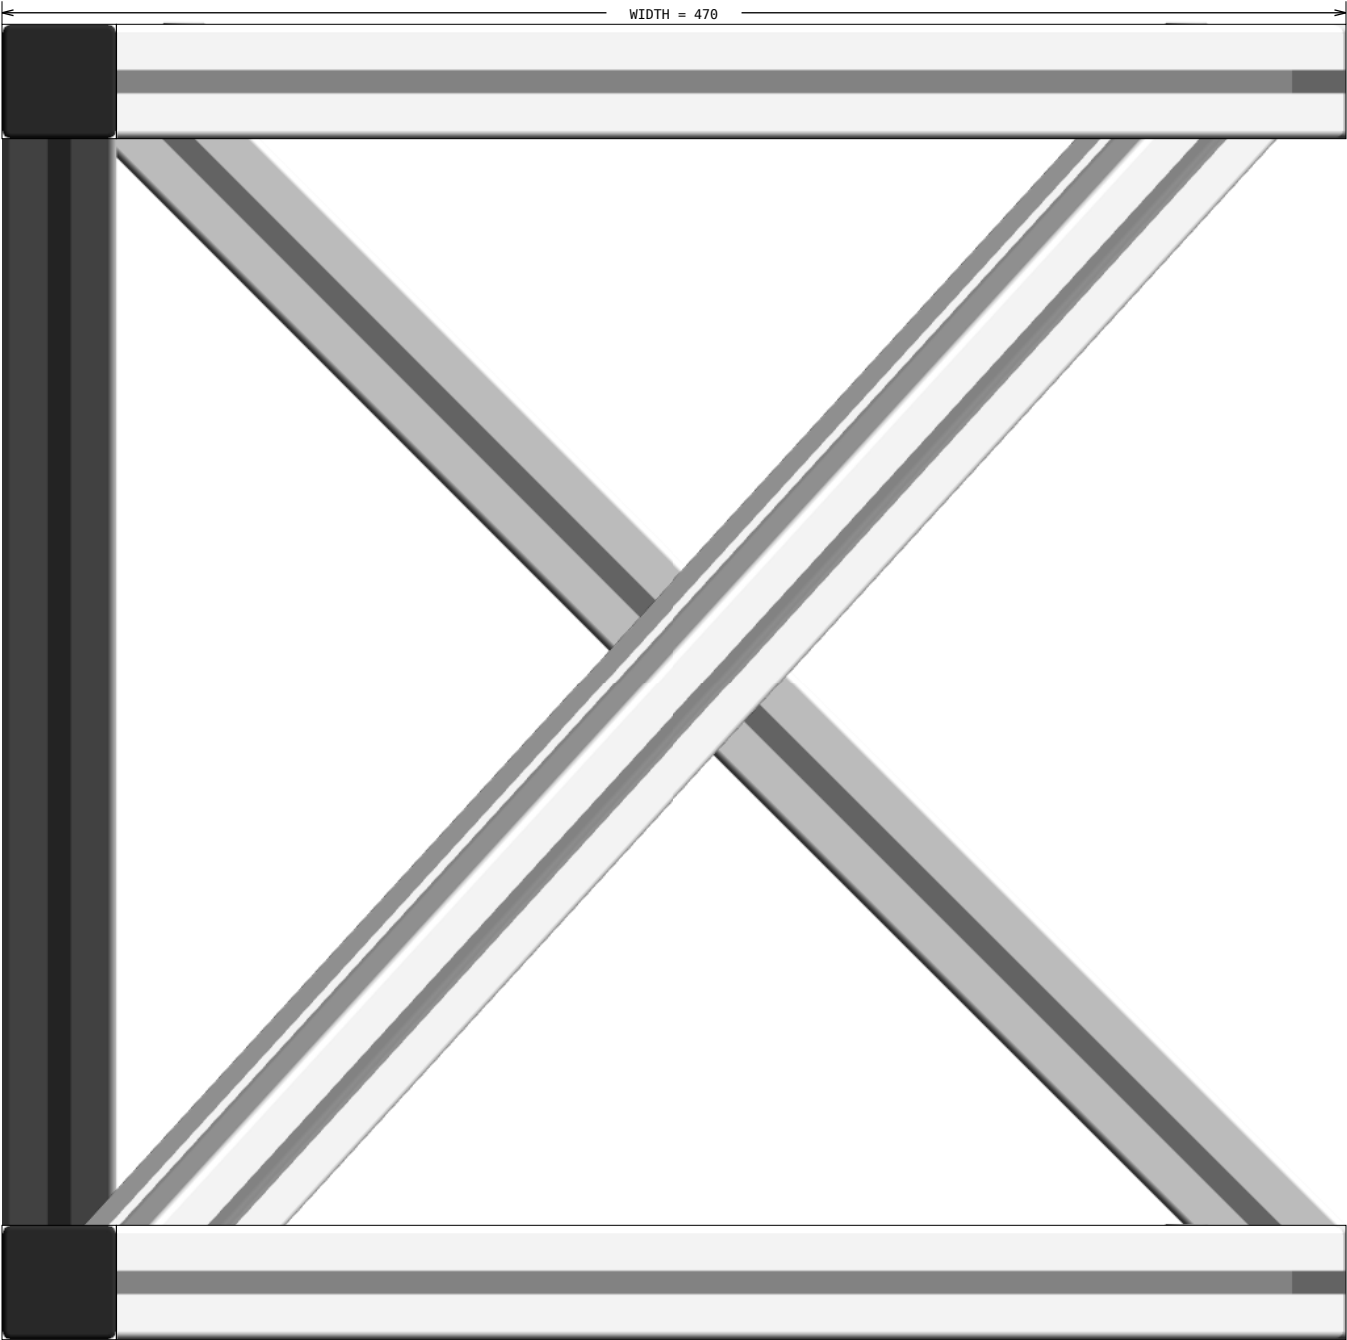

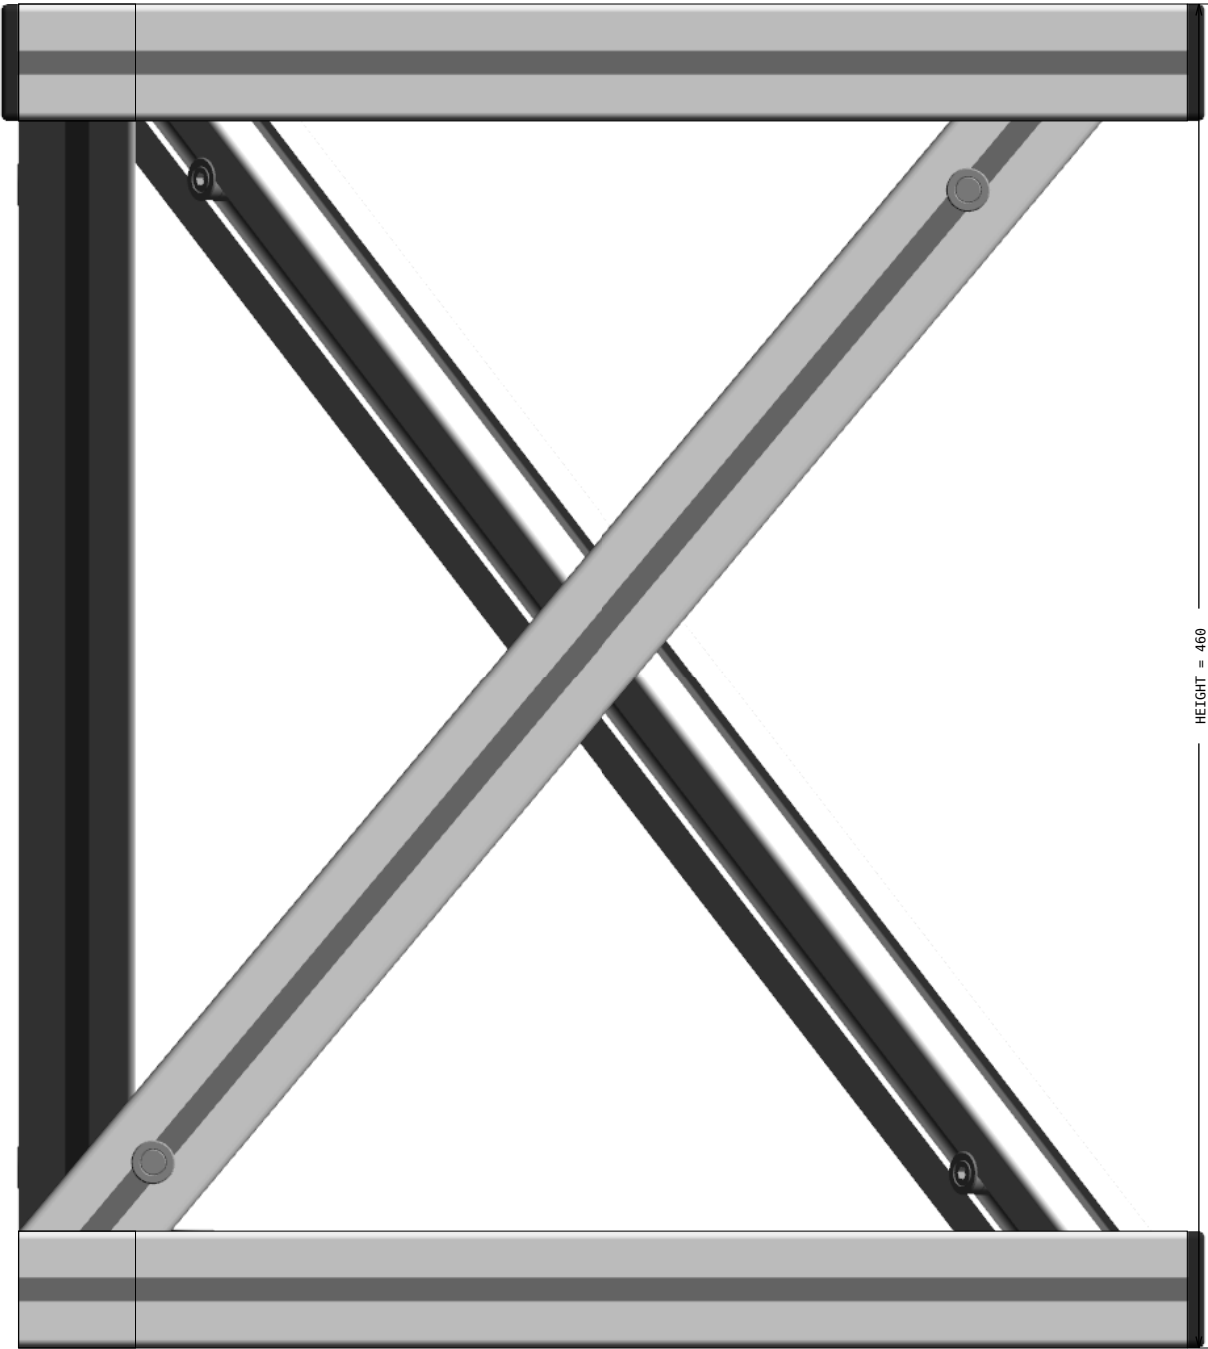

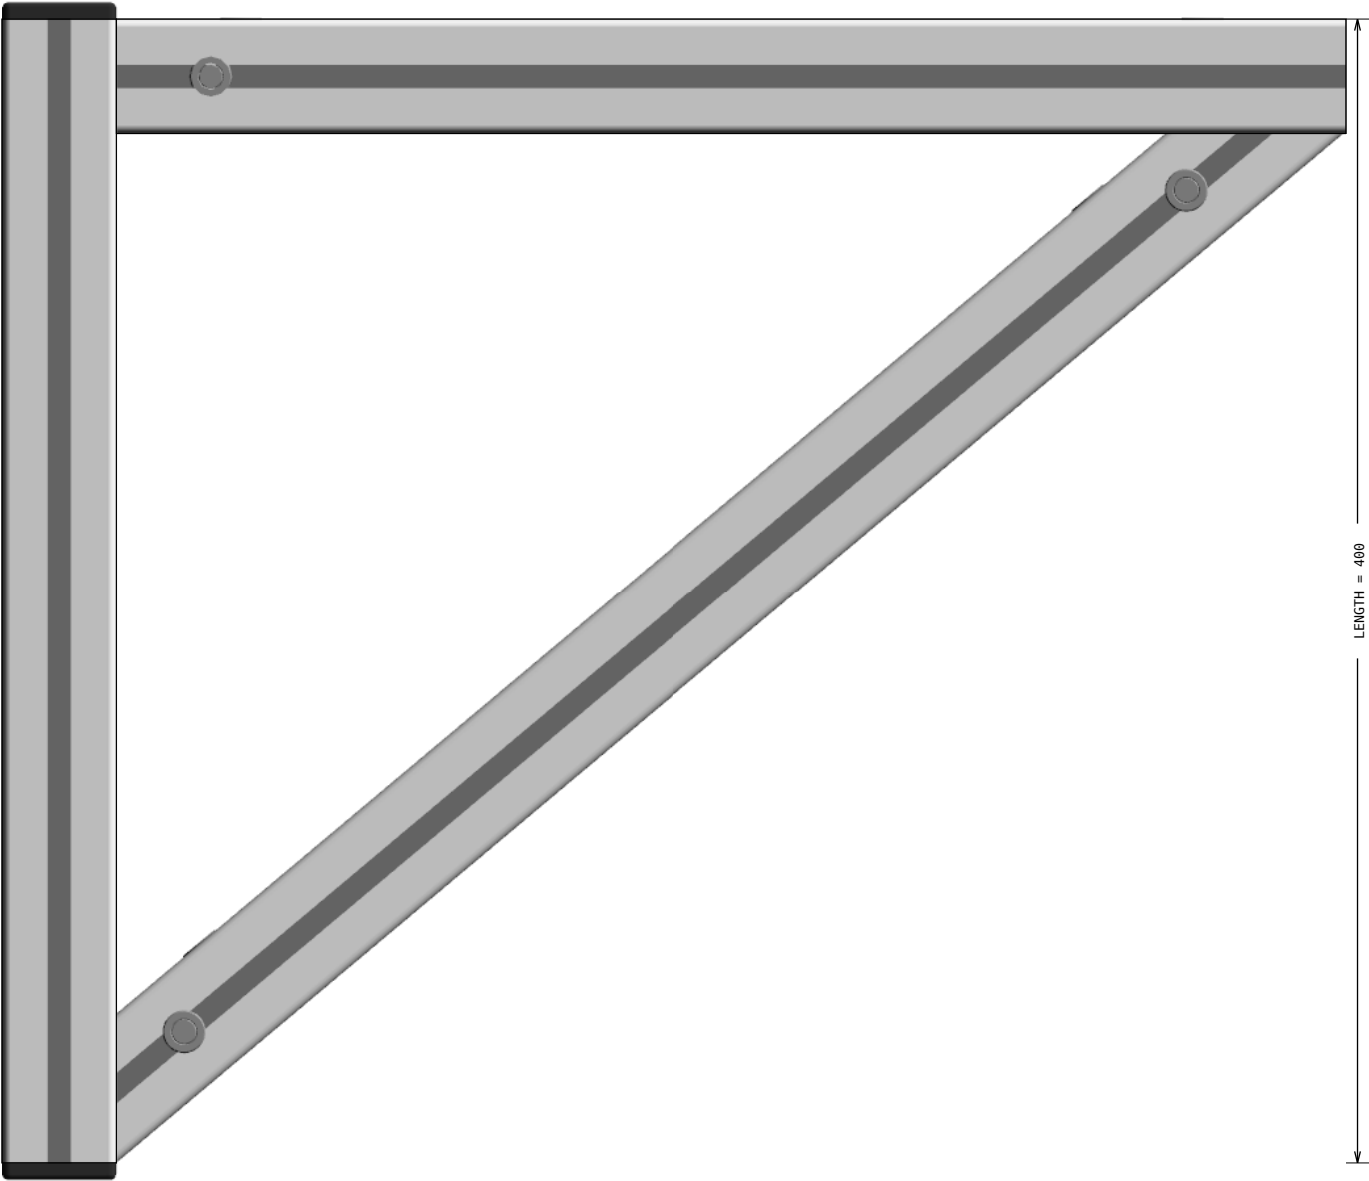


LENGTH = 400

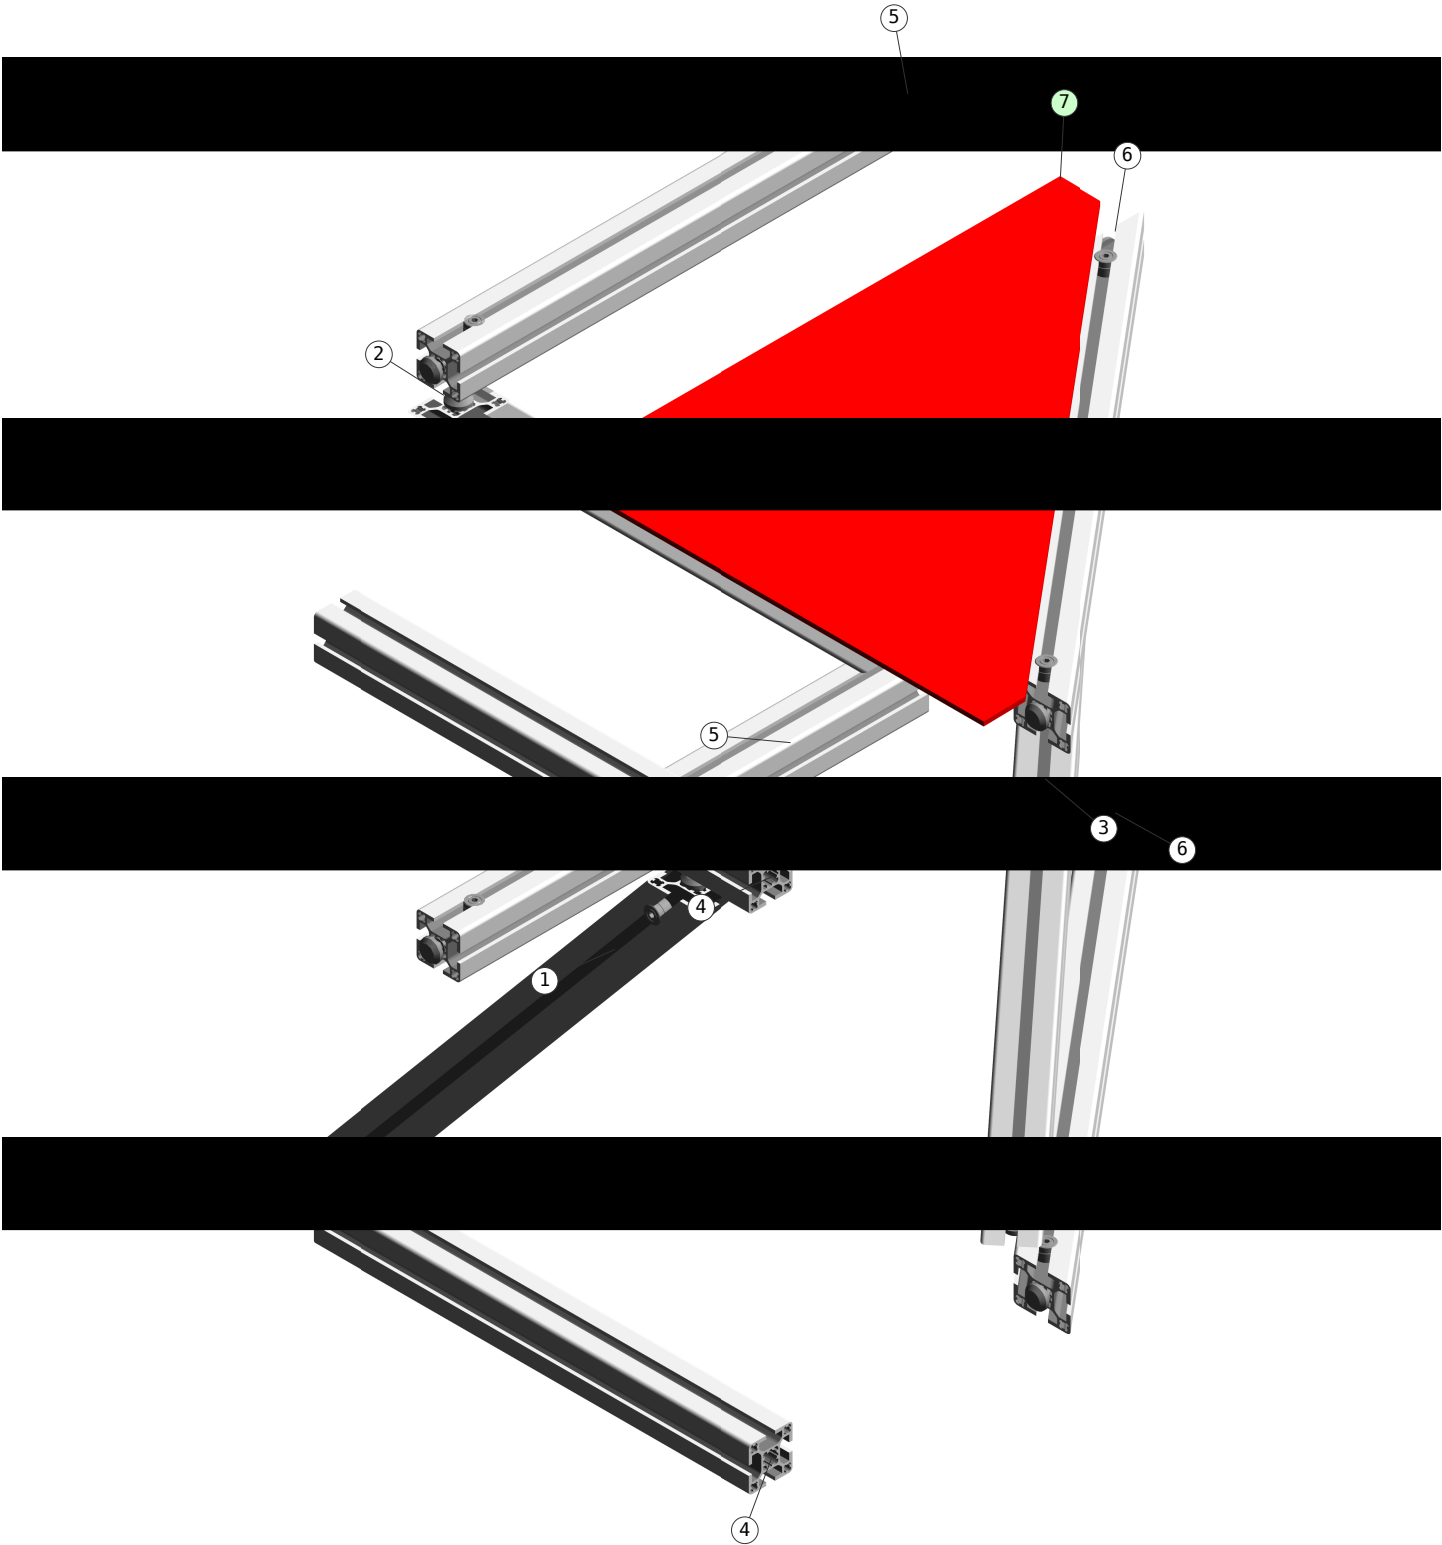

Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.11.040040.43LP-EA1DA1/529.6	Profile 40x40, 4E, light, plain	1.21.4EK1. Connector. oblique-hinge l. + r.	2
2	1.11.040040.43LP-DA3EA3/577.4	Profile 40x40, 4E, light, plain	1.21.4EK1. Connector. oblique-hinge l. + r.	2
3	1.11.040040.43LP-EA3DA3/638.9	Profile 40x40, 4E, light, plain	1.21.4EK1. Connector. oblique-hinge l. + r.	2
5	1.11.040040.43LP-AA4A00/430	Profile 40x40, 4E, light, plain	1.21.4E0. Connector. universal	2
6	1.11.040040.43LP-DA1DA1/560.1	Profile 40x40, 4E, light, plain	1.21.4EK1. Connector. oblique-hinge l. + r.	4
7	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04012, Flat head screw, DIN 7991 - M4x12 1.31.EM4, Threaded plate E, M4	7 7


Profile machining details

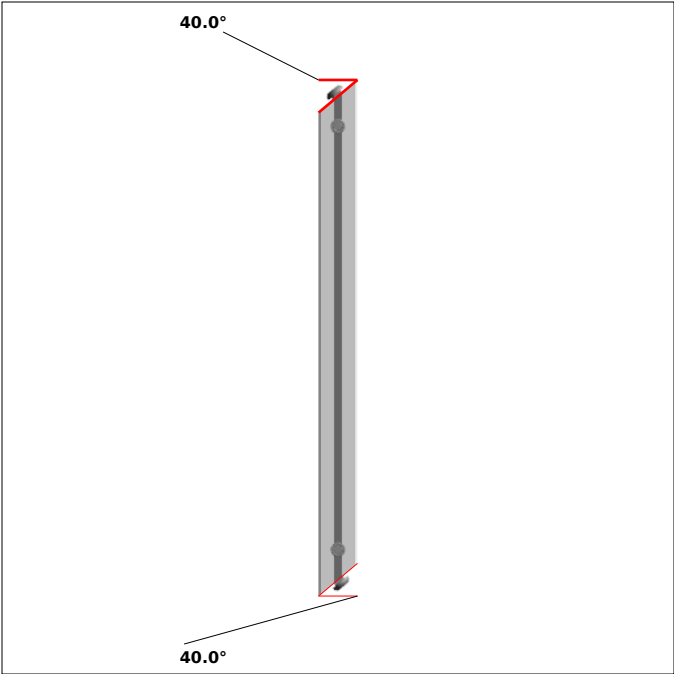

DRAWING 1, Pos 1
SIDE 1, bar length: 529.6 mm



DRAWING 1, Pos 1
SIDE 2

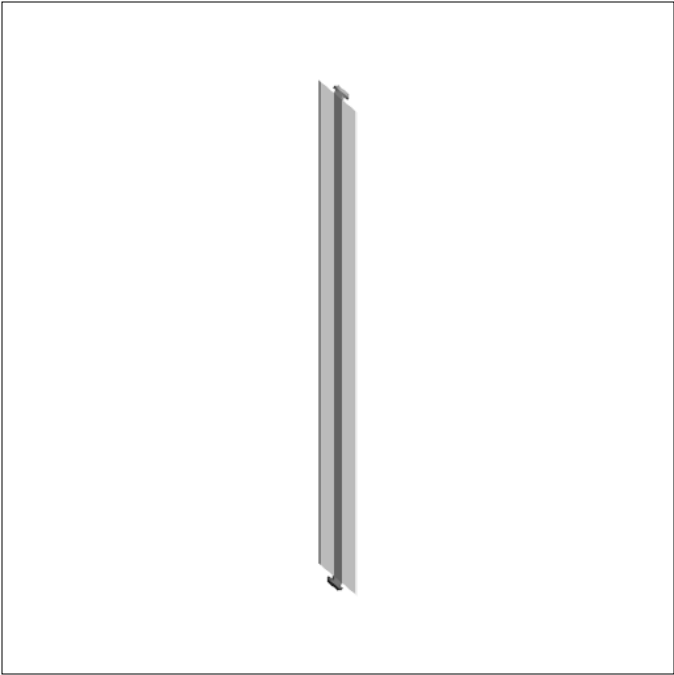


DRAWING 1, Pos 1
SIDE 3



DRAWING 1, Pos 1
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

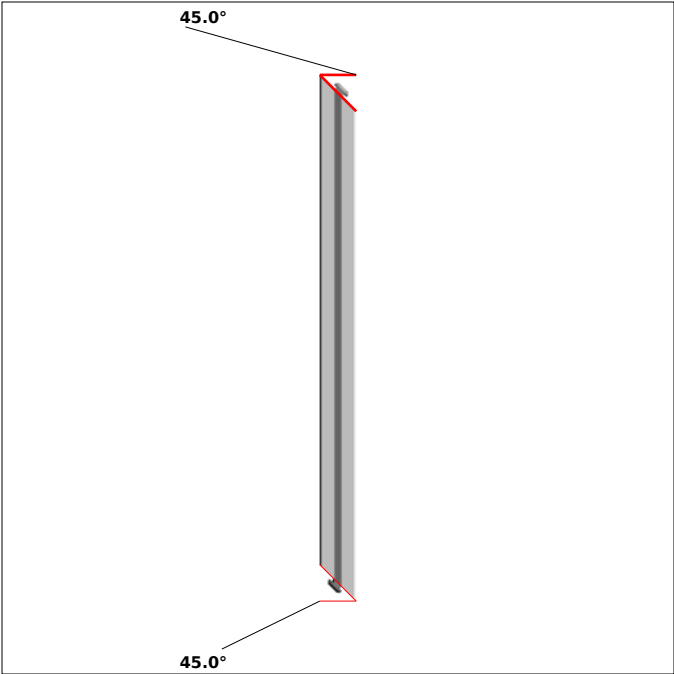


DRAWING 2, Pos 2
SIDE 1, bar length: 577.4 mm



DRAWING 2, Pos 2
SIDE 2

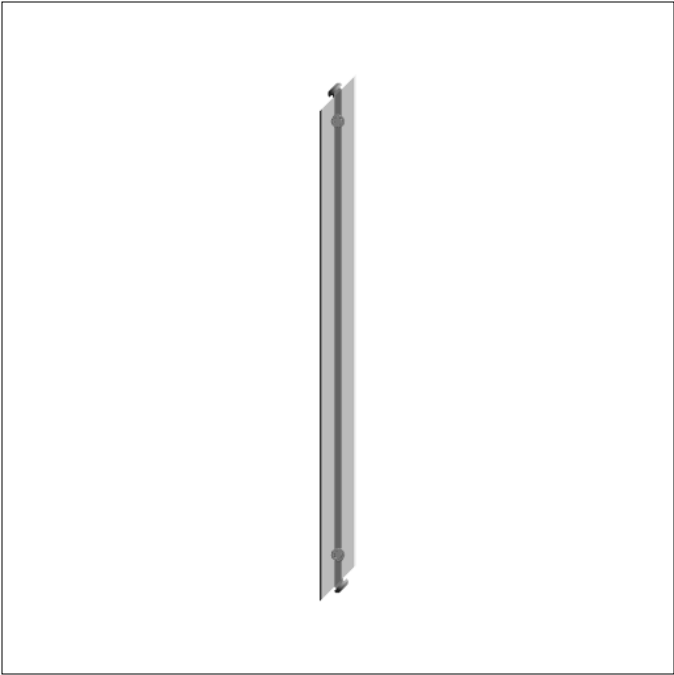


DRAWING 2, Pos 2
SIDE 3

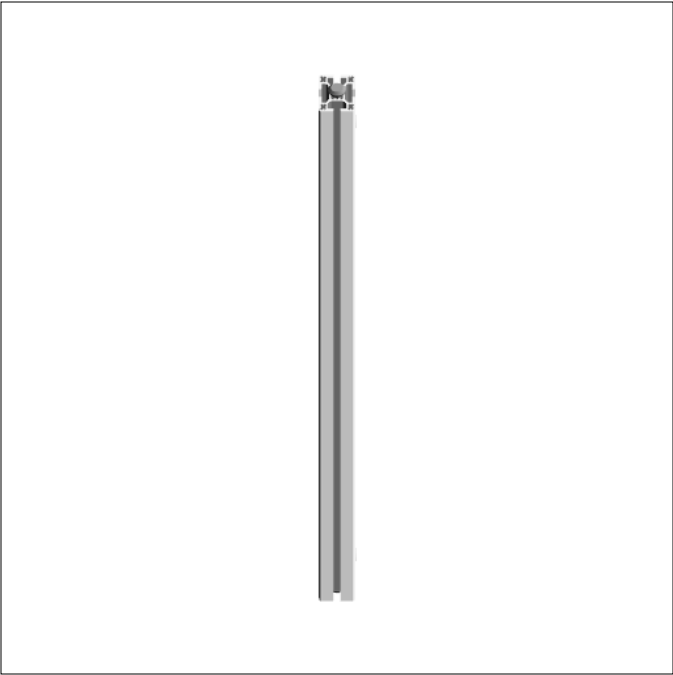

DRAWING 2, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

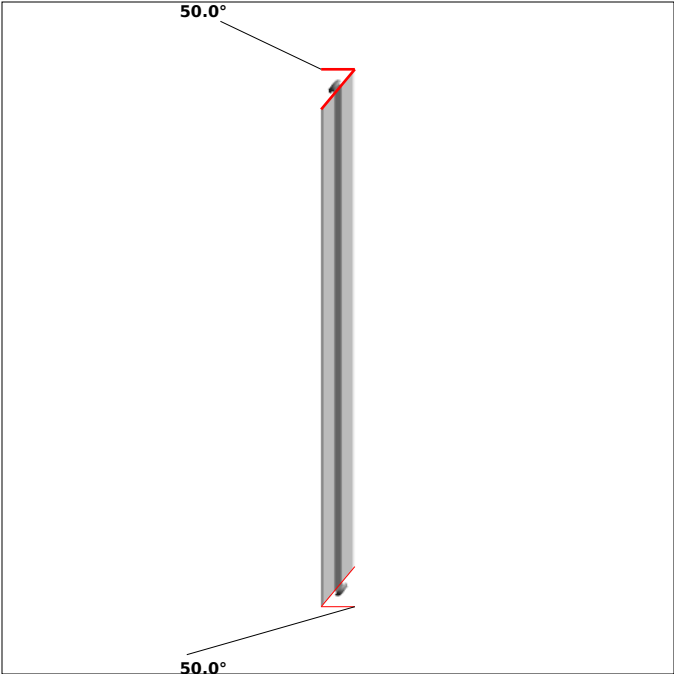

DRAWING 3, Pos 3
SIDE 1, bar length: 638.9 mm



DRAWING 3, Pos 3
SIDE 2




DRAWING 3, Pos 3
SIDE 3



DRAWING 3, Pos 3
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

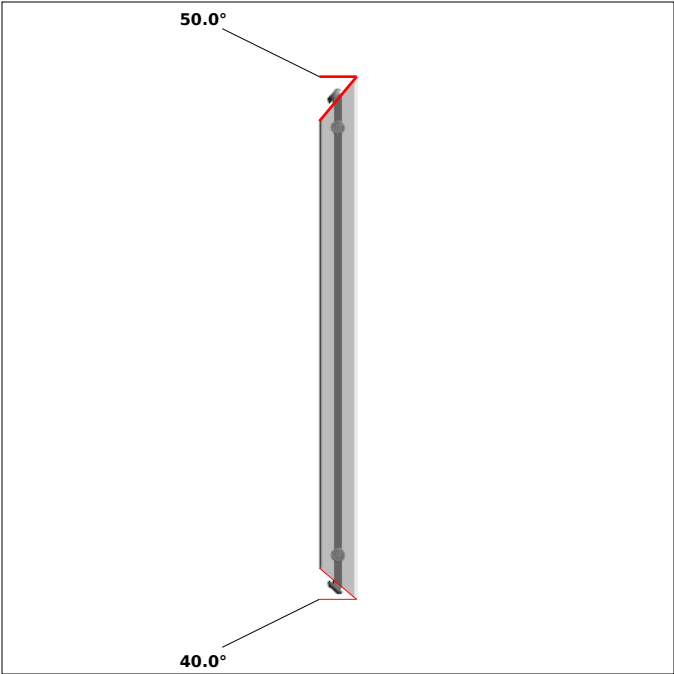


DRAWING 4, Pos 6
SIDE 1, bar length: 560.1 mm



DRAWING 4, Pos 6
SIDE 2

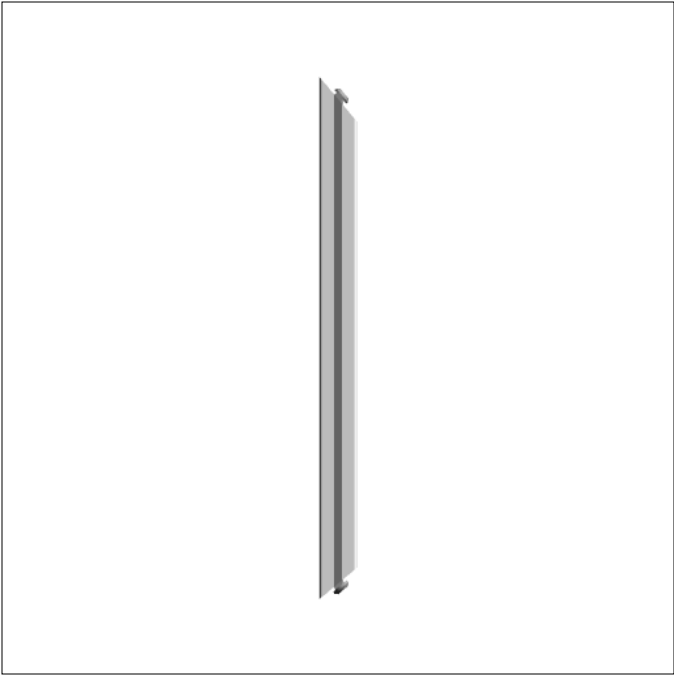


DRAWING 4, Pos 6
SIDE 3

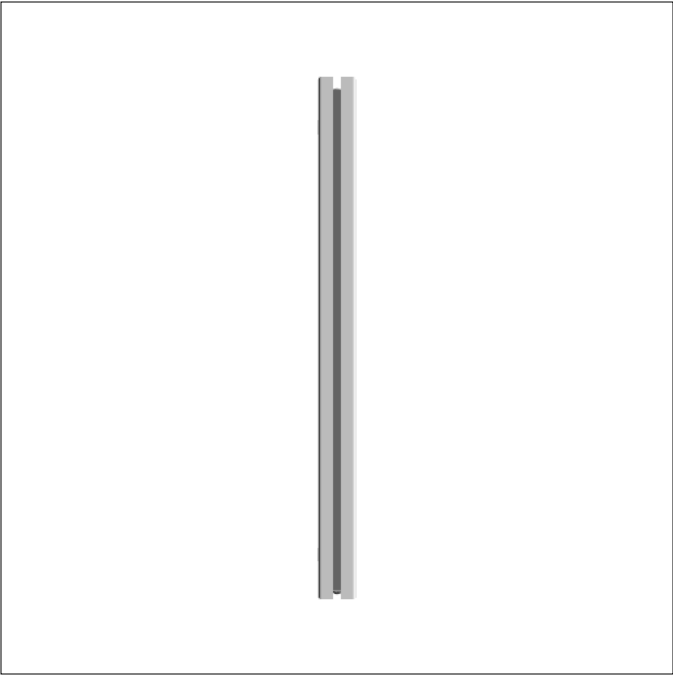


DRAWING 4, Pos 6
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Panels

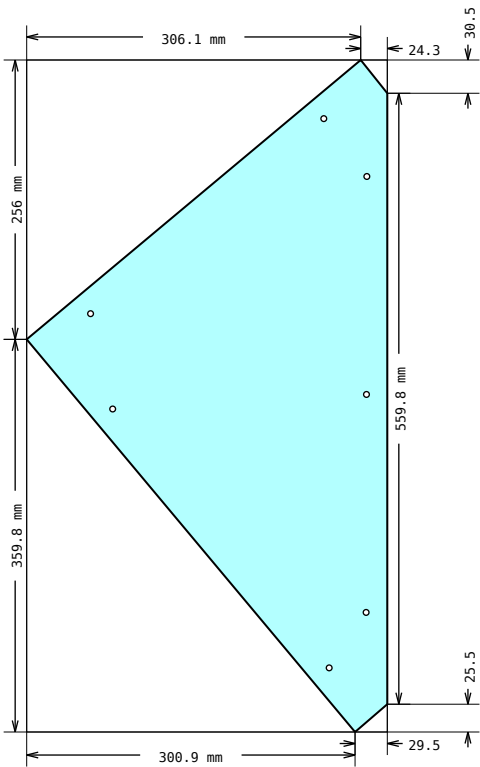

DRAWING 5, Pos 7
Shape measurements

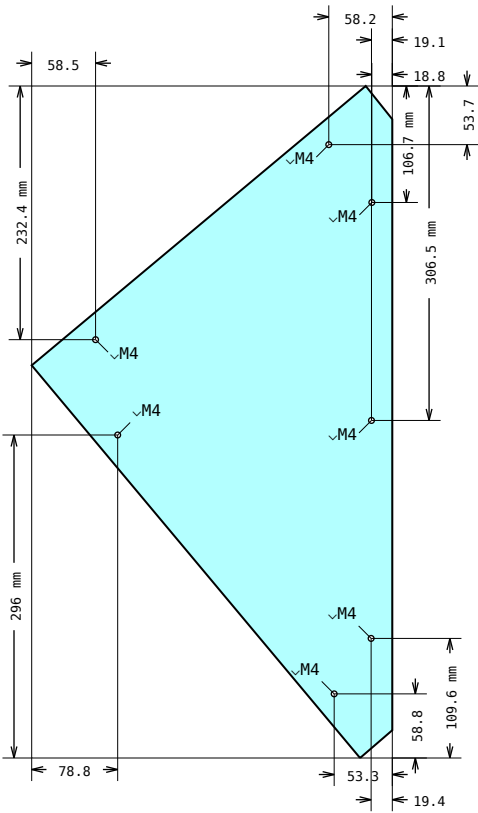

DRAWING 5, Pos 7
Hole placement



Connectors for profiles with core hole-Ø 12 mm

1.21.4E0

Connection	Connector	Finished dimension	PG	Article-No. for connector with E-head		
				steel standard	E	VA
Universal			40	1.21.4E0	E	V

Connector types and materials

Technical data				
Connector	Article-No.	Material	Strength	Surface
Standard ground	1.21.4E0 1.21.4E0 E	steel	≥ 650 N/mm²	galvanised
Standard VA	1.21.4E0 V	stainless steel 1.4305	490 - 685 N/mm²	pickled and passivated


Strength values for profile connections with MayTec-Connectors

Torque tightening values for connector setscrew

PG	Slot	Setscrew special execution	Torque value	
			recommended	max.
40	E	M10×12	30.0 Nm	40.0 Nm

Comments
The max. tightening values are only valid for the MayTec setscrew and can not be reached by the usual commercial quality standard.


Tension load




PG	Slot	Connector	max. Tensile strength
40	E	Universal	12,000 N

Comments
All values given have been tested with pretension of the connectors and maximum torque value and refer to the connection of two identical profiles.

Slide load



Flexure load



PG	Slot	Profile	Pcs	max. Slide strength		max. Flexure strength		
				Connector, Universal		E-connector		
40	E	40×40	1	6,000 N	9,000 N	250 Nm		
		40×80	2	12,000 N	18,000 N		500 Nm	1,000 Nm
		80×80, 8E	4	24,000 N	36,000 N	2,000 Nm		







The listed values are valid for all light and heavy profiles

E = ground-connector, VA = stainless steel 1.4305


Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.040040.43LP	④ ④ ⑤ ⑤ ① ⑥ ⑥ ② ③	1442.5 mm
	400.0400.0430.0430.0529.6560.1560.1577.4638.9	

Assembly hints

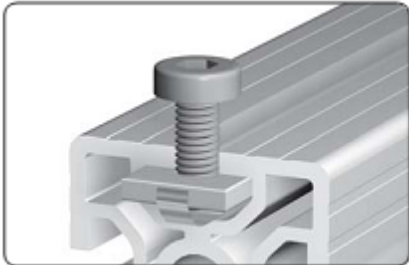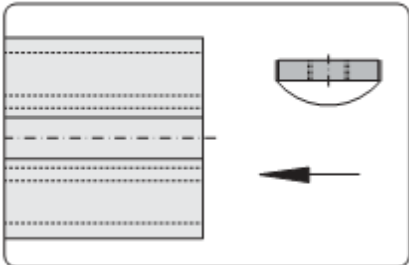CONNECTOR	1.21.4E0	Connector, universal	 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
None	1.31.EM4	Threaded plate E, M4	 Fixed into position with leaf spring  Assembly Insert from end These plates must be inserted from the open side of the profile, prior to final frame assembly

Assembly hints

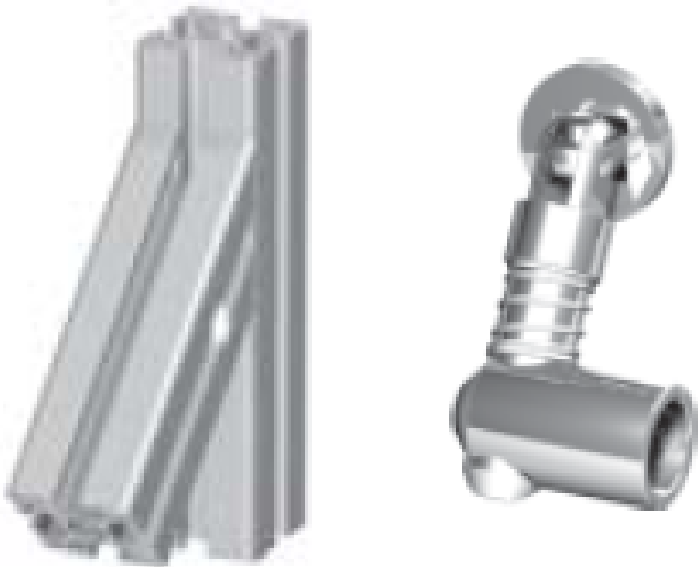CONNECTOR	1.21.4EK1	Connector, oblique-hinge l. + r.
		This type of connector assembles similar to universal connector