


Design Title : Menu.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-23

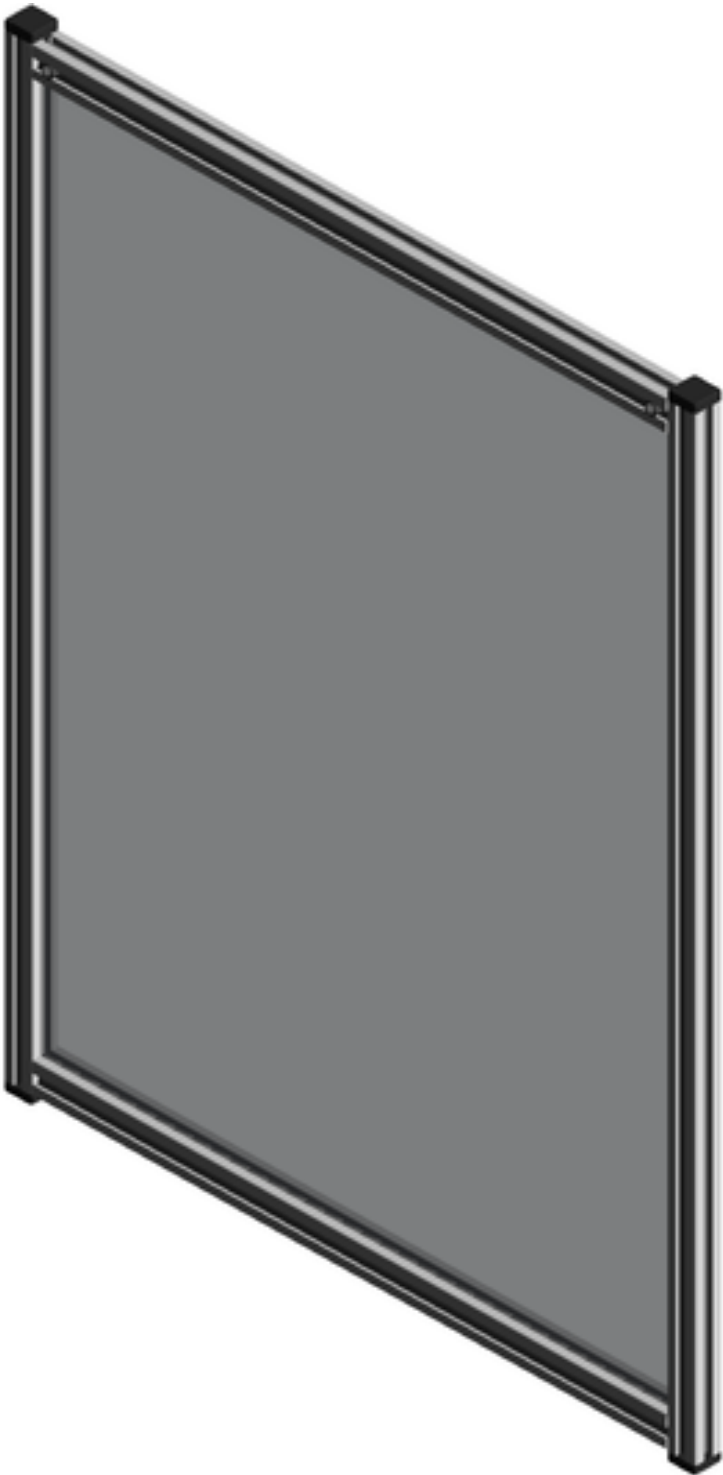



Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA4AA4/450	Profile 20x20, 4H, light, plain	MM	2
2	1.10.020020.43LP-A00A00/600	Profile 20x20, 4H, light, plain	MM	2
3	1.41.H04.1	Combination profile PVC, H, B4, grey (bar 2.5 m)	EA	1
5	1.42.10202.2	Cover cap 20x20, black	EA	4
6	1.20.2H0	Connector, universal	EA	4
		Frame weight:	1.40 kg (3.08 lbs)	
4	2.87.1571-99	Polycarbonat 4mm, SIZE: 458.00MM x 568.00MM **PER DRAWING 1**	SM	1
		Panels weight:	1.11 kg (2.44 lbs)	
		Total Weight:	2.50 kg (5.52 lbs)	

Isometric view
Some accessories may not be shown




Multiview

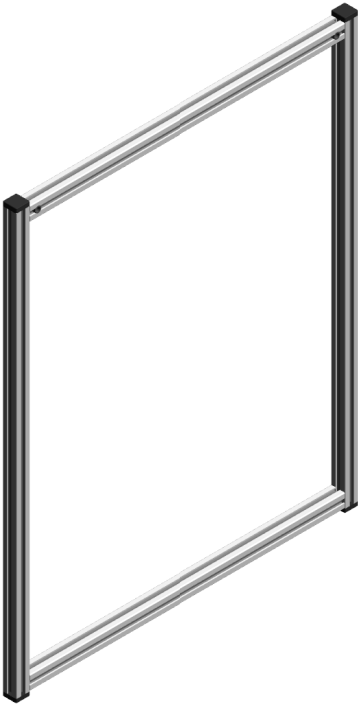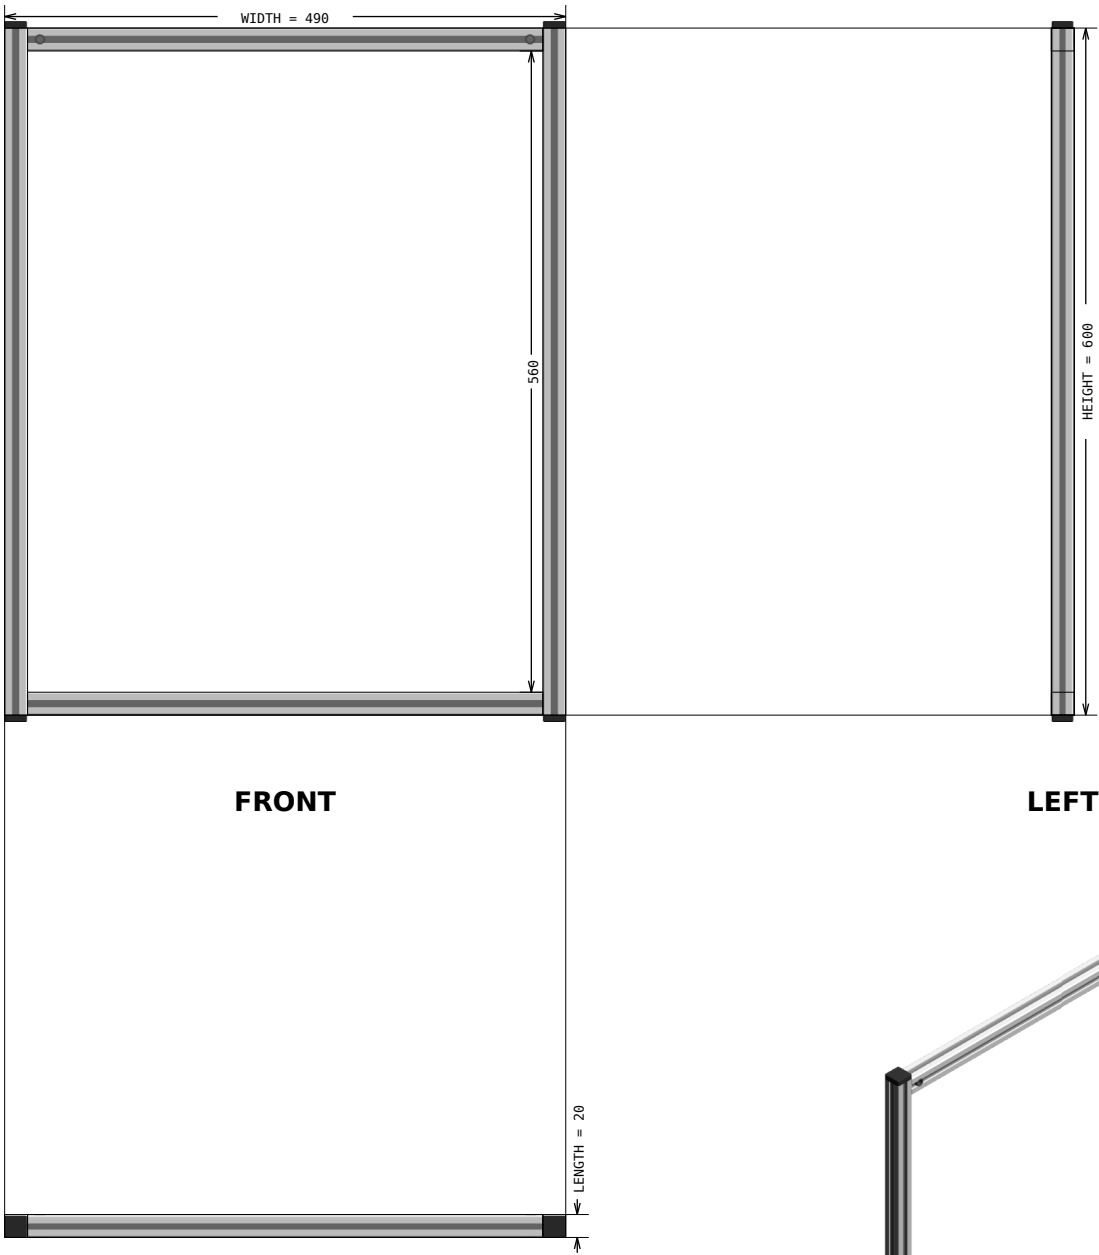


ISOMETRIC








Exploded view

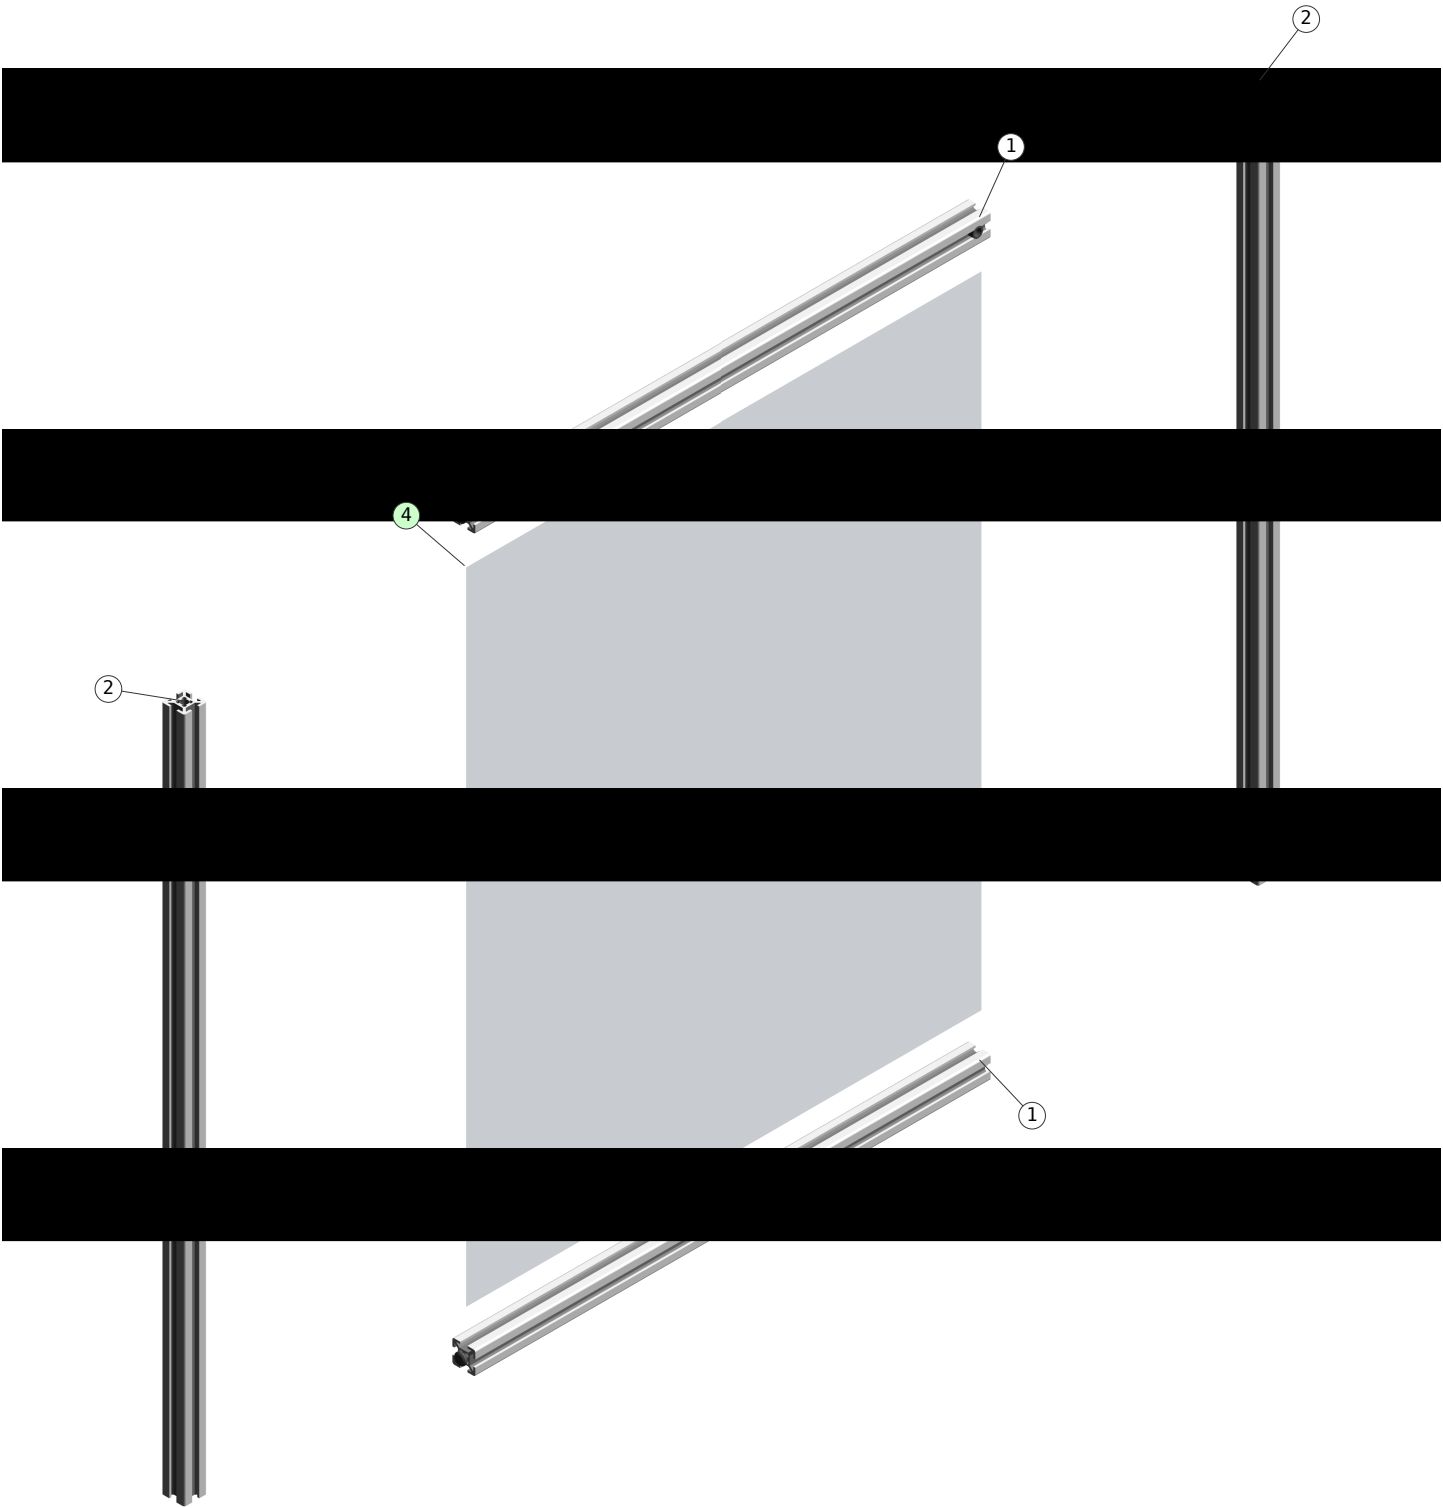

Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA4AA4/450	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	4

Panels






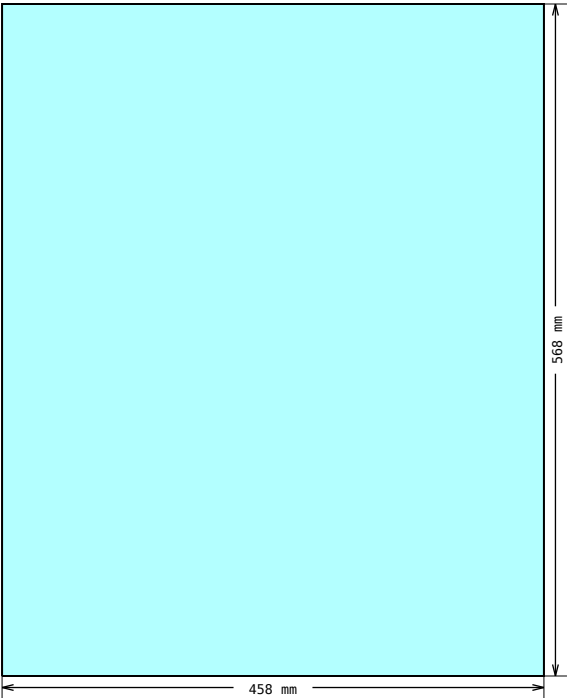


DRAWING 1, Pos 4
Shape measurements

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.10.020020.43LP	① ① ② ② 450.0450.0600.0600.0	3886.0 mm

Assembly hints

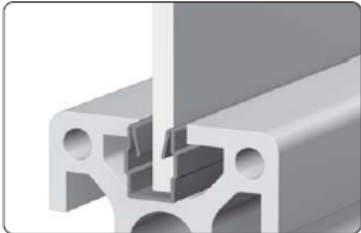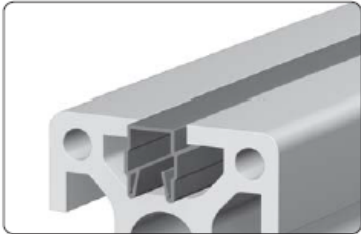CONNECTOR	1.20.2H0	Connector, universal	 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
None	1.41.H04.1	Combination profile PVC, H, B4, grey (bar 2.5 m)	 Use as reduction profile  Use as slot-cover profile Application Combination profiles for use as reduction or cover profiles Technical data bar length: 2.5 m material: PP • oil and water resistant Colours: grey black orange red blue green These profiles fill the space between the panel and the walls of the T-slot.