



Design Title : cabinet 02 display.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

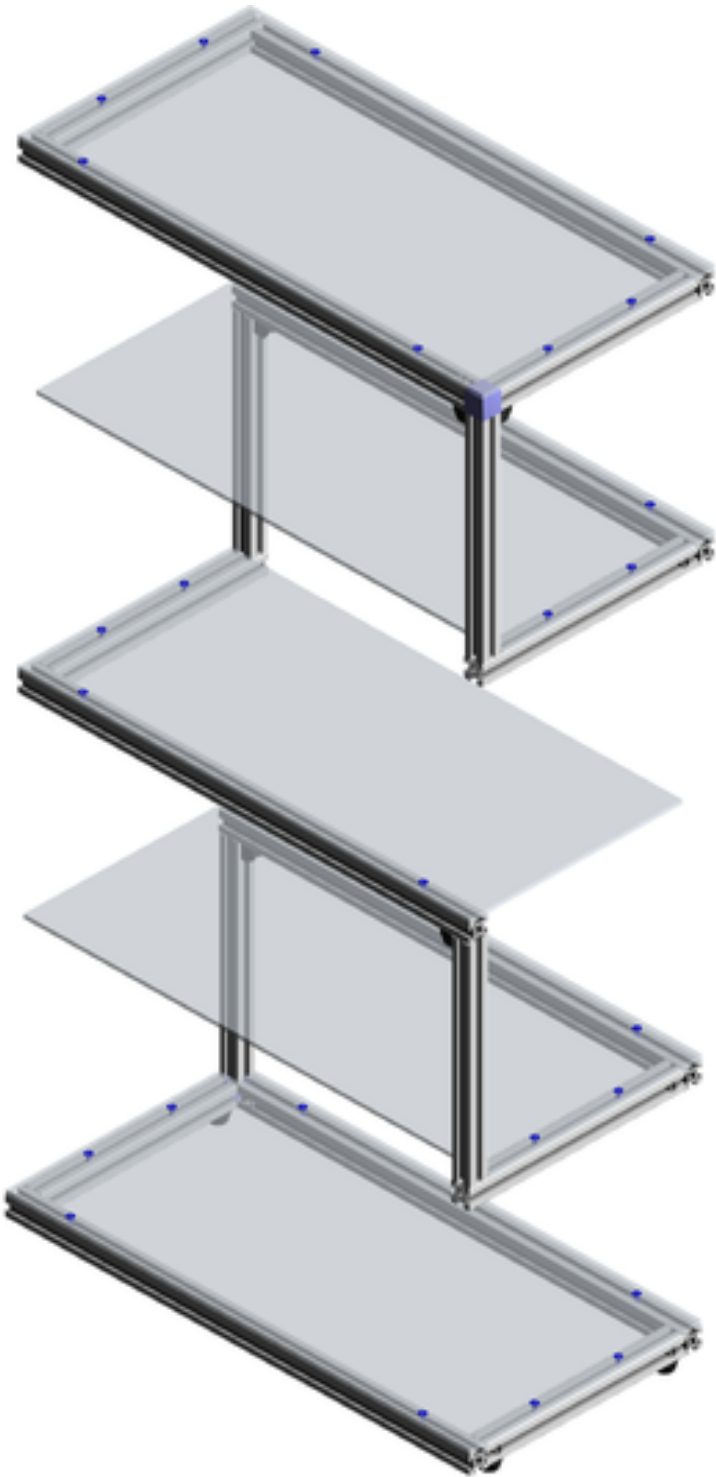


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-A00A00/486	Profile 20x20, 4H, light, plain	MM	1
2	1.10.020020.43LP-AA4A00/480	Profile 20x20, 4H, light, plain	MM	3
3	1.10.020020.43LP-A00A00/500	Profile 20x20, 4H, light, plain	MM	3
4	1.10.020020.43LP-AA4A00/230	Profile 20x20, 4H, light, plain	MM	4
5	1.10.020020.43LP-AA4AA4/210	Profile 20x20, 4H, light, plain	MM	7
11	1.48.221	Corner piece cubic 20, anodized	EA	2
12	1.64.2H2M4.2	Mounting block H, M4, black	EA	5
13	1.66.8060	Rubber door stop for suspended door	EA	4
14	0.63.D07991.04008	Flat head screw, DIN 7991 - M4x8	EA	29
15	1.20.2H0	Connector, universal	EA	21
16	1.31.HM4	Threaded plate H, M4	EA	29
		Frame weight:	4.50 kg (9.91 lbs)	
6	2.87.1571-99	Polycarbonat 4mm, SIZE: 229.00MM x 486.00MM **PER DRAWING 1**	SM	1
7	2.87.1571-99	Polycarbonat 4mm, SIZE: 230.00MM x 500.00MM **PER DRAWING 2**	SM	1
8	2.87.1571-99	Polycarbonat 4mm, SIZE: 230.00MM x 500.00MM **PER DRAWING 3**	SM	1
9	2.87.1571-99	Polycarbonat 4mm, SIZE: 249.00MM x 499.00MM **PER DRAWING 4**	SM	1
10	2.87.1571-99	Polycarbonat 4mm, SIZE: 250.00MM x 500.00MM **PER DRAWING 5**	SM	1
		Panels weight:	2.60 kg (5.72 lbs)	
		Total Weight:	7.09 kg (15.64 lbs)	


Isometric view
Some accessories may not be shown

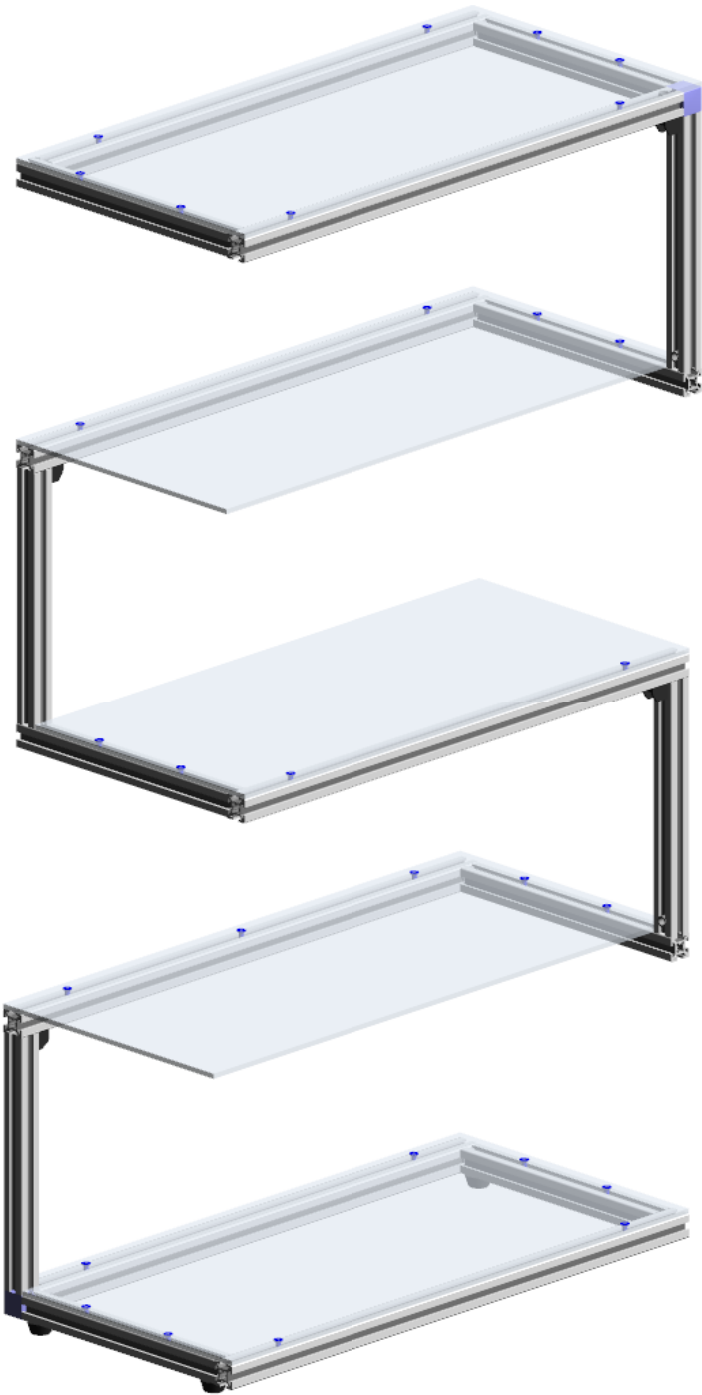


Multiview

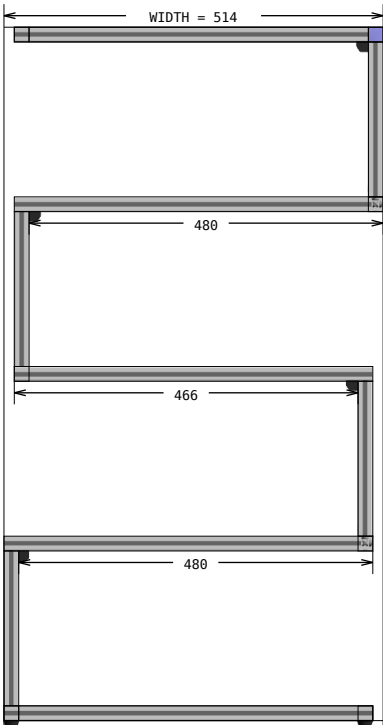


FRONT

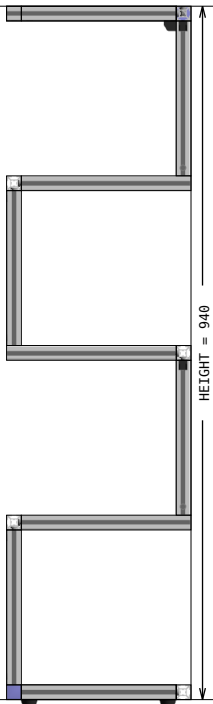


LEFT

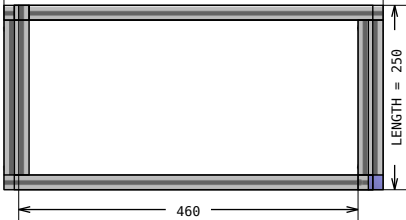


TOP

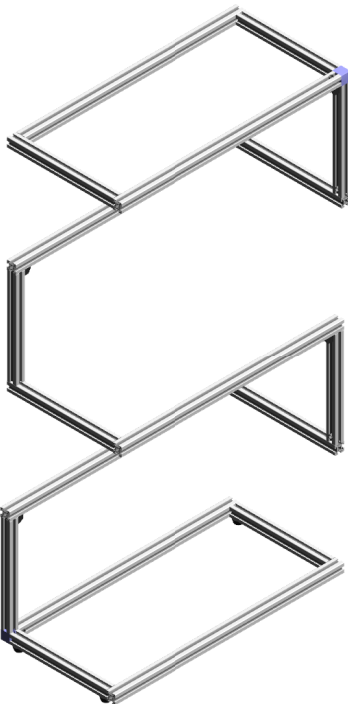

ISOMETRIC

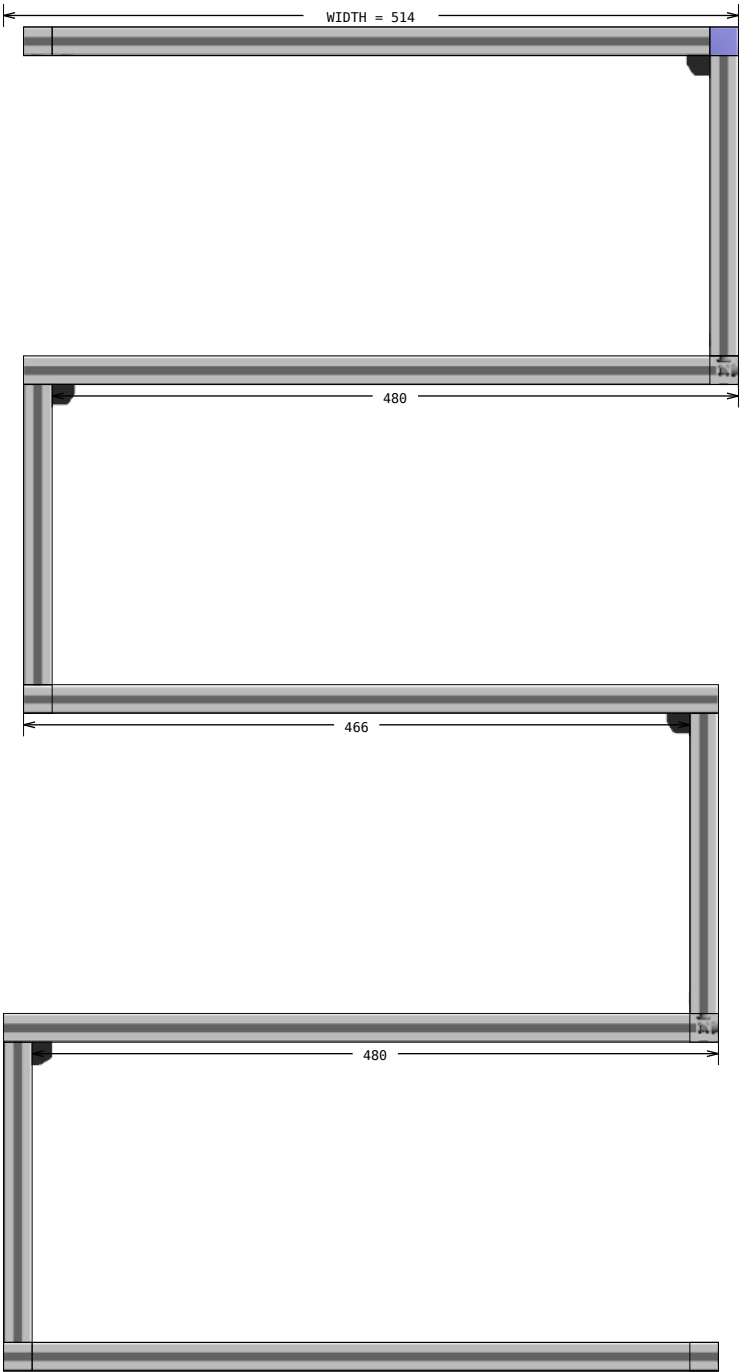


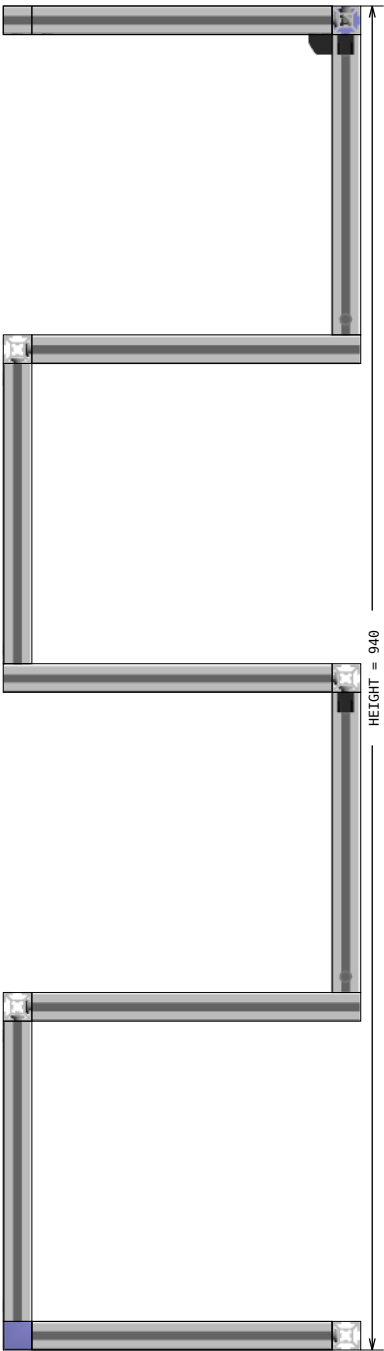

Design Title : cabinet 02 display.scene
Customer Name :
Date : 2025-06-19

TOP VIEW




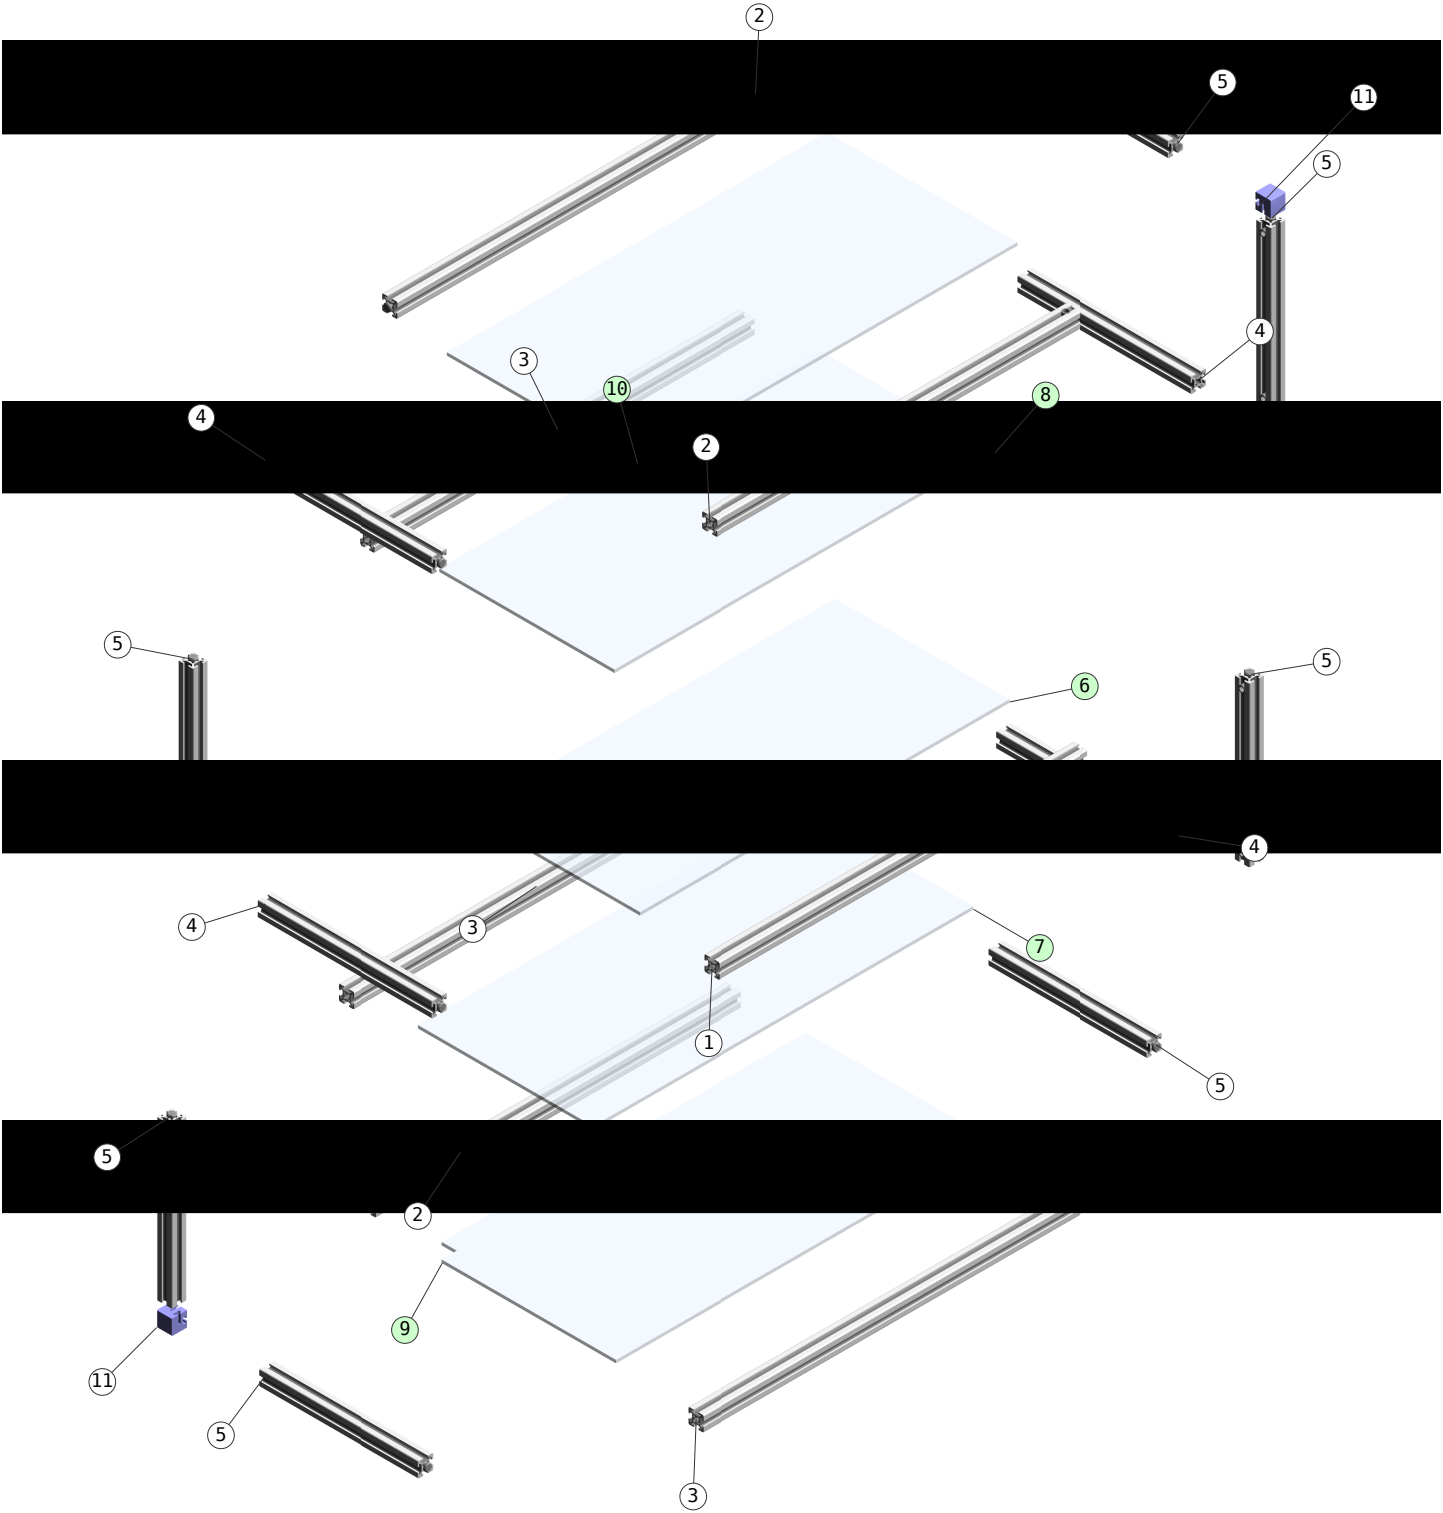


Assembly List

Pos	Article-No	Description	Related parts	Qty
2	1.10.020020.43LP-AA4A00/480	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	2
			1.20.2H0, Connector, universal	1
4	1.10.020020.43LP-AA4A00/230	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	4
5	1.10.020020.43LP-AA4AA4/210	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	4
			1.20.2H0, Connector, universal	10
6	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8	4
			1.31.HM4, Threaded plate H, M4	4
7	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8	5
			1.31.HM4, Threaded plate H, M4	5
8	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8	4
			1.31.HM4, Threaded plate H, M4	4
9	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8	8
			1.31.HM4, Threaded plate H, M4	8
10	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8	8
			1.31.HM4, Threaded plate H, M4	8


Panels

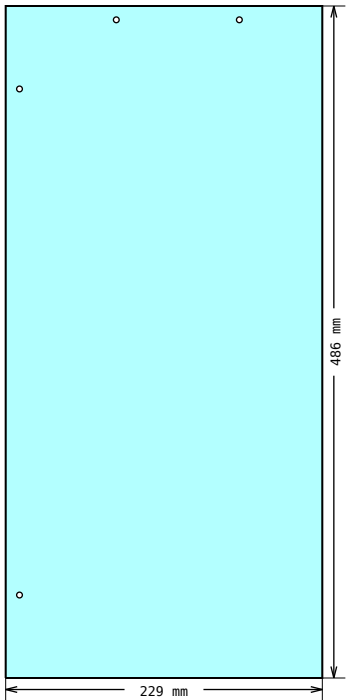


DRAWING 1, Pos 6
Shape measurements

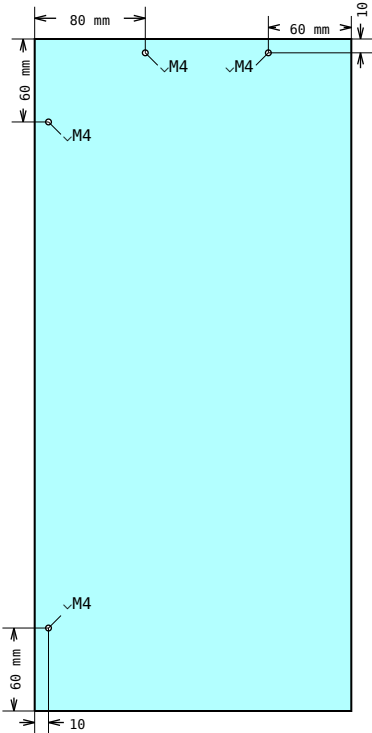

DRAWING 1, Pos 6
Hole placement

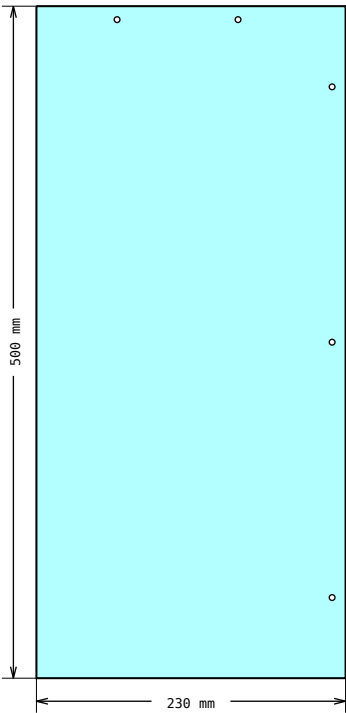


DRAWING 2, Pos 7
Shape measurements

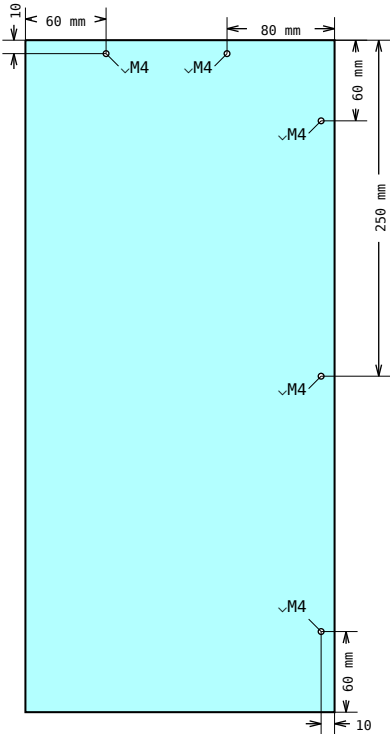


DRAWING 2, Pos 7
Hole placement


Panels

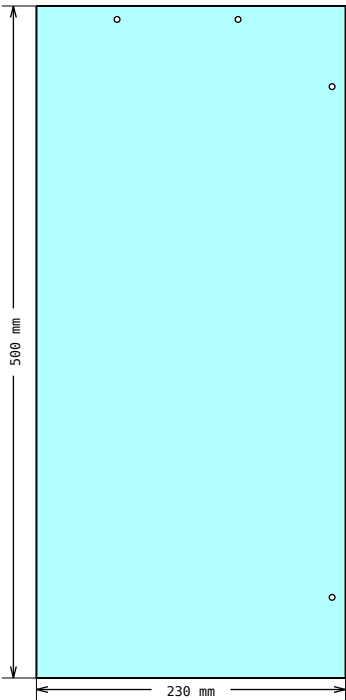


DRAWING 3, Pos 8
Shape measurements

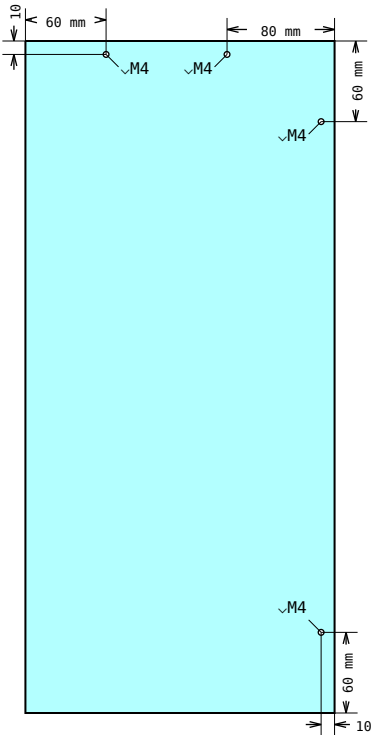

DRAWING 3, Pos 8
Hole placement

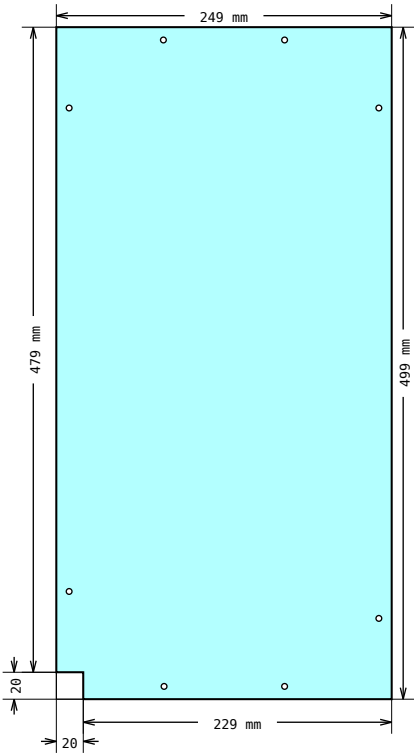


DRAWING 4, Pos 9
Shape measurements

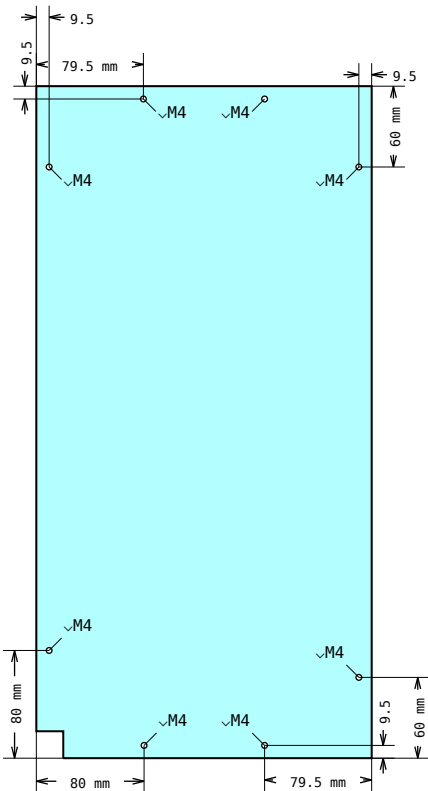


DRAWING 4, Pos 9
Hole placement

Panels

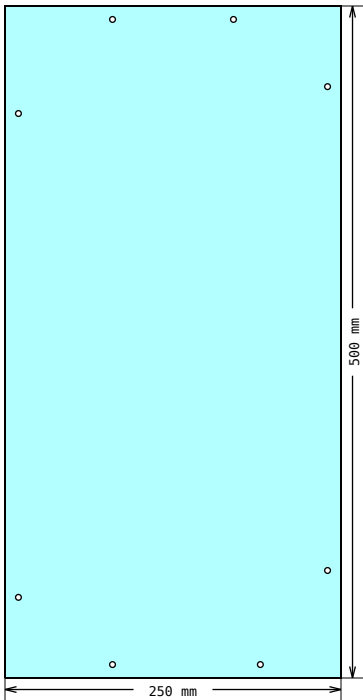

DRAWING 5, Pos 10
Shape measurements






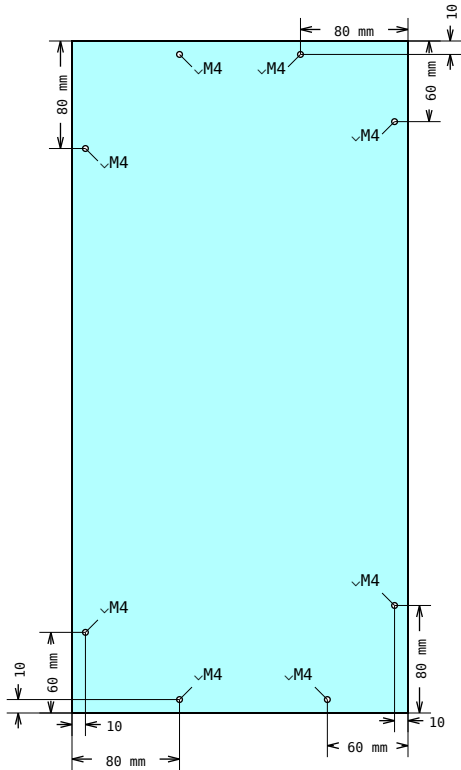


DRAWING 5, Pos 10
Hole placement

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.10.020020.43LP	5 5 5 5 5 5 5 4 4 4 4 2 2 2 1 3 3 3 210.0 210.0 210.0 210.0 210.0 210.0 230.0 230.0 230.0 230.0 480.0 480.0 480.0 486.0 500.0 500.0 500.0 210.0 210.0 210.0 210.0 230.0 230.0 480.0 480.0 500.0 500.0	121.0 mm

Assembly hints

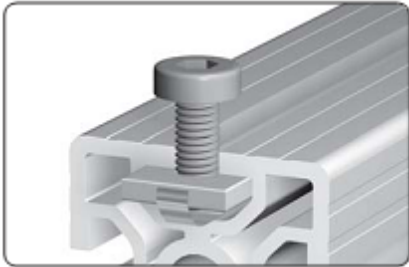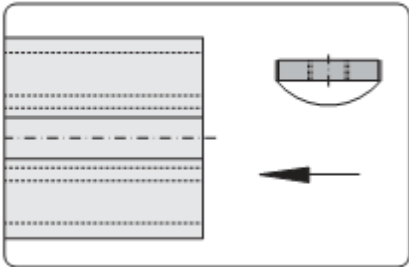CONNECTOR	1.20.2H0	Connector, universal	 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
None	1.31.HM4	Threaded plate H, M4	 Fixed into position with leaf spring  Application Fastening element for screw-type connections Assembly Insert from end These plates must be inserted from the open side of the profile, prior to final frame assembly