


Design Title : cabinet 03.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

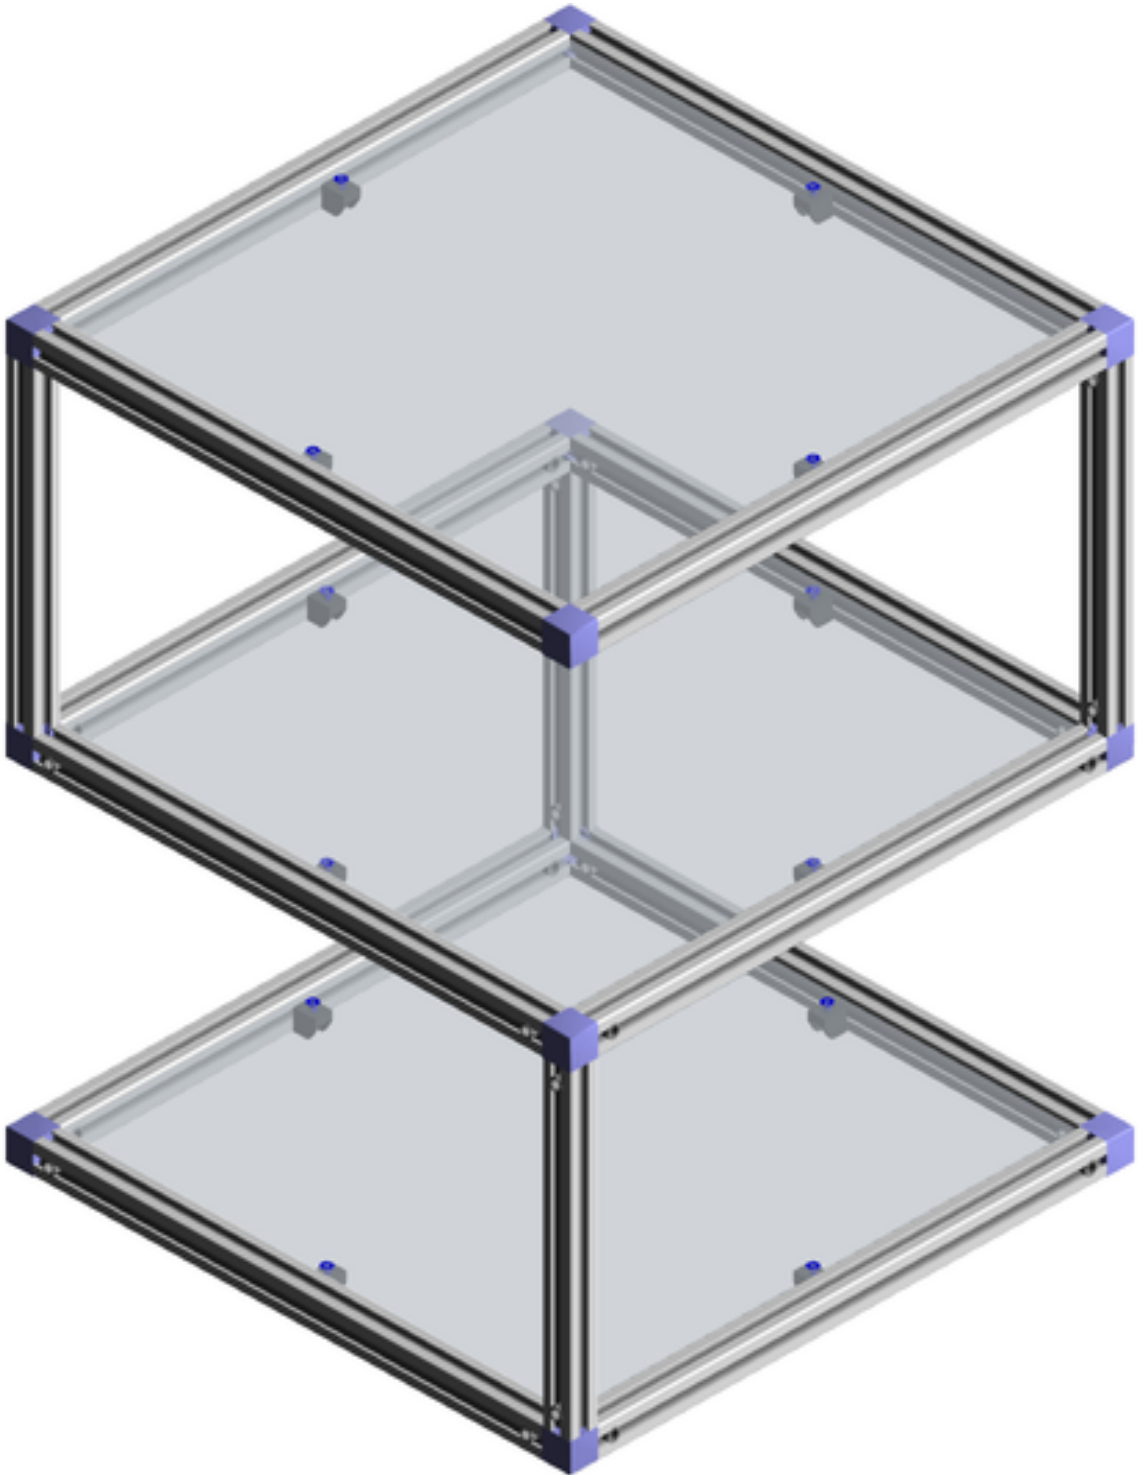

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA4AA4/210	Profile 20x20, 4H, light, plain	MM	4
2	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain	MM	12
5	1.48.221	Corner piece cubic 20, anodized	EA	12
6	1.64.2H2M4.2	Mounting block H, M4, black	EA	12
7	0.63.D07991.04012	Flat head screw, DIN 7991 - M4x12	EA	12
8	1.20.2H0	Connector, universal	EA	32


Frame weight: 4.30 kg (9.48 lbs)

3	2.87.1571-99	Polycarbonat 4mm, SIZE: 359.00MM x 359.00MM **PER DRAWING 1**	SM	1
4	2.87.1571-99	Polycarbonat 4mm, SIZE: 359.00MM x 359.00MM **PER DRAWING 2**	SM	2


Panels weight: 1.70 kg (3.75 lbs)

Total Weight: 6.00 kg (13.23 lbs)


Isometric view
Some accessories may not be shown

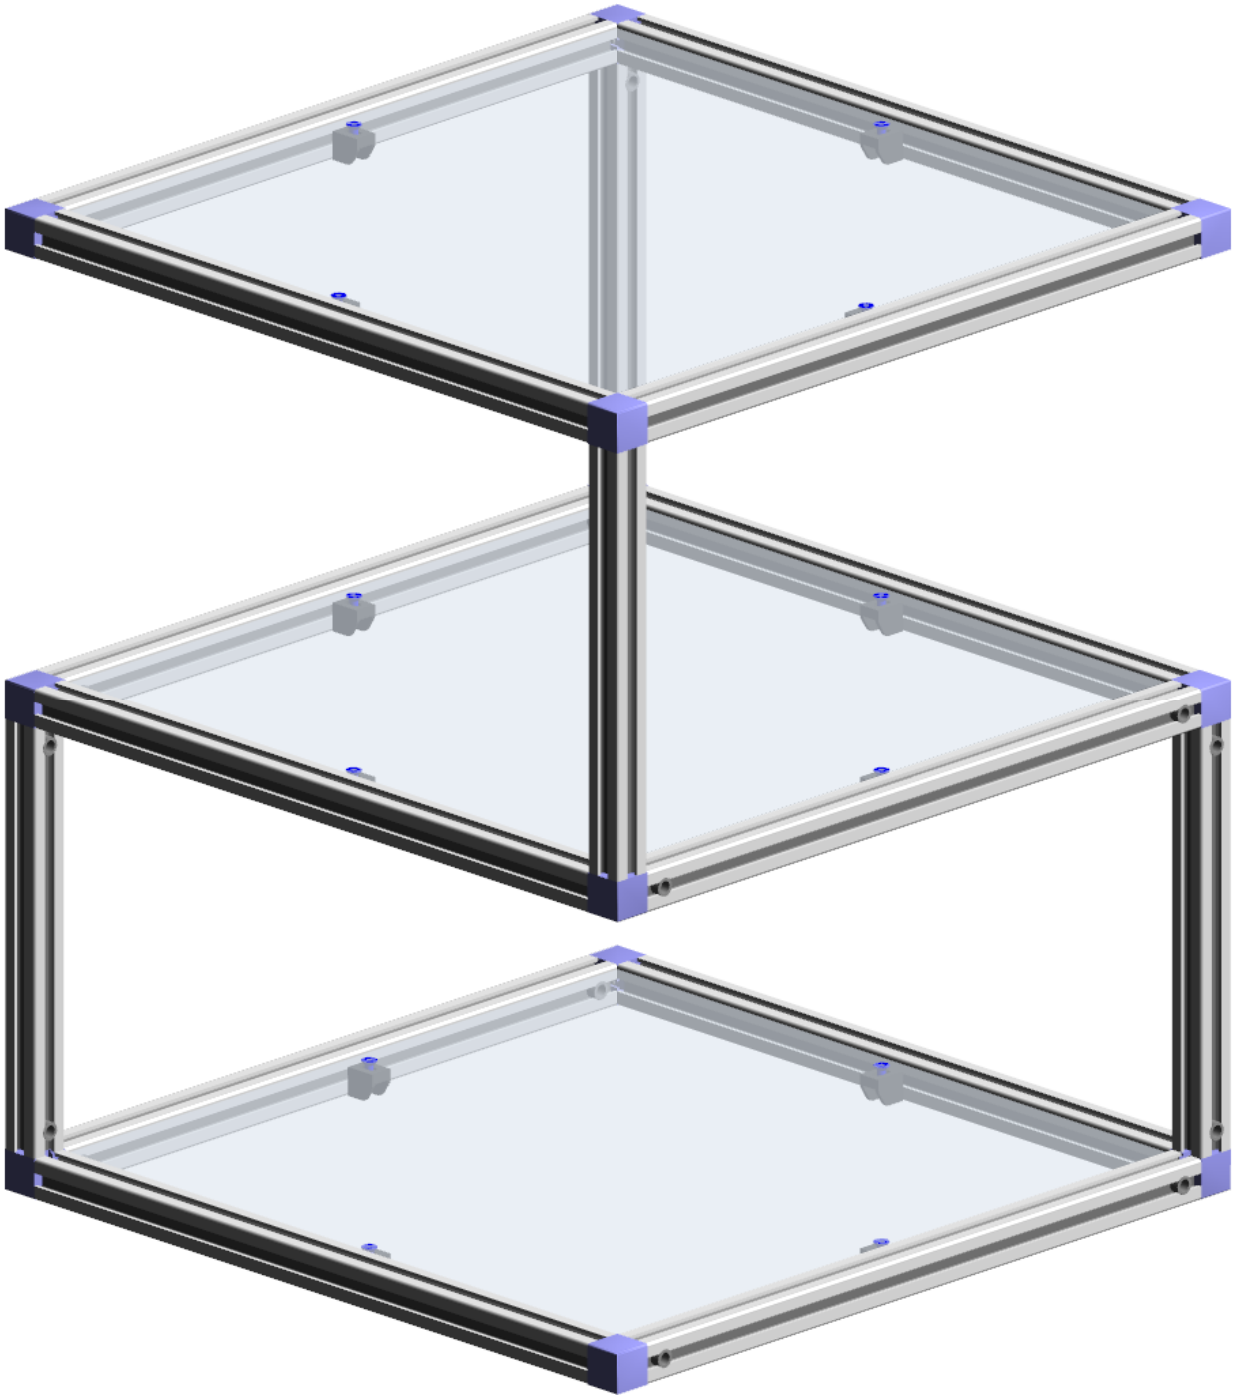


Multiview

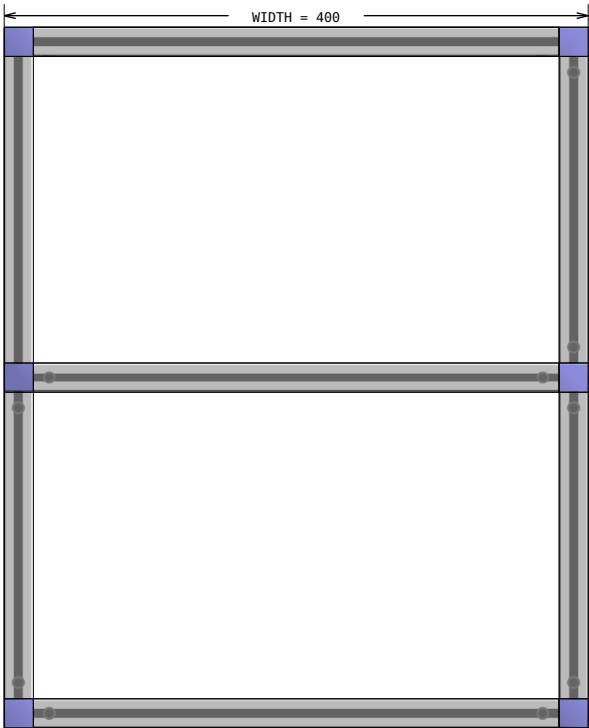


FRONT

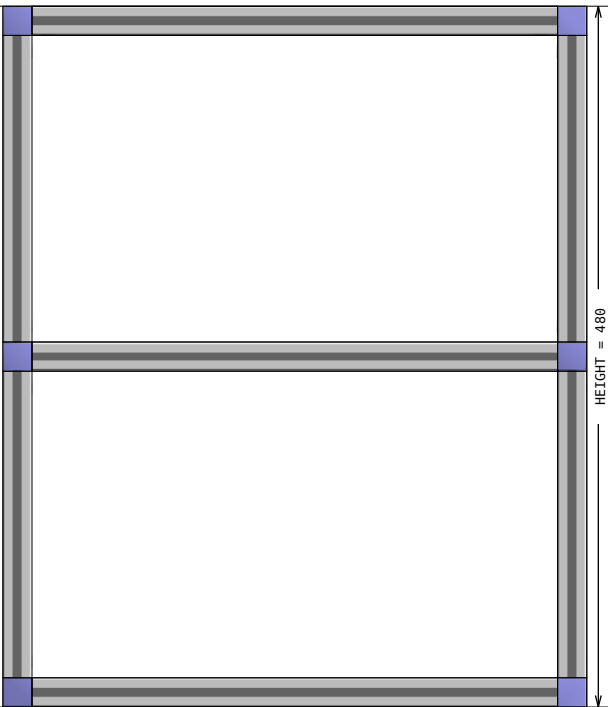


LEFT

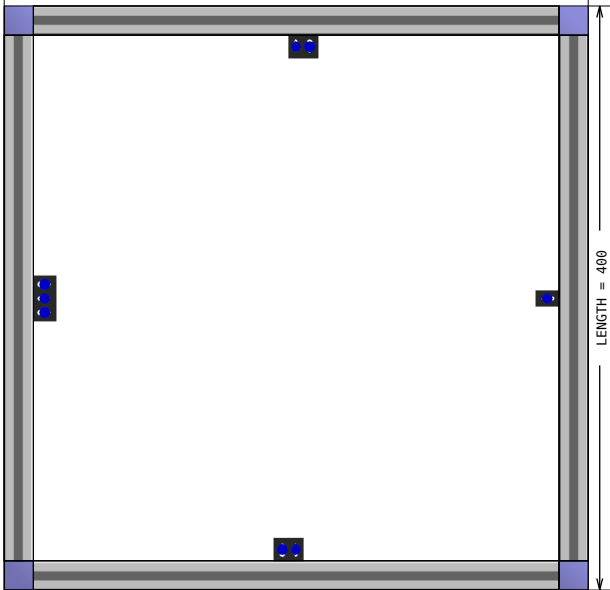



TOP

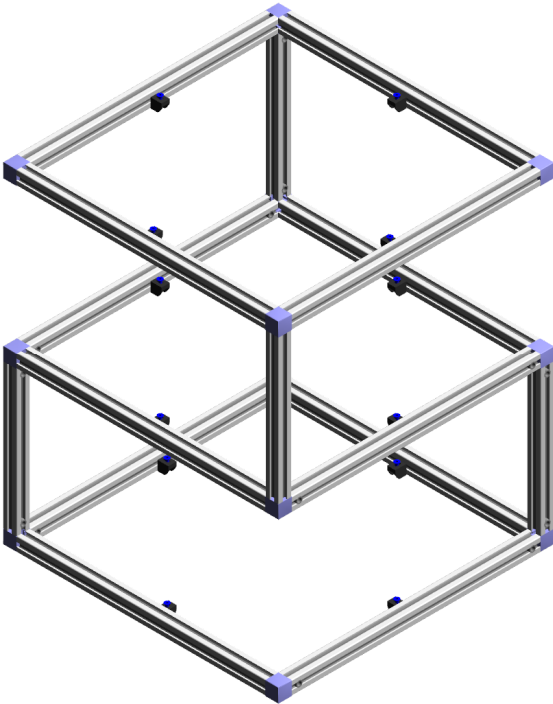


ISOMETRIC

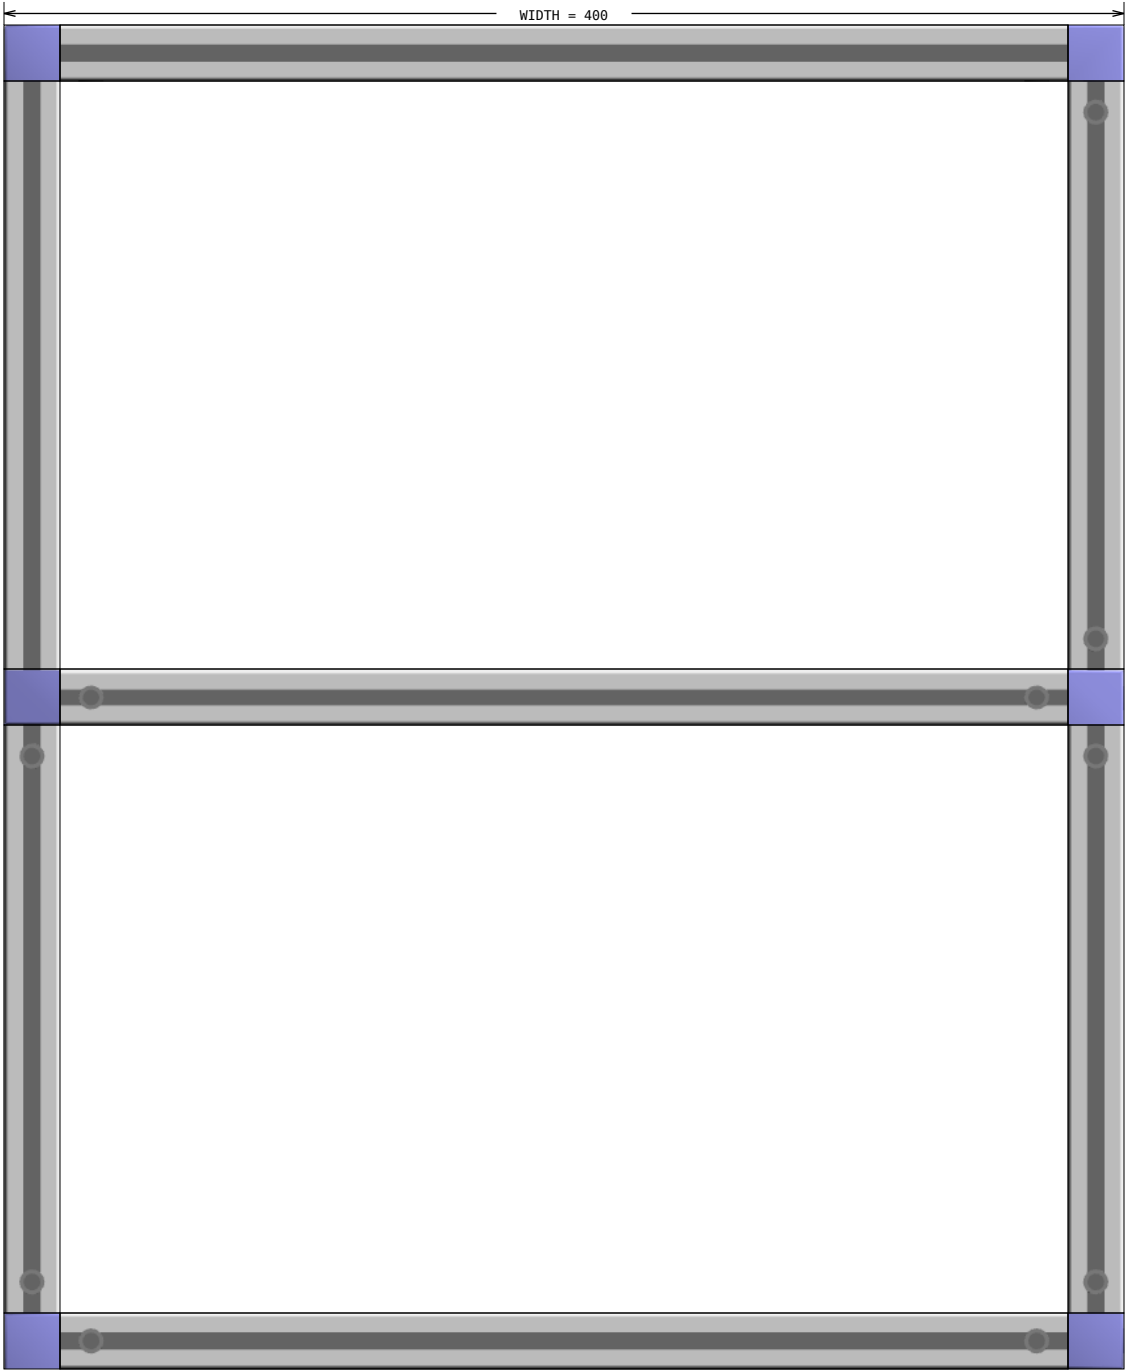

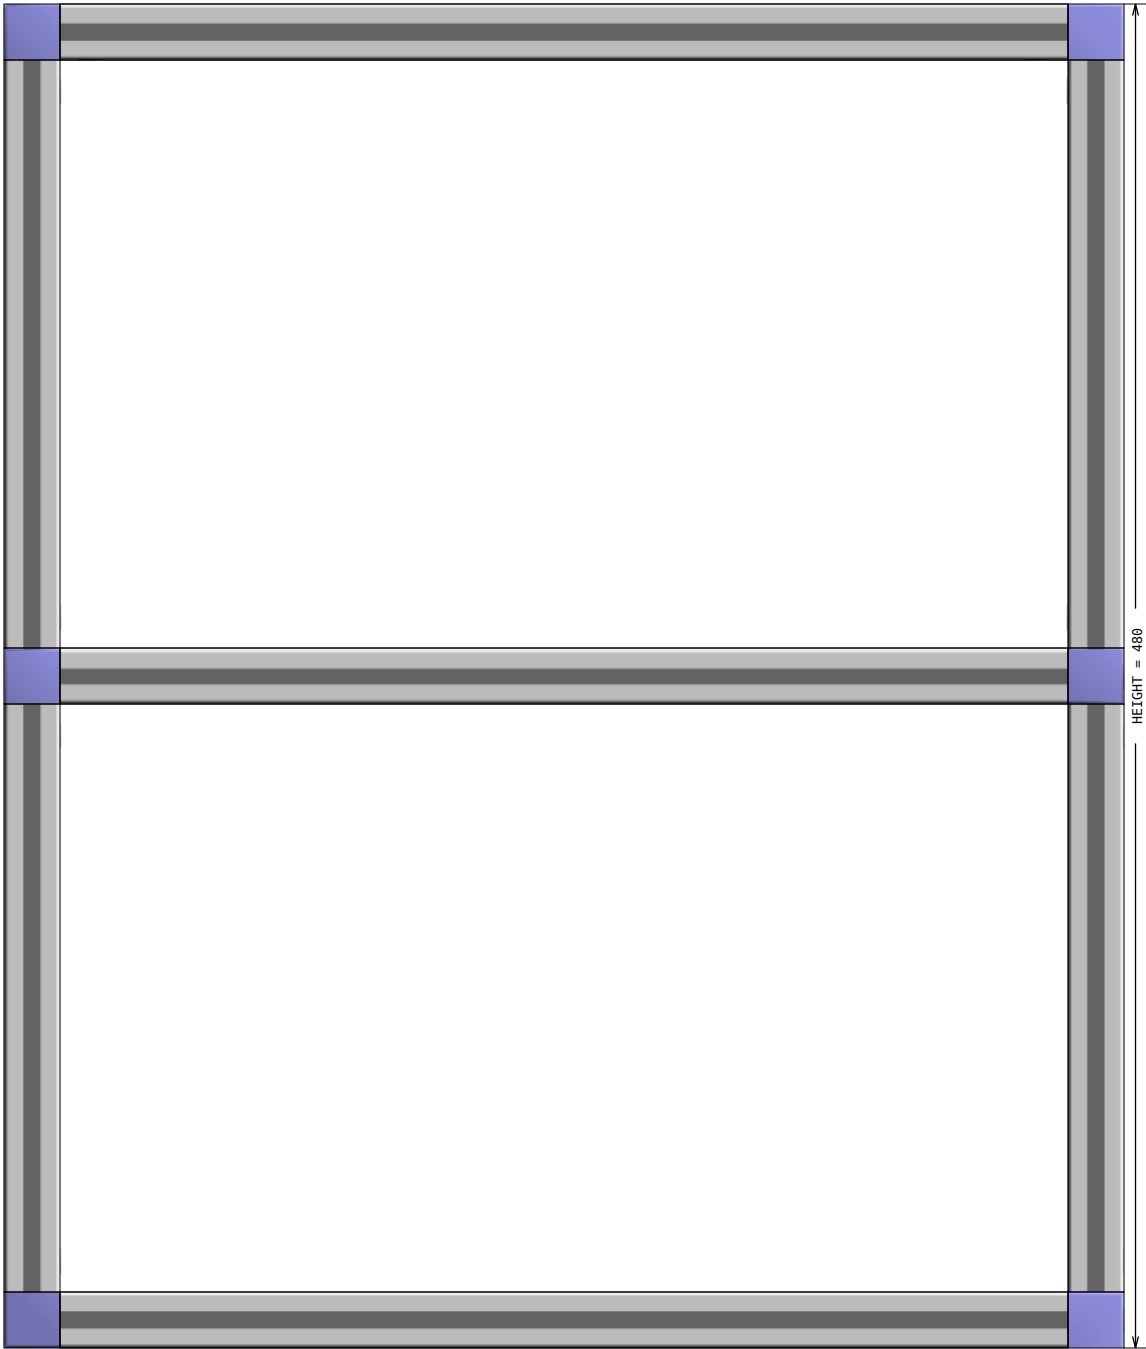

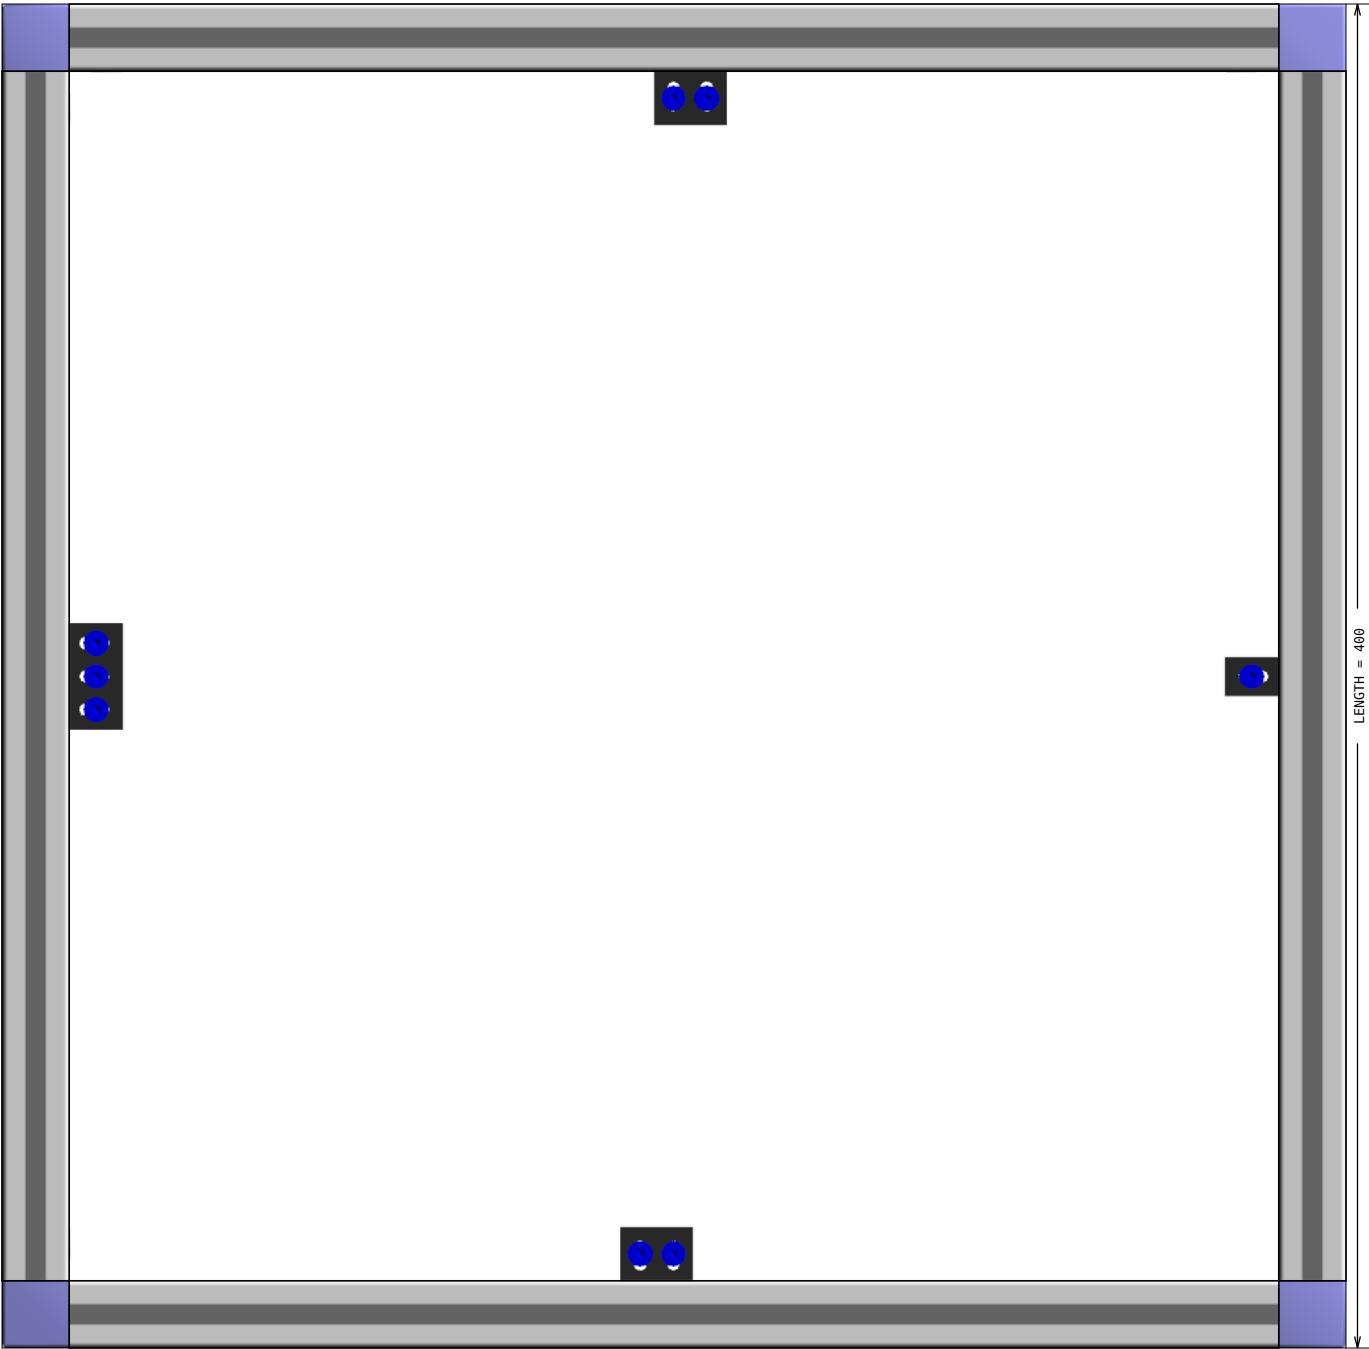


Exploded view

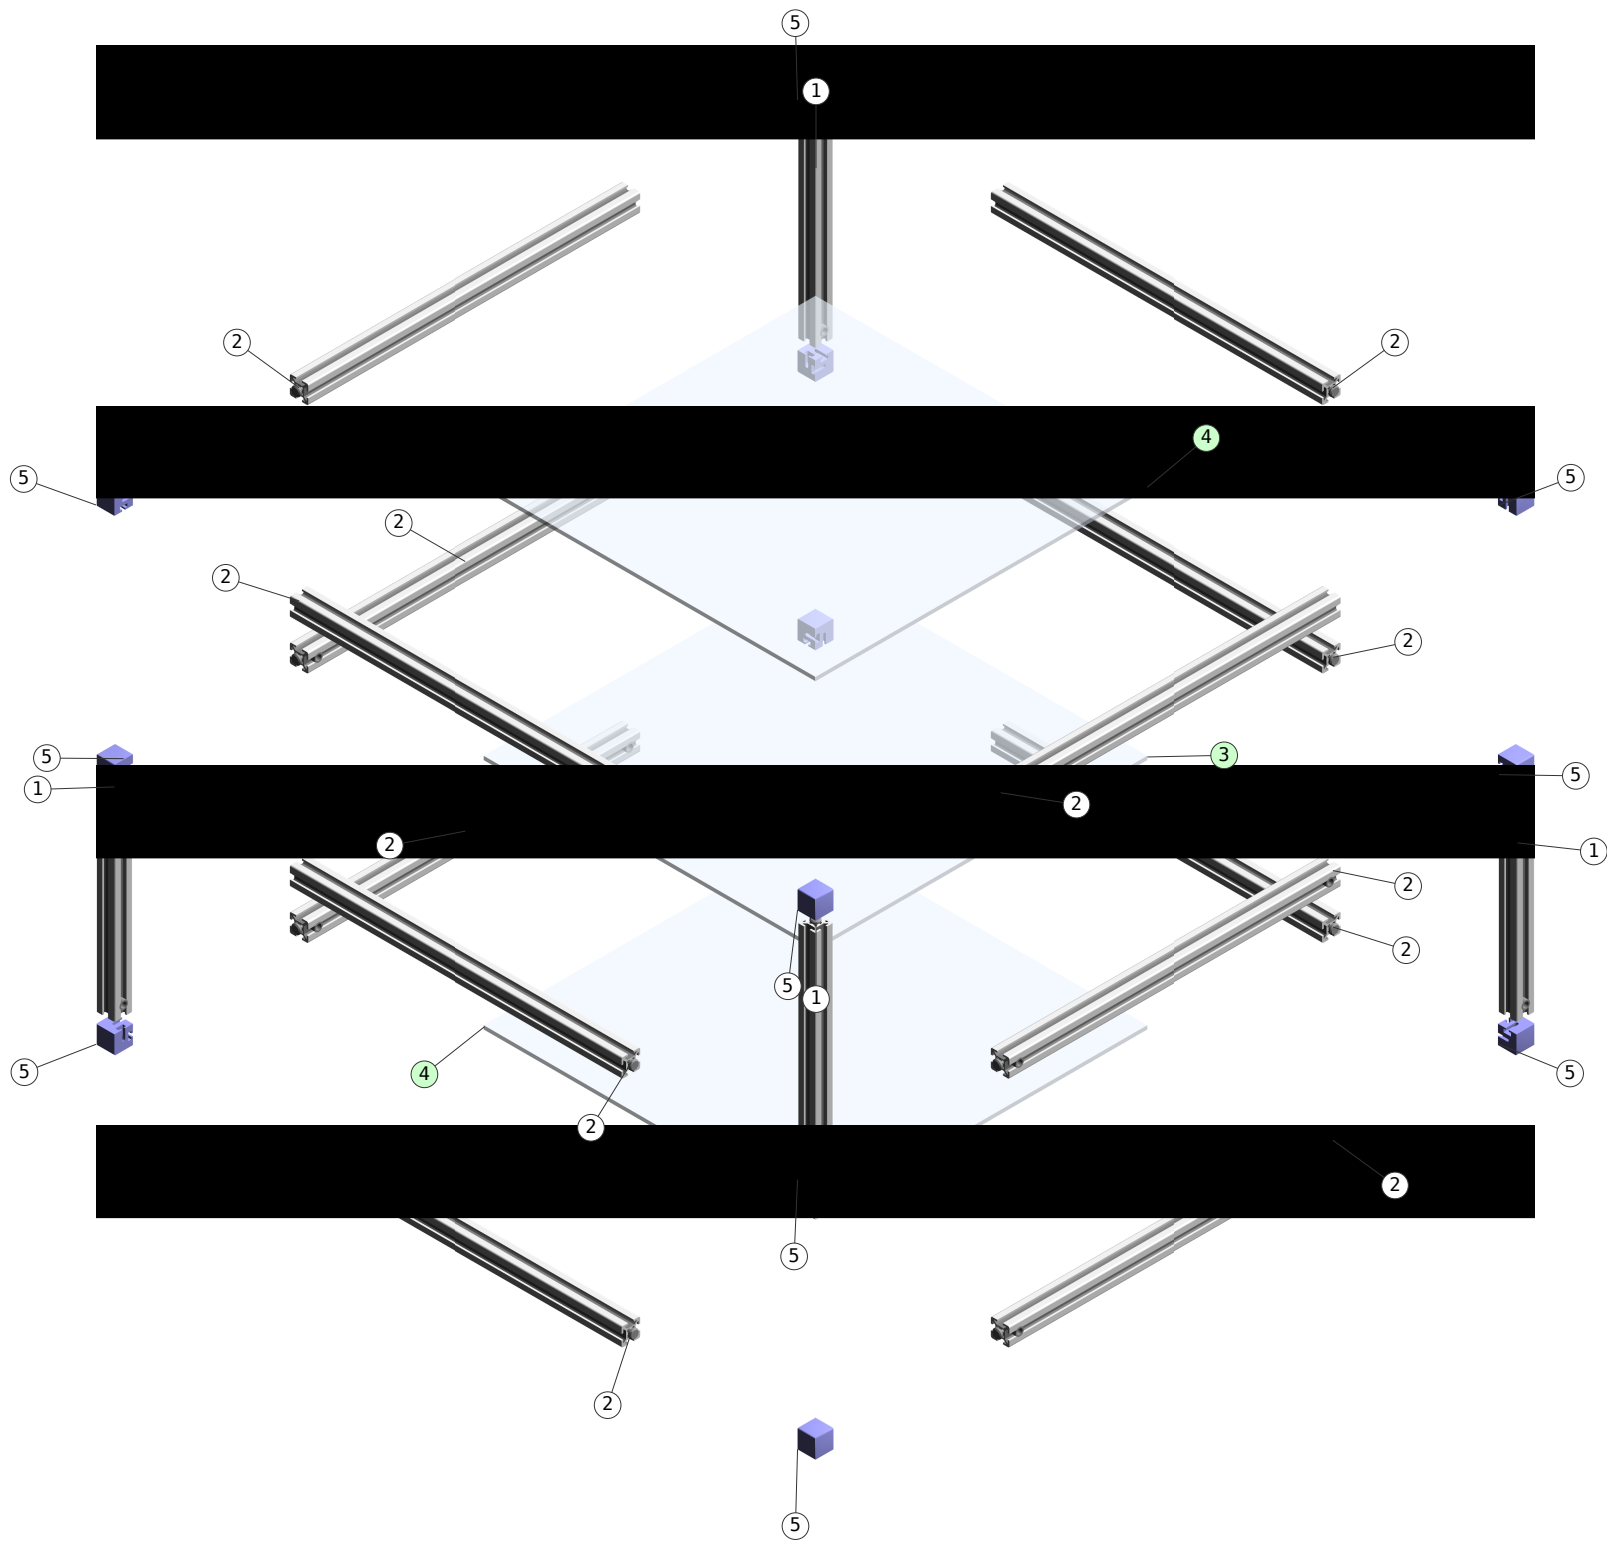


Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA4AA4/210	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	8
2	1.10.020020.43LP-AA4AA4/360	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	24
3	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04012, Flat head screw, DIN 7991 - M4x12	4
4	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04012, Flat head screw, DIN 7991 - M4x12	8
6	1.64.2H2M4.2	Mounting block H, M4, black	0.63.D07991.04012, Flat head screw, DIN 7991 - M4x12	12


Panels

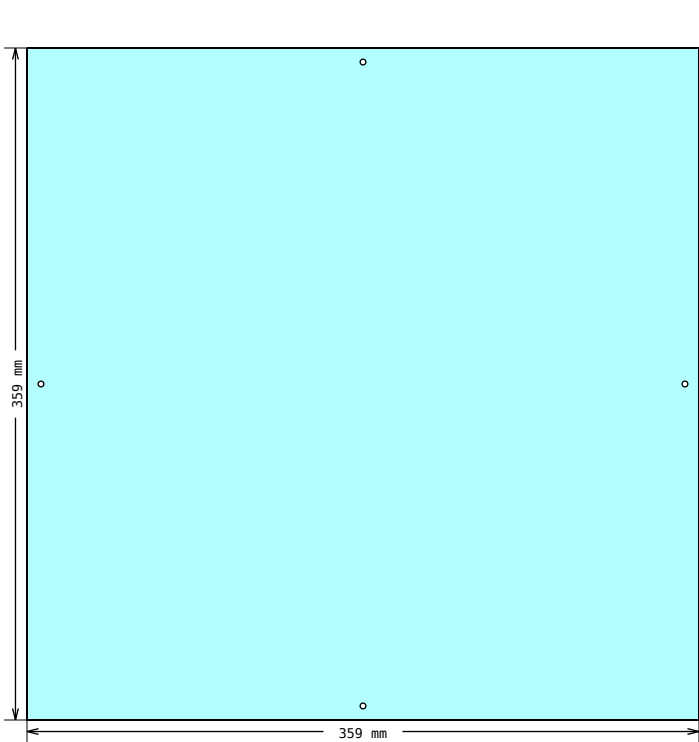


DRAWING 1, Pos 3
Shape measurements

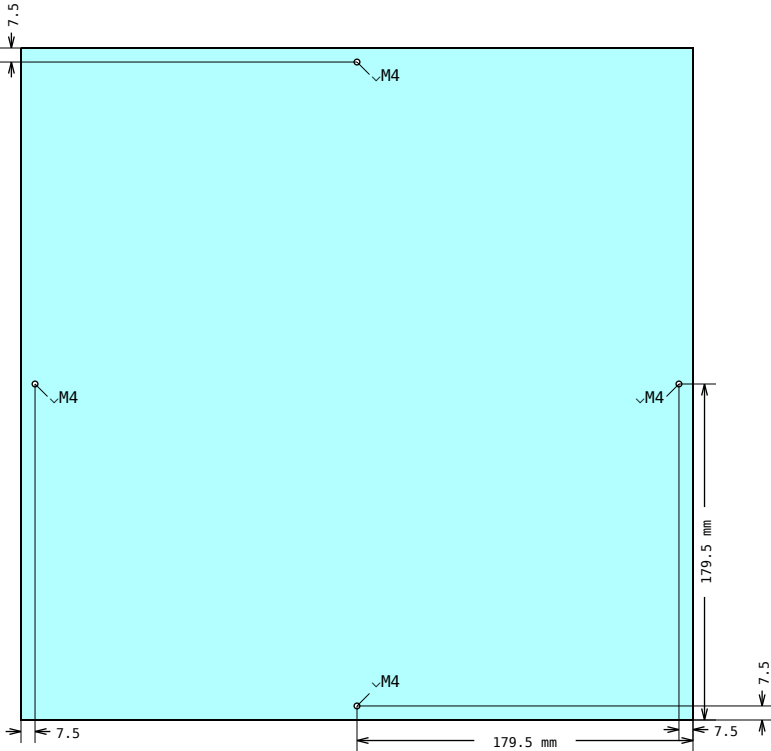

DRAWING 1, Pos 3
Hole placement

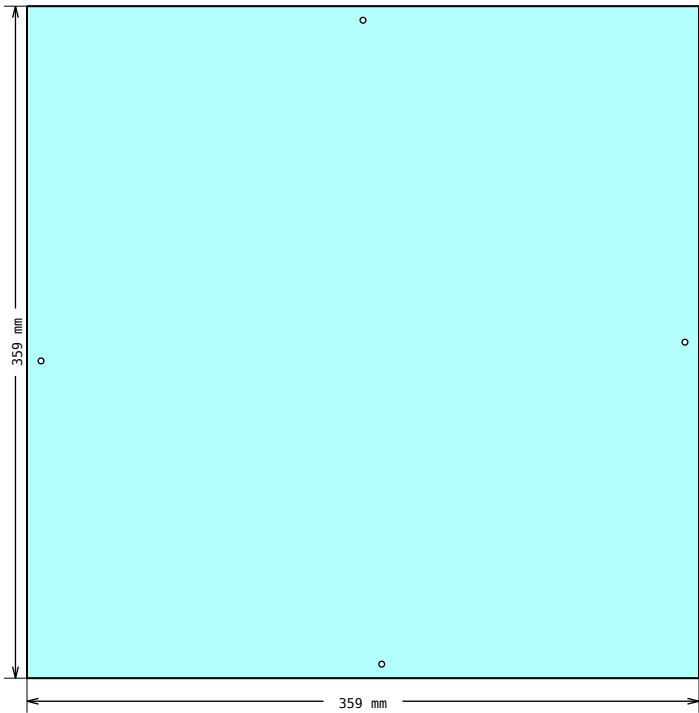

DRAWING 2, Pos 4
Shape measurements




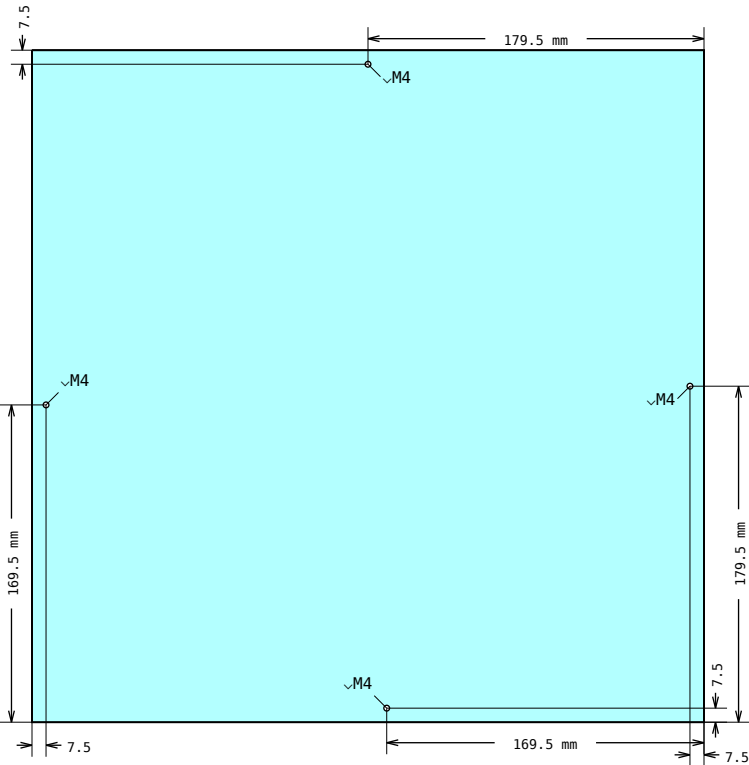


DRAWING 2, Pos 4
Hole placement

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.10.020020.43LP	1 1 1 1 2 2 2 2 2 2 2 2 2 2 2 2 210.0 210.0 210.0 210.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0 360.0	784.0 mm

Assembly hints

CONNECTOR	1.20.2H0	Connector, universal
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.		