

Design Title : chair 02 customer.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19



Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.040040.43LP-A00A00/540	Profile 40x40, 4E, light, plain	MM	1
2	1.11.040040.43LP-A00A00/559.8	Profile 40x40, 4E, light, plain **PER DRAWING 1**	MM	1
2.A	ZA4/330.9	Parallel-connector distance left: 330.9 mm, anchor on side: 1	EA	1
2.B	ZA4/501.8	Parallel-connector distance left: 501.8 mm, anchor on side: 3	EA	1
2.C	ZA4/548.0	Parallel-connector distance left: 548.0 mm, anchor on side: 3	EA	1
3	1.11.040040.43LP-A00A00/559.8	Profile 40x40, 4E, light, plain **PER DRAWING 2**	MM	1
3.A	ZA4/330.9	Parallel-connector distance left: 330.9 mm, anchor on side: 3	EA	1
3.B	ZA4/501.8	Parallel-connector distance left: 501.8 mm, anchor on side: 1	EA	1
3.C	ZA4/548.0	Parallel-connector distance left: 548.0 mm, anchor on side: 1	EA	1
4	1.11.040040.43LP-E00A00/575	Profile 40x40, 4E, light, plain Special angle, Left: 35.0°; **PER DRAWING 3**	MM	1
4.A	ZA4/550.9	Parallel-connector distance left: 550.9 mm, anchor on side: 3	EA	1
5	1.11.040040.43LP-E00A00/575	Profile 40x40, 4E, light, plain Special angle, Left: 35.0°; **PER DRAWING 4**	MM	1
5.A	ZA4/550.9	Parallel-connector distance left: 550.9 mm, anchor on side: 1	EA	1
6	1.11.040040.43LP-A00A00/681	Profile 40x40, 4E, light, plain **PER DRAWING 5**	MM	1
6.A	ZA4/51.5	Parallel-connector distance left: 51.5 mm, anchor on side: 3	EA	1
6.B	ZA4/222.4	Parallel-connector distance left: 222.4 mm, anchor on side: 1	EA	1
7	1.11.040040.43LP-A00A00/700	Profile 40x40, 4E, light, plain **PER DRAWING 6**	MM	1
7.A	ZA4/70.5	Parallel-connector distance left: 70.5 mm, anchor on side: 1	EA	1
7.B	ZA4/241.4	Parallel-connector distance left: 241.4 mm, anchor on side: 3	EA	1
8	1.11.040040.43LP-D00A00/746.4	Profile 40x40, 4E, light, plain Special angle, Left: 30.0°; **PER DRAWING 7**	MM	1
8.A	ZA4/519.4	Parallel-connector distance left: 519.4 mm, anchor on side: 3	EA	1
8.B	ZA4/690.3	Parallel-connector distance left: 690.3 mm, anchor on side: 1	EA	1
8.C	ZA4/736.5	Parallel-connector distance left: 736.5 mm, anchor on side: 1	EA	1
9	1.11.040040.43LP-D00A00/746.4	Profile 40x40, 4E, light, plain Special angle, Left: 30.0°; **PER DRAWING 8**	MM	1
9.A	ZA4/519.4	Parallel-connector distance left: 519.4 mm, anchor on side: 1	EA	1
9.B	ZA4/690.3	Parallel-connector distance left: 690.3 mm, anchor on side: 3	EA	1
9.C	ZA4/736.5	Parallel-connector distance left: 736.5 mm, anchor on side: 3	EA	1
10	1.11.040040.43LP-AA4AA4/290	Profile 40x40, 4E, light, plain	MM	2
11	1.11.040040.43LP-A00EA3/330.6	Profile 40x40, 4E, light, plain Special angle, Right: 25.0°; **PER DRAWING 9**	MM	2
12	1.11.040040.43LP-EA1EA1/474.2	Profile 40x40, 4E, light, plain Special angle, Right: 20.0°; **PER DRAWING 10**	MM	2
13	1.11.040040.43LP-A00A00/500	Profile 40x40, 4E, light, plain	MM	2

Bill of materials (Number of kits: 1)



Pos	Article-No	Description	Units	Qty
14	1.11.040040.43LP-A00A00/700	Profile 40x40, 4E, light, plain	MM	2
15	1.11.040040.43LP-A00A00/709	Profile 40x40, 4E, light, plain **PER DRAWING 11**	MM	2
15.A	ZA1/60.0	Parallel-connector distance left: 60.0 mm, anchor on side: 2	EA	2
15.B	ZA1/440.0	Parallel-connector distance left: 440.0 mm, anchor on side: 2	EA	2
16	1.11.040040.43LP-AA4AA4/460	Profile 40x40, 4E, light, plain	MM	3
17	1.11.040040.43LP-AA4AA4/540	Profile 40x40, 4E, light, plain	MM	4
18	1.42.20404.2	Cover cap 40x40, dia: 12, black	EA	12
19	1.44.820001L	Base angle 200x87x42, L	EA	4
20	0.63.D06912.08010	Cylindric head screw, DIN 6912 - M8x10	EA	12
21	1.21.4E0	Connector, universal	EA	18
22	1.21.4E5	Connector, parallel-square	EA	22
23	1.21.4EK1	Connector, oblique-hinge l. + r.	EA	6
24	1.32.4EM8	T-Nut for subsequent insertion, w. spring E, M8	EA	12
		Total Weight:	26.87 kg (59.25 lbs)	

Isometric view


Some accessories may not be shown



Multiview

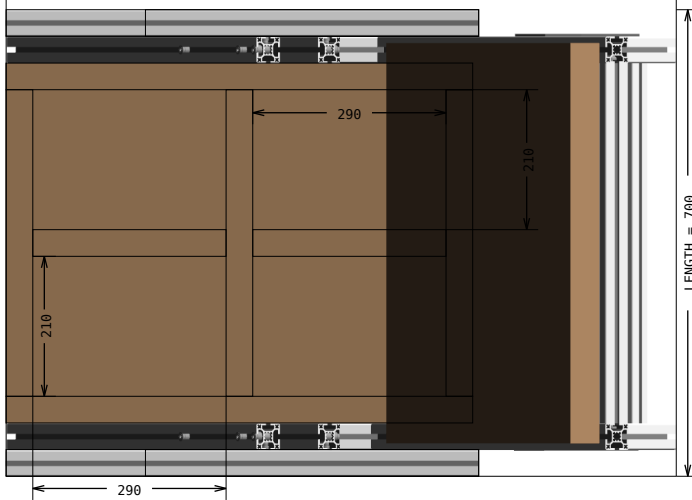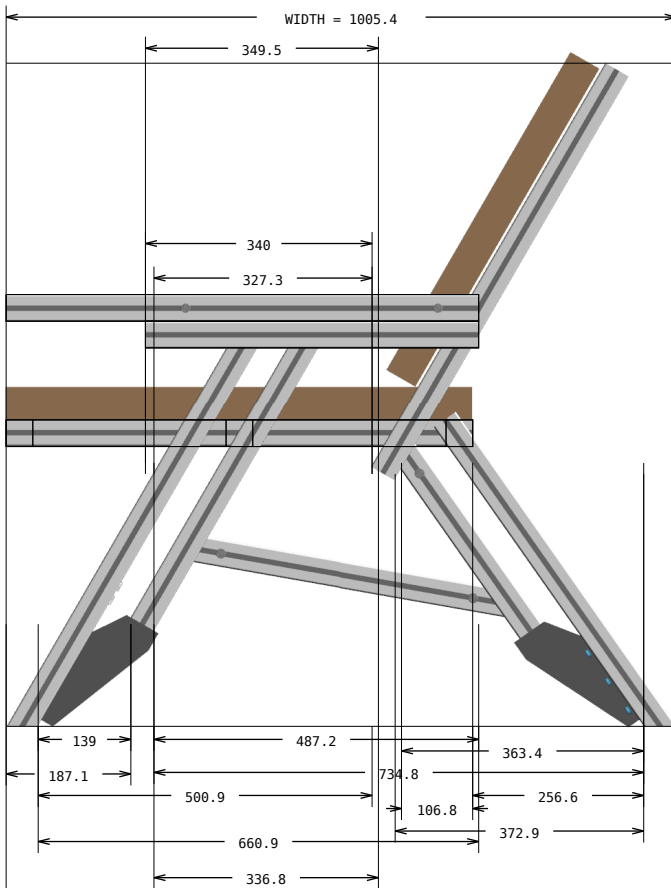


TOP

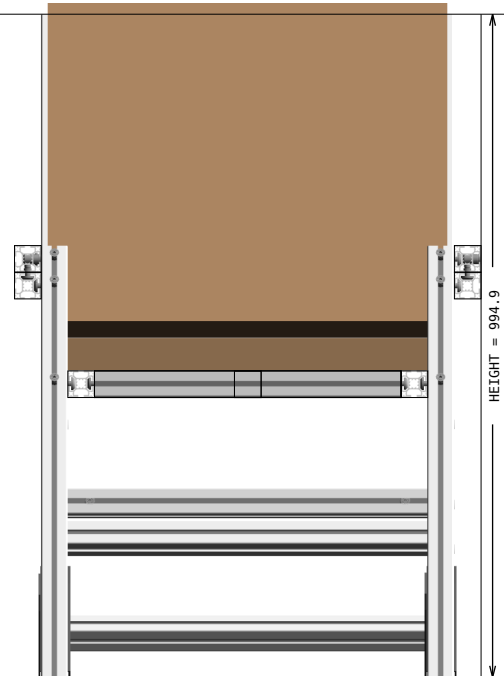



LEFT




ISOMETRIC

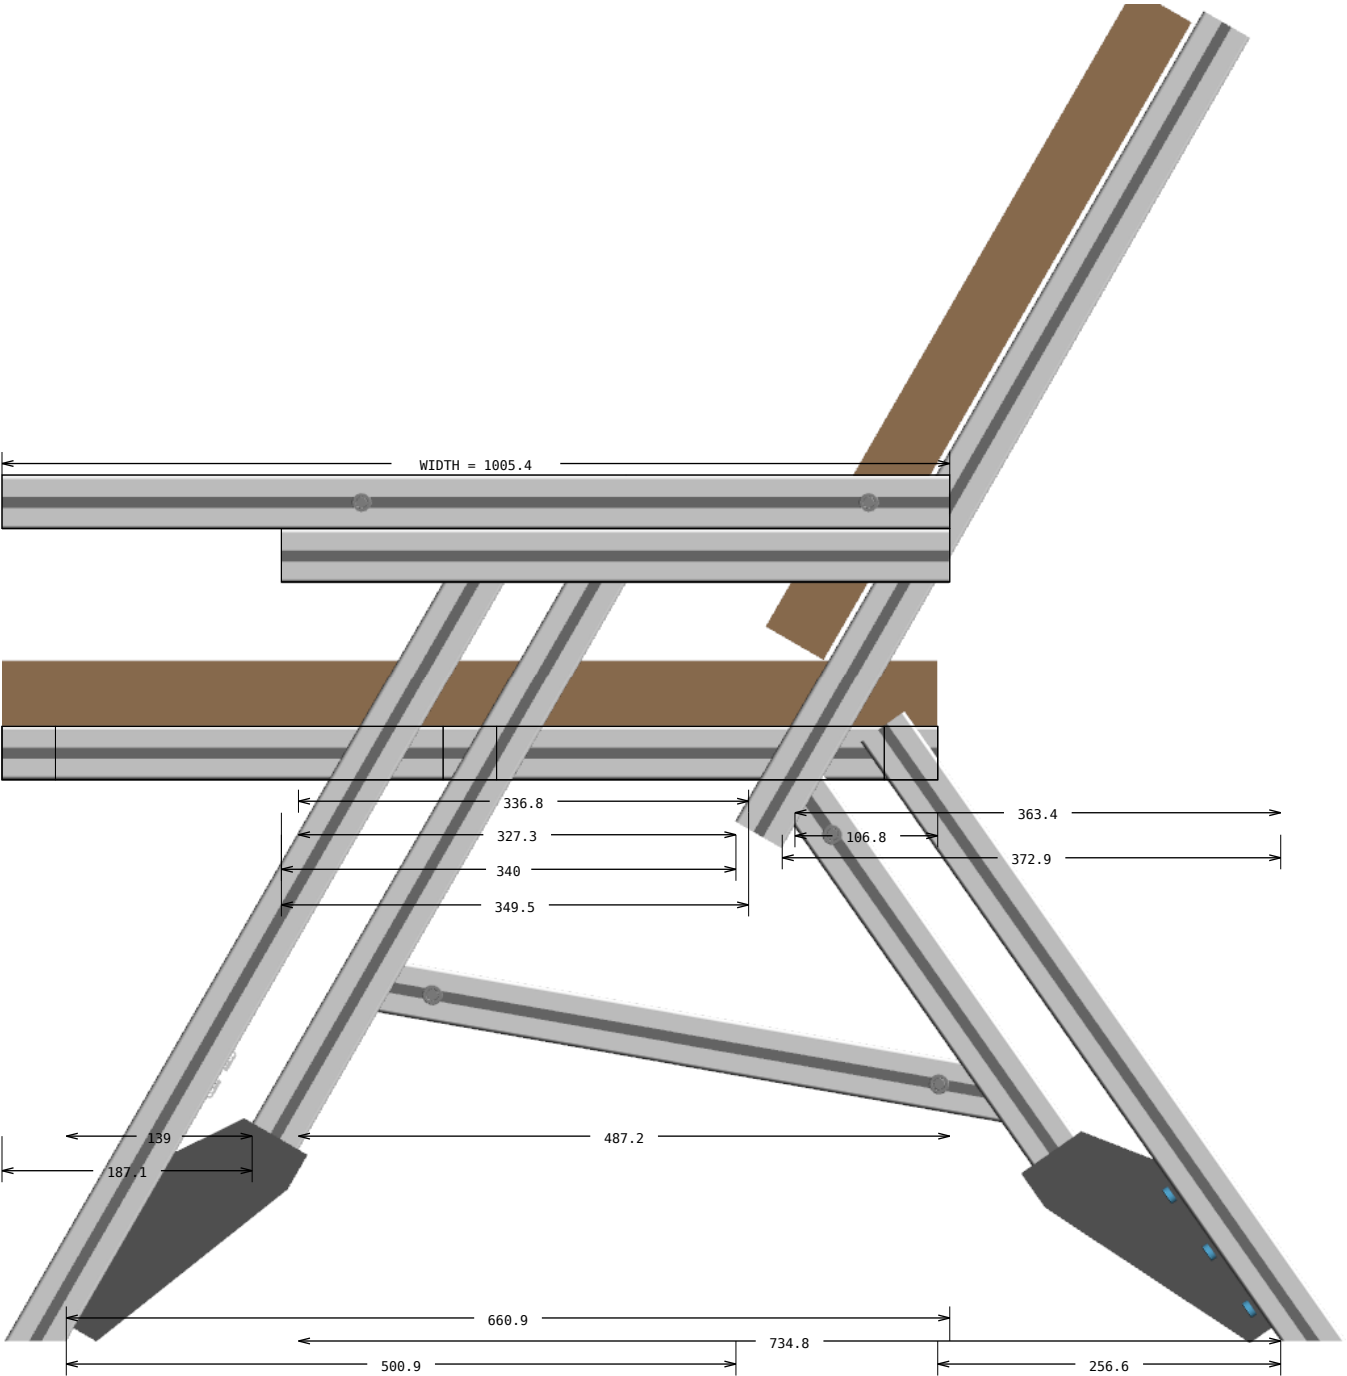

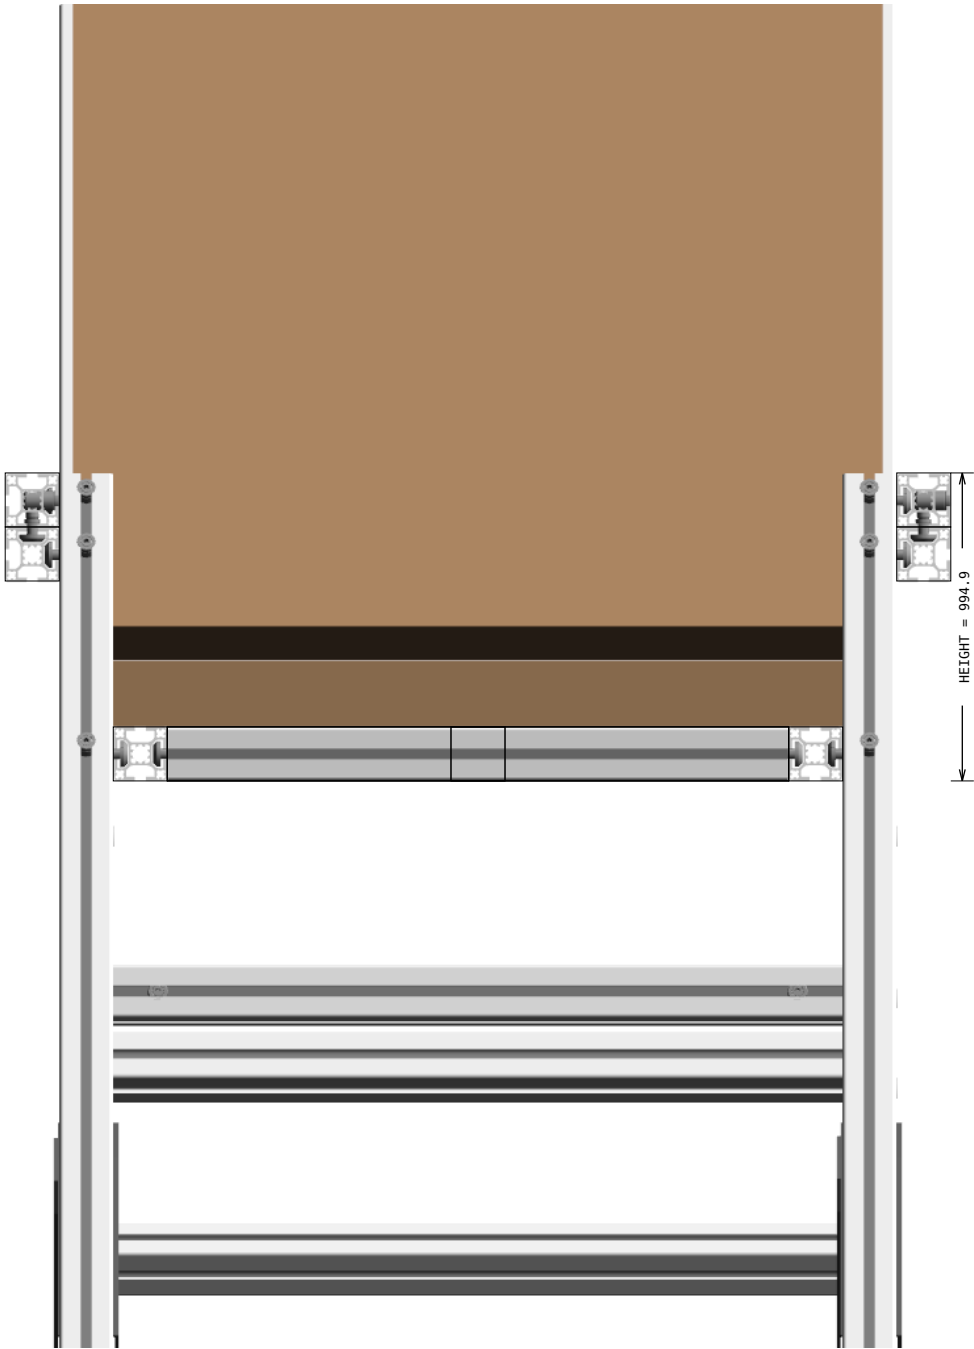

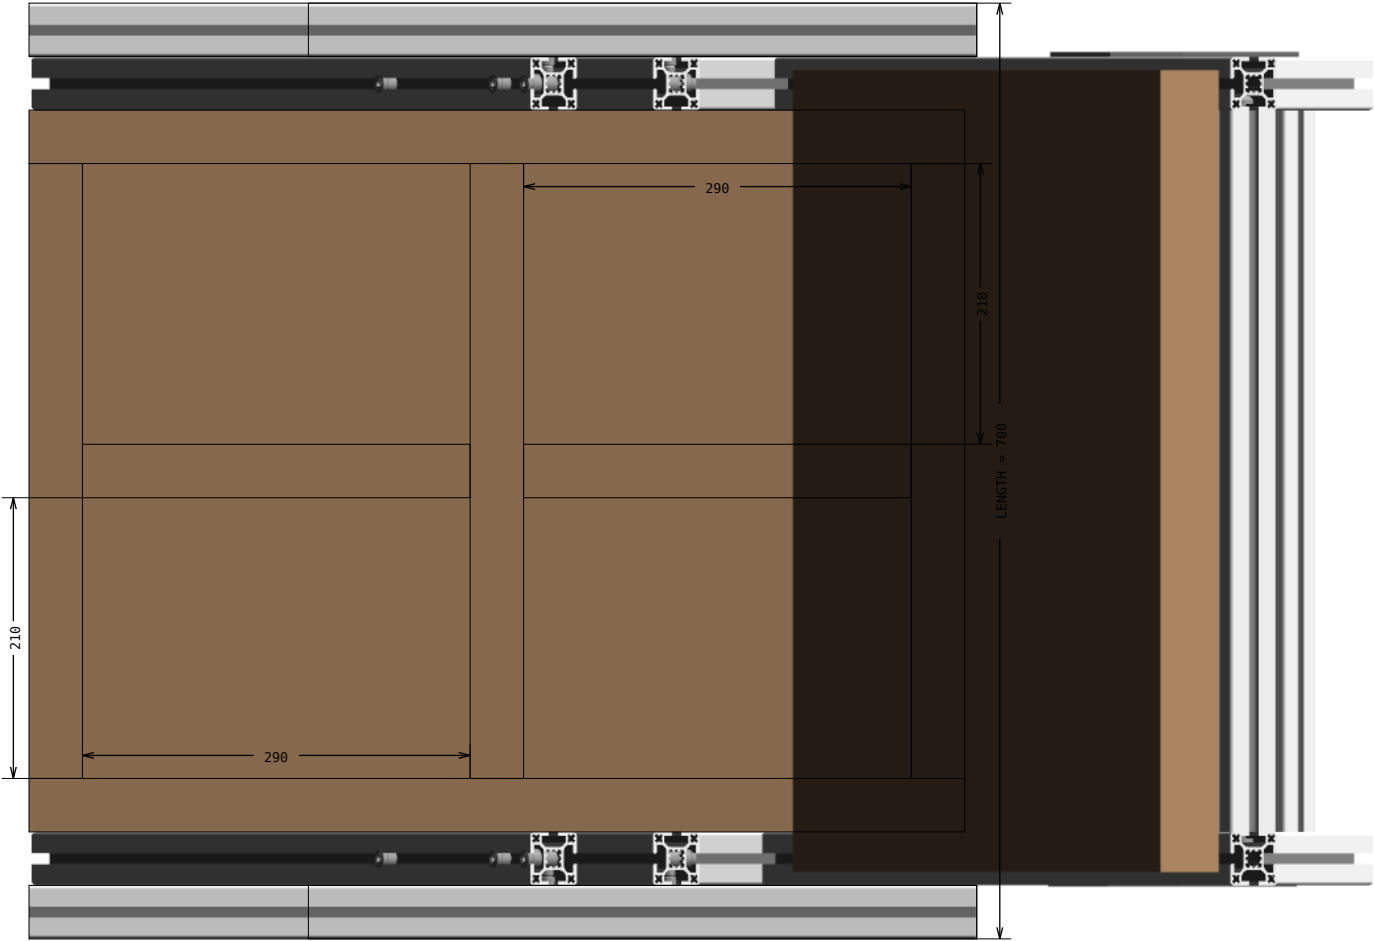


Exploded view

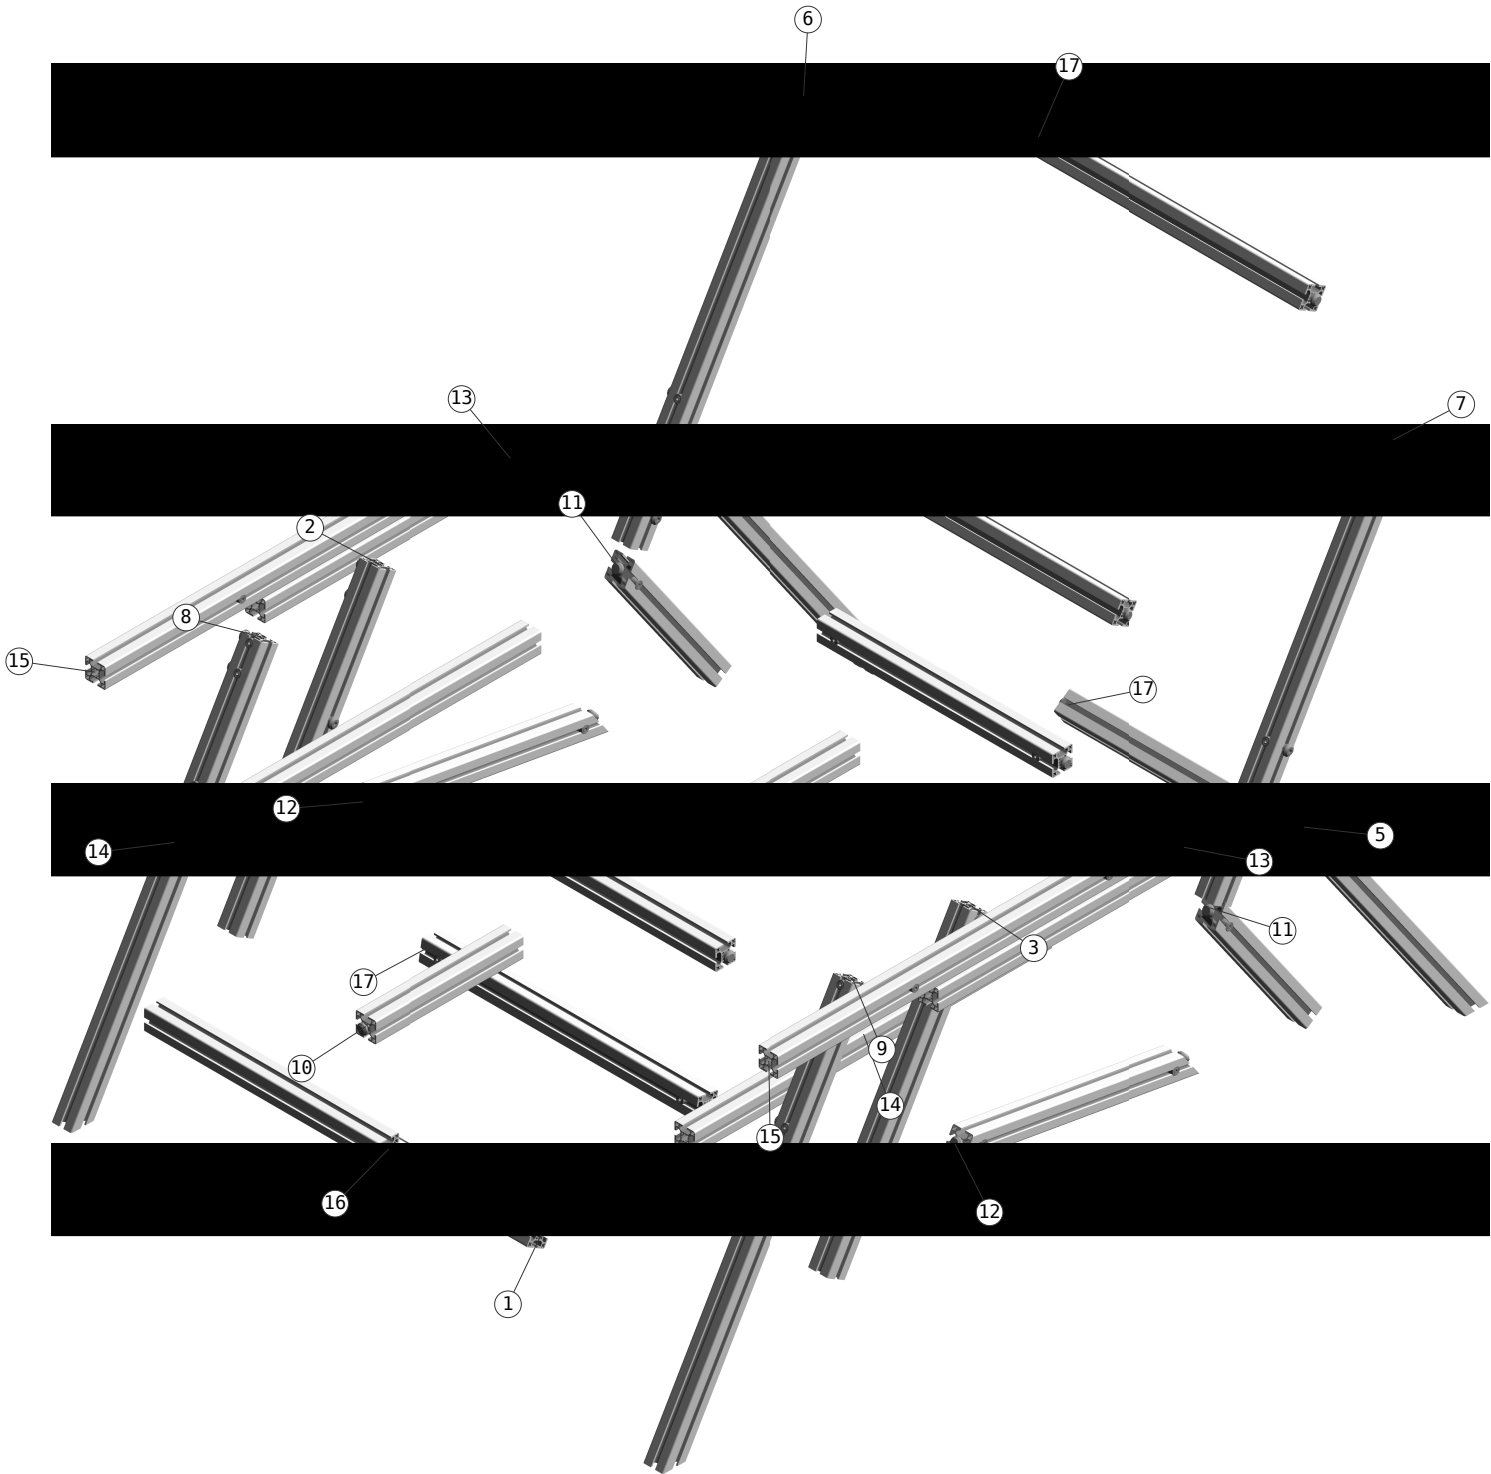

Assembly List

Pos	Article-No	Description	Related parts	Qty
2	1.11.040040.43LP-A00A00/559.8	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	3
3	1.11.040040.43LP-A00A00/559.8	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	3
4	1.11.040040.43LP-E00A00/575	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	1
5	1.11.040040.43LP-E00A00/575	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	1
6	1.11.040040.43LP-A00A00/681	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	2
7	1.11.040040.43LP-A00A00/700	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	2
8	1.11.040040.43LP-D00A00/746.4	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	3
9	1.11.040040.43LP-D00A00/746.4	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	3
10	1.11.040040.43LP-AA4AA4/290	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	4
11	1.11.040040.43LP-A00EA3/330.6	Profile 40x40, 4E, light, plain	1.21.4EK1, Connector, oblique-hinge l. + r.	2
12	1.11.040040.43LP-EA1EA1/474.2	Profile 40x40, 4E, light, plain	1.21.4EK1, Connector, oblique-hinge l. + r.	4
15	1.11.040040.43LP-A00A00/709	Profile 40x40, 4E, light, plain	1.21.4E5, Connector, parallel-square	4
16	1.11.040040.43LP-AA4AA4/460	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	6
17	1.11.040040.43LP-AA4AA4/540	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	8
19	1.44.820001L	Base angle 200x87x42, L	1.32.4EM8, T-Nut for subsequent insertion, w. spring E, M8 0.63.D06912.08010, Cylindric head screw, DIN 6912 - M8x10	12 12


Profile machining details

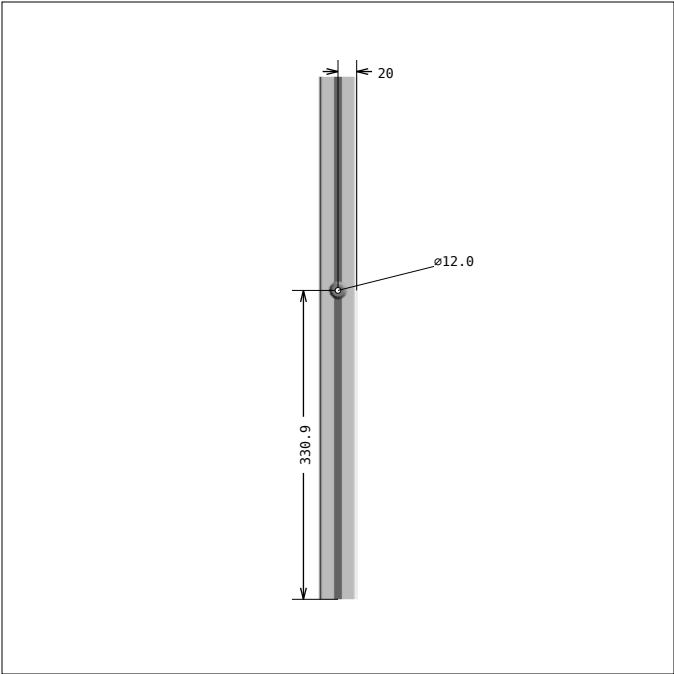


DRAWING 1, Pos 2
SIDE 1, bar length: 559.8 mm



DRAWING 1, Pos 2
SIDE 2

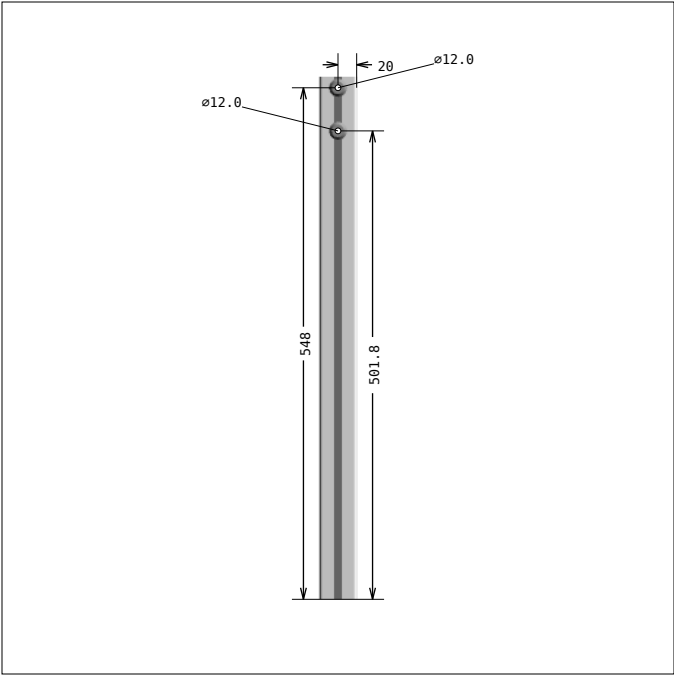


DRAWING 1, Pos 2
SIDE 3

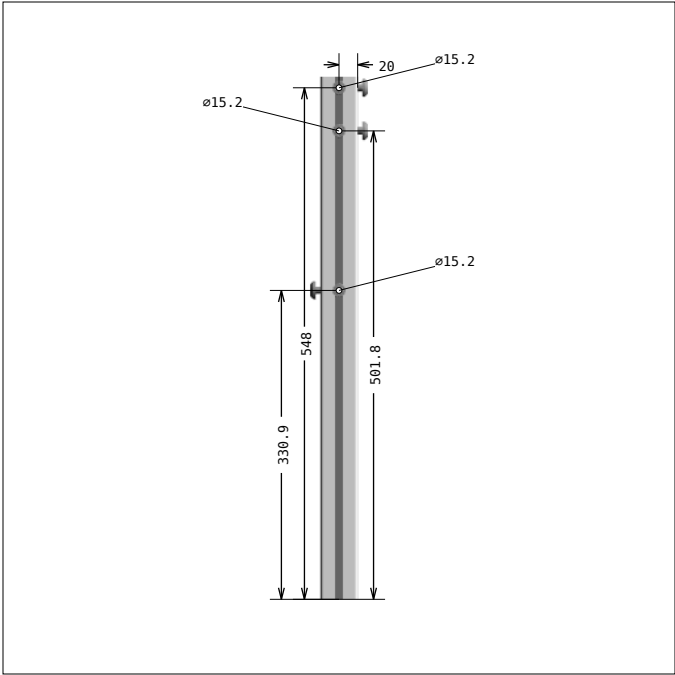

DRAWING 1, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

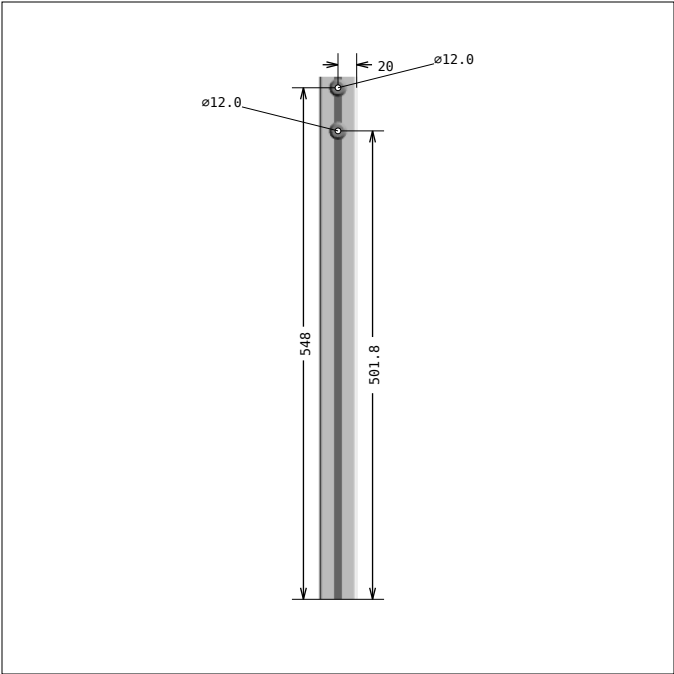


DRAWING 2, Pos 3
SIDE 1, bar length: 559.8 mm



DRAWING 2, Pos 3
SIDE 2

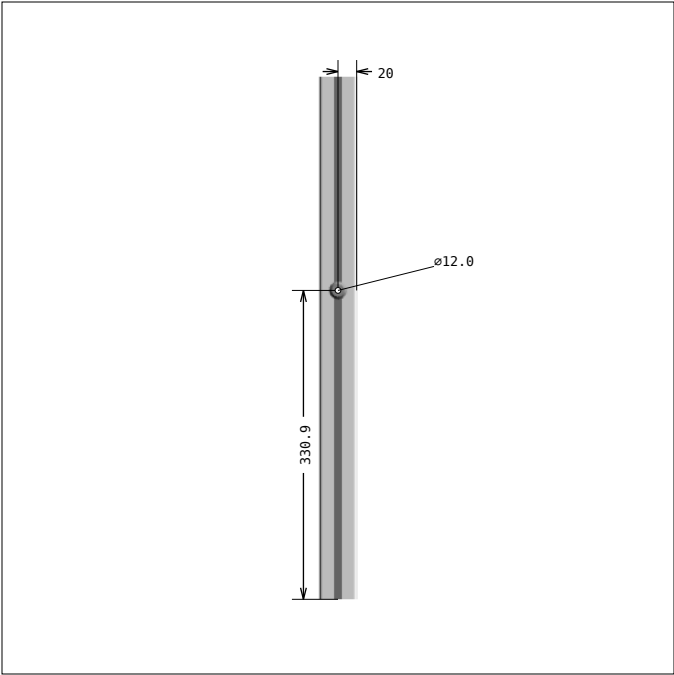


DRAWING 2, Pos 3
SIDE 3

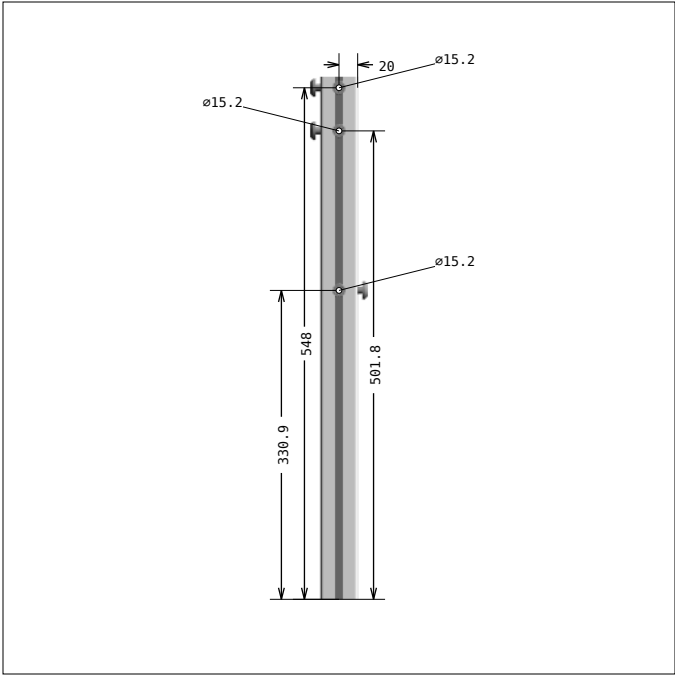


DRAWING 2, Pos 3
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

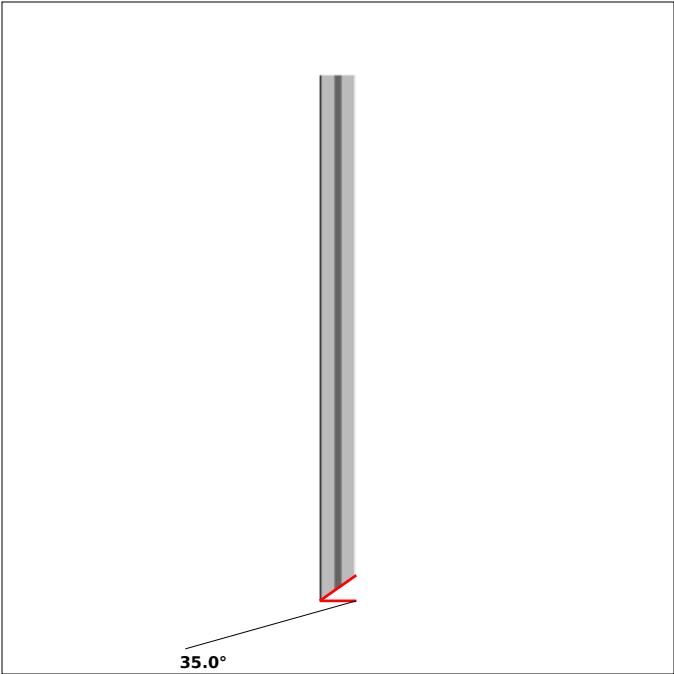


DRAWING 3, Pos 4
SIDE 1, bar length: 575.0 mm

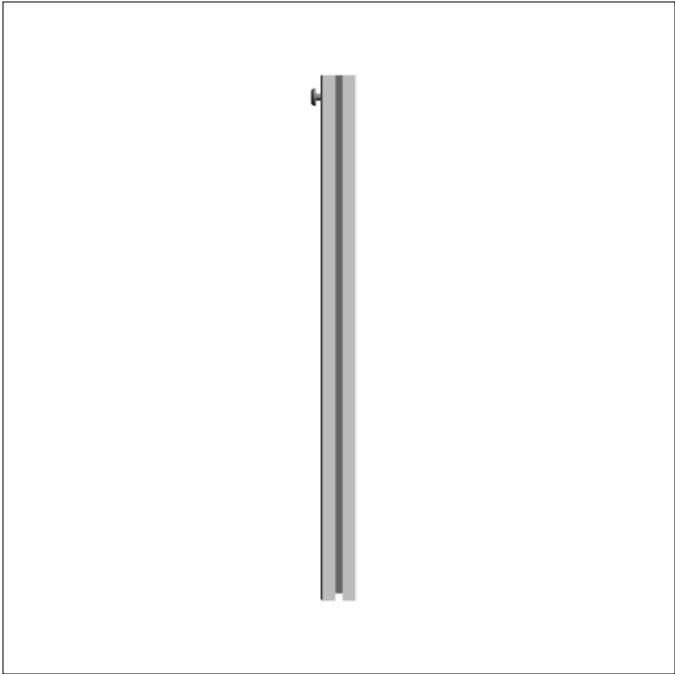

DRAWING 3, Pos 4
SIDE 2

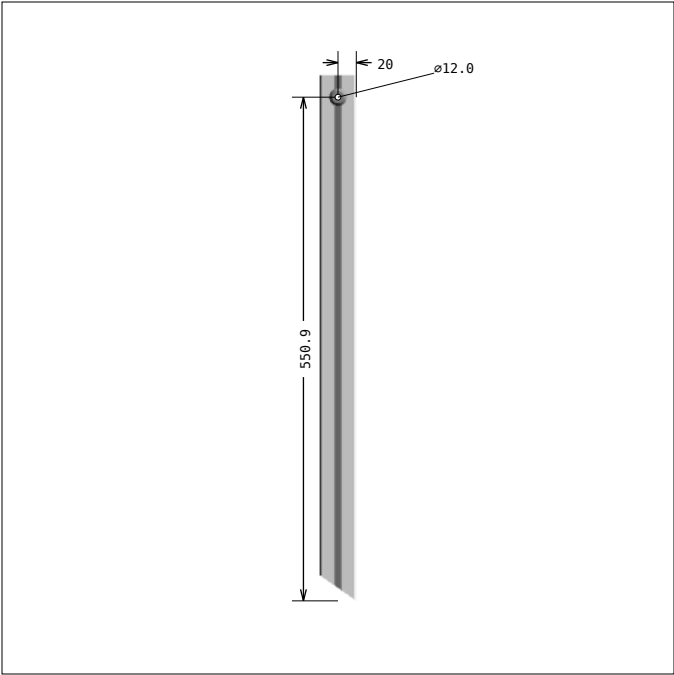


DRAWING 3, Pos 4
SIDE 3

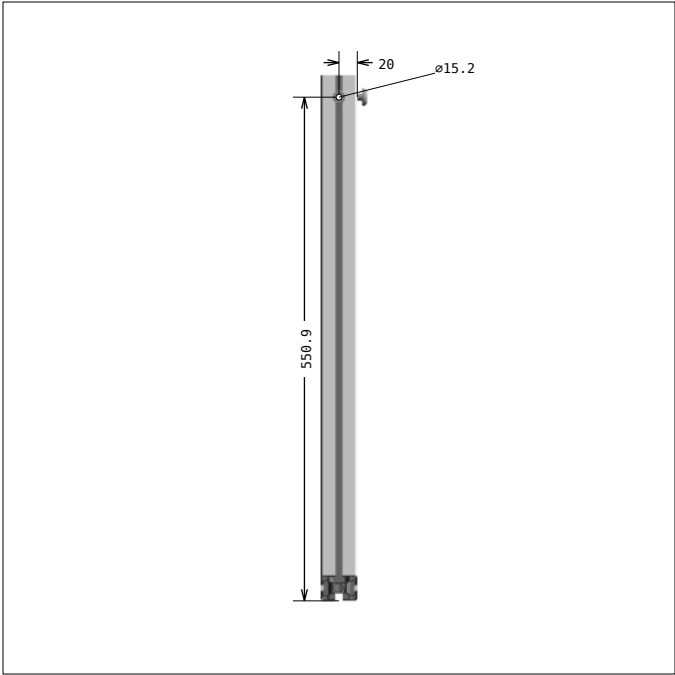


DRAWING 3, Pos 4
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

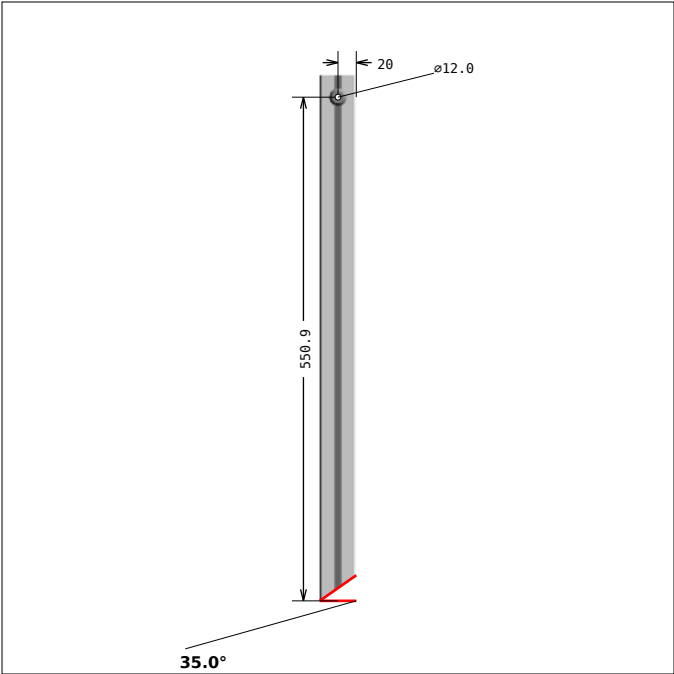


DRAWING 4, Pos 5
SIDE 1, bar length: 575.0 mm

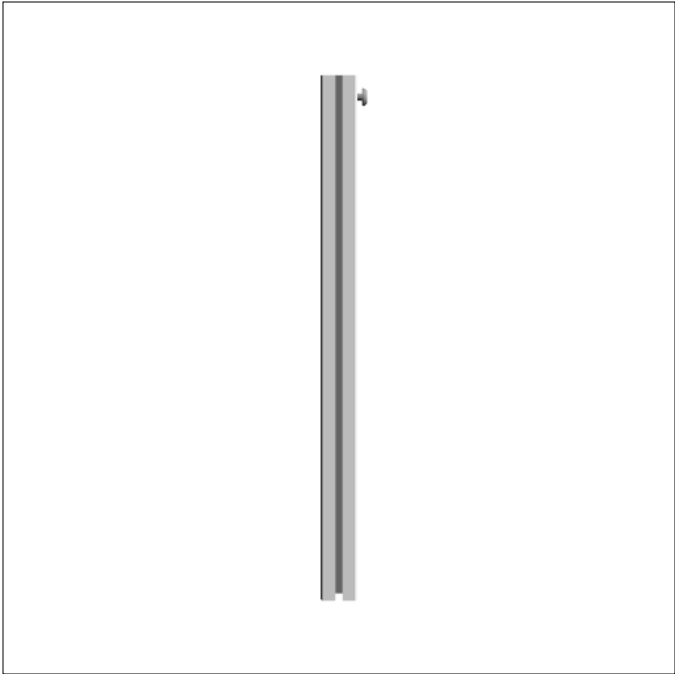

DRAWING 4, Pos 5
SIDE 2

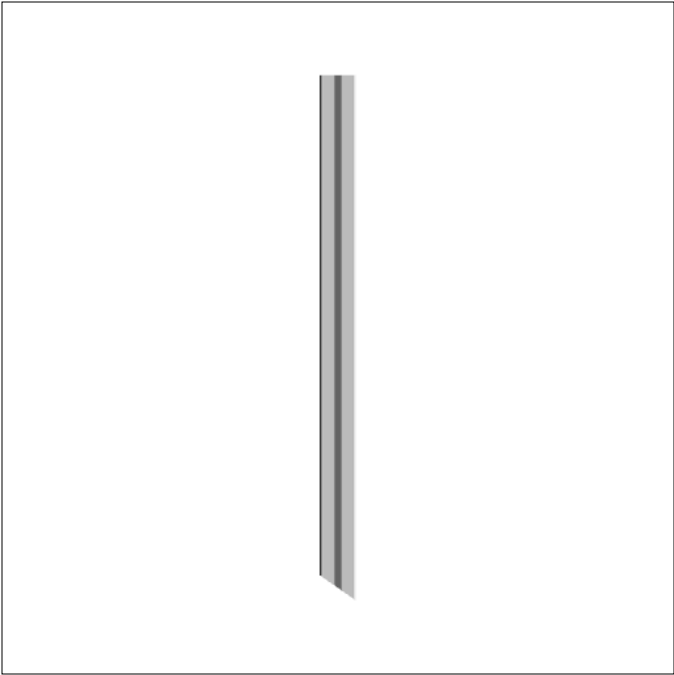


DRAWING 4, Pos 5
SIDE 3

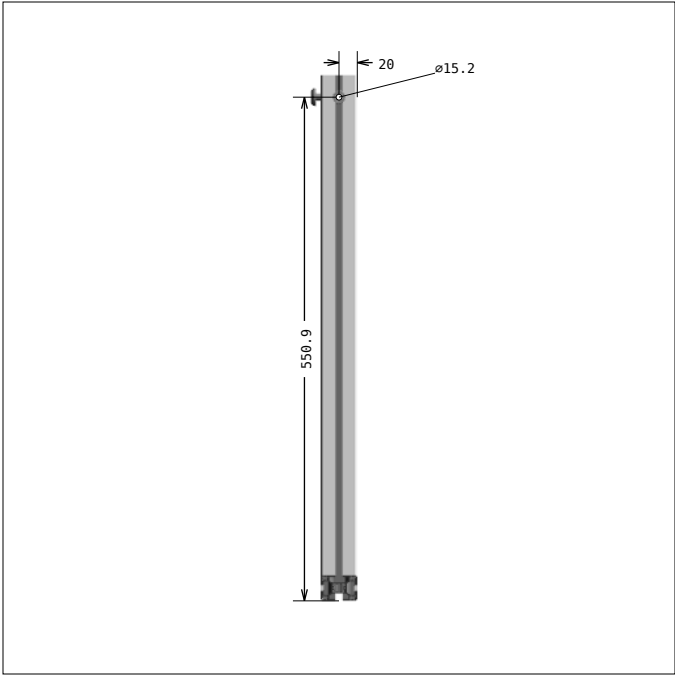

DRAWING 4, Pos 5
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

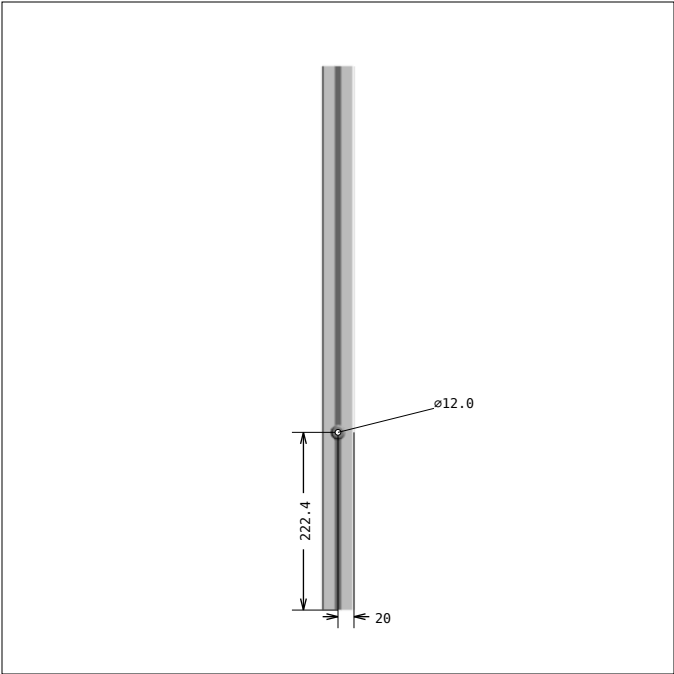


DRAWING 5, Pos 6
SIDE 1, bar length: 681.0 mm



DRAWING 5, Pos 6
SIDE 2

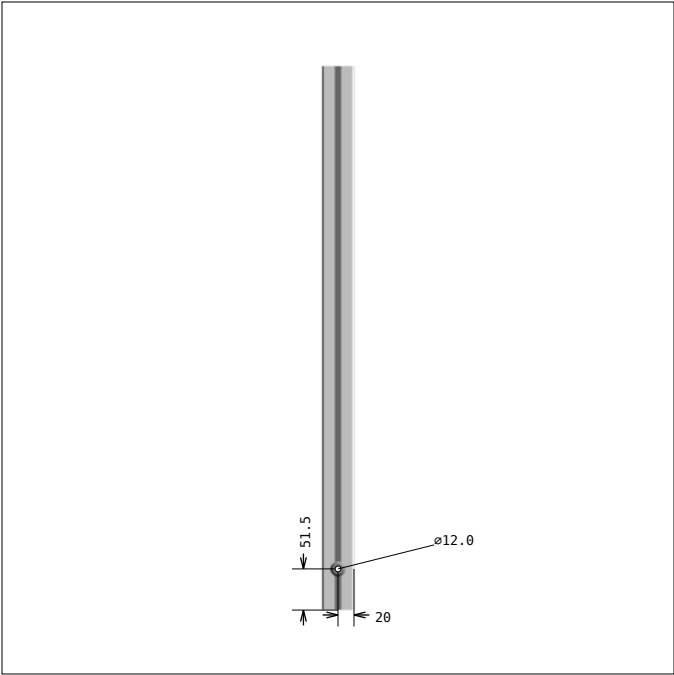


DRAWING 5, Pos 6
SIDE 3

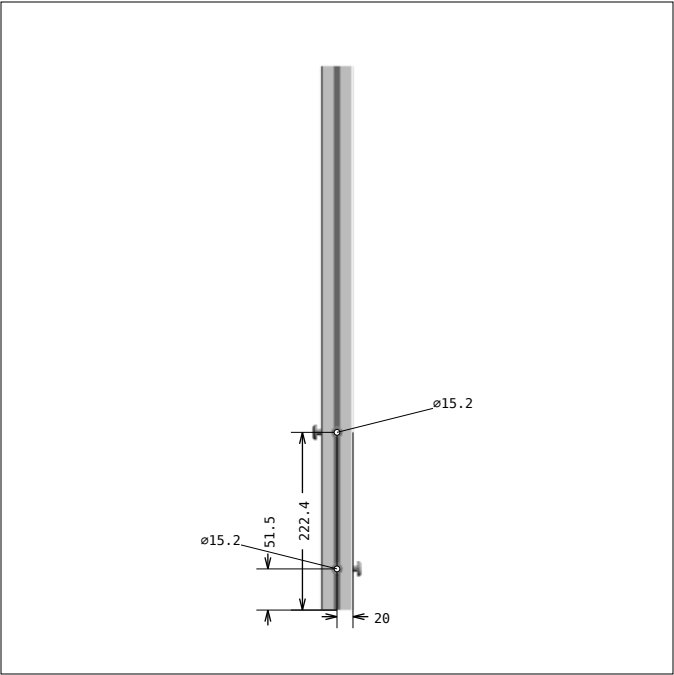

DRAWING 5, Pos 6
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

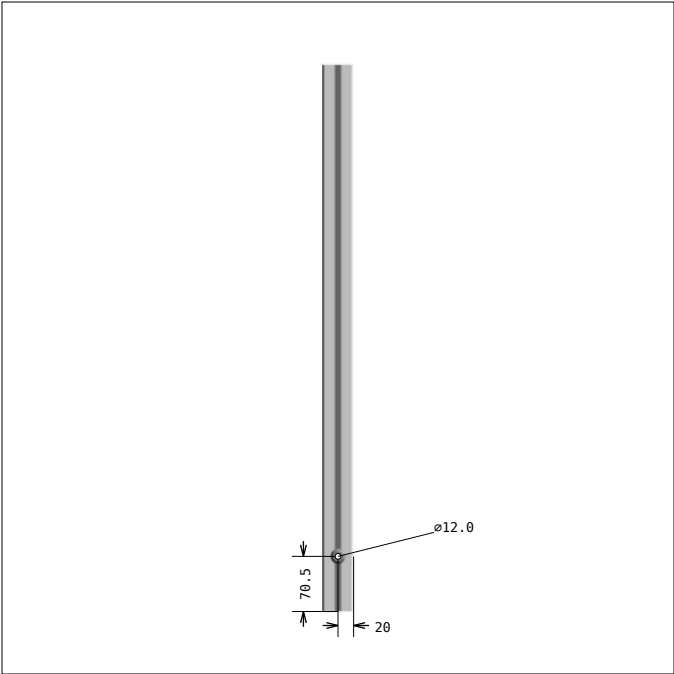


DRAWING 6, Pos 7
SIDE 1, bar length: 700.0 mm



DRAWING 6, Pos 7
SIDE 2

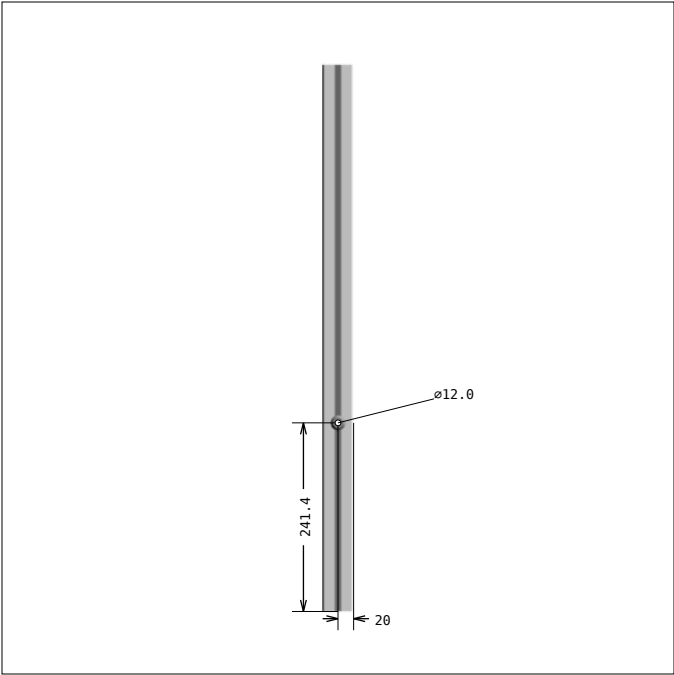


DRAWING 6, Pos 7
SIDE 3

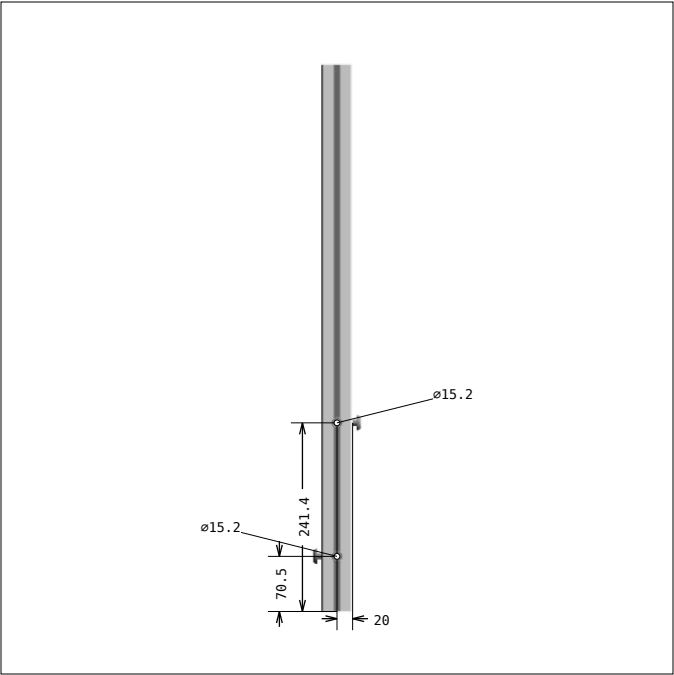

DRAWING 6, Pos 7
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

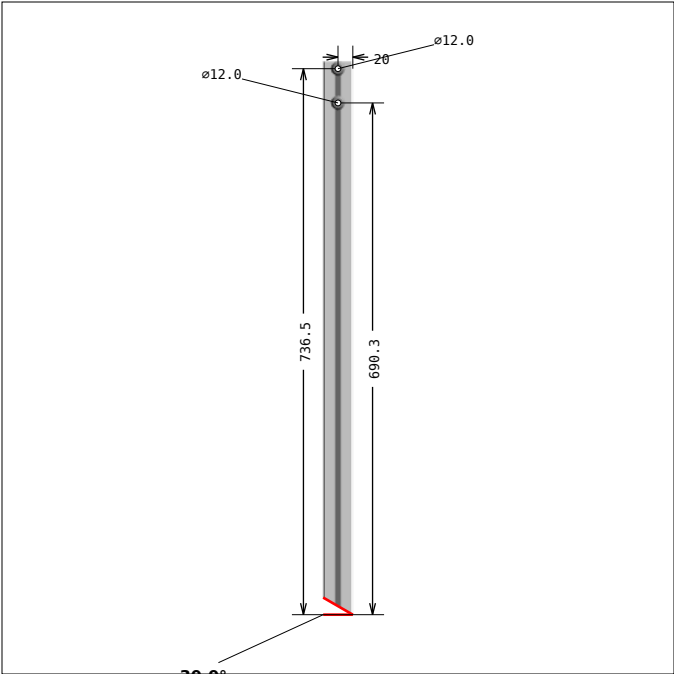


DRAWING 7, Pos 8
SIDE 1, bar length: 746.4 mm



DRAWING 7, Pos 8
SIDE 2

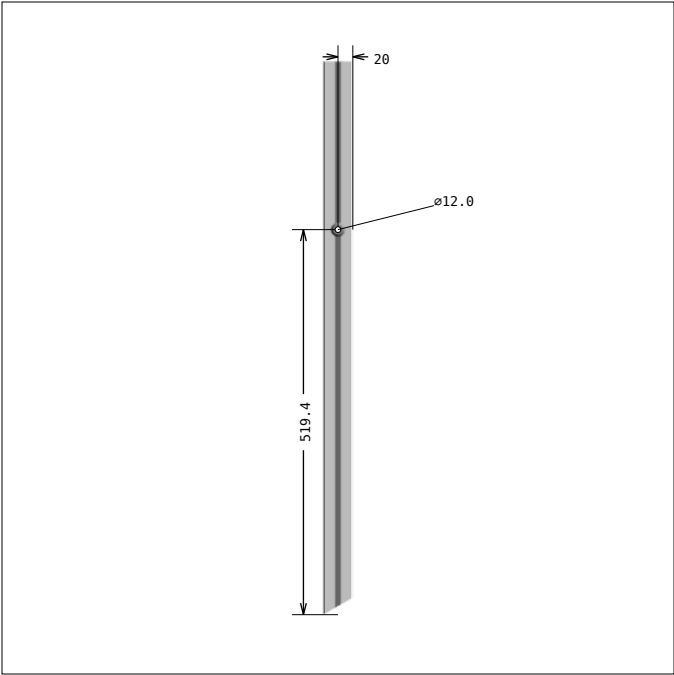


DRAWING 7, Pos 8
SIDE 3

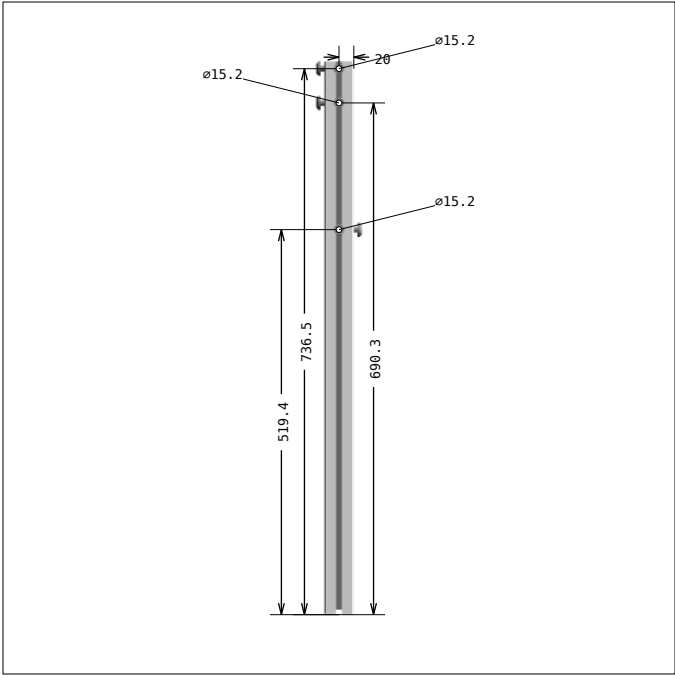

DRAWING 7, Pos 8
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

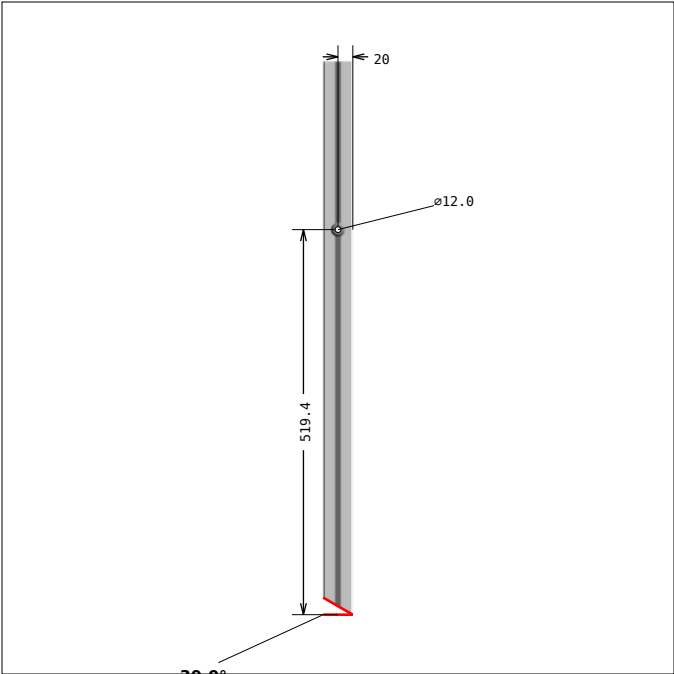


DRAWING 8, Pos 9
SIDE 1, bar length: 746.4 mm



DRAWING 8, Pos 9
SIDE 2

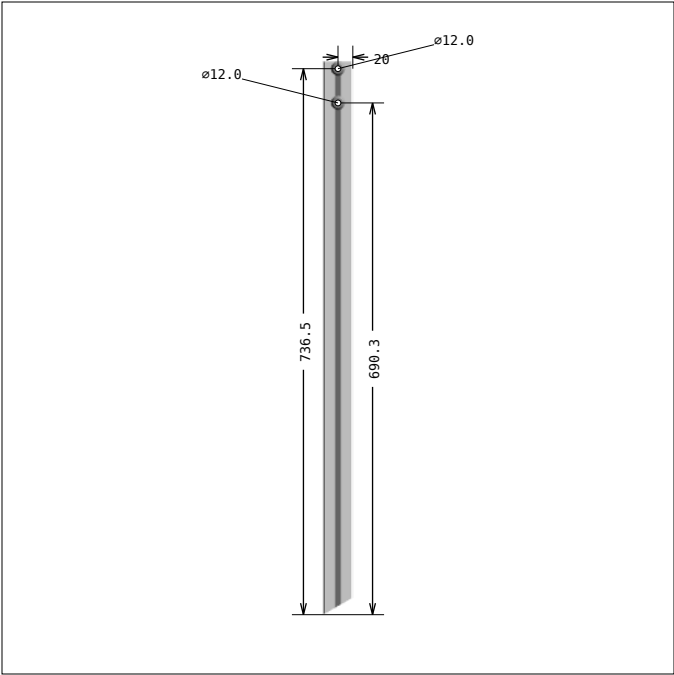


DRAWING 8, Pos 9
SIDE 3

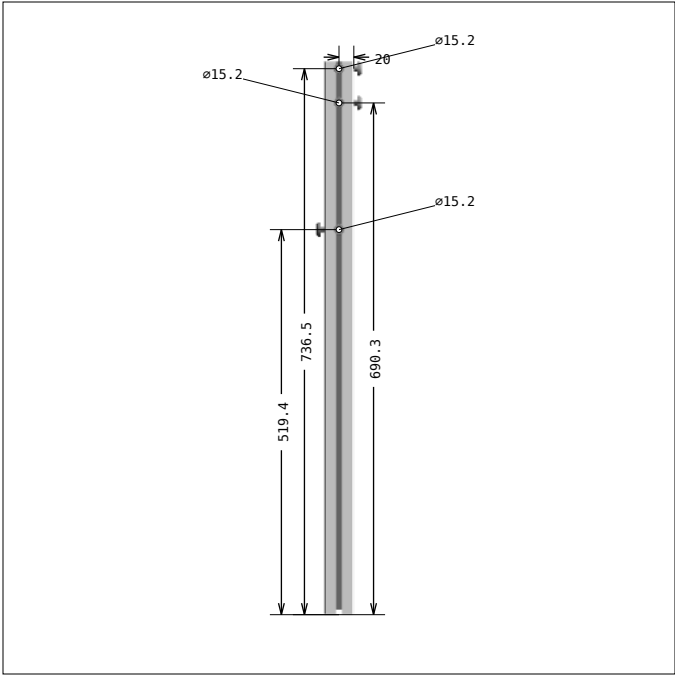


DRAWING 8, Pos 9
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

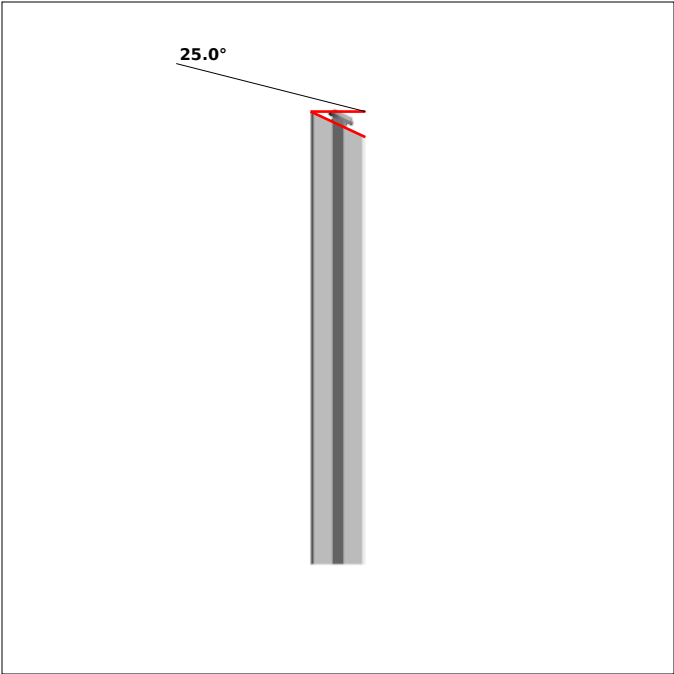

DRAWING 9, Pos 11
SIDE 1, bar length: 330.6 mm

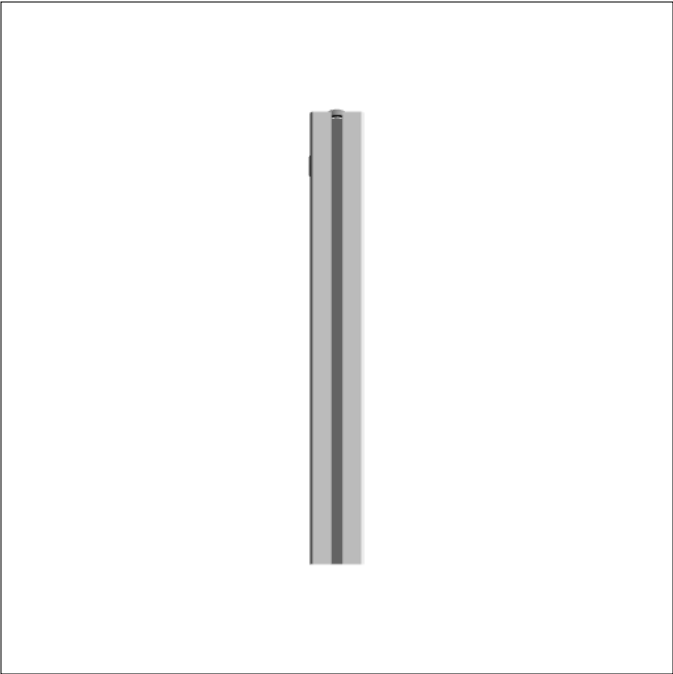

DRAWING 9, Pos 11
SIDE 2

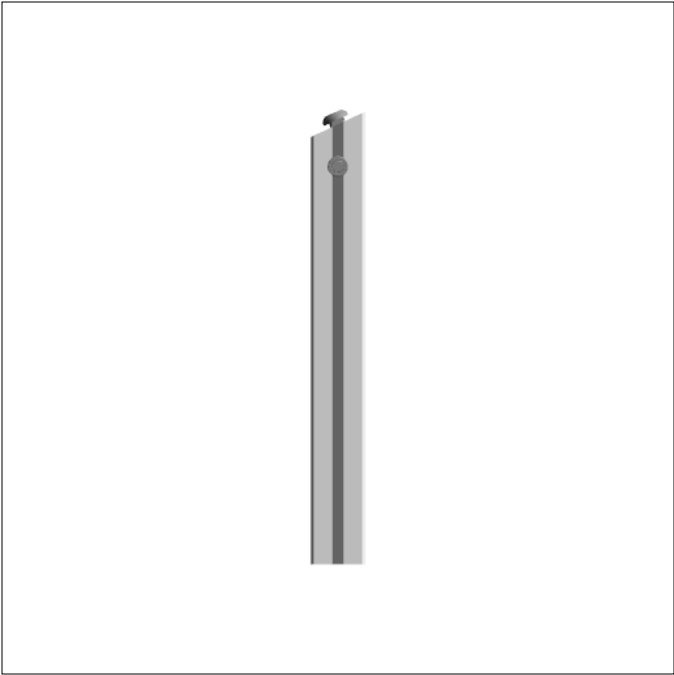


DRAWING 9, Pos 11
SIDE 3




DRAWING 9, Pos 11
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

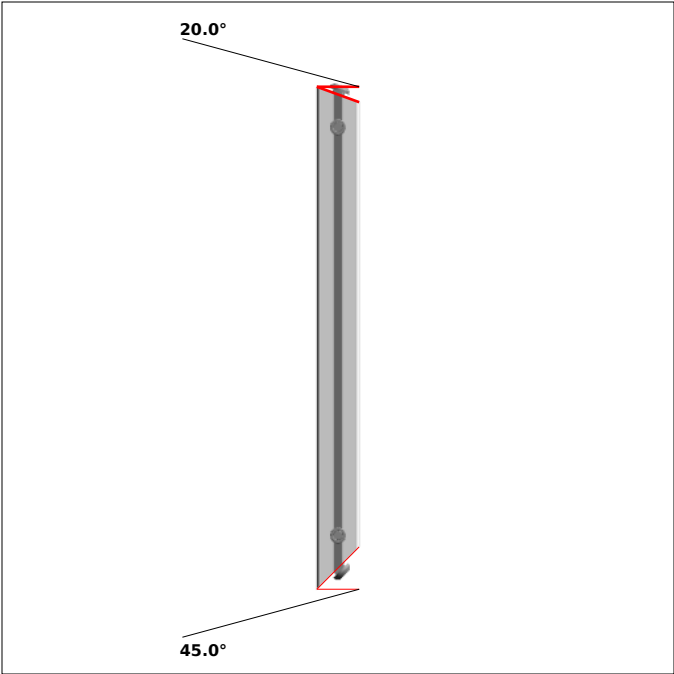

DRAWING 10, Pos 12
SIDE 1, bar length: 474.2 mm

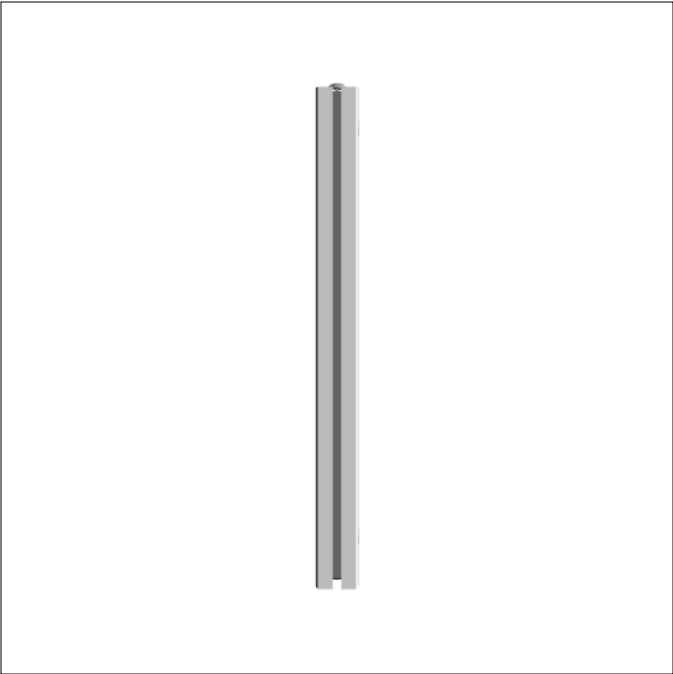

DRAWING 10, Pos 12
SIDE 2




DRAWING 10, Pos 12
SIDE 3




DRAWING 10, Pos 12
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

Profile machining details

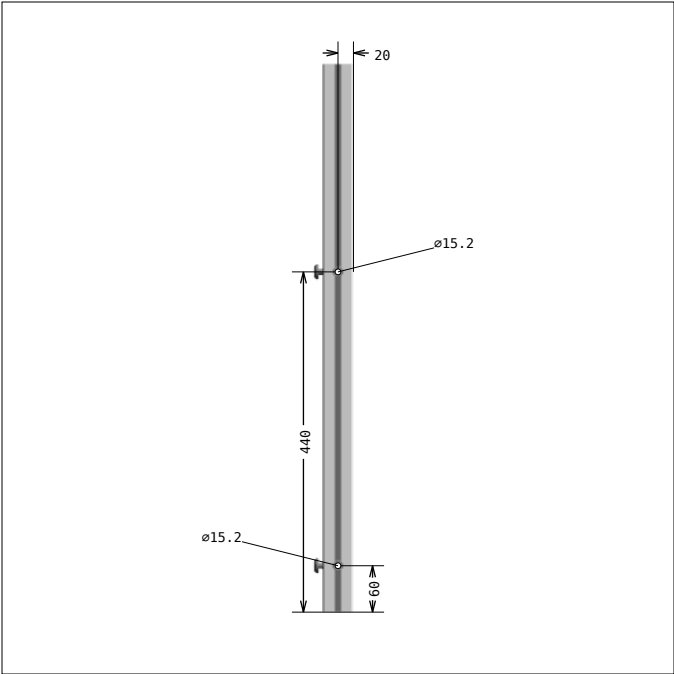


DRAWING 11, Pos 15
SIDE 1, bar length: 709.0 mm

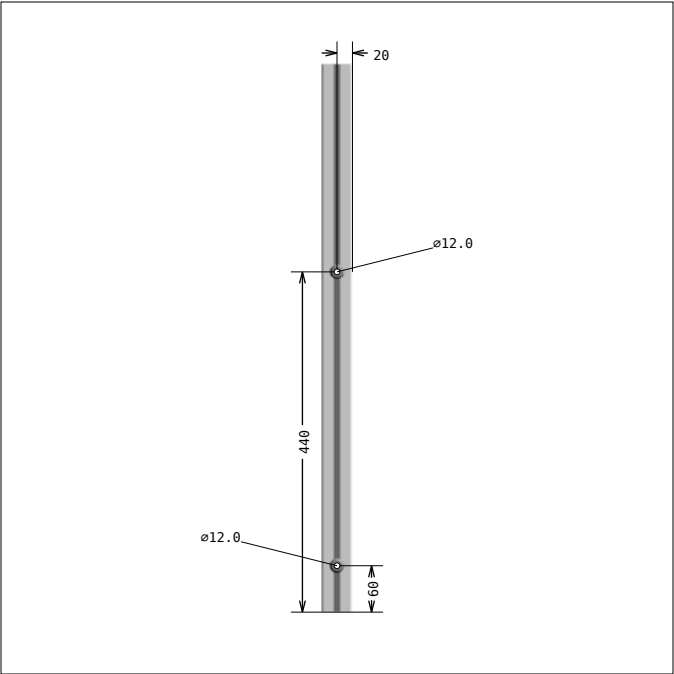

DRAWING 11, Pos 15
SIDE 2



DRAWING 11, Pos 15
SIDE 3



DRAWING 11, Pos 15
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".



Connectors for profiles with core hole-Ø 12 mm

1.21.4E0

Connection	Connector	Finished dimension	PG	Article-No. for connector with E-head		
				steel standard	E	VA
Universal			40	1.21.4E0	E	V

Connector types and materials

Technical data				
Connector	Article-No.	Material	Strength	Surface
Standard ground	1.21.4E0 1.21.4E0 E	steel	≥ 650 N/mm²	galvanised
Standard VA	1.21.4E0 V	stainless steel 1.4305	490 - 685 N/mm²	pickled and passivated


Strength values for profile connections with MayTec-Connectors

Torque tightening values for connector setscrew

PG	Slot	Setscrew special execution	Torque value	
			recommended	max.
40	E	M10×12	30.0 Nm	40.0 Nm

Comments
The max. tightening values are only valid for the MayTec setscrew and can not be reached by the usual commercial quality standard.


Tension load




PG	Slot	Connector	max. Tensile strength
40	E	Universal	12,000 N

Comments
All values given have been tested with pretension of the connectors and maximum torque value and refer to the connection of two identical profiles.

Slide load



Flexure load



PG	Slot	Profile	Pcs	max. Slide strength		max. Flexure strength		
				Connector, Universal		E-connector		
40	E	40×40	1	6,000 N	9,000 N	250 Nm		
		40×80	2	12,000 N	18,000 N		500 Nm	1,000 Nm
		80×80, 8E	4	24,000 N	36,000 N	2,000 Nm		






The listed values are valid for all light and heavy profiles

E = ground-connector, VA = stainless steel 1.4305


Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.040040.43LP	6 7 14 14 15 15 9 8 681.0700.0700.0700.0709.0709.0746.4746.4	280.2 mm
	12 13 17 1 17 17 17 3 2 5 4 474.2500.0540.0540.0540.0540.0540.0559.8559.8575.0575.0	17.6 mm
	10 10 11 11 16 16 16 12 13 290.0290.0330.6330.6460.0460.0460.0474.2500.0	2373.0 mm

Assembly hints

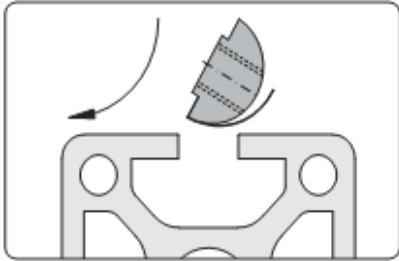ACCESSORY	1.32.4EM8	T-Nut for subsequent insertion, w. spring E, M8	
 Fixing with leaf spring  Insert front-sided and rotate Application Fastening element for screw-type connections Technical data Design steel: - material: steel - surface: galvanised Design stainless: - material: stainless steel 1.4305 - surface: pickled and passivated max. moment of torque: $M_{A, max}$		These t-nuts are easily inserted into assembled frames	
CONNECTOR	1.21.4E0	Connector, universal	
	1.21.4E5	Connector, parallel-square	
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side		Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.	

Assembly hints

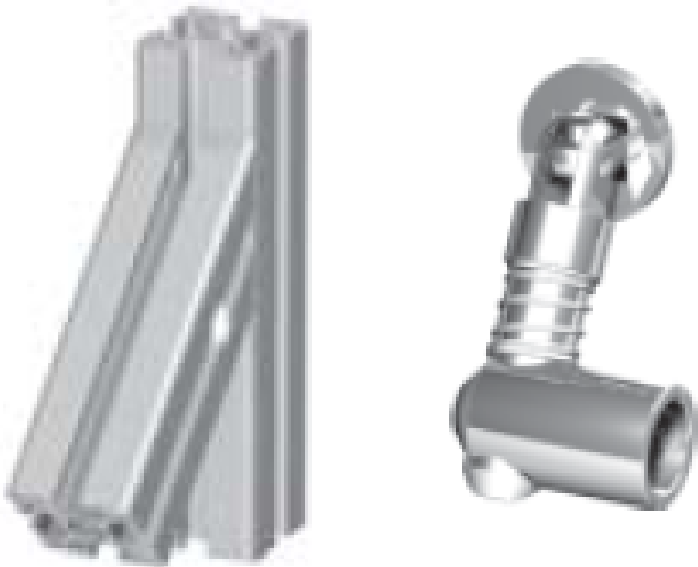CONNECTOR	1.21.4EK1	Connector, oblique-hinge l. + r.
		This type of connector assembles similar to universal connector