

Design Title : chair 02 customer 800 mm.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19



Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA4AA4/390	Profile 20x20, 4H, light, plain	MM	2
2	1.11.030030.43LP-AA4AA4/390	Profile 30x30, 4F, light, plain	MM	2
3	1.11.040040.43LP-EA1EA1/568.4	Profile 40x40, 4E, light, plain Special angle, Right: 10.0°; Special angle, Left: 10.0°; **PER DRAWING 1**	MM	1
4	1.11.040040.43LP-EA3EA3/568.4	Profile 40x40, 4E, light, plain Special angle, Right: 10.0°; Special angle, Left: 10.0°; **PER DRAWING 2**	MM	1
5	1.11.040040.43LP-EA1EA1/335.8	Profile 40x40, 4E, light, plain Special angle, Right: 10.0°; Special angle, Left: 10.0°; **PER DRAWING 3**	MM	2
6	1.11.040040.43LP-A00A00/800	Profile 40x40, 4E, light, plain	MM	4
7	1.34.EM84	T-Bolt E, M8x40	EA	2
8	7.11.706.88/01	Angle Bracket 55x55	EA	4
9	0.63.D06912.08014	Cylindric head screw, DIN 6912 - M8x14	EA	4
10	0.63.D06912.08014	Cylindric head screw, DIN 6912 - M8x14	EA	4
11	1.20.2E0	Connector, universal	EA	4
12	1.21.3E0	Connector, universal	EA	4
13	1.21.4EK1	Connector, oblique-hinge l. + r.	EA	8
14	0.61.D06923.08	Hexagonal nut with flange DIN 6923 - M8	EA	4
15	1.31.EM8	Threaded plate E, M8	EA	4


Total Weight: 9.36 kg (20.64 lbs)

Isometric view


Some accessories may not be shown




Multiview

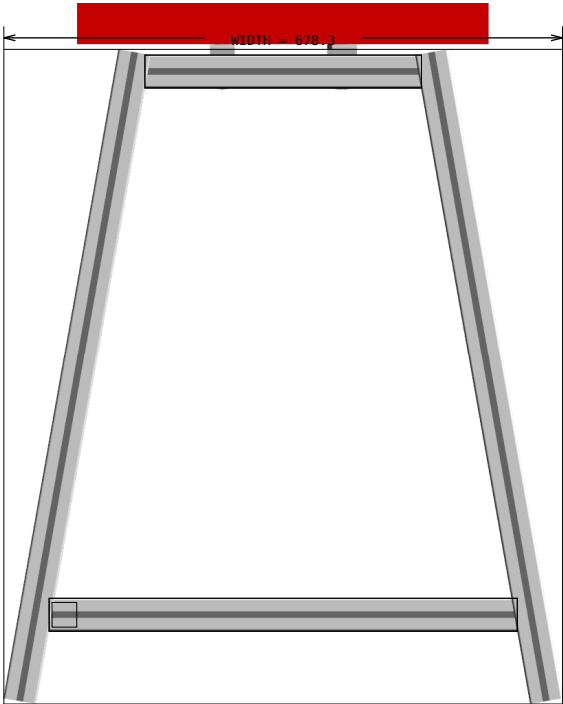

FRONT

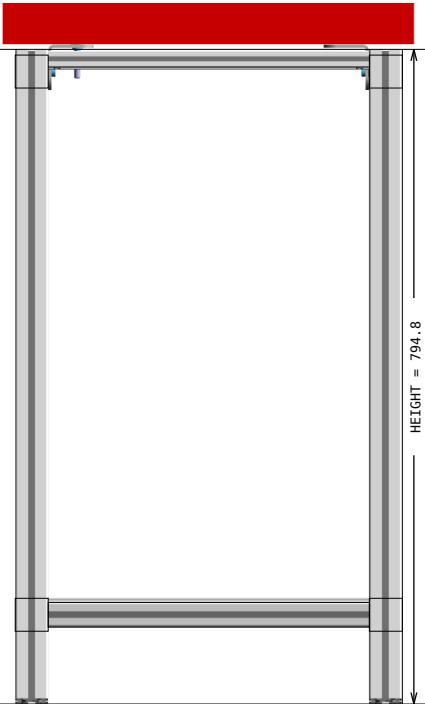

LEFT

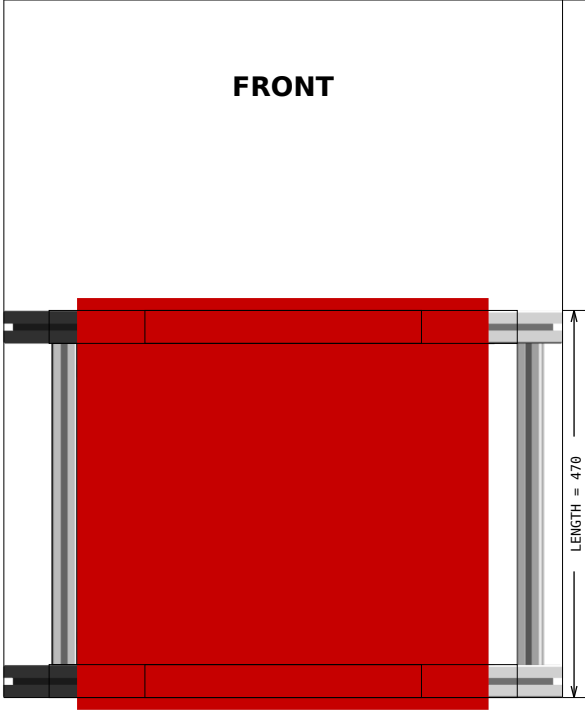


TOP





ISOMETRIC


Design Title : chair 02 customer 800 mm.scene
Customer Name :
Date : 2025-06-19

FRONT VIEW

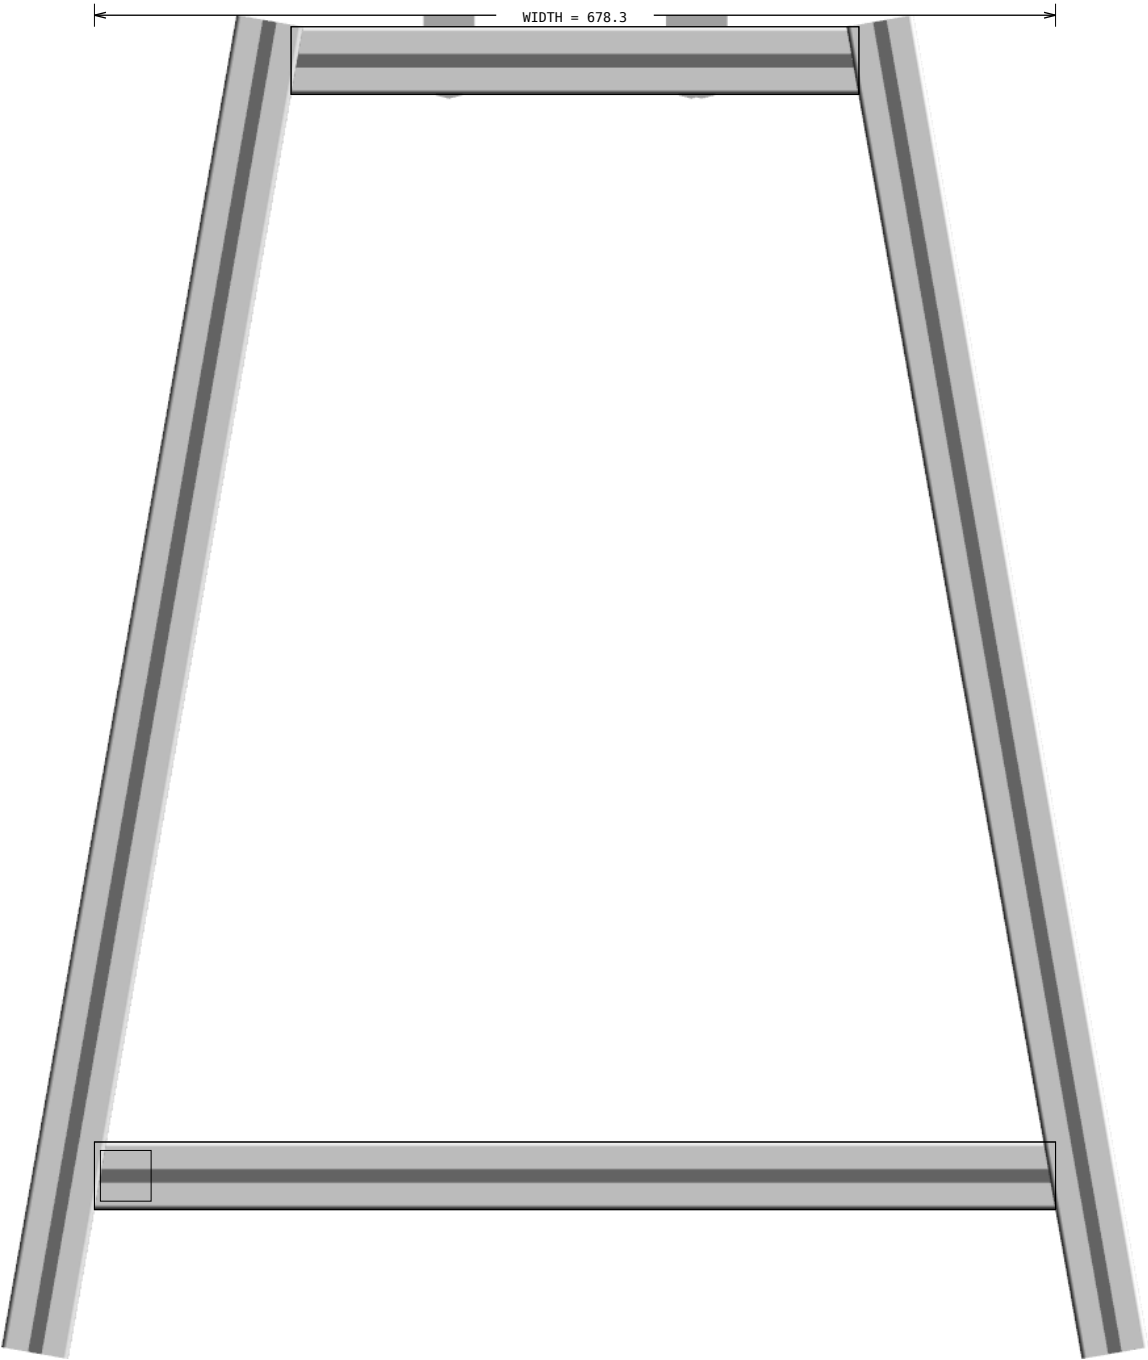

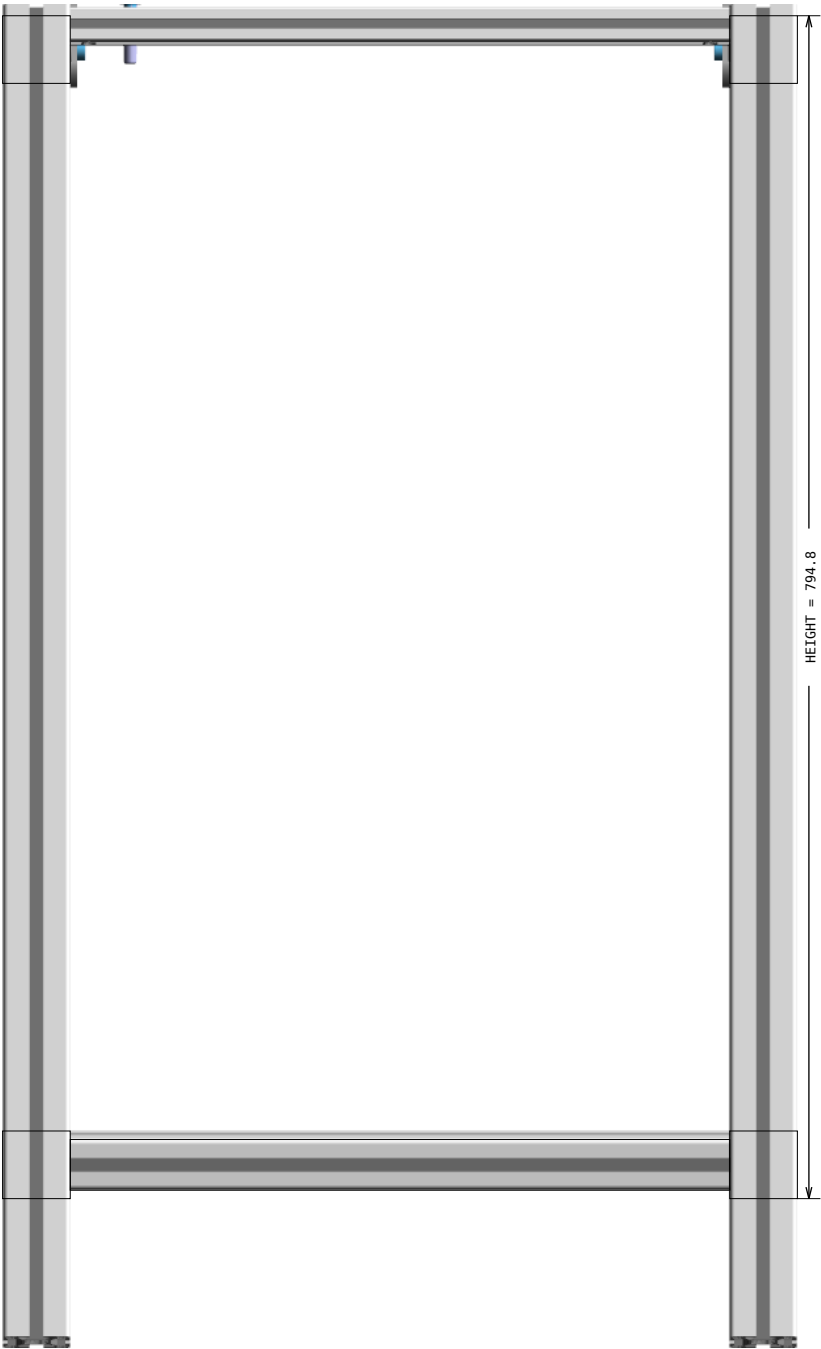

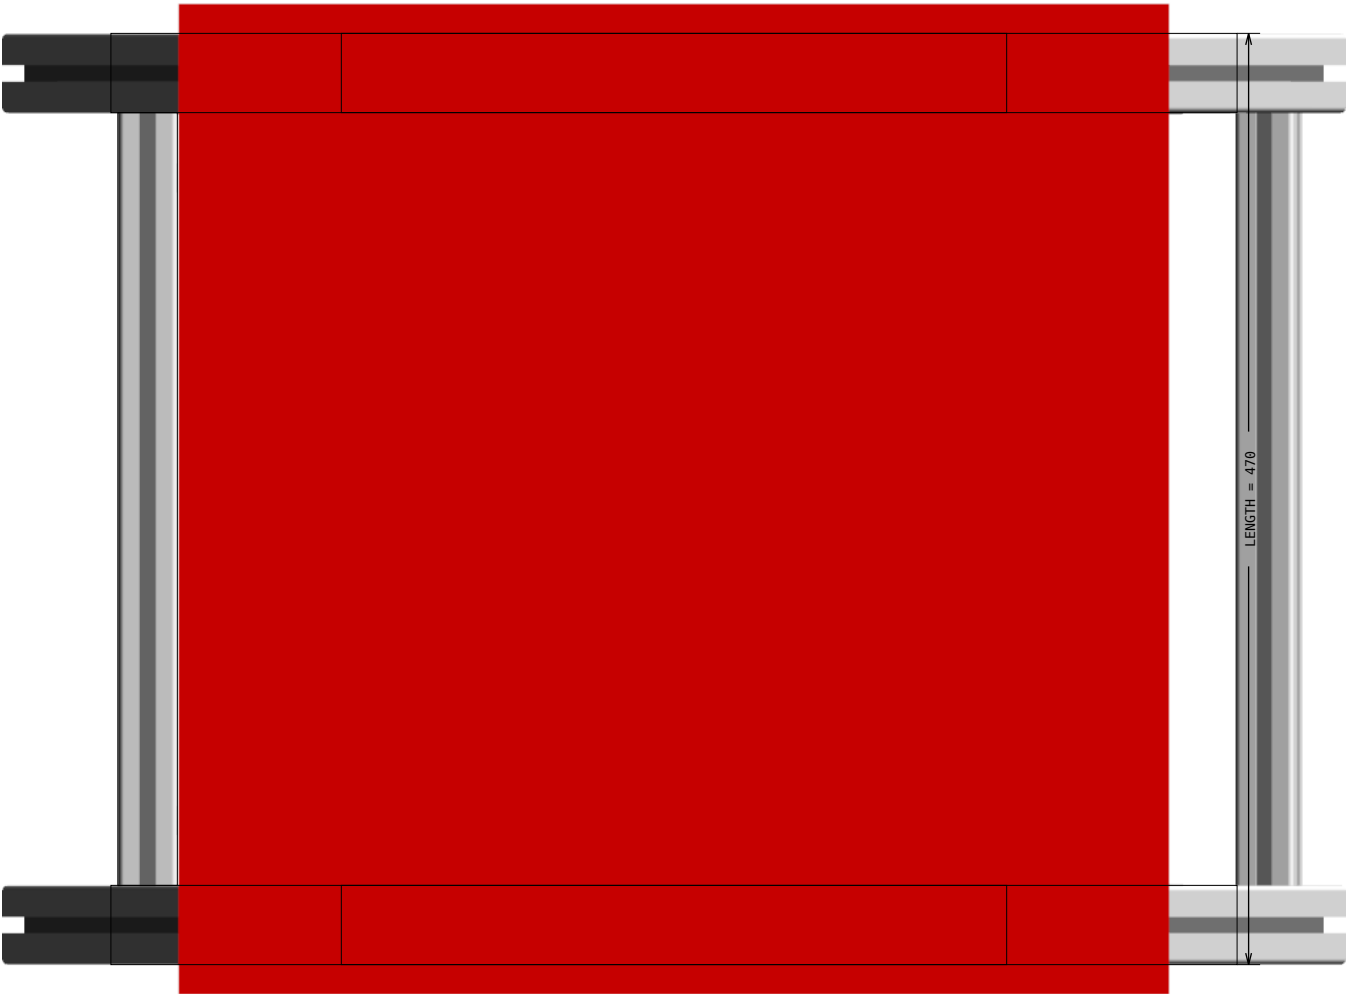

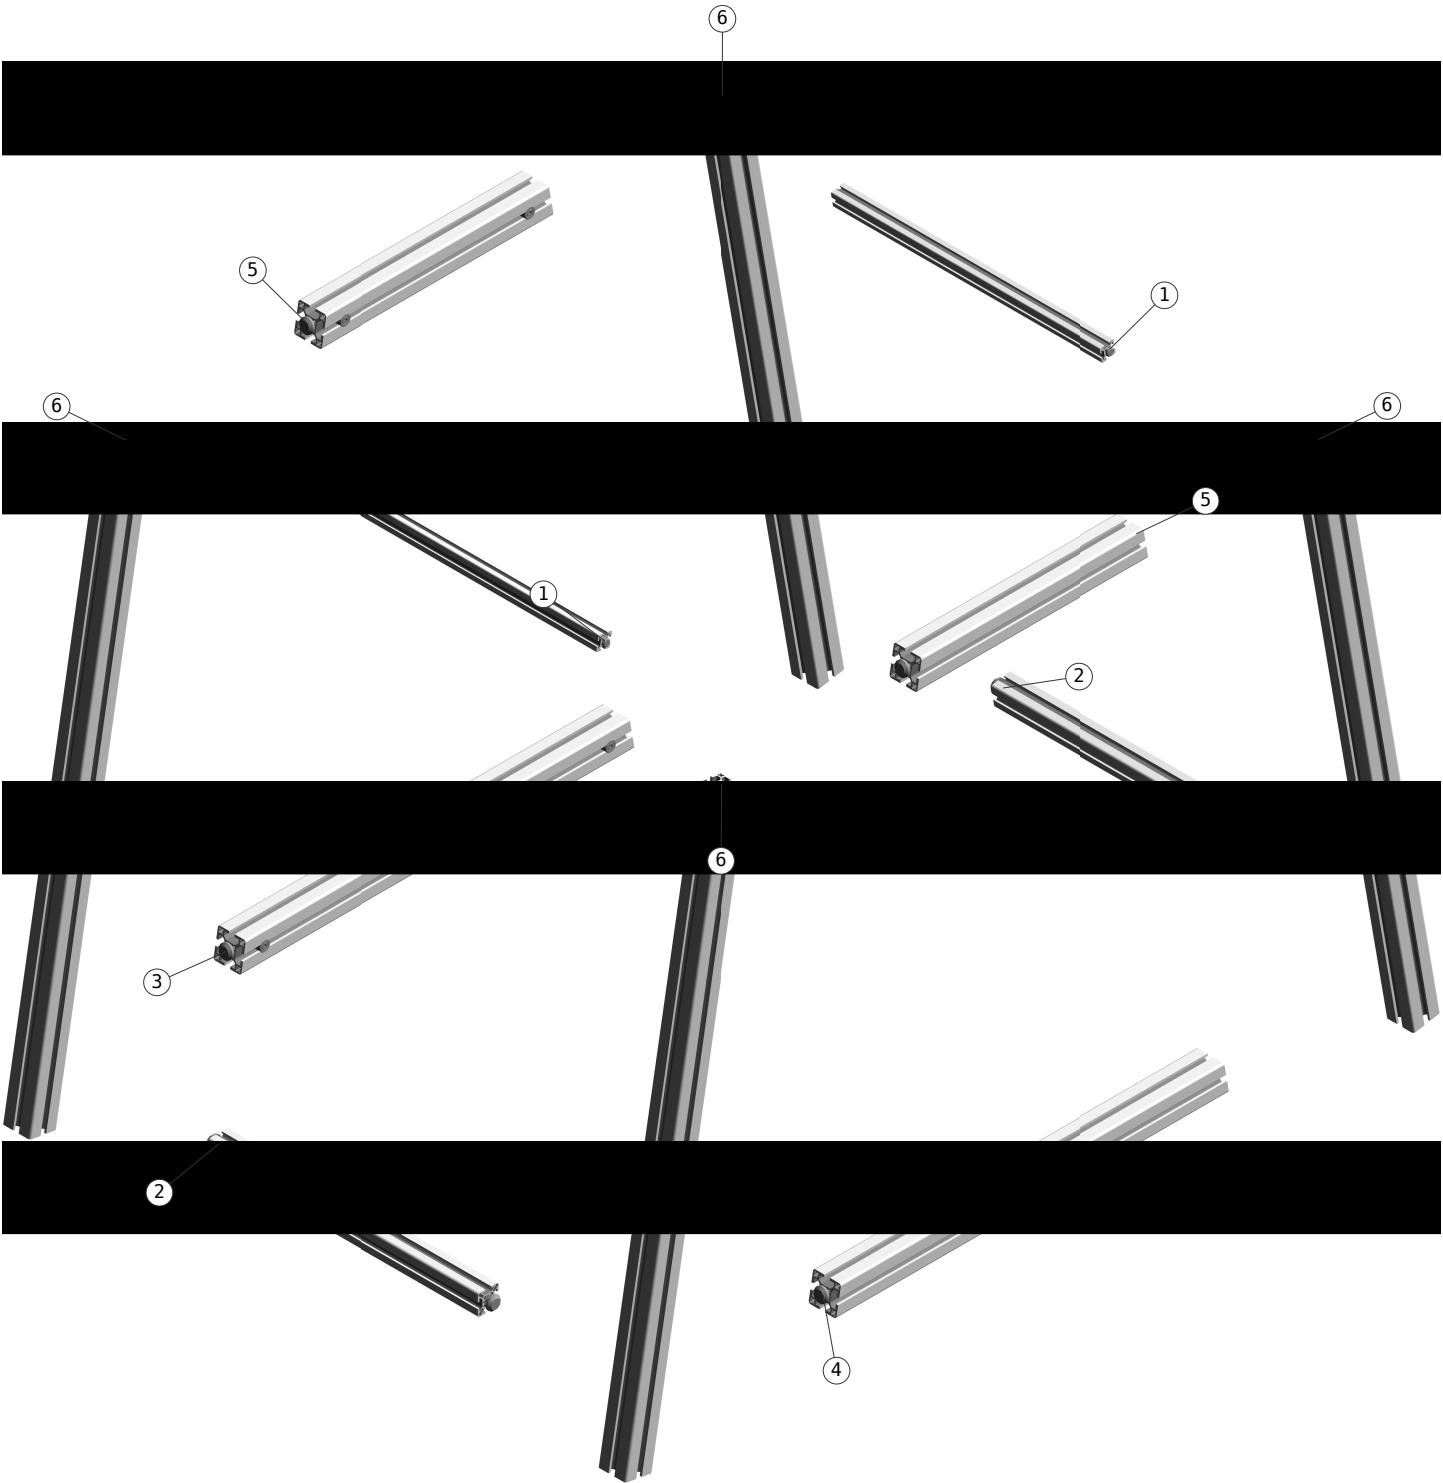


Assembly List


Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA4AA4/390	Profile 20x20, 4H, light, plain	1.20.2E0, Connector, universal	4
2	1.11.030030.43LP-AA4AA4/390	Profile 30x30, 4F, light, plain	1.21.3E0, Connector, universal	4
3	1.11.040040.43LP-EA1EA1/568.4	Profile 40x40, 4E, light, plain	1.21.4EK1, Connector, oblique-hinge l. + r.	2
4	1.11.040040.43LP-EA3EA3/568.4	Profile 40x40, 4E, light, plain	1.21.4EK1, Connector, oblique-hinge l. + r.	2
5	1.11.040040.43LP-EA1EA1/335.8	Profile 40x40, 4E, light, plain	1.21.4EK1, Connector, oblique-hinge l. + r.	4
8	7.11.706.88/01	Angle Bracket 55x55	1.31.EM8, Threaded plate E, M8 0.61.D06923.08, Hexagonal nut with flange DIN 6923 - M8 0.63.D06912.08014, Cylindric head screw, DIN 6912 - M8x14	4 4 8

Sliced profile details


Profile machining details

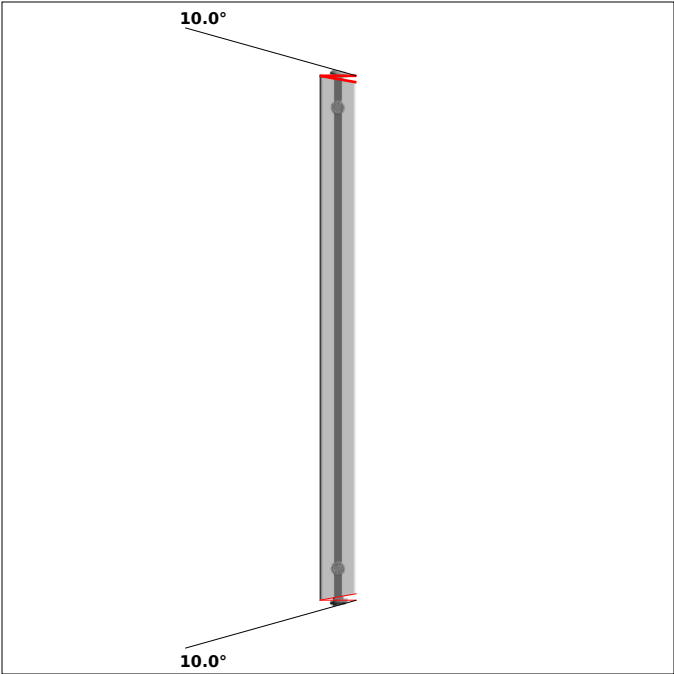


DRAWING 1, Pos 3
SIDE 1, bar length: 568.4 mm

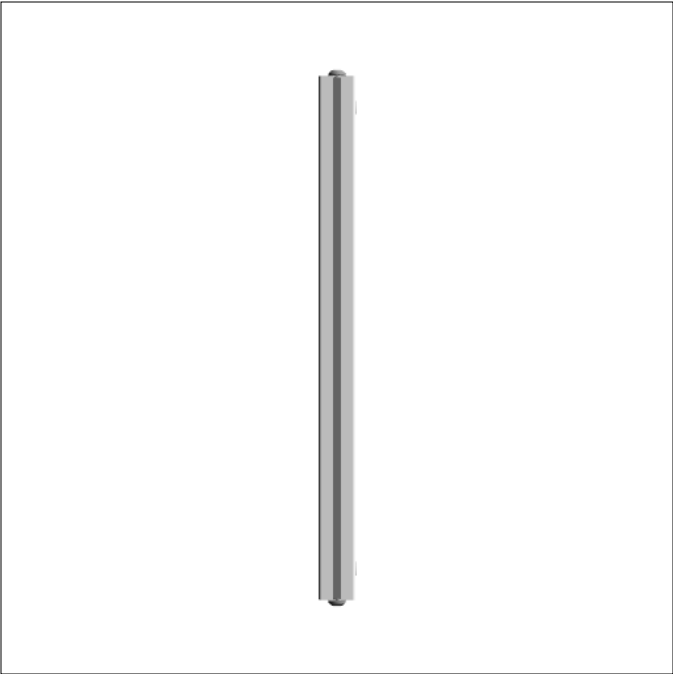

DRAWING 1, Pos 3
SIDE 2

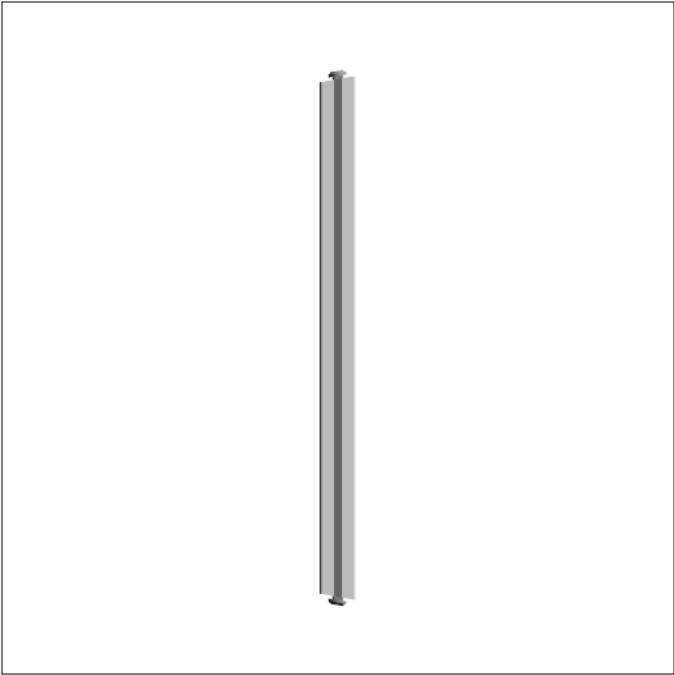


DRAWING 1, Pos 3
SIDE 3

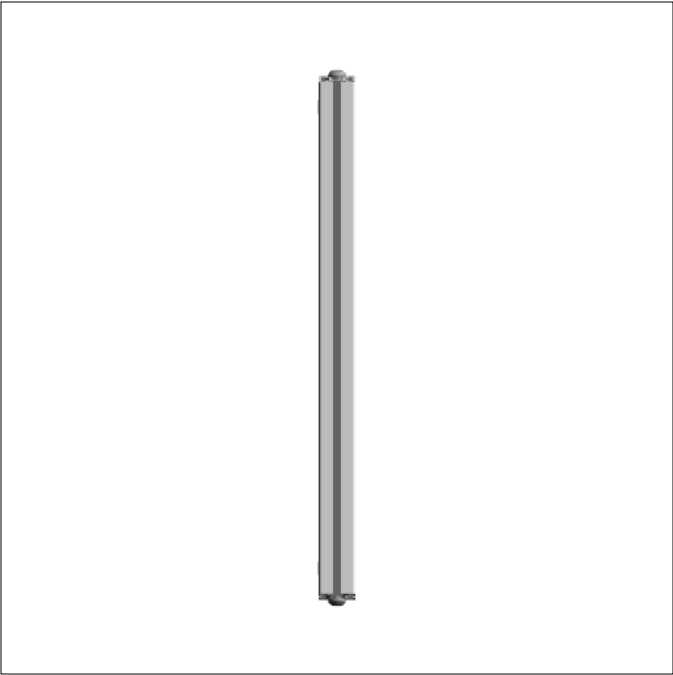


DRAWING 1, Pos 3
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

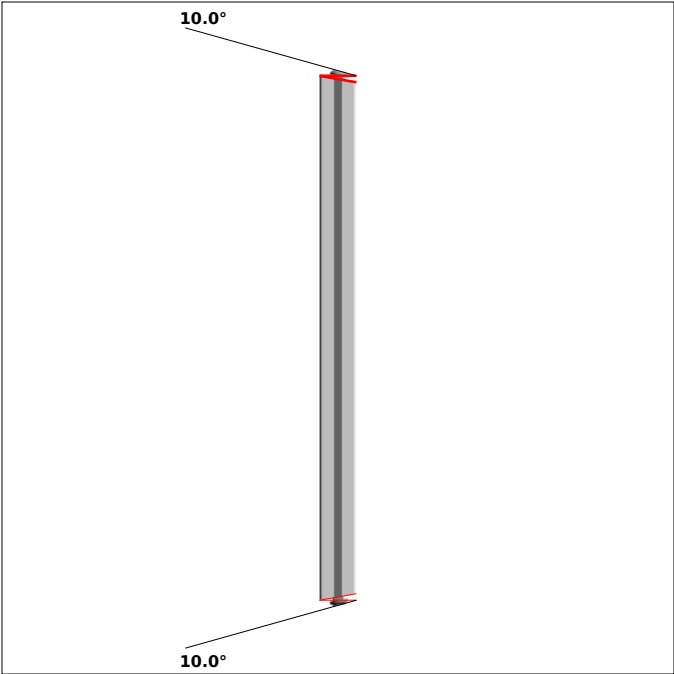


DRAWING 2, Pos 4
SIDE 1, bar length: 568.4 mm

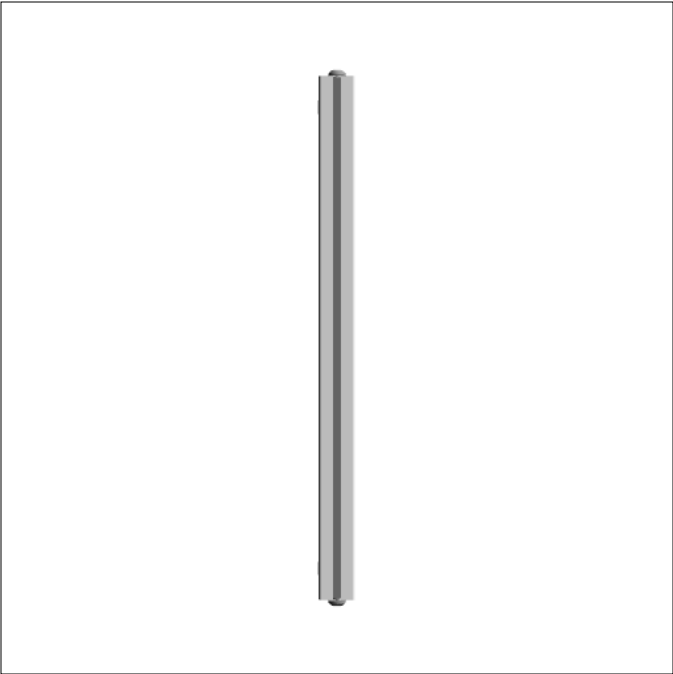

DRAWING 2, Pos 4
SIDE 2

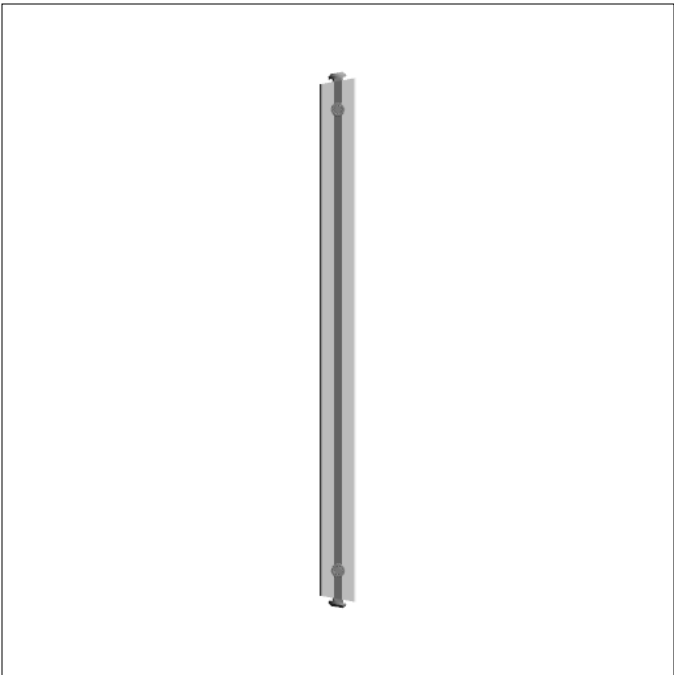


DRAWING 2, Pos 4
SIDE 3

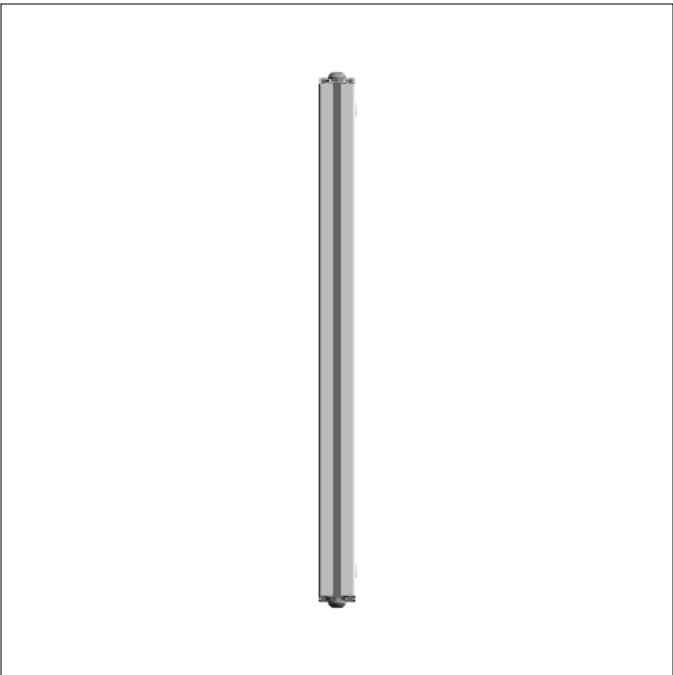


DRAWING 2, Pos 4
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

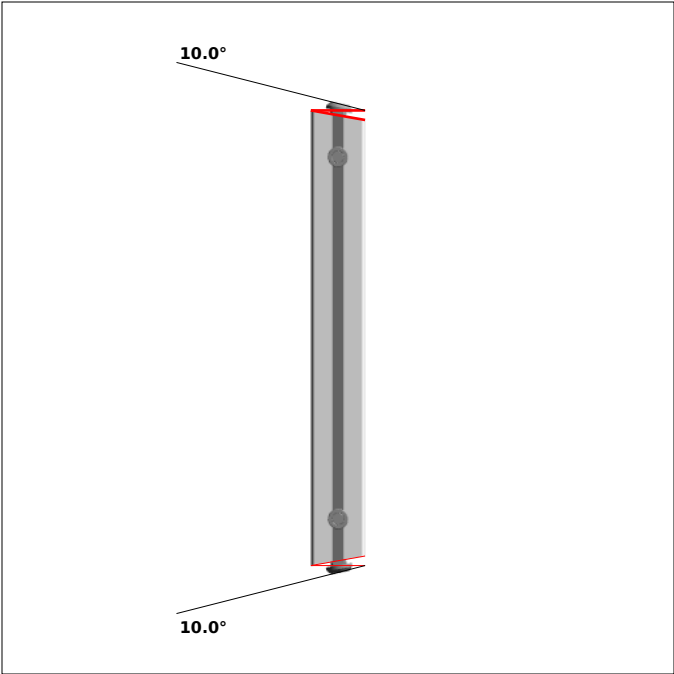


DRAWING 3, Pos 5
SIDE 1, bar length: 335.8 mm

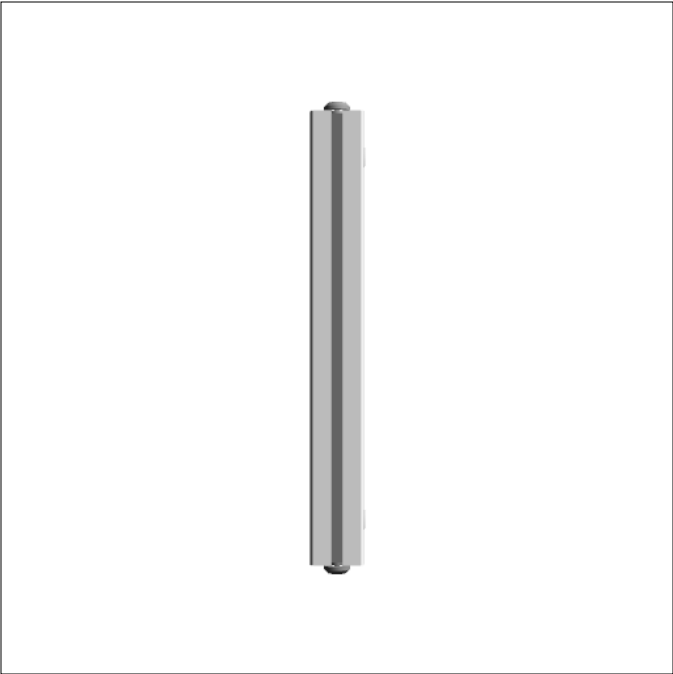

DRAWING 3, Pos 5
SIDE 2

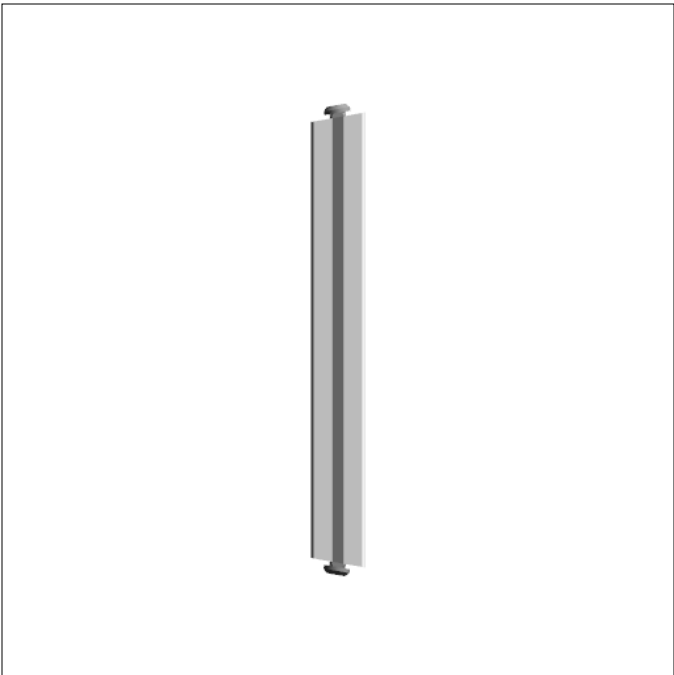

DRAWING 3, Pos 5
SIDE 3

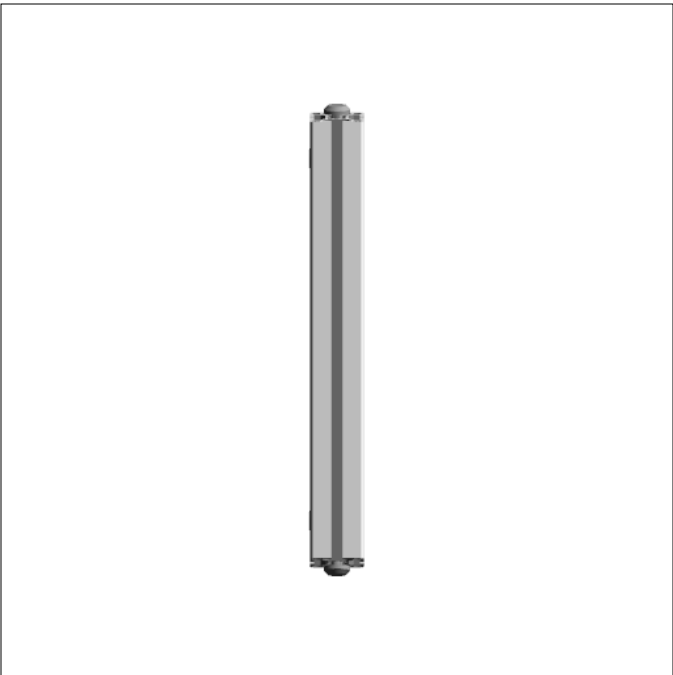







DRAWING 3, Pos 5
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.040040.43LP	5 5 4 3 6 6 6 6 335.8 335.8 568.4 568.4 800.0 800.0 800.0 800.0	963.6 mm
1.10.020020.43LP	1 1 390.0 390.0	5213.0 mm
1.11.030030.43LP	2 2 390.0 390.0	5213.0 mm

Assembly hints

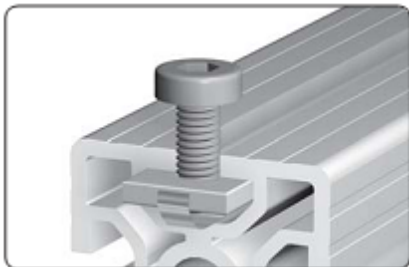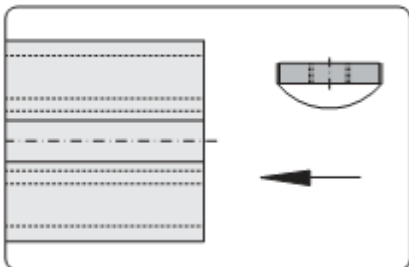CONNECTOR	1.20.2E0	Connector, universal	
	1.21.3E0	Connector, universal	
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side <td> Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles. </td>			Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
None	1.31.EM8	Threaded plate E, M8	
 Fixed into position with leaf spring  Application Fastening element for screw-type connections Assembly Insert from end			These plates must be inserted from the open side of the profile, prior to final frame assembly

Assembly hints

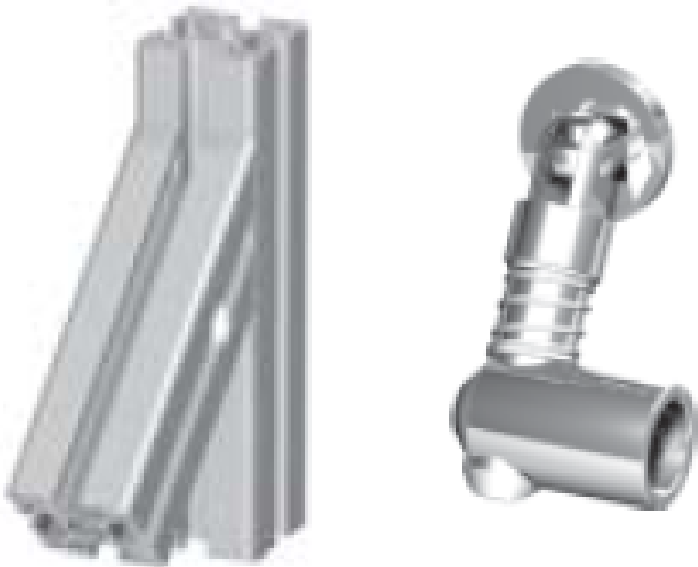CONNECTOR	1.21.4EK1	Connector, oblique-hinge l. + r.
		This type of connector assembles similar to universal connector