



Design Title : chair.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

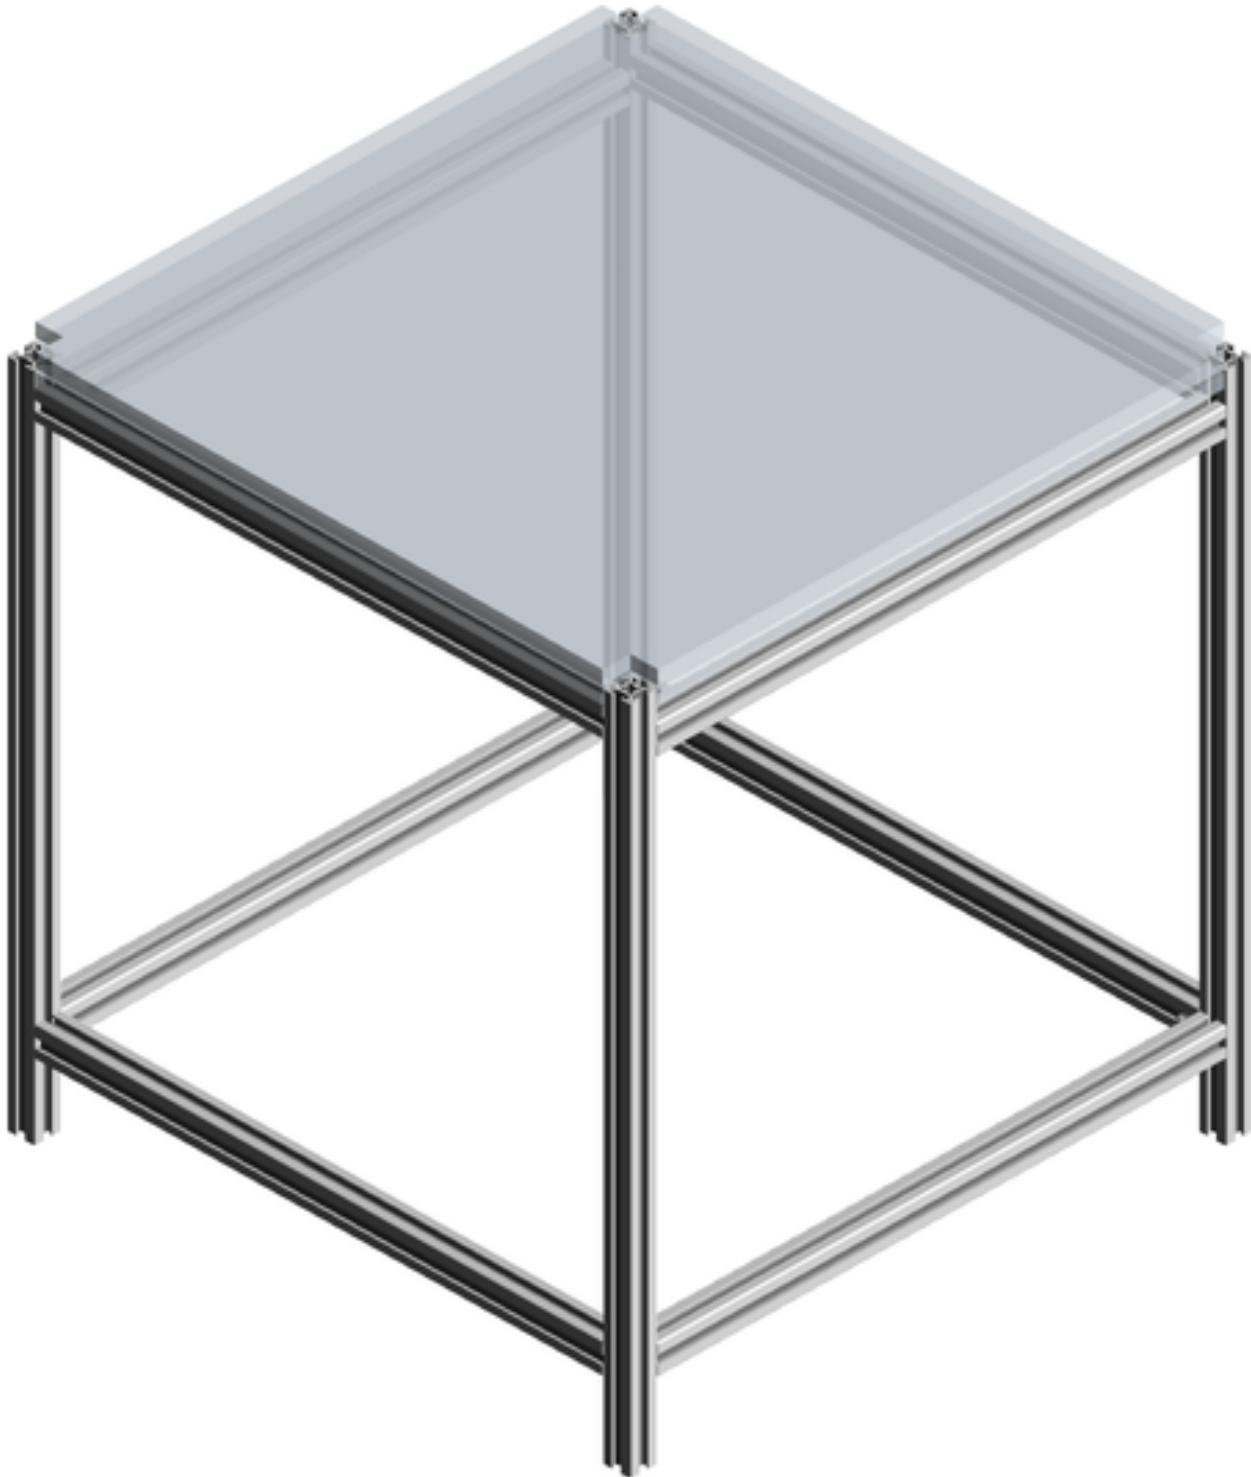


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA4A00/410	Profile 20x20, 4H, light, plain	MM	1
2	1.10.020020.43LP-AA4AA4/409.6	Profile 20x20, 4H, light, plain	MM	3
3	1.10.020020.43LP-AA4AA4/410	Profile 20x20, 4H, light, plain	MM	4
4	1.10.020020.43LP-A00A00/450	Profile 20x20, 4H, light, plain	MM	4
6	1.20.2H0	Connector, universal	EA	15
		Frame weight:	2.94 kg (6.48 lbs)	
5	2.87.3751-99	Polycarbonate 9,5 mm **NOTE: Non-stock, purchased as needed, SIZE: 448.59MM x 449.00MM (The panel does not have any fastening elements, please verify) **PER DRAWING 1**	SM	2
		Panels weight:	4.57 kg (10.07 lbs)	
		Total Weight:	7.51 kg (16.55 lbs)	


Isometric view
Some accessories may not be shown

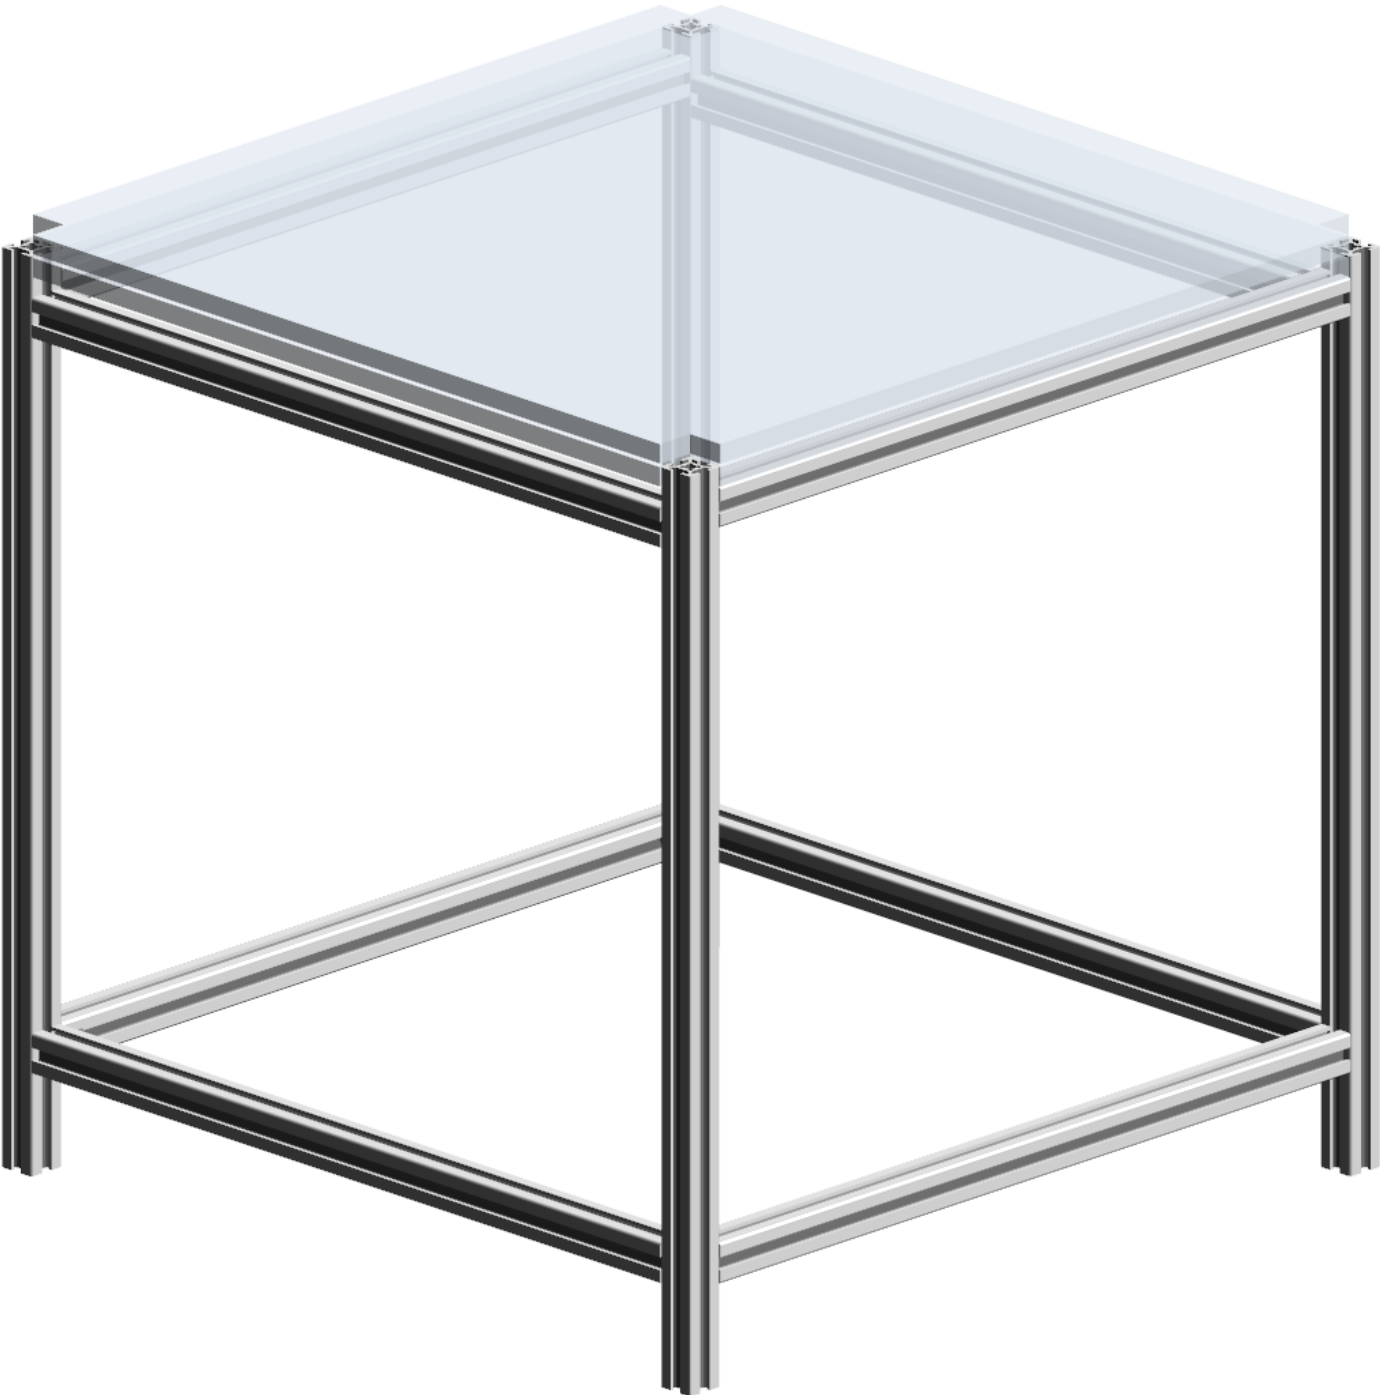


Multiview

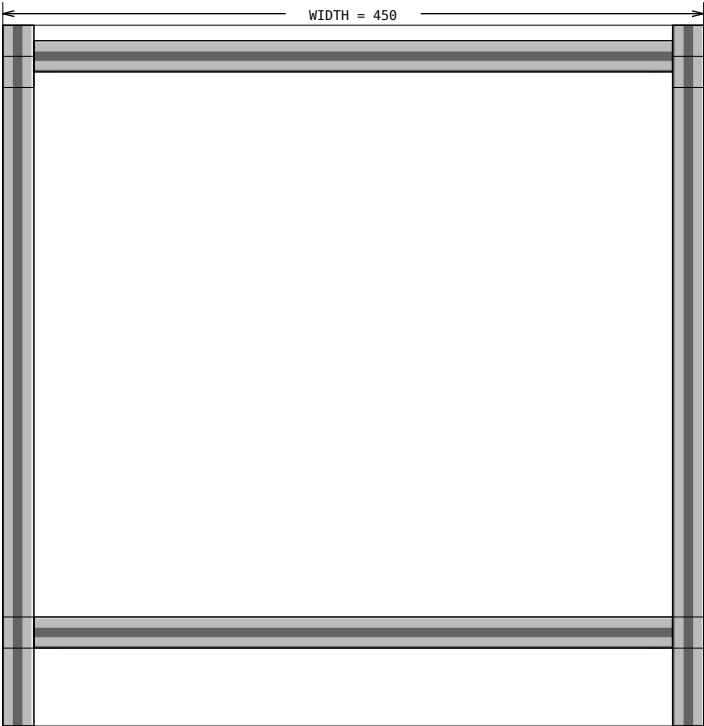


FRONT

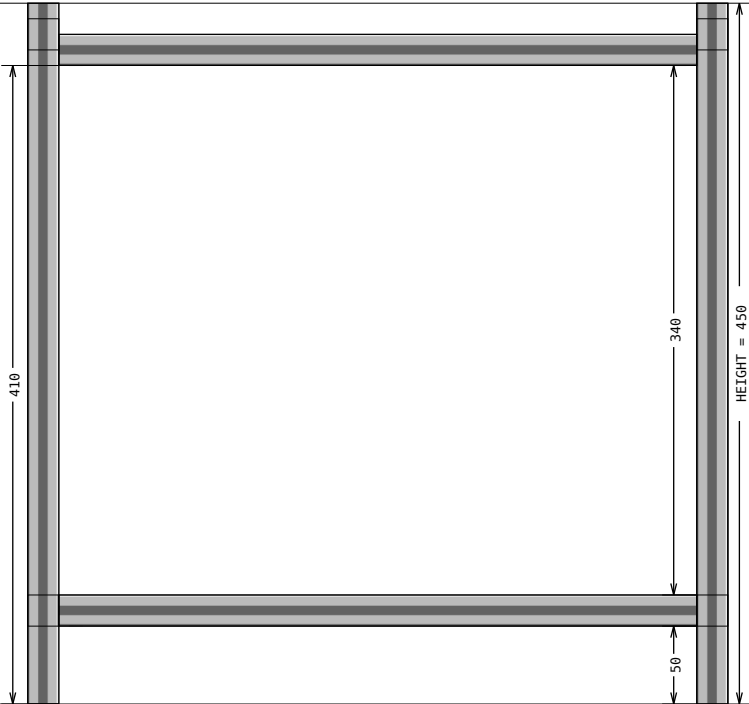

LEFT

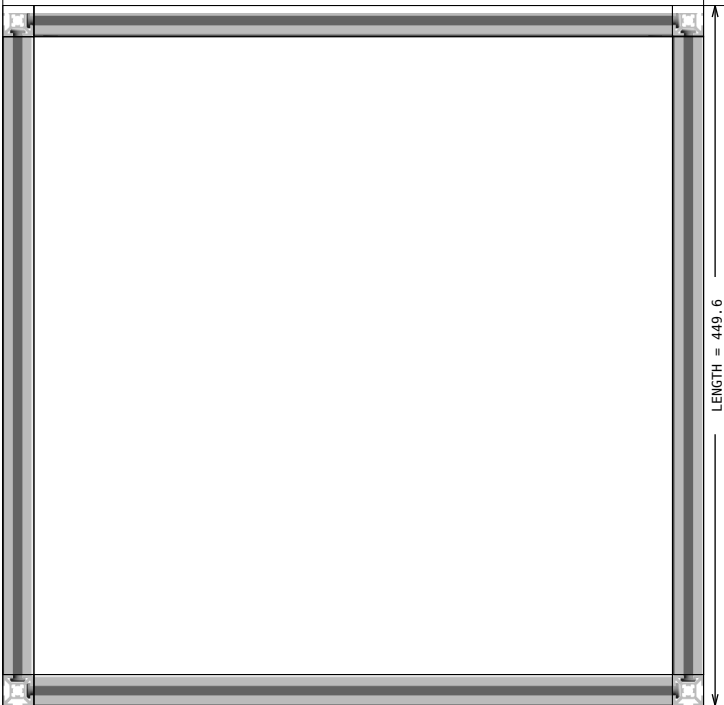



TOP

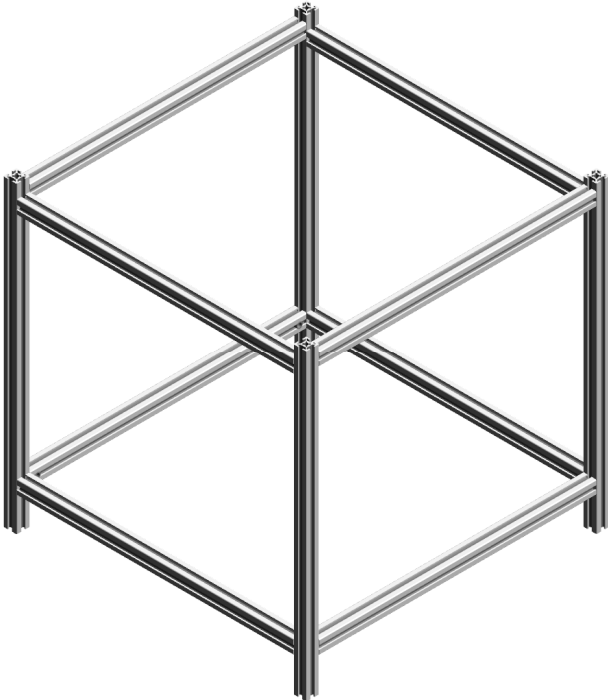



ISOMETRIC

FRONT VIEW



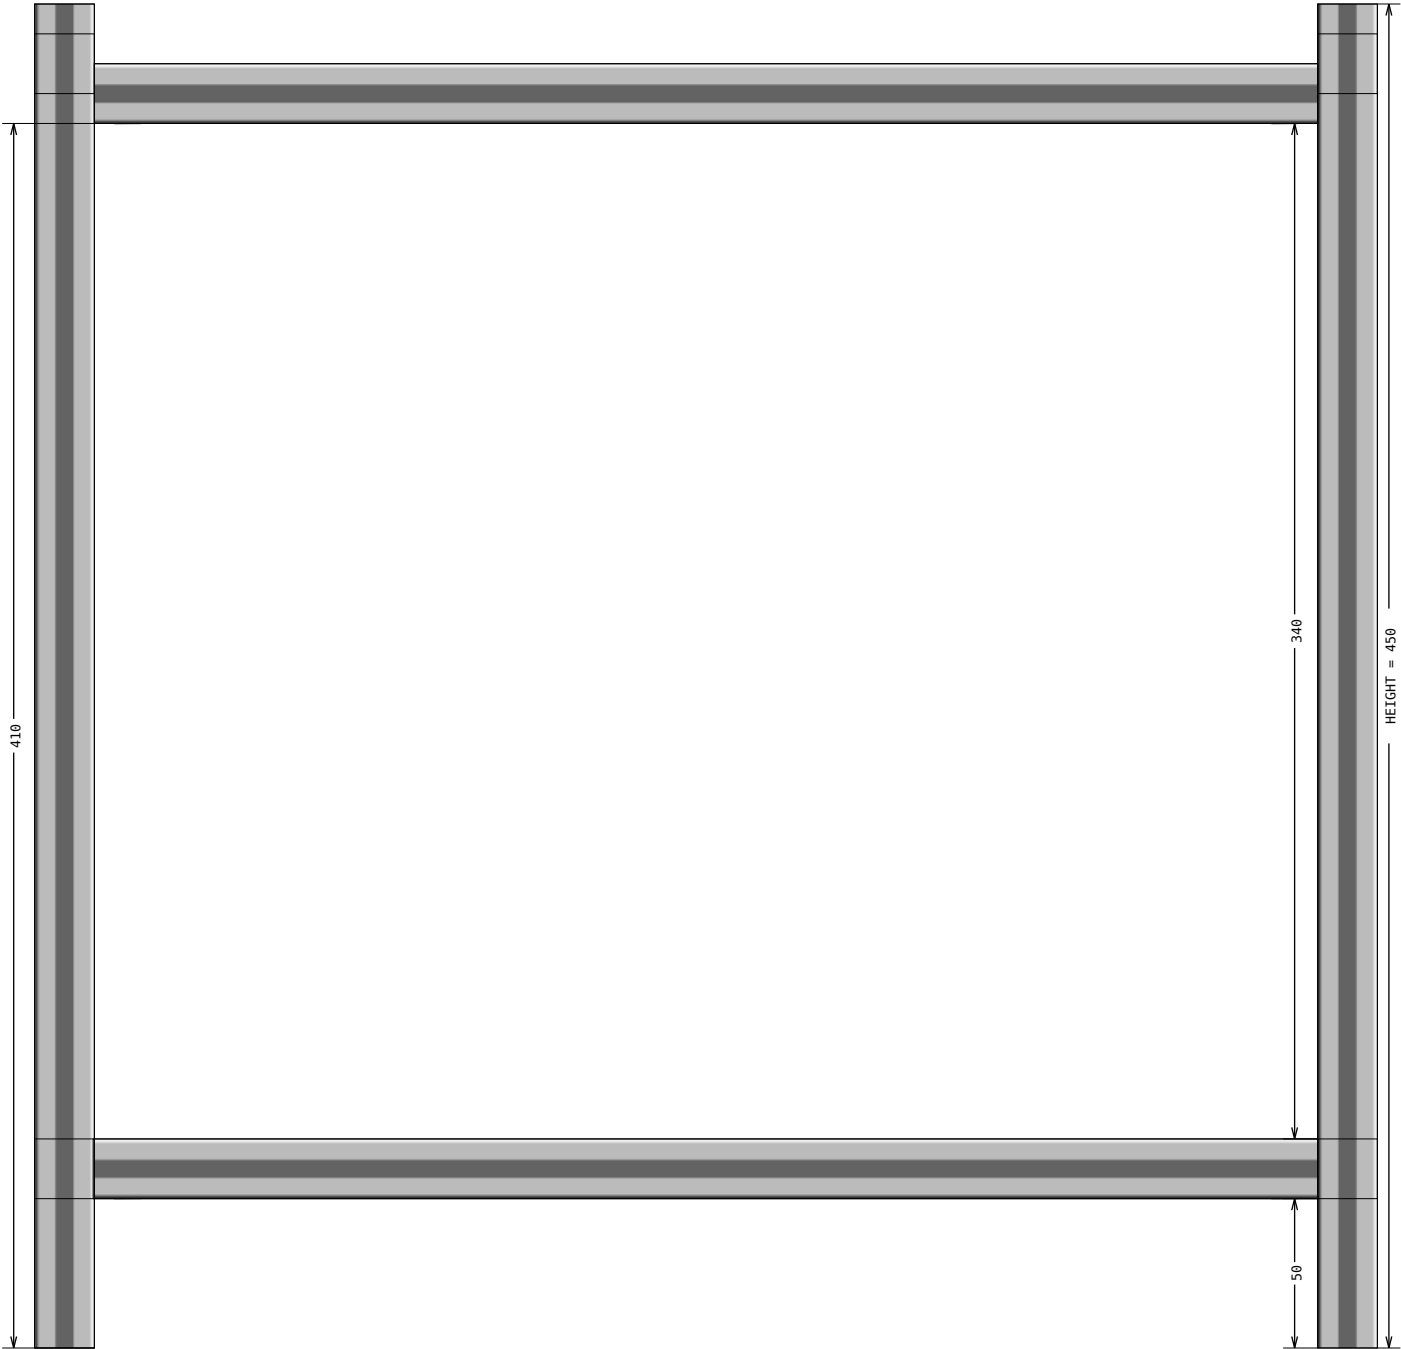

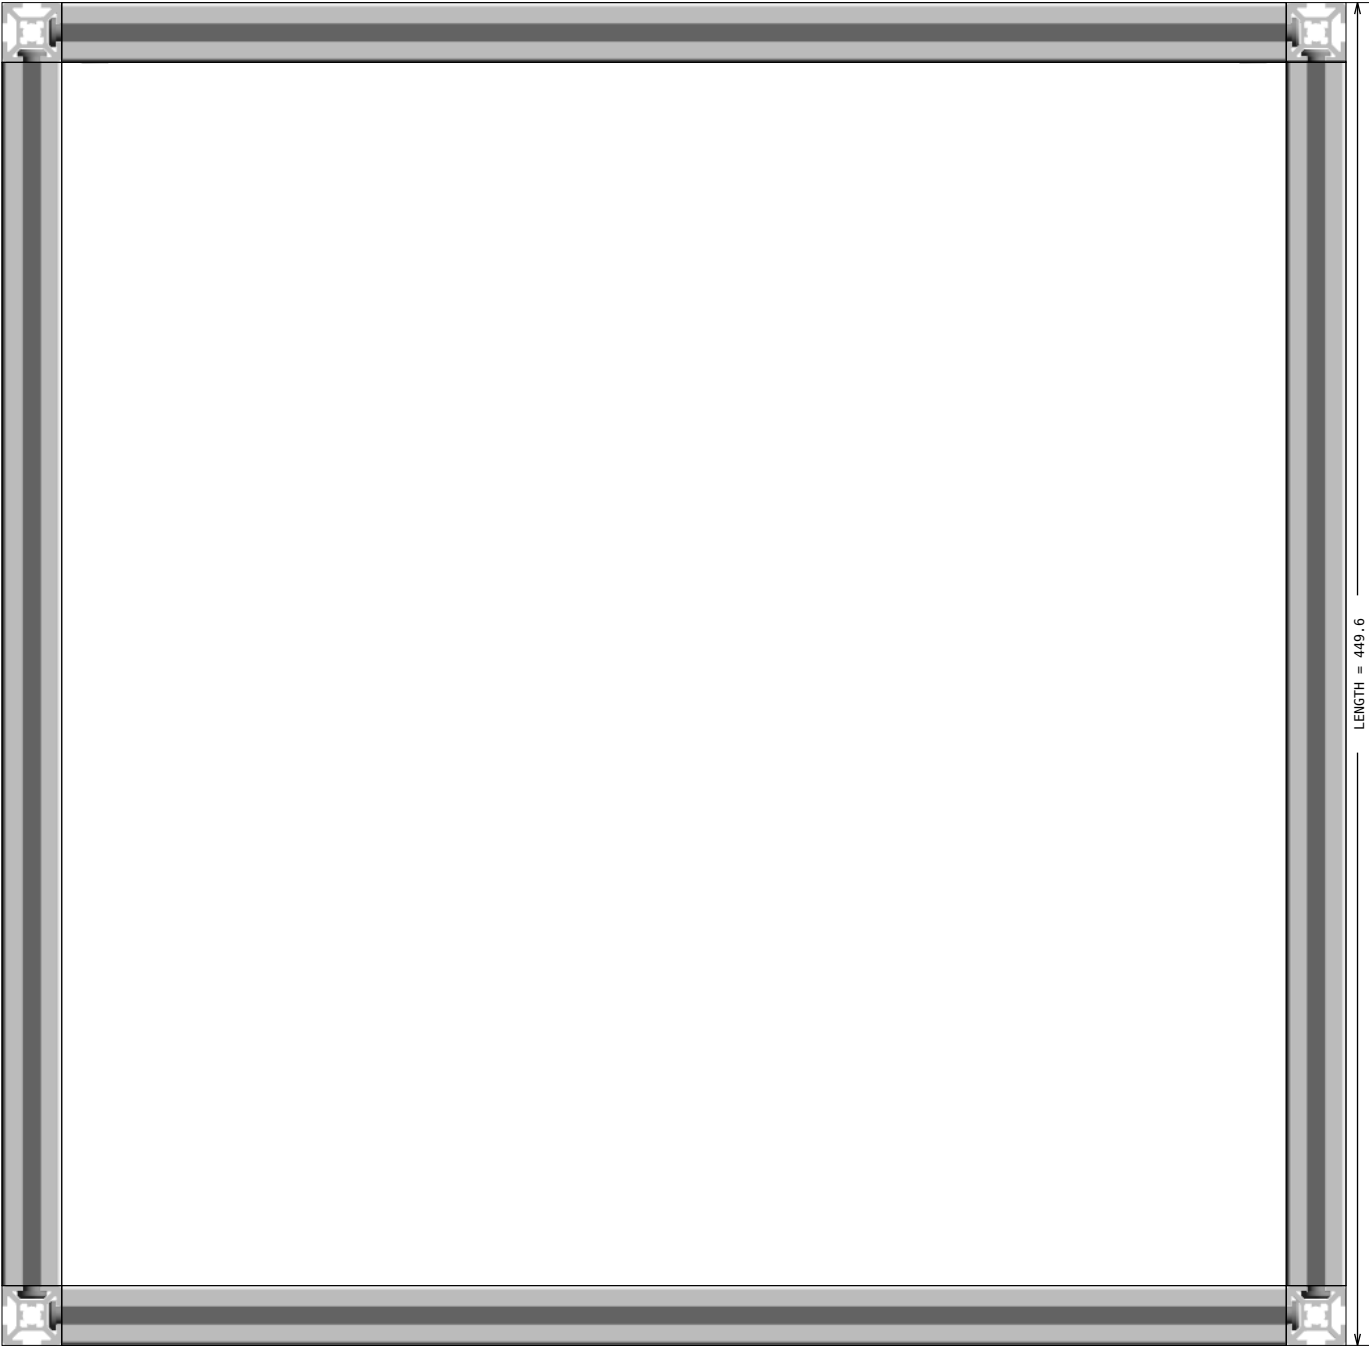


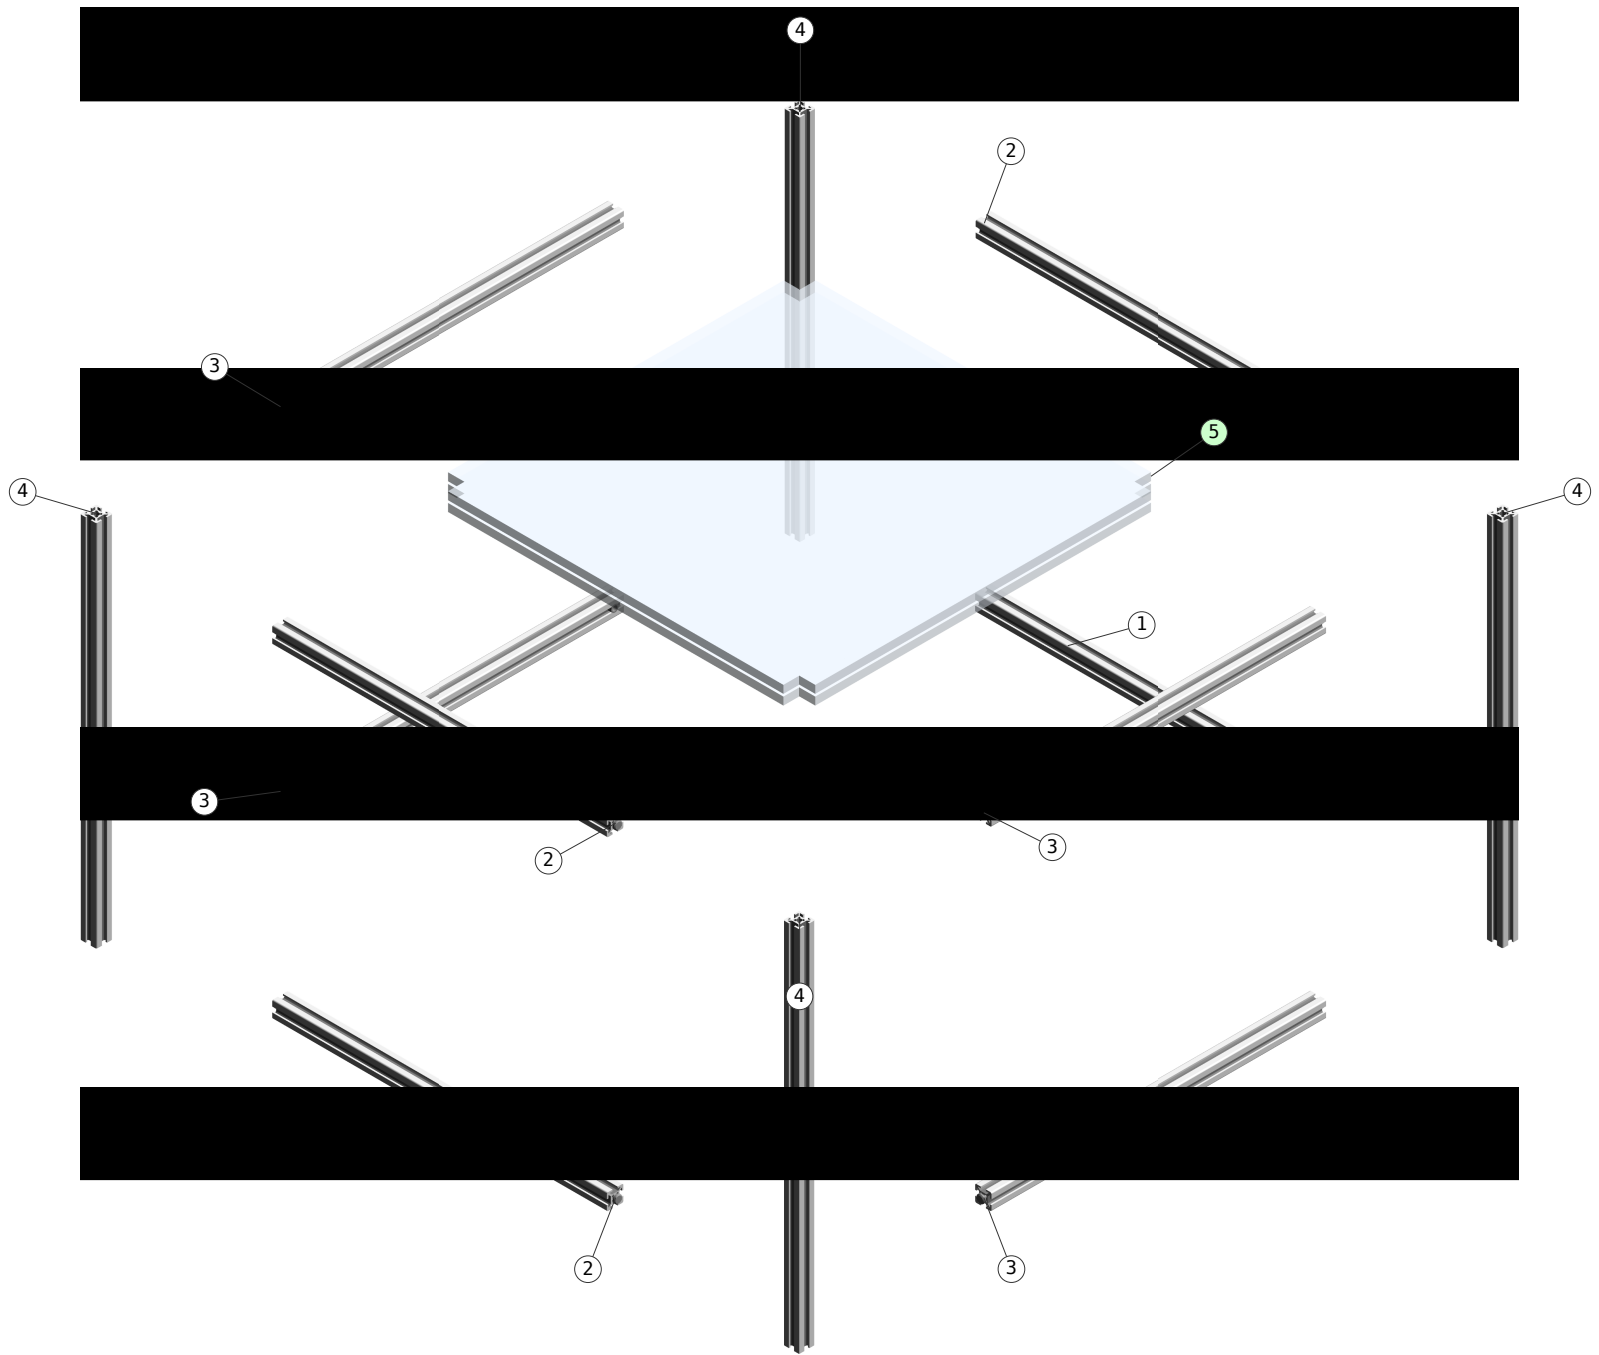

Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA4A00/410	Profile 20x20, 4H, light, plain	1.20.2H0. Connector. universal	1
2	1.10.020020.43LP-AA4AA4/409.6	Profile 20x20, 4H, light, plain	1.20.2H0. Connector. universal	6
3	1.10.020020.43LP-AA4AA4/410	Profile 20x20, 4H, light, plain	1.20.2H0. Connector. universal	8

Panels




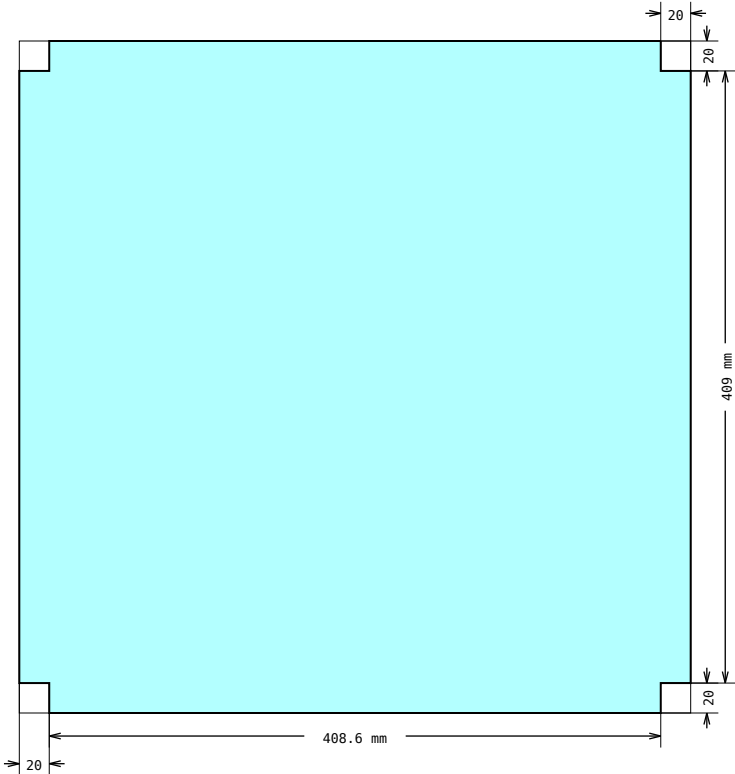


DRAWING 1, Pos 5
Shape measurements

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)																										
1.10.020020.43LP	<table><tr><td>②</td><td>②</td><td>②</td><td>①</td><td>③</td><td>③</td><td>③</td><td>③</td><td>④</td><td>④</td><td>④</td><td>④</td><td></td></tr><tr><td>409.6</td><td>409.6</td><td>409.6</td><td>410.0</td><td>410.0</td><td>410.0</td><td>410.0</td><td>410.0</td><td>450.0</td><td>450.0</td><td>450.0</td><td>450.0</td><td></td></tr></table>	②	②	②	①	③	③	③	③	④	④	④	④		409.6	409.6	409.6	410.0	410.0	410.0	410.0	410.0	450.0	450.0	450.0	450.0		879.2 mm
②	②	②	①	③	③	③	③	④	④	④	④																	
409.6	409.6	409.6	410.0	410.0	410.0	410.0	410.0	450.0	450.0	450.0	450.0																	

Assembly hints

CONNECTOR	1.20.2H0	Connector, universal
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side <td> Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles. </td>	Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.	