


Design Title : Menu.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19





Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.030030.13LP-A00A00/500	Profile 30x30, 1F, light, plain	MM	2
2	1.11.030030.13LP-AA2AA2/970	Profile 30x30, 1F, light, plain	MM	2
3	1.69.F010	Suspended glider F	EA	8
4	1.21.3F0	Connector, universal	EA	4
		Total Weight:	2.81 kg (6.19 lbs)	


Isometric view
Some accessories may not be shown

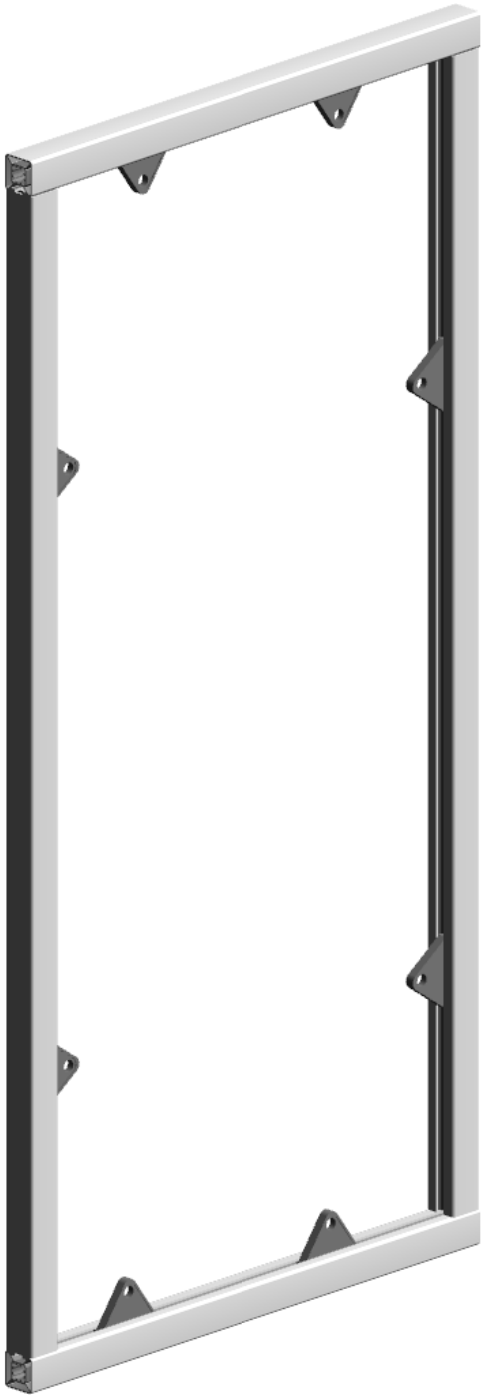


Multiview

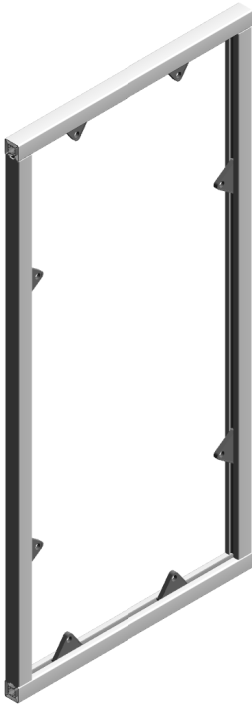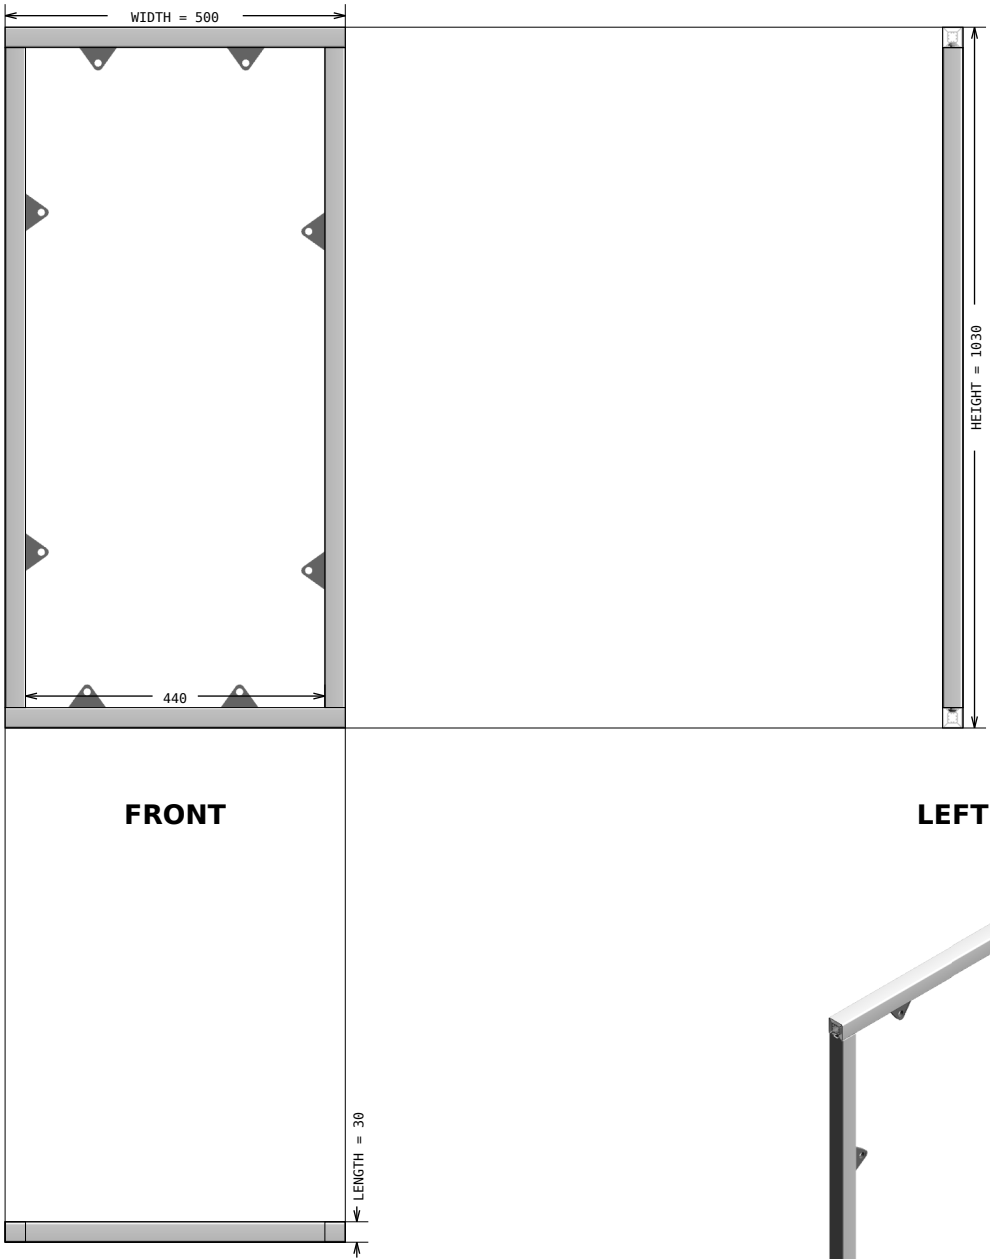

ISOMETRIC

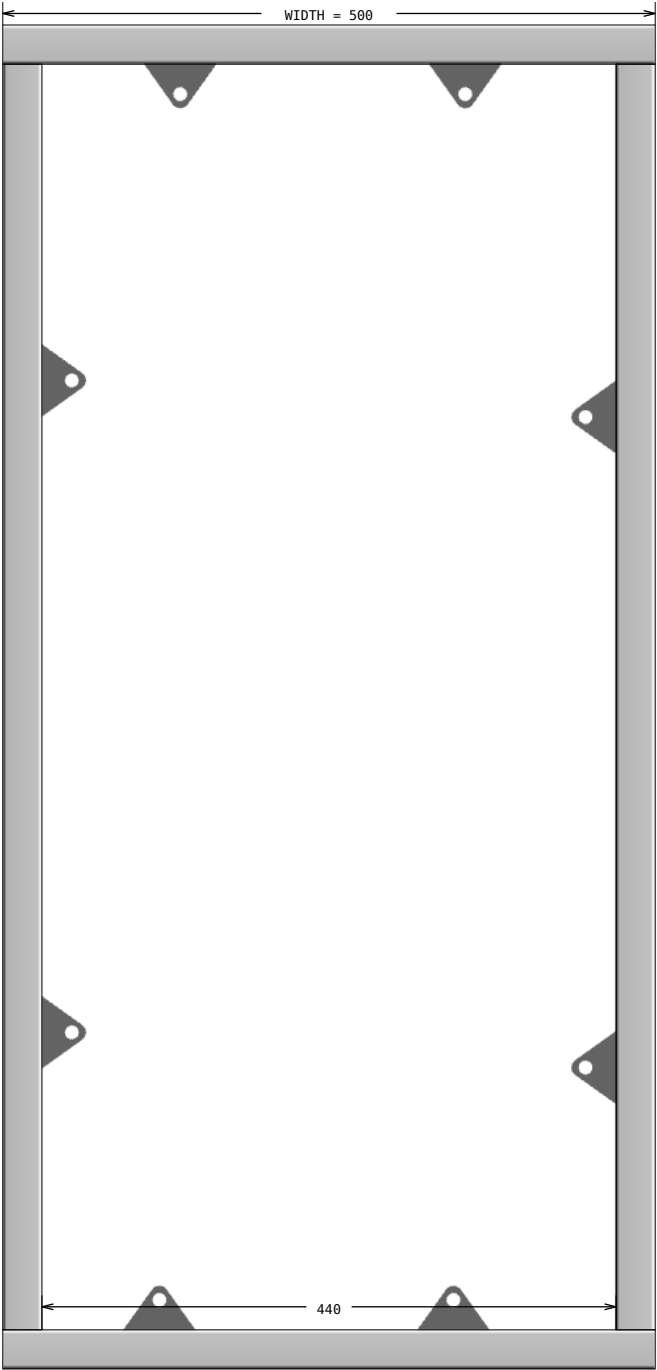




Design Title : Menu.scene
Customer Name :
Date : 2025-06-19

TOP VIEW




Exploded view

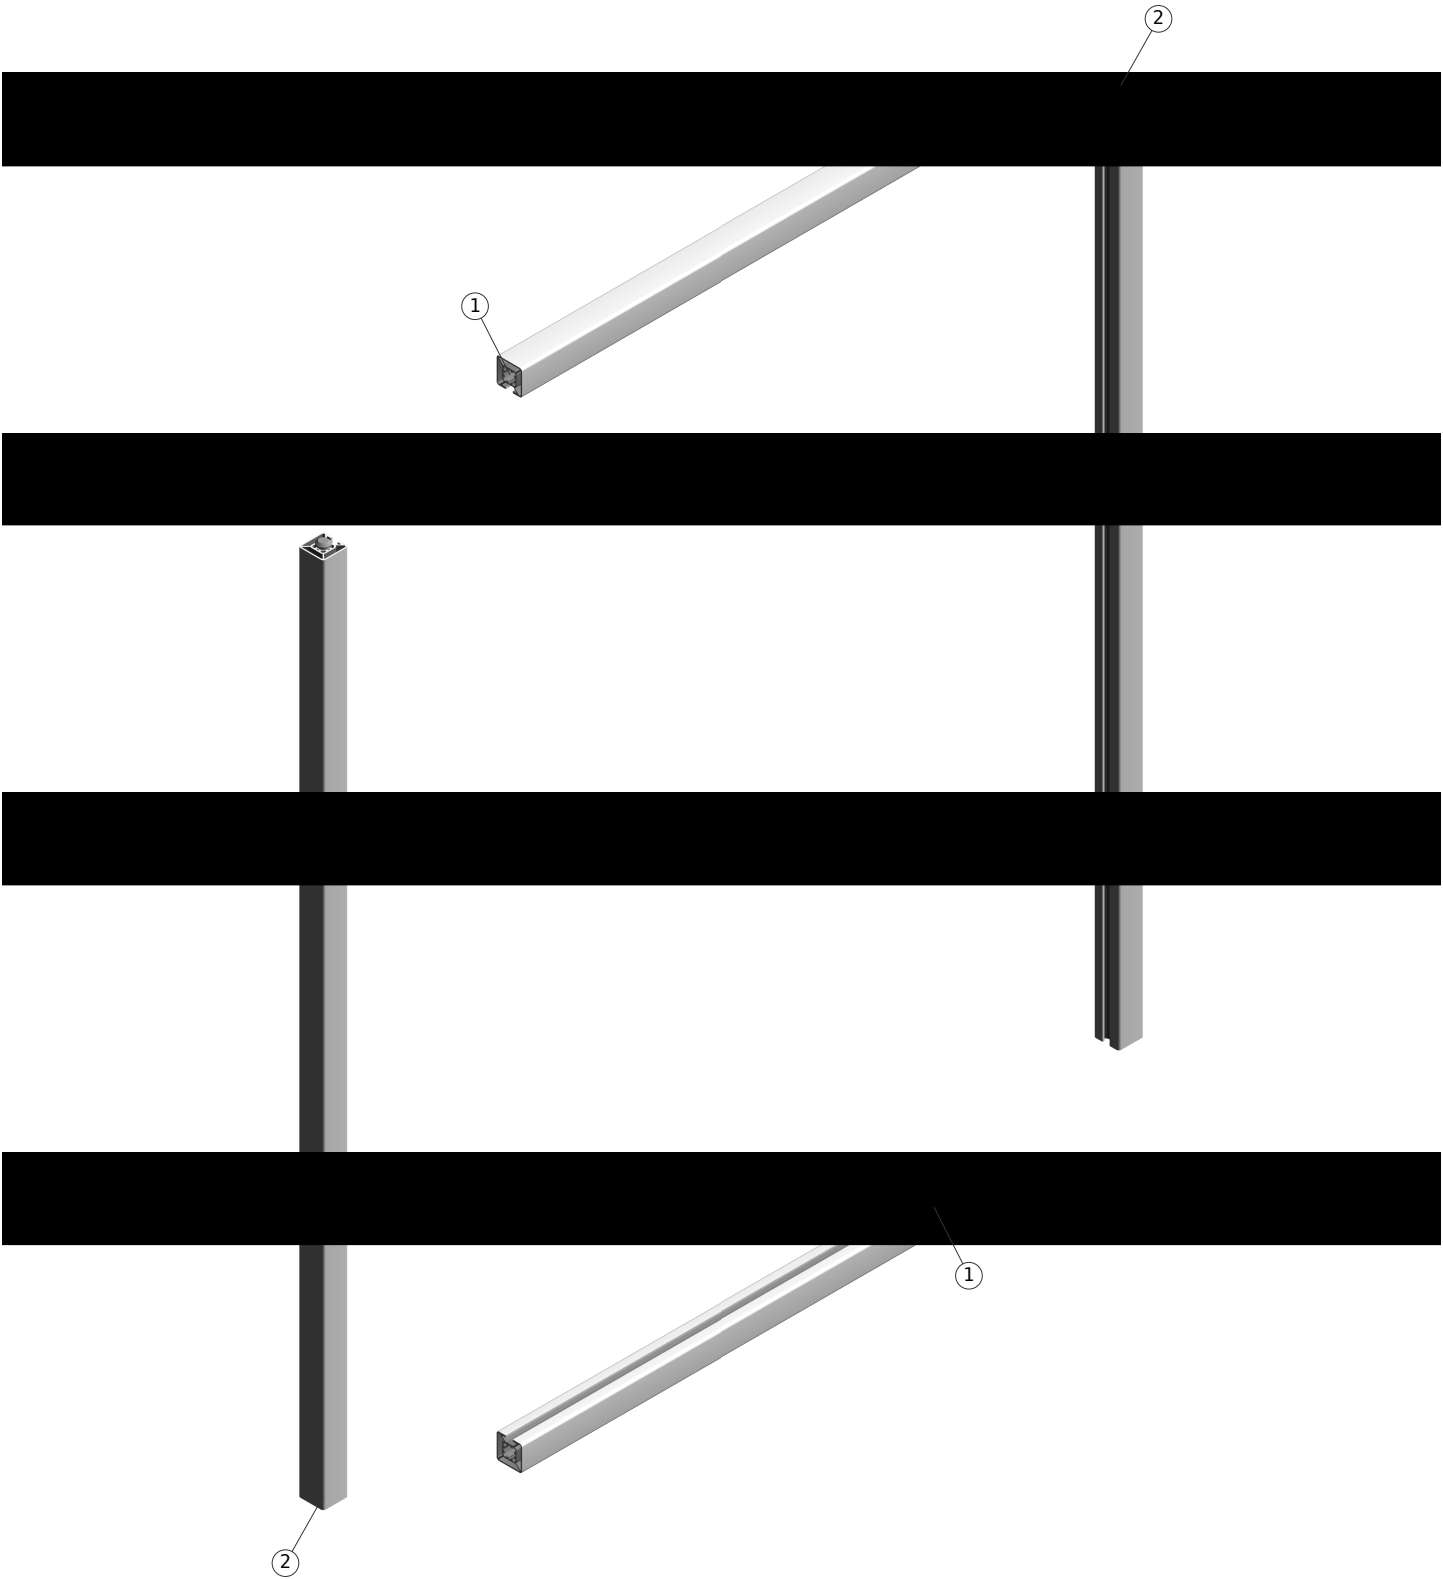





Assembly List

Pos	Article-No	Description	Related parts	Qty
2	1.11.030030.13LP-AA2AA2/970	Profile 30x30, 1F, light, plain	1.21.3F0, Connector, universal	4

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.030030.13LP		3046.0 mm

Assembly hints

CONNECTOR	1.21.3F0	Connector, universal	
			Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
	Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side		