


Design Title : office cabinet.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2025-06-19

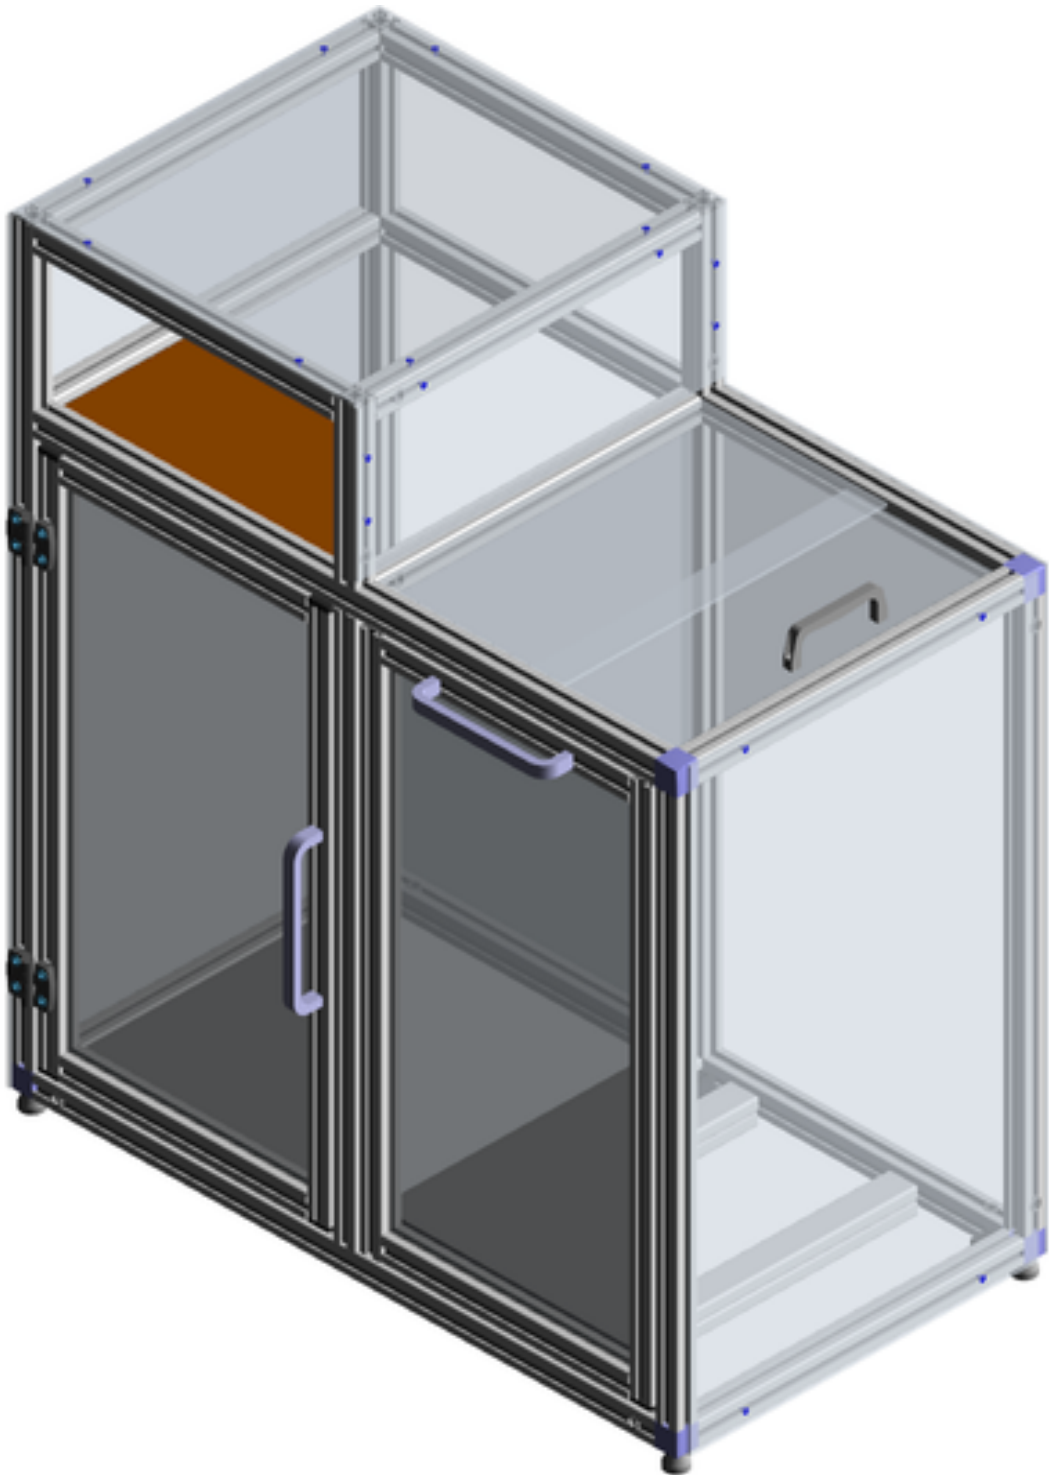


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.016040.14LP-A00A00/400	Profile 16x40, 1F, light, plain	MM	2
2	1.10.016040.14LP-A00A00/401	Profile 16x40, 1F, light, plain	MM	2
3	1.11.030030.43LP-AA4AA4/405	Profile 30x30, 4F, light, plain	MM	1
4	1.11.030030.43LP-A00A00/405	Profile 30x30, 4F, light, plain	MM	1
5	1.11.030030.43LP-A00AA4/439	Profile 30x30, 4F, light, plain	MM	1
6	1.11.030030.43LP-AA1A00/439	Profile 30x30, 4F, light, plain	MM	1
7	1.11.030030.43LP-A00A00/668	Profile 30x30, 4F, light, plain	MM	1
8	1.11.030030.43LP-A00A00/668	Profile 30x30, 4F, light, plain **PER DRAWING 1**	MM	1
8.A	Q11A4I07161-5.5	Counterbore, left Ø 5.5 mm, distance 244.0 mm, Side: 4	EA	1
8.B	Q11A4I07161-5.5	Counterbore, left Ø 5.5 mm, distance 424.0 mm, Side: 4	EA	1
9	1.11.030030.43LP-A00A00/673	Profile 30x30, 4F, light, plain	MM	1
10	1.11.030030.43LP-A00A00/680	Profile 30x30, 4F, light, plain	MM	1
11	1.11.030030.43LP-AA1AA1/690	Profile 30x30, 4F, light, plain	MM	1
12	1.11.030030.43LP-AA4AA4/690	Profile 30x30, 4F, light, plain	MM	1
13	1.11.030030.43LP-AA4A00/200	Profile 30x30, 4F, light, plain	MM	2
14	1.11.030030.43LP-AA4A00/439	Profile 30x30, 4F, light, plain	MM	2
15	1.11.030030.43LP-AA4AA4/690	Profile 30x30, 4F, light, plain Depth of thread, left: 100.0 mm (M14)	MM	2
16	1.11.030030.43LP-AA4A00/920	Profile 30x30, 4F, light, plain Depth of thread, left: 100.0 mm (M14)	MM	2
17	1.11.030030.43LP-AA4AA4/335	Profile 30x30, 4F, light, plain	MM	4
18	1.11.030030.43LP-AA4AA4/440	Profile 30x30, 4F, light, plain	MM	4
19	1.11.030030.43LP-AA4AA4/840	Profile 30x30, 4F, light, plain	MM	4
20	1.41.F14.1	Combination profile PP, F, 1-4.5, grey (bar 2.5 m)	EA	4
35	1.42.20303.2	Cover cap 30x30, black	EA	5
36	1.48.331	Corner piece cubic 30, anodized	EA	6
37	1.61.20.1	Handle light PA, grey	EA	1
38	1.61.210	Handle light	EA	2
39	1.64.2F2M4.2	Mounting block F, M4, black	EA	8
40	0.63.D06912.05035	Cylindric head screw, DIN 6912 - M5x35	EA	2
41	0.63.D07991.04008	Flat head screw, DIN 7991 - M4x8	EA	45
42	0.63.D07991.06010	Flat head screw, DIN 7991 - M6x10	EA	8
43	1.21.3F0	Connector, universal	EA	42
44	1.31.FM4	Threaded plate F, M4	EA	44
45	1.32.4FM6	T-Nut for subsequent insertion, w. spring F, M6	EA	8
46	1.44.431030	Adjustable tilt-foot plate GD-Zn, 30	EA	1
47	1.44.431030V	Adjustable tilt-foot plate stainless, 30	EA	3
48	1.44.4614066	Adjustable tilt-foot spindle steel, M14x66	EA	1
49	1.44.4614066V	Adjustable tilt-foot spindle stainless, M14x66	EA	3
50	1.44.46M14	Nut M14	EA	1


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
51	1.44.46M14V	Nut M14, stainless	EA	3
52	1.62.448.17/17	Hinge 48 fixed, A 17.5	EA	2
		Frame weight:	20.04 kg (44.18 lbs)	
21	2.83.0236.02-99	PVC expanded foam 6mm, Grey. **NOTE: Non-stock, purchased as needed, SIZE: 390.00MM x 439.00MM **PER DRAWING 2**	SM	1
22	2.83.0236.02-99	PVC expanded foam 6mm, Grey. **NOTE: Non-stock, purchased as needed, SIZE: 404.00MM x 439.00MM **PER DRAWING 3**	SM	1
23	2.83.0236.02-99	PVC expanded foam 6mm, Grey. **NOTE: Non-stock, purchased as needed, SIZE: 404.00MM x 439.00MM **PER DRAWING 4**	SM	1
24	2.87.1571-99	Polycarbonat 4mm, SIZE: 200.00MM x 439.14MM **PER DRAWING 5**	SM	1
25	2.87.1571-99	Polycarbonat 4mm, SIZE: 188.42MM x 499.00MM **PER DRAWING 6**	SM	1
26	2.87.1571-99	Polycarbonat 4mm, SIZE: 250.00MM x 439.17MM **PER DRAWING 7**	SM	1
27	2.87.1571-99	Polycarbonat 4mm, SIZE: 440.00MM x 450.00MM **PER DRAWING 8**	SM	1
28	2.87.1571-99	Polycarbonat 4mm, SIZE: 465.00MM x 499.00MM **PER DRAWING 9**	SM	1
29	2.87.1571-99	Polycarbonat 4mm, SIZE: 415.00MM x 700.00MM **PER DRAWING 10**	SM	1
30	2.87.1571-99	Polycarbonat 4mm, SIZE: 470.00MM x 750.00MM **PER DRAWING 11**	SM	1
31	2.87.1571-99	Polycarbonat 4mm, SIZE: 450.00MM x 895.00MM **PER DRAWING 12**	SM	1
32	2.87.1571-99	Polycarbonat 4mm, SIZE: 484.00MM x 950.00MM **PER DRAWING 13**	SM	1
33	2.87.1571-99	Polycarbonat 4mm, SIZE: 899.00MM x 949.00MM **PER DRAWING 14**	SM	1
34	2.87.1571-99	Polycarbonat 4mm, SIZE: 345.00MM x 630.00MM **PER DRAWING 15**	SM	2
		Panels weight:	17.06 kg (37.61 lbs)	
		Total Weight:	37.10 kg (81.79 lbs)	


Isometric view
Some accessories may not be shown

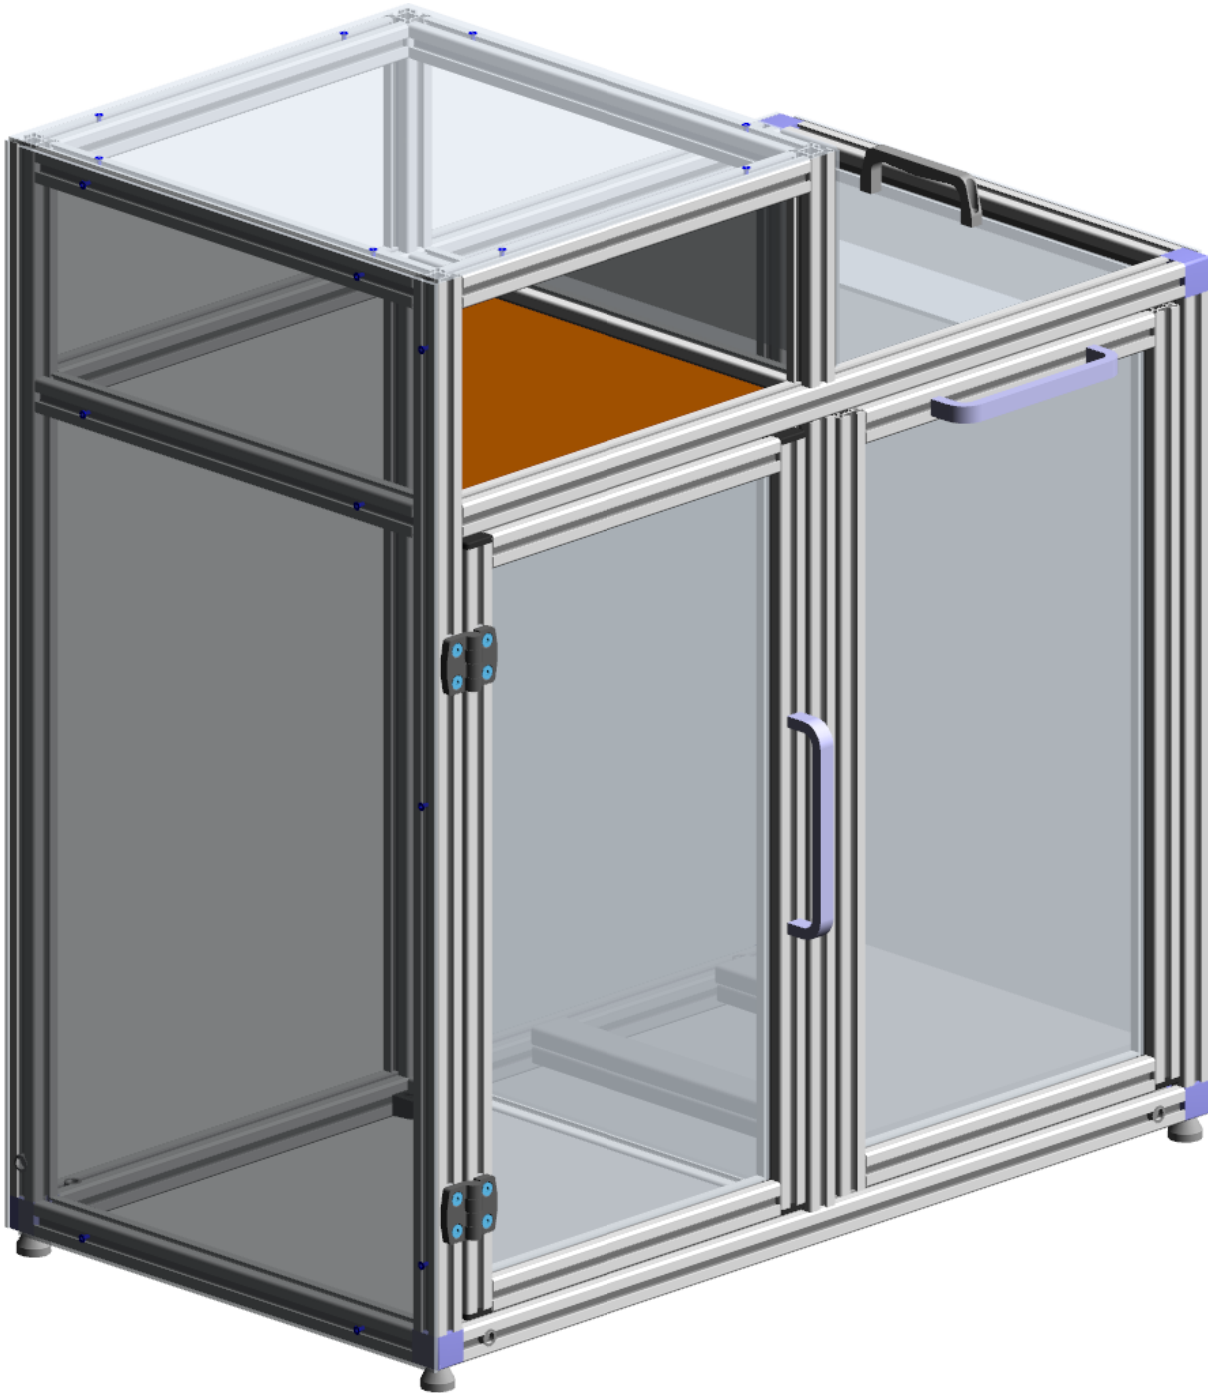


Multiview

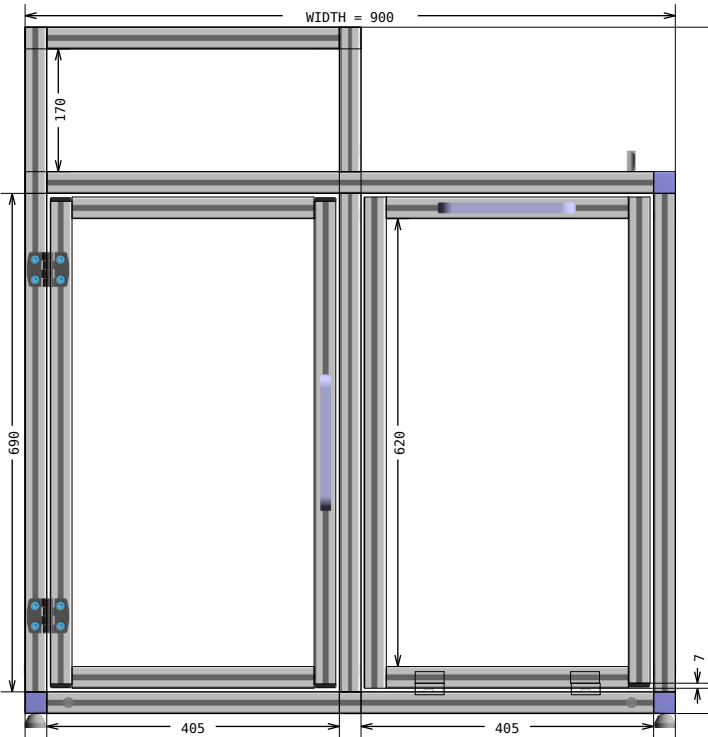


FRONT

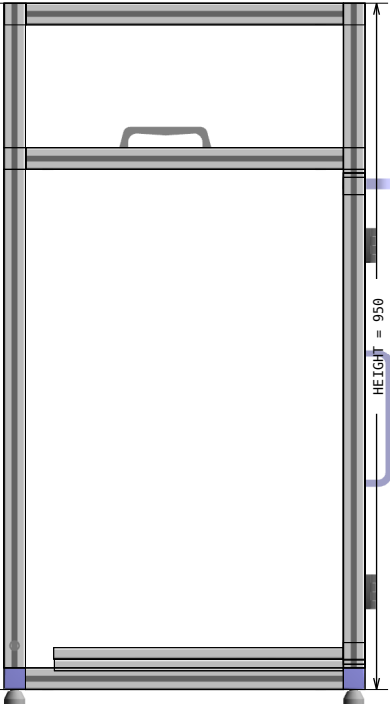

LEFT

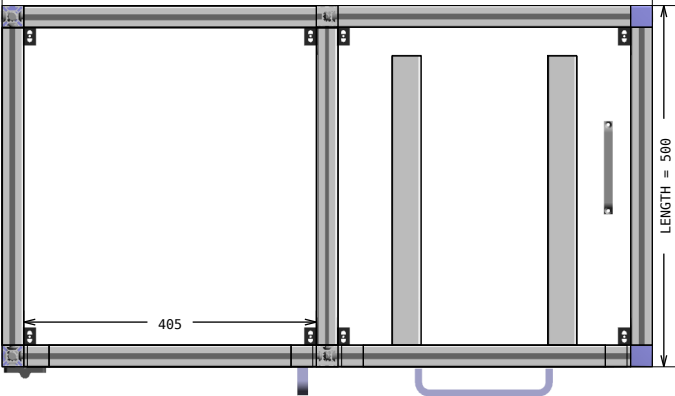



TOP

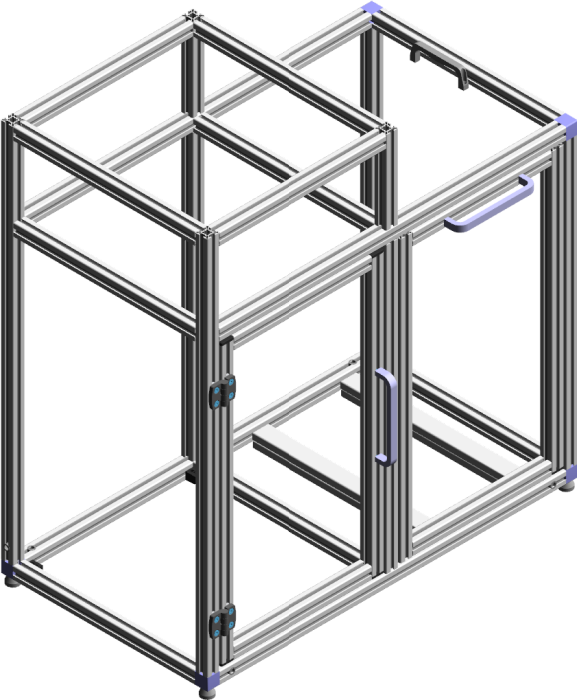


ISOMETRIC


FRONT VIEW

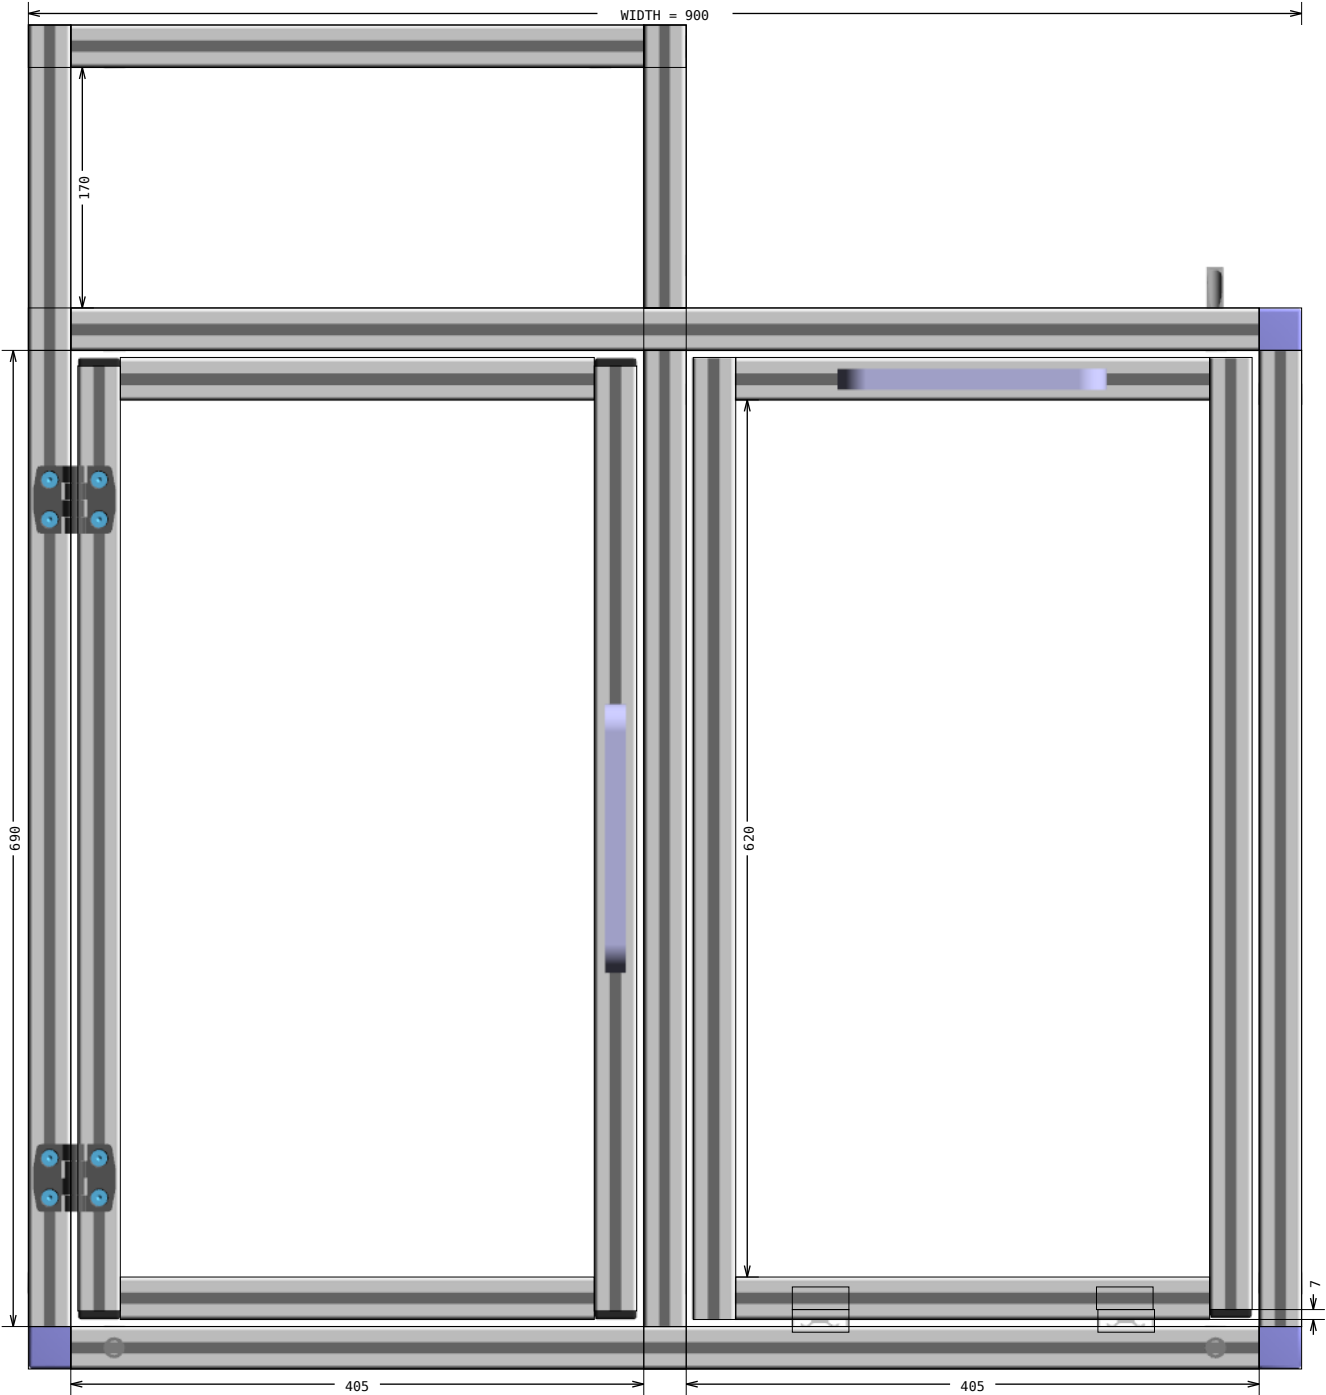


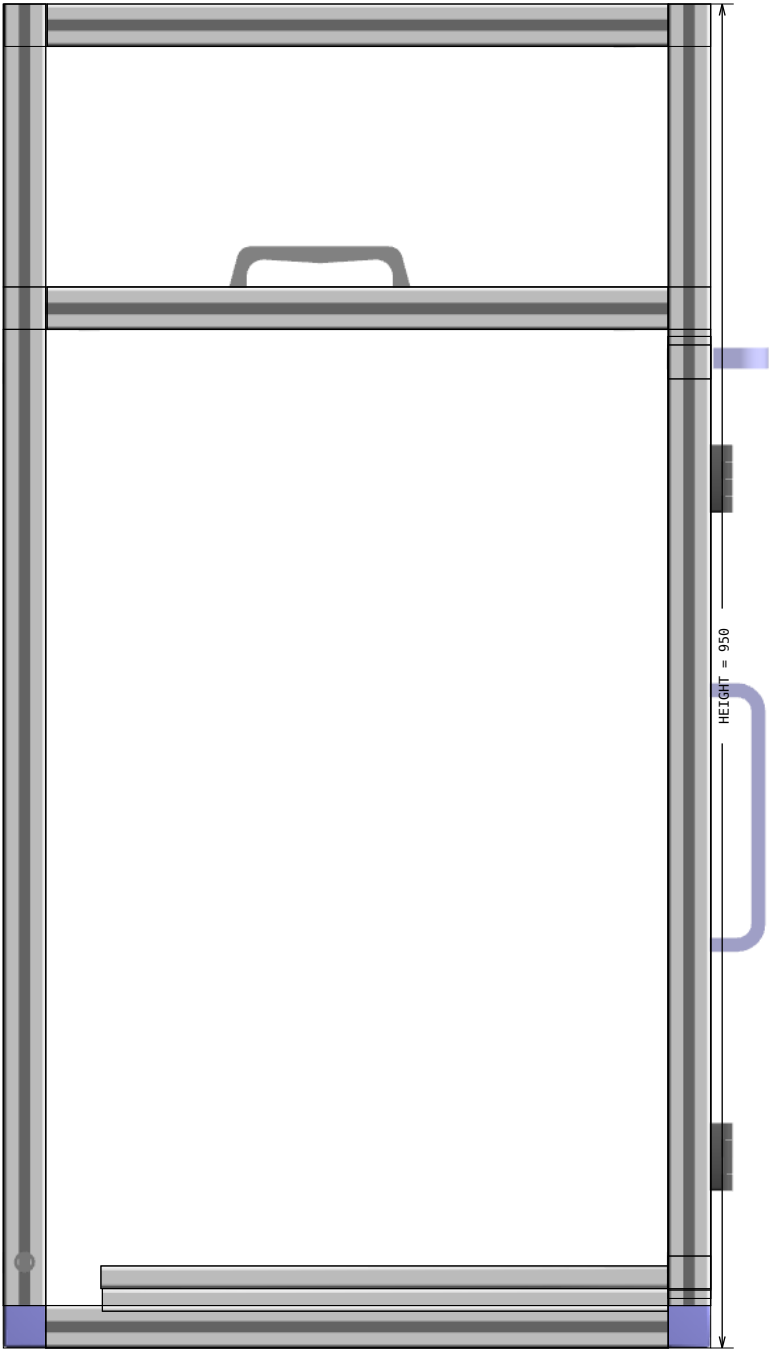

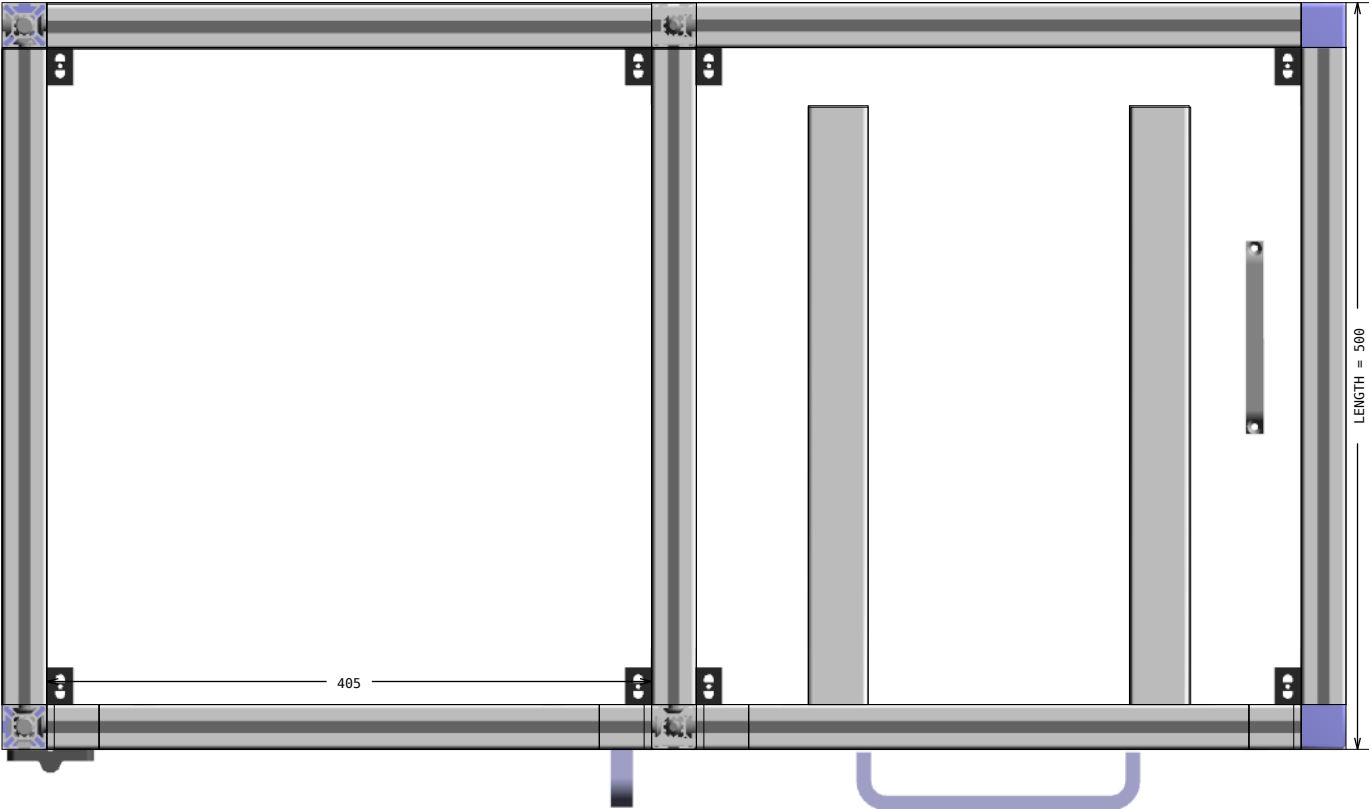


Exploded view

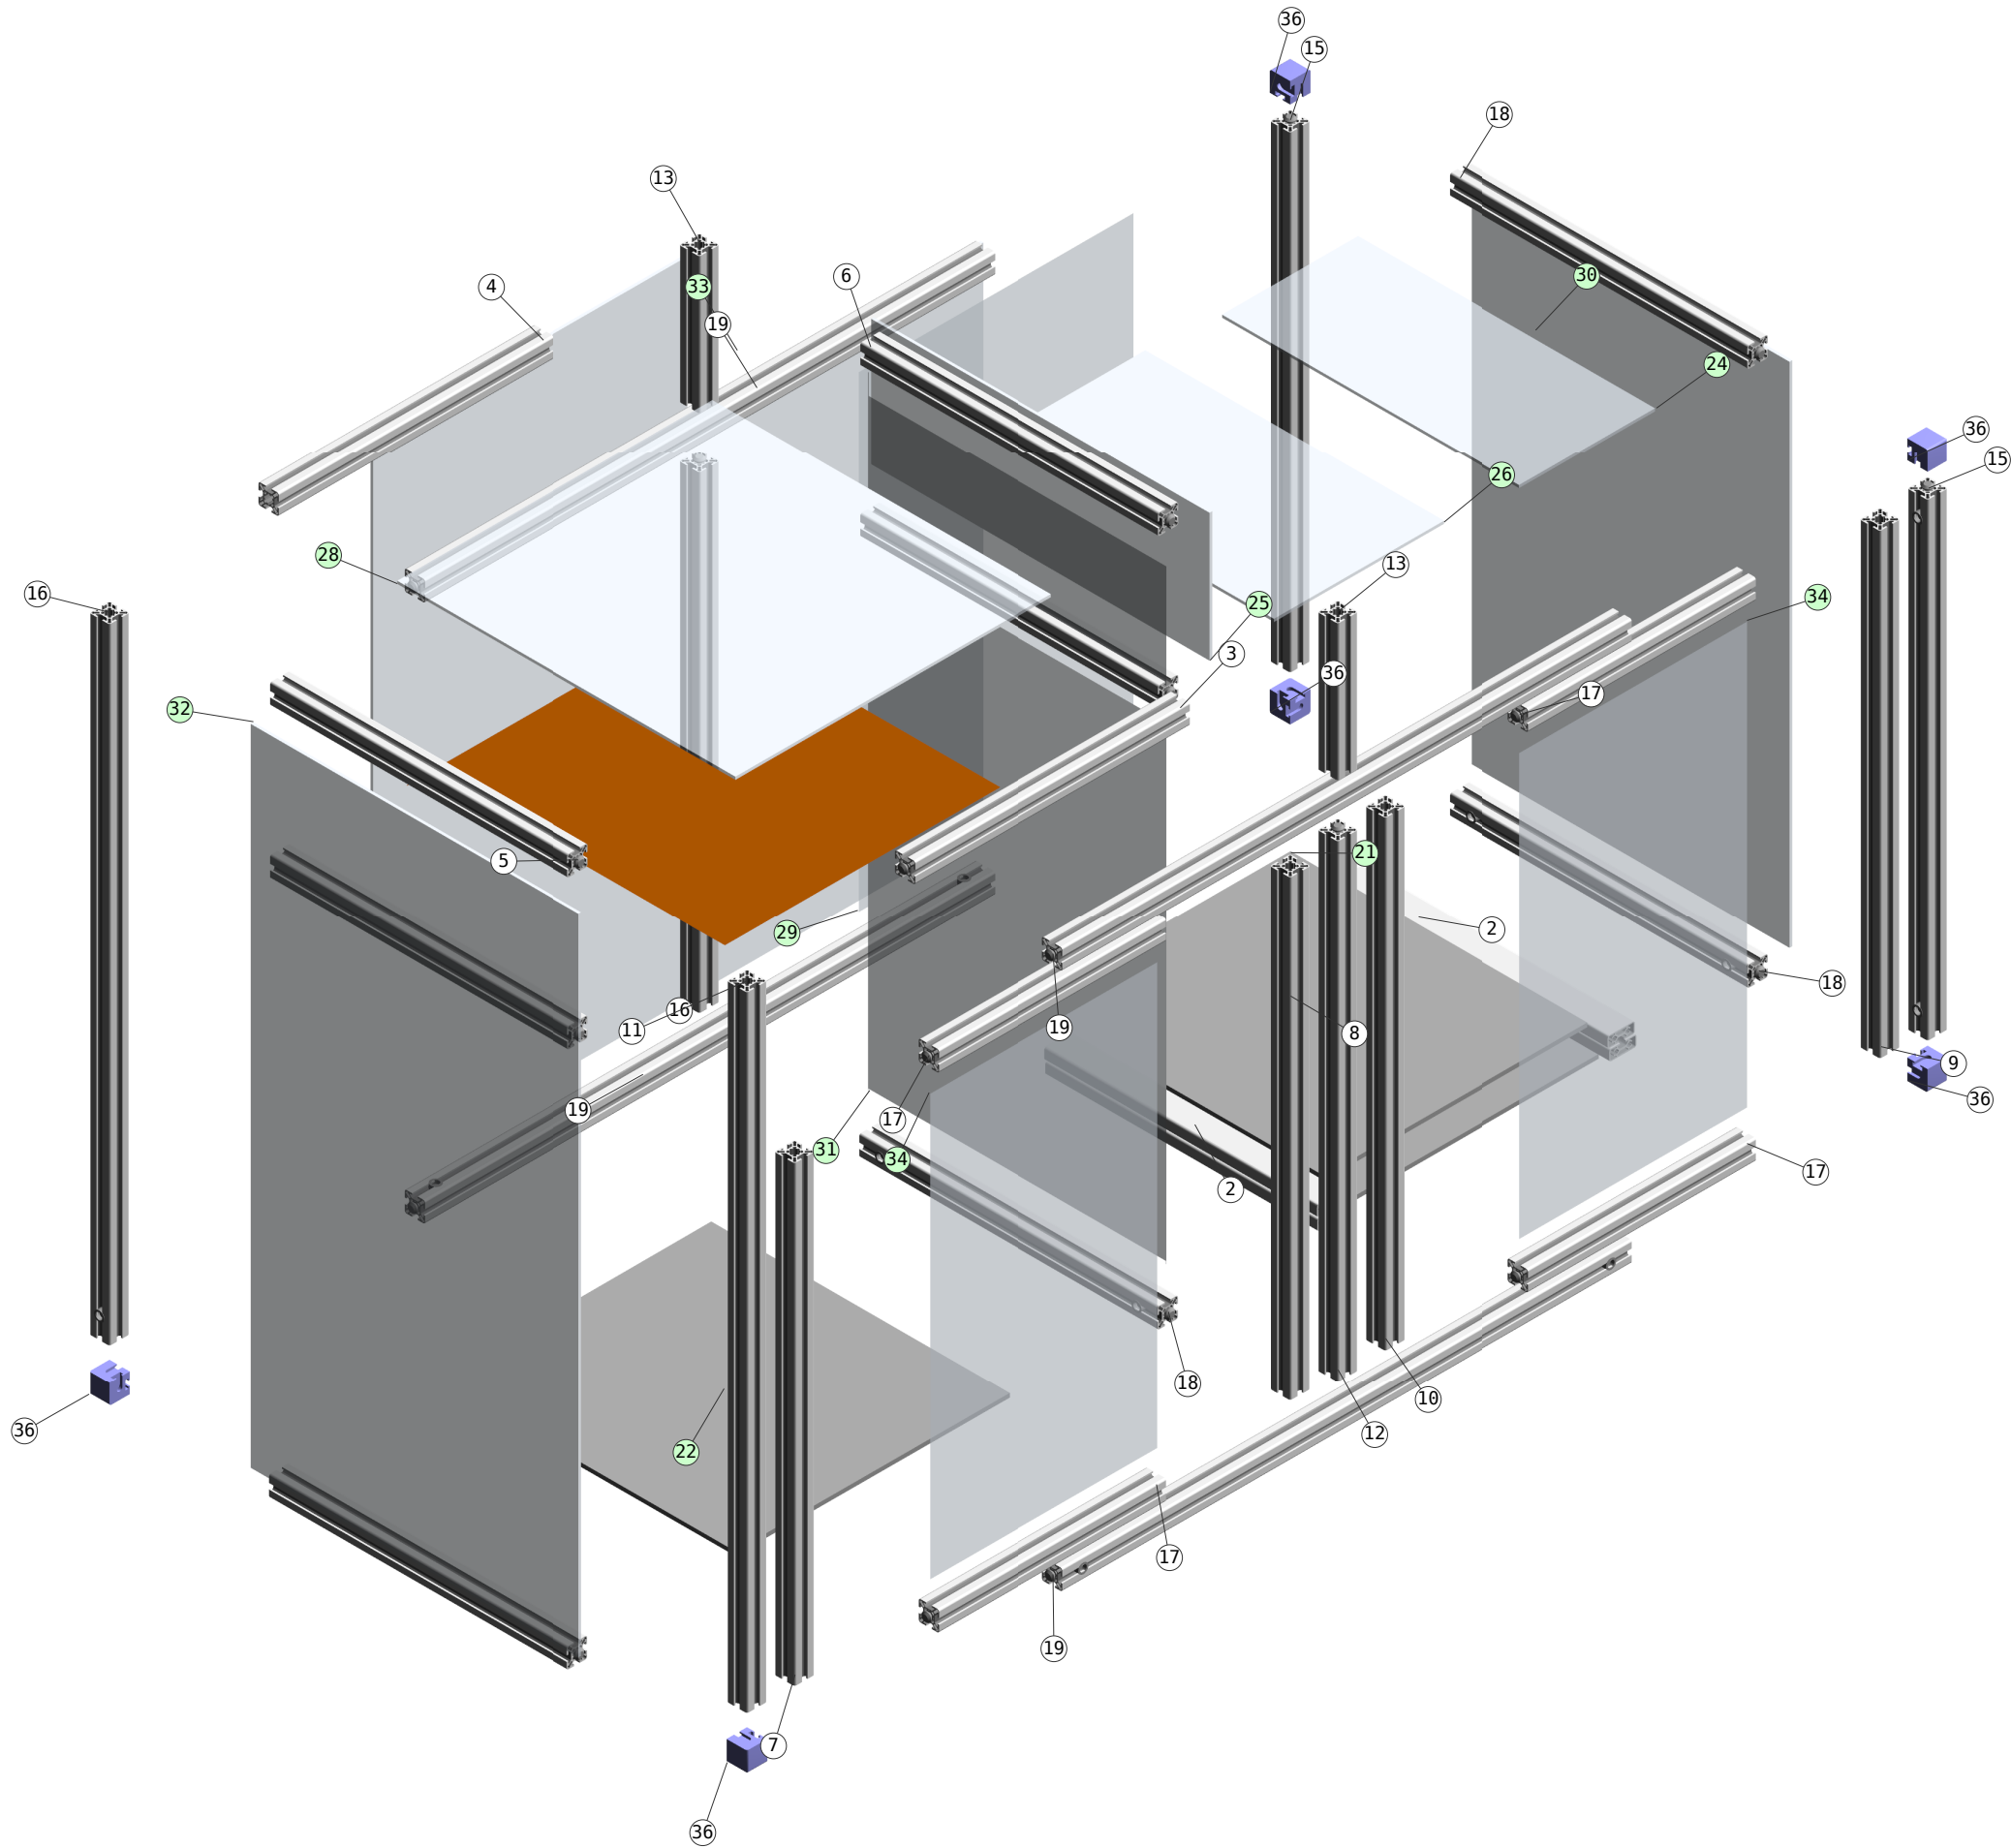


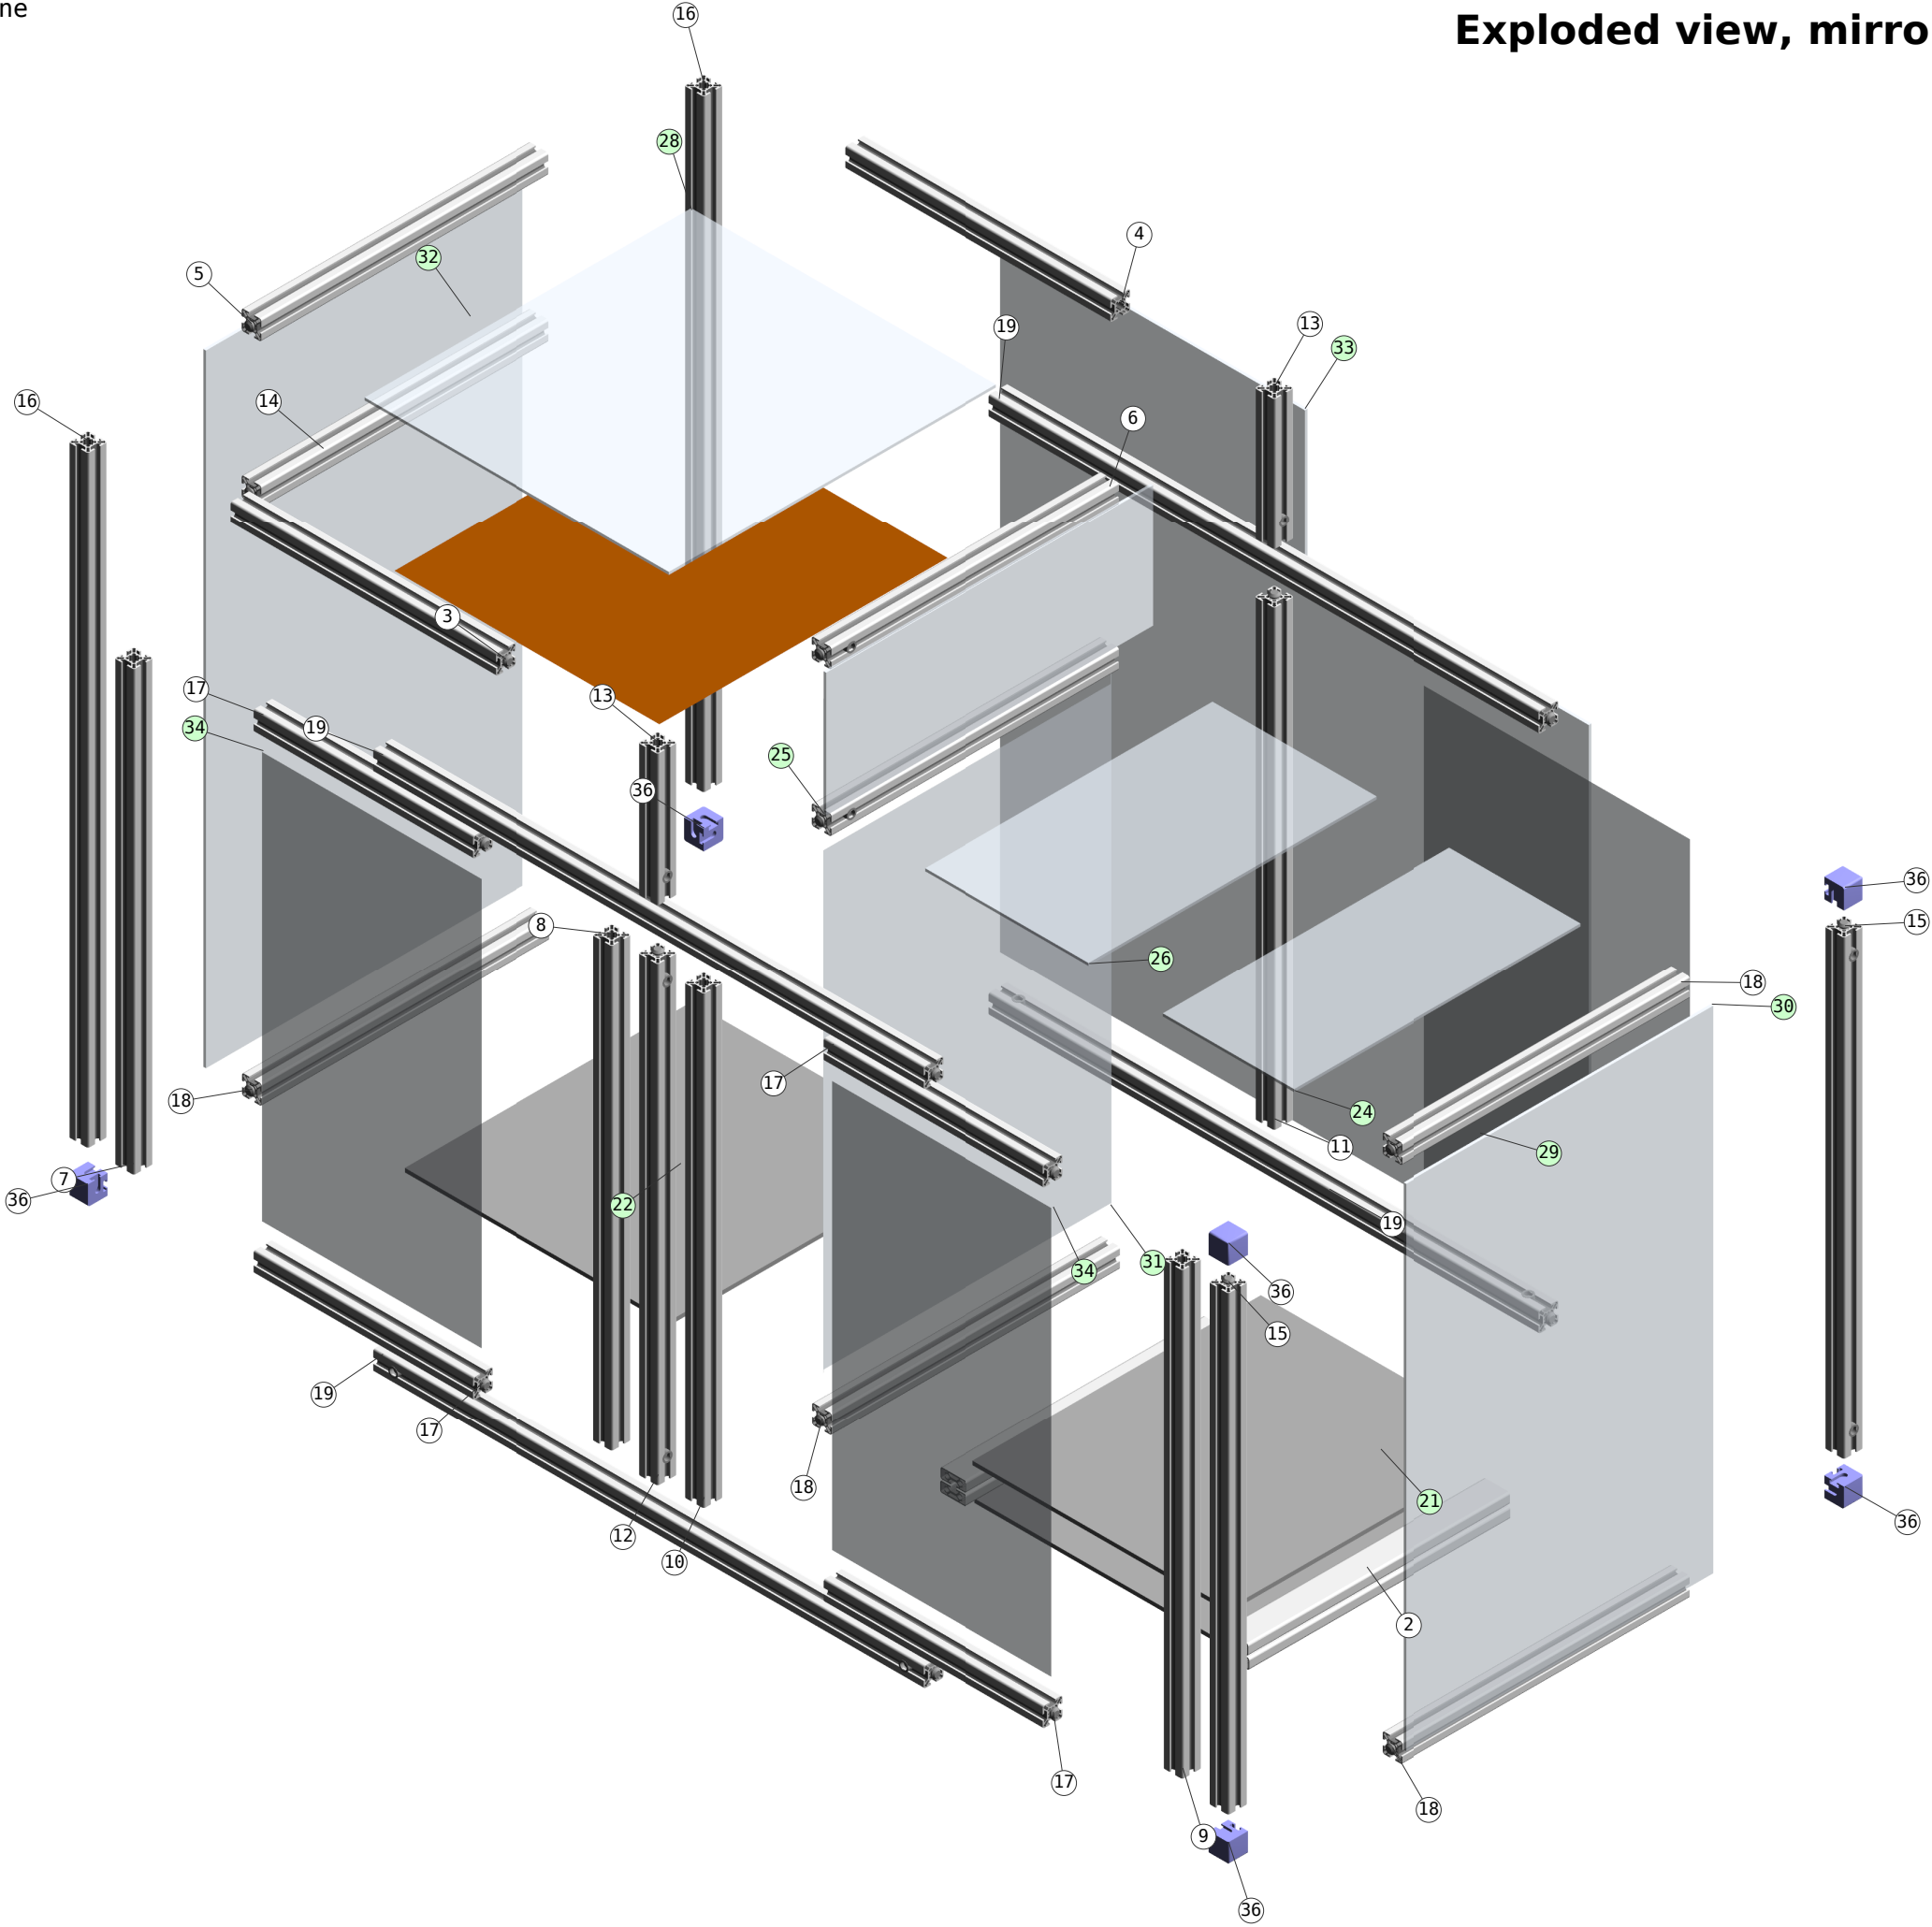

Components of group: etuet
Panels are not shown for image clarity, their locations are marked by green balloons

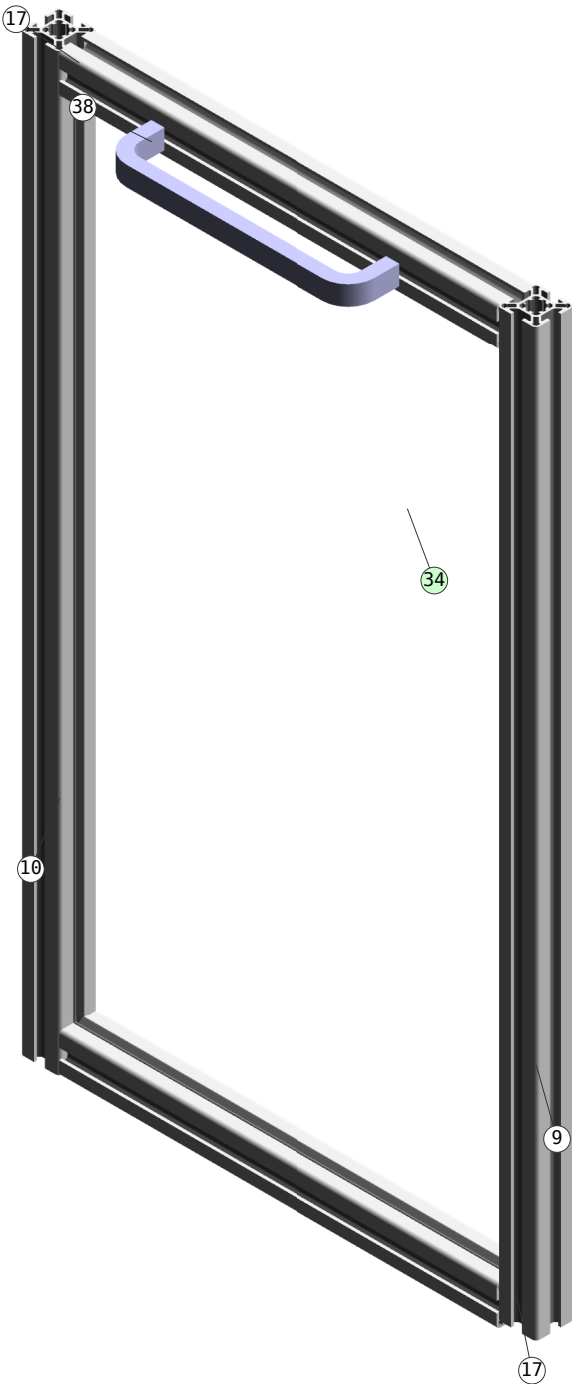

Components of group: Door
Panels are not shown for image clarity, their locations are marked by green balloons

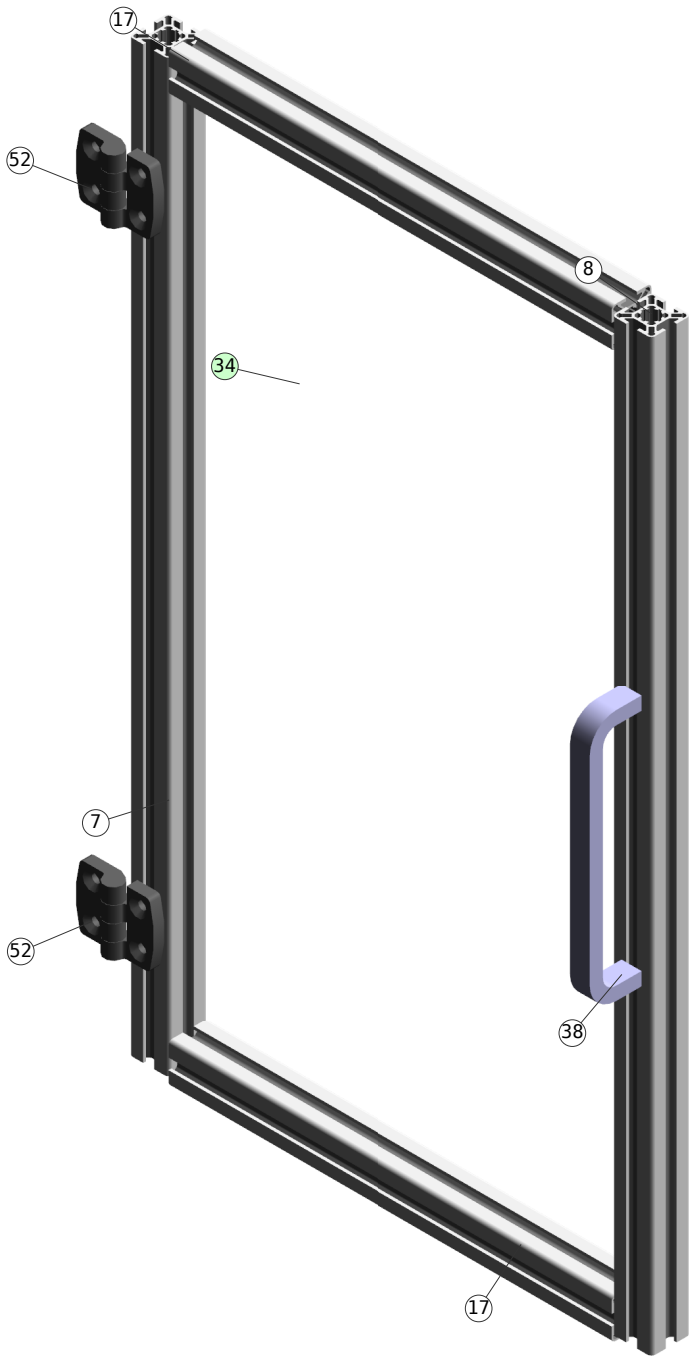


Components of group: FHGJ
Panels are not shown for image clarity, their locations are marked by green balloons



21


Components of group: swrdfgS
Panels are not shown for image clarity, their locations are marked by green balloons



Assembly List

Pos	Article-No	Description	Related parts	Qty
3	1.11.030030.43LP-AA4AA4/405	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
5	1.11.030030.43LP-A00AA4/439	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
6	1.11.030030.43LP-AA1A00/439	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
11	1.11.030030.43LP-AA1AA1/690	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
12	1.11.030030.43LP-AA4AA4/690	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
13	1.11.030030.43LP-AA4A00/200	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
14	1.11.030030.43LP-AA4A00/439	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
15	1.11.030030.43LP-AA4AA4/690	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	4
16	1.11.030030.43LP-AA4A00/920	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
17	1.11.030030.43LP-AA4AA4/335	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	8
18	1.11.030030.43LP-AA4AA4/440	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal 1.21.3F0, Connector, universal	2 6
19	1.11.030030.43LP-AA4AA4/840	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal 1.21.3F0, Connector, universal	2 6
25	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8 1.31.FM4, Threaded plate F, M4	6 6
28	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8 1.31.FM4, Threaded plate F, M4	8 8
30	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8 1.31.FM4, Threaded plate F, M4	4 4
32	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8 1.31.FM4, Threaded plate F, M4	9 9
33	2.87.1571-99	Polycarbonat 4mm	0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8 1.31.FM4, Threaded plate F, M4	17 17
38	1.61.210	Handle light	0.63.D06912.05035, Cylindric head screw, DIN 6912 - M5x35	2
52	1.62.448.17/17	Hinge 48 fixed, A 17.5	1.32.4FM6, T-Nut for subsequent insertion, w. spring F, M6 0.63.D07991.06010, Flat head screw, DIN 7991 - M6x10	8 8


Profile machining details




DRAWING 1, Pos 8
SIDE 1, bar length: 668.0 mm



DRAWING 1, Pos 8
SIDE 2




DRAWING 1, Pos 8
SIDE 3

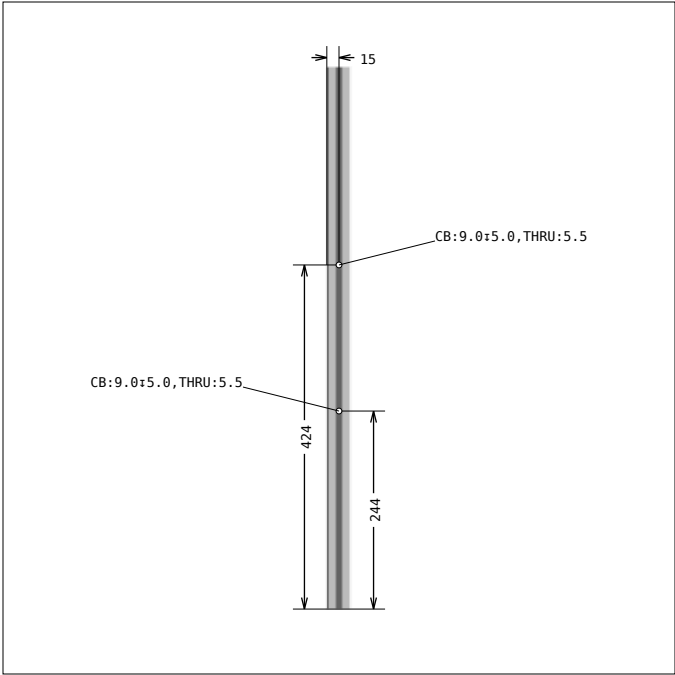


DRAWING 1, Pos 8
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Panels

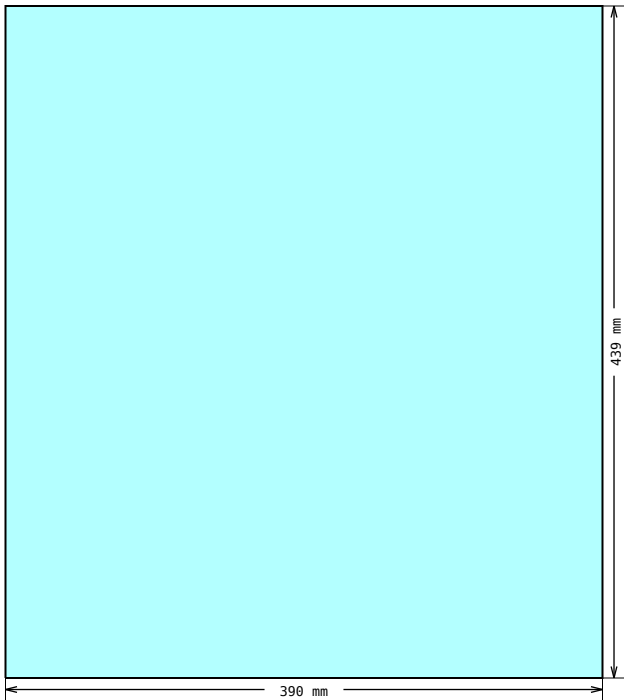


DRAWING 2, Pos 21
Shape measurements

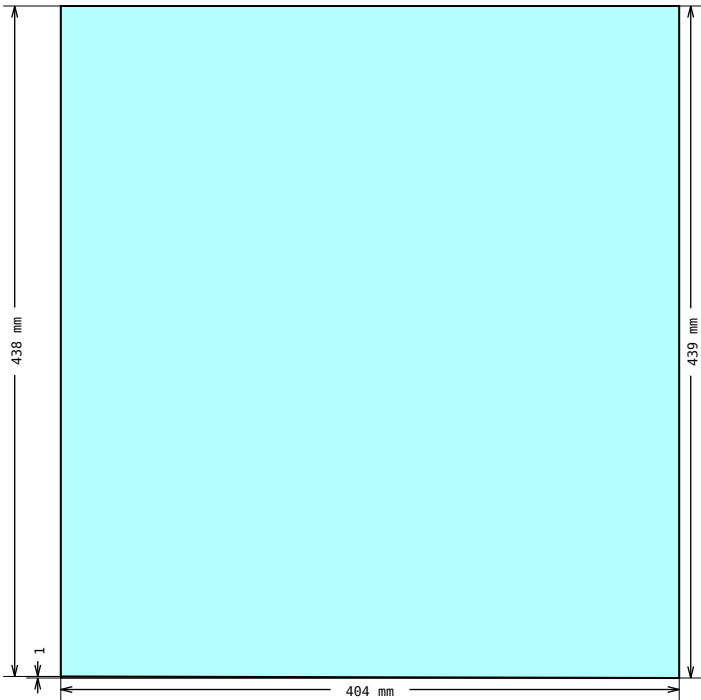

DRAWING 3, Pos 22
Shape measurements

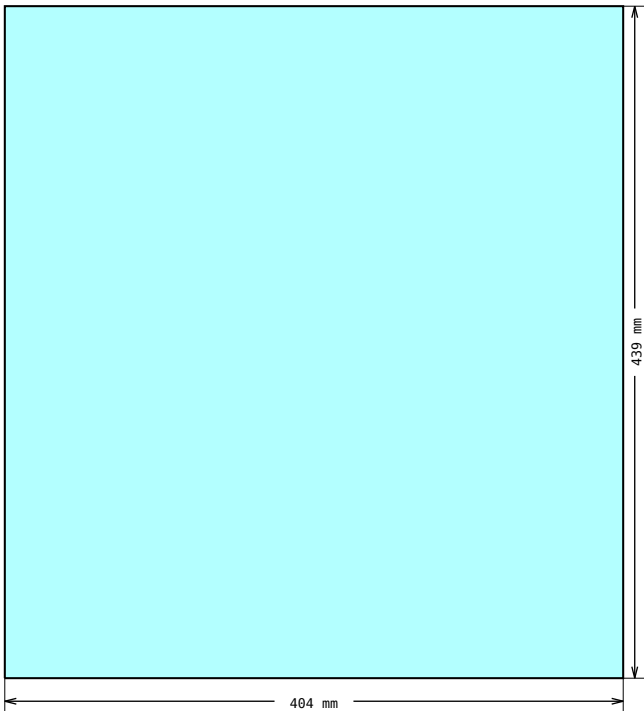


DRAWING 4, Pos 23
Shape measurements

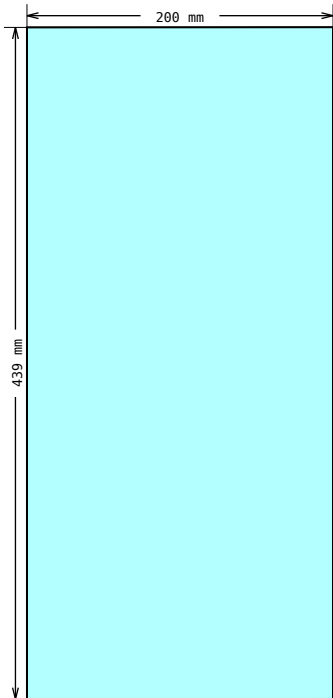


DRAWING 5, Pos 24
Shape measurements


Panels

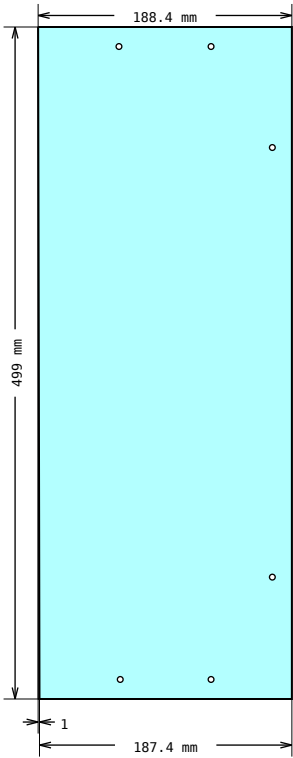


DRAWING 6, Pos 25
Shape measurements

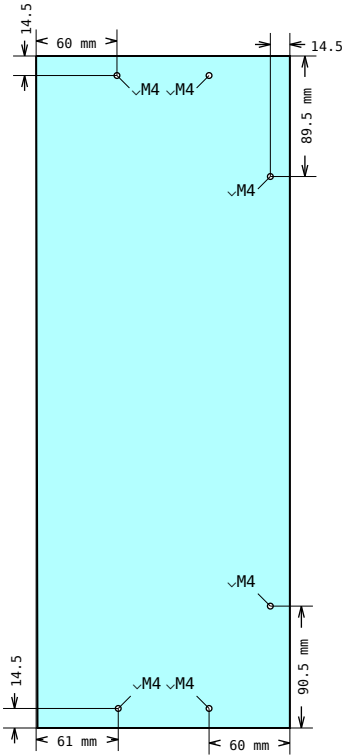

DRAWING 6, Pos 25
Hole placement

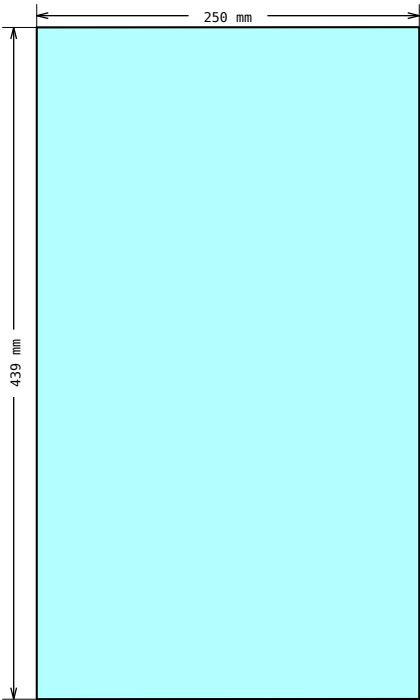


DRAWING 7, Pos 26
Shape measurements

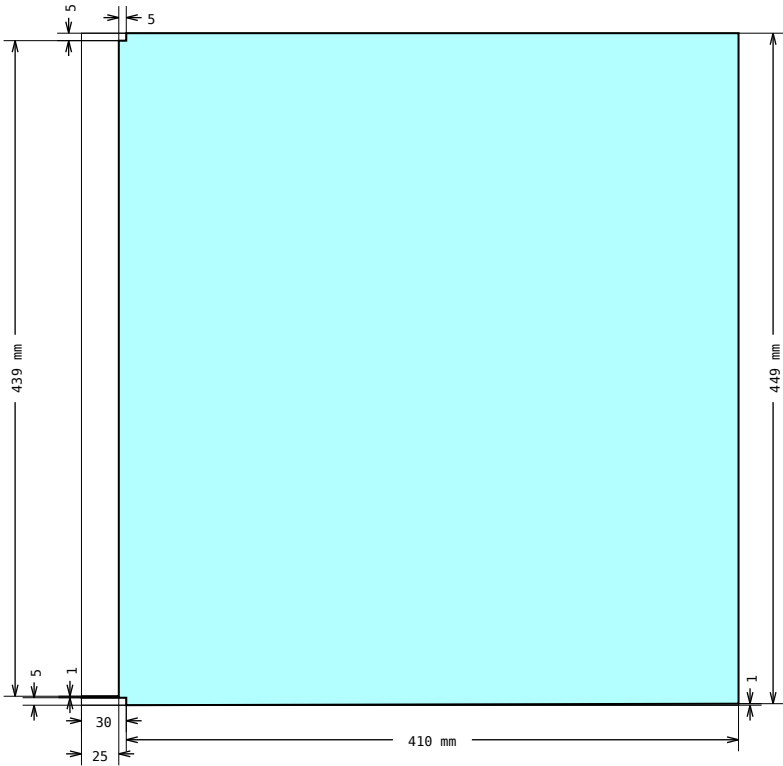


DRAWING 8, Pos 27
Shape measurements


Panels

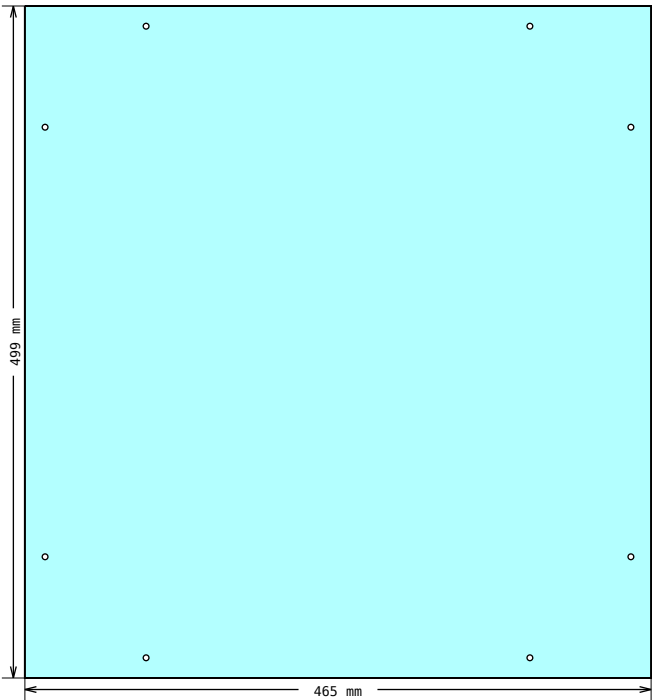


DRAWING 9, Pos 28
Shape measurements

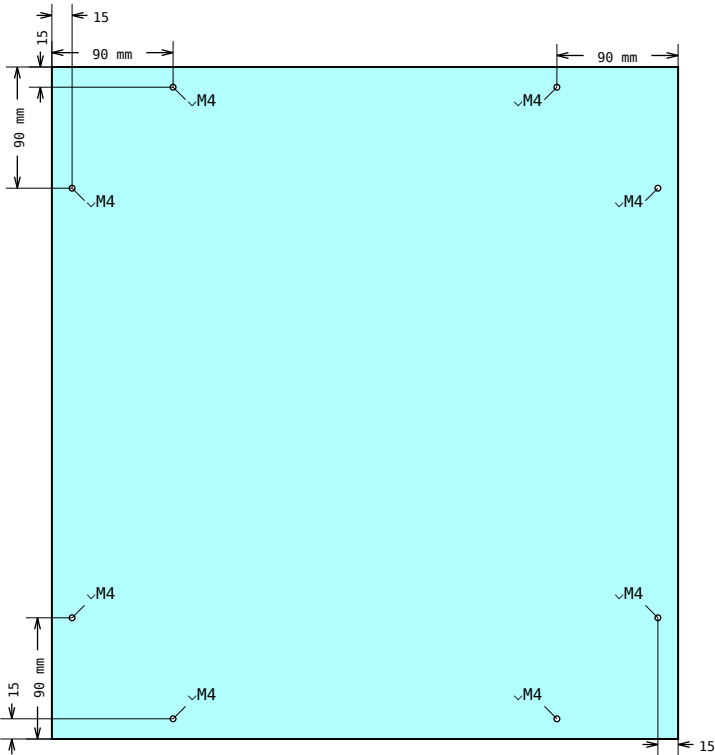

DRAWING 9, Pos 28
Hole placement

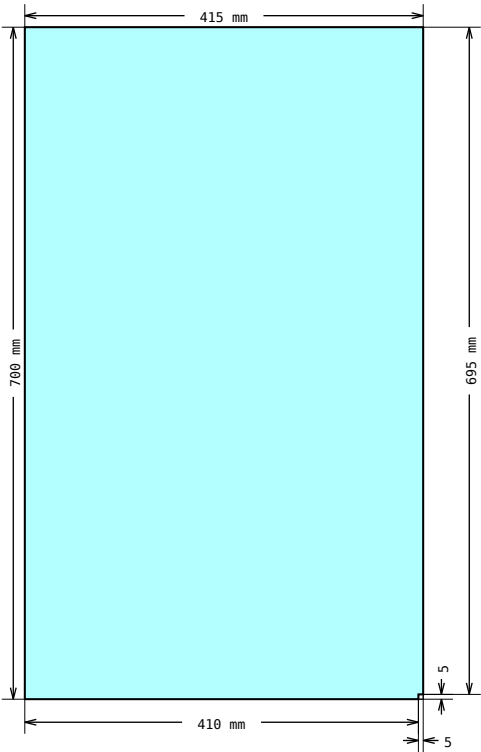


DRAWING 10, Pos 29
Shape measurements

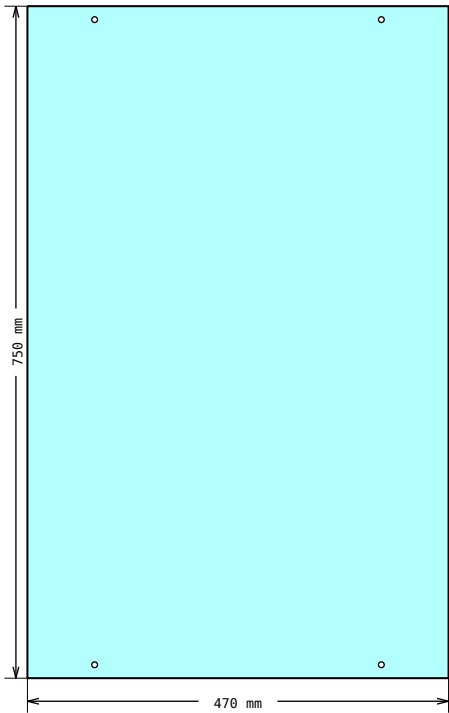


DRAWING 11, Pos 30
Shape measurements


Panels

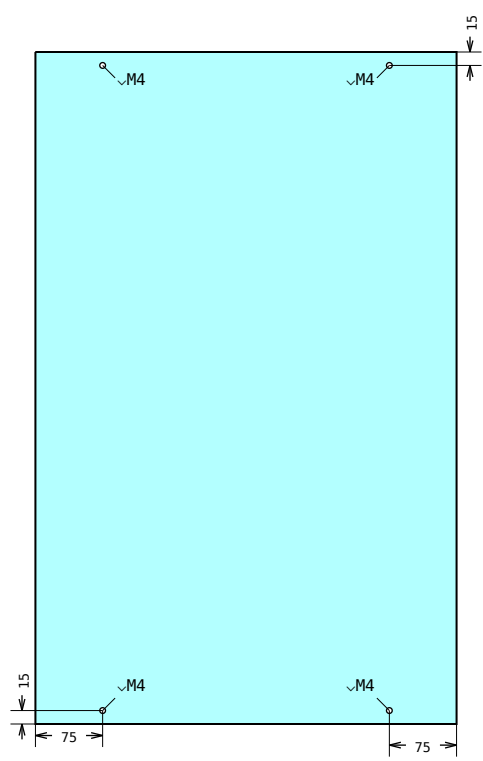


DRAWING 11, Pos 30
Hole placement

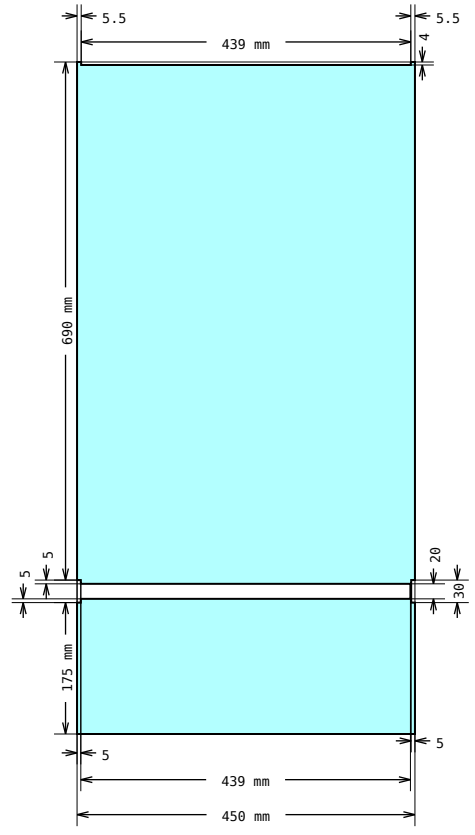

DRAWING 12, Pos 31
Shape measurements

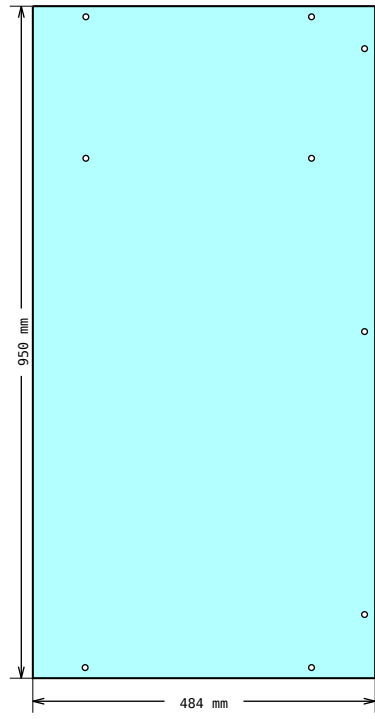


DRAWING 13, Pos 32
Shape measurements

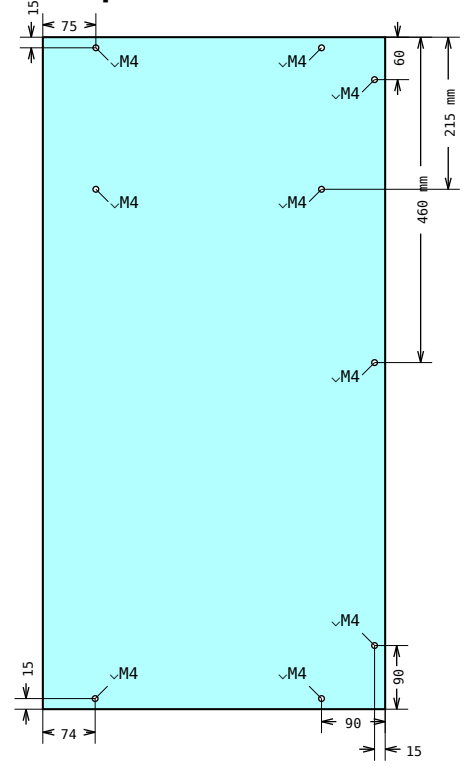


DRAWING 13, Pos 32
Hole placement


Panels

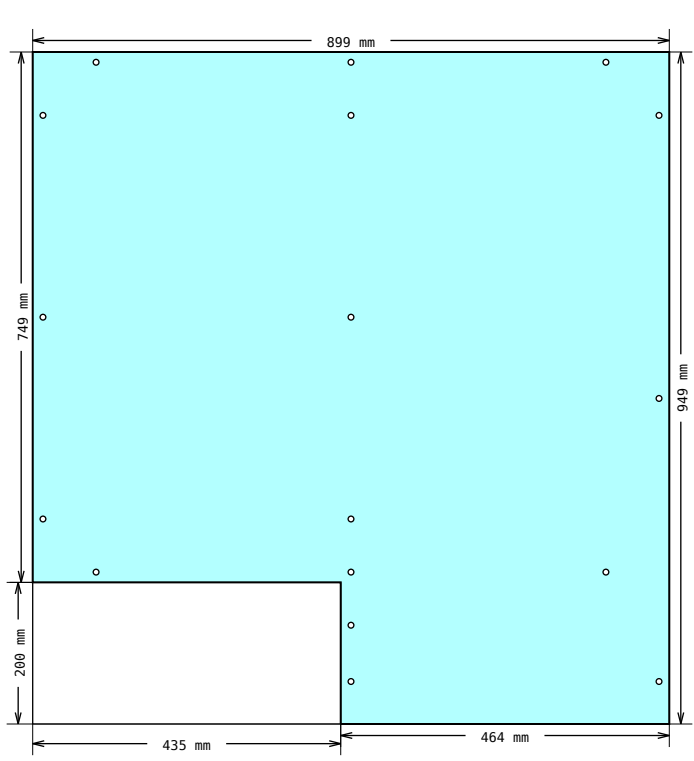

DRAWING 14, Pos 33
Shape measurements

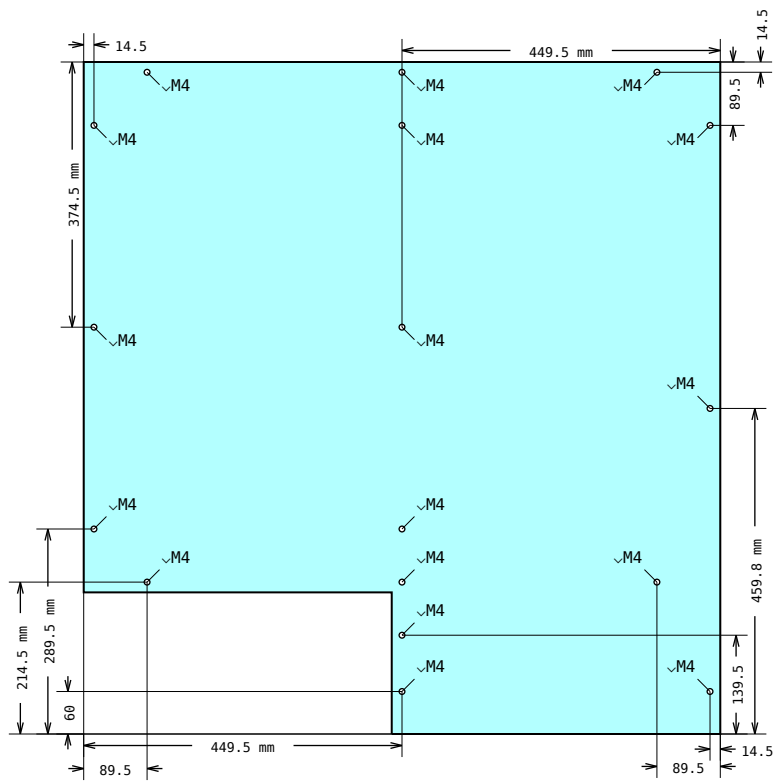

DRAWING 14, Pos 33
Hole placement





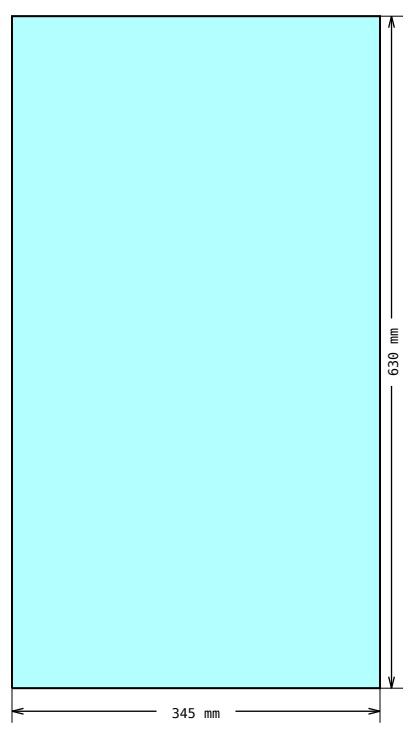


DRAWING 15, Pos 34
Shape measurements





Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.030030.43LP	15 19 19 19 19 16 16 690.0840.0840.0840.0840.0920.0920.0	85.5 mm
	13 18 18 8 7 9 10 12 11 15 200.0440.0440.0668.0668.0673.0680.0690.0690.0690.0	126.0 mm
	13 17 17 17 17 4 3 14 6 14 5 18 18 200.0335.0335.0335.0335.0405.0405.0439.0439.0439.0439.0440.0440.0	968.5 mm
1.10.016040.14LP	1 1 2 2 400.0400.0401.0401.0	4384.0 mm

Assembly hints

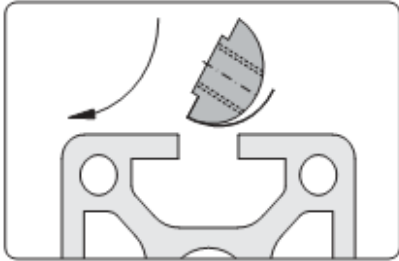ACCESSORY	1.32.4FM6	T-Nut for subsequent insertion, w. spring F, M6	
 Fixing with leaf spring Application Fastening element for screw-type connections  Insert front-sided and rotate Technical data Design steel: • material: steel • surface: galvanised Design stainless: • material: stainless steel 1.4305 • surface: pickled and passivated max. moment of torque: $M_{A, max}$			These t-nuts are easily inserted into assembled frames
CONNECTOR	1.21.3F0	Connector, universal	
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side			Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.

Assembly hints

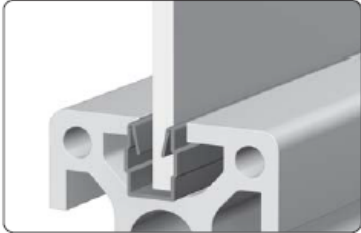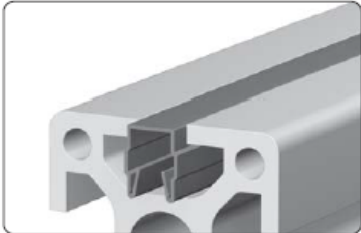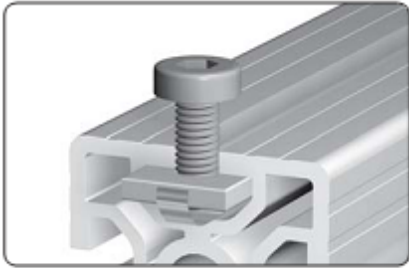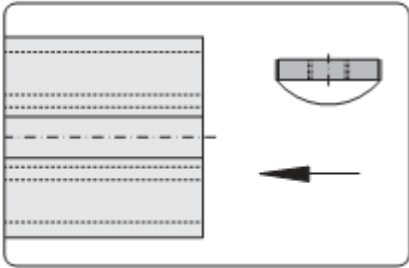None	1.41.F14.1	Combination profile PP, F, 1-4.5, grey (bar 2.5 m)	
 Use as reduction profile  Use as slot-cover profile Application Combination profiles for use as reduction or cover profiles Technical data bar length: 2.5 m material: PP • oil and water resistant Colours: grey black orange red blue green			These profiles fill the space between the panel and the walls of the T-slot.
None	1.31.FM4	Threaded plate F, M4	
 Fixed into position with leaf spring  Assembly Insert from end			These plates must be inserted from the open side of the profile, prior to final frame assembly