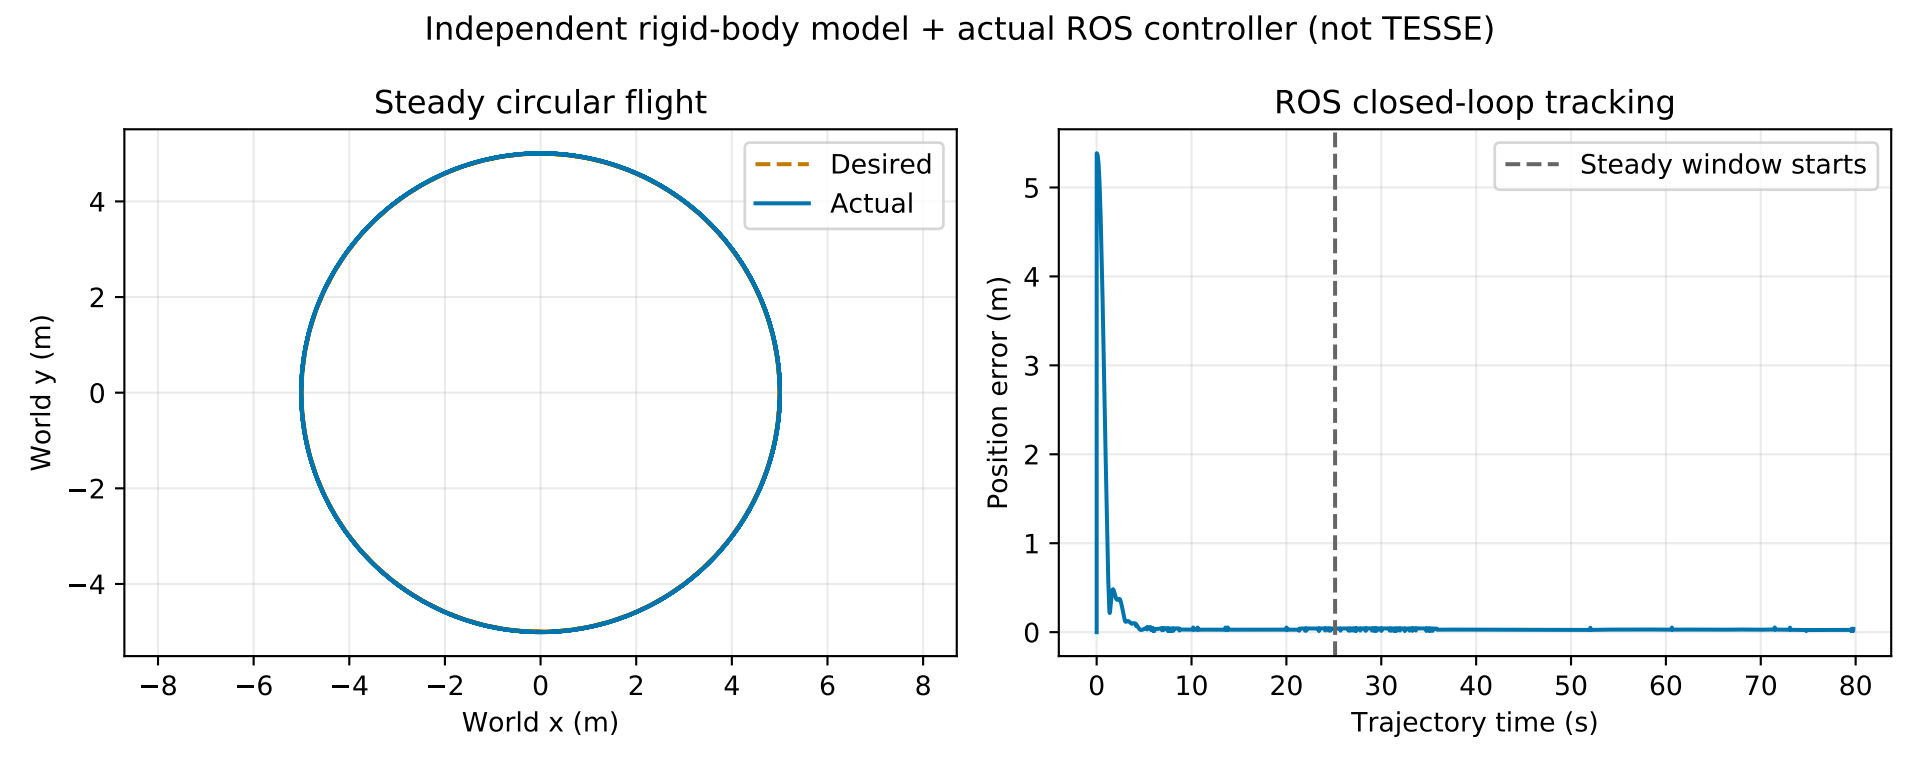
Independent rigid-body model + actual ROS controller (not TESSE)
Steady circular flight
Desired
Actual
World x (m)
World y (m)
ROS closed-loop tracking
Steady window starts
Position error (m)
Trajectory time (s)