Test Report

Name of Sample:	INSTAFLASH V16
Brand Name:	INSTAFLASH
Model No.:	G002
Client:	MOMENTUM SYSTEMS, S.L.
Manufacturer:	HUIZHOU LIDAFENG TECHNOLOGY CO., LTD.
Test Sort:	Commission Test
Test Item:	IP54

Shenzhen EBO Technology Co., Ltd.

Address: A219、220, Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen

TEL：0755-29451282 Web：http:// www.ebotek.cn E-Mail：ebo@ebotek.cn

Shenzhen EBO Technology Co., Ltd.

Test Report

Client	MOMENTUM SYSTEMS, S.L.		
Address	CALLE AVIADOR ZORITA, NUM 13 PLANTA 2, PUERTA 05 28020 MADRID-(MADRID)		
Manufacturer	HUIZHOU LIDAFENG TECHNOLOGY CO., LTD.		
Name of sample	INSTAFLASH V16		
Brand Name	INSTAFLASH	Model No.	G002
Sample size	/	Samples Weight	/
Application date	March 13, 2026	Test date	March 17, 2026 to March 18, 2026

Sample description:

Sample Quantity: 2

Sample No.: ET20260313001-1/2 (For IP5X testing), ET20260313001-2/2 (For IPX4 testing)

In good condition before test.

Test item:

IP54

Test Standard:

IEC 60529:2013

Test Results:

After the IP5X test, No trace of dust inside sample (ET20260313001-1/2).

The 1.0mm test stick can not enter the gap of the sample (ET20260313001-1/2)

After the IPX4 test, No ingress of water was found inside sample. (ET20260313001-2/2)

Date: March 20, 2026

Tested by:	Reviewed & Approved by:
Bowne	Cenjo (General Manager)

Lab Environmental Conditions:

Ambient temperature: 15℃-35℃

Relative humidity: 35%RH-75%RH

Test Equipment:

Name	Type	Serial No.	Calibration useful-life
Dust tester	XL-SC-1000L	E00206	October 16, 2026
IPX1-X7 Waterproof grade testing machine	GT1310	E00207	October 14, 2026
1.0mm Test stick	1.0 mm	E00186	October 21, 2026

Test Method/ Specification:

IP5X:

(1) Observe whether the test stick whose diameter is 1.0mm could enter the gap of the sample.

(2) Place the sample ET20260313001-1/2 into the Dust Proof Chamber, the test condition is as below:

Test dust: Talcum powder

Dust concentration: 2kg/m^3 and be kept in suspension during the test

Test duration: 8h

(3) Examine the protection against ingress of dust of specimen after this test

IPX4:

(1) The test sample ET20260313001-2/2 is fixed on the test bench and the test conditions are as follows:

Spray method: Oscillating tube.

Oscillating angle: ~360° (~180°/ side)

Water flow rate: 0.07 l / min ±5% / hole

Test Duration: 10 min

(1) Examine the protection against ingress water of specimen(s) after this test.

Test Results:

Check Item / Sample No.:	Visual check
ET20260313001-1/2	After the IP5X test, No trace of dust inside sample The 1.0mm test stick can not enter the gap of the sample
ET20260313001-2/2	After the IPX4 test, No ingress of water was found inside sample

Before test Photos




IP5X



IPX4

Test Photos

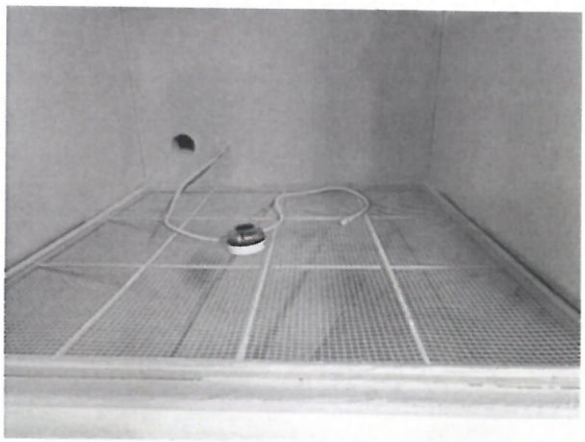

IP5X




The 1.0mm test stick can not enter the gap of the sample ET20260313001-1/2



IPX4

空白

After test Photos

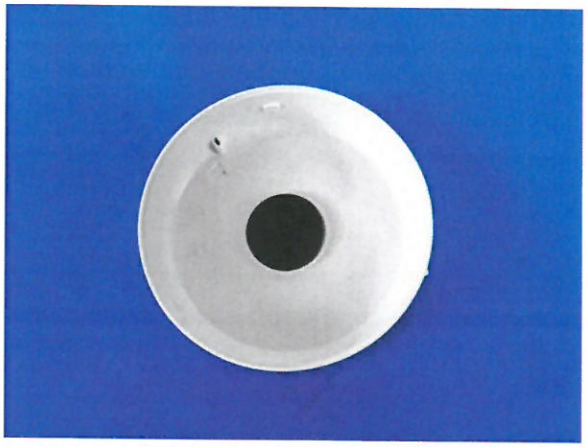


Visual check ET20260313001-1/2 (IP5X)



Visual check ET20260313001-1/2 (IP5X)




Visual check ET20260313001-1/2 (IP5X)

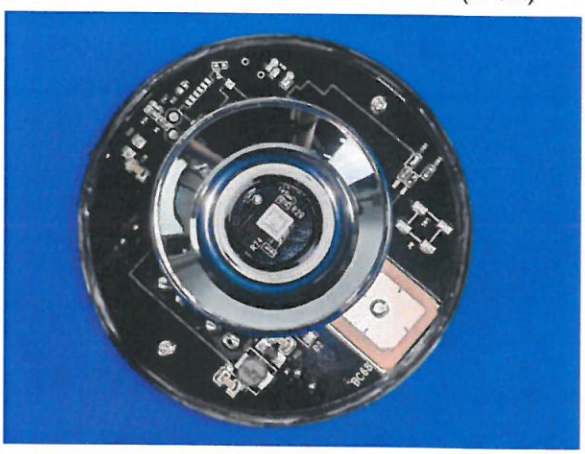

Visual check ET20260313001-1/2 (IP5X)




Visual check ET20260313001-2/2 (IPX4)

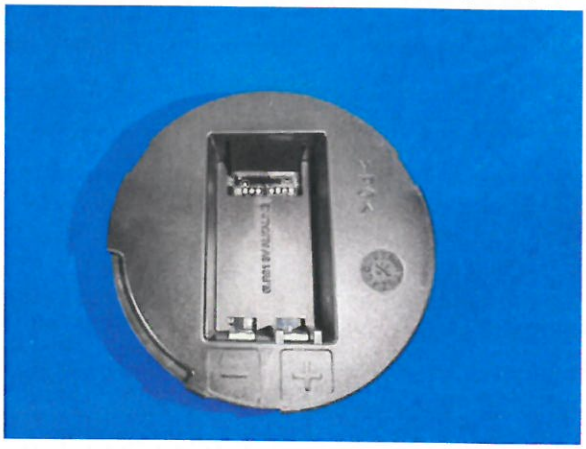

Visual check ET20260313001-2/2 (IPX4)



Visual check ET20260313001-2/2 (IPX4)

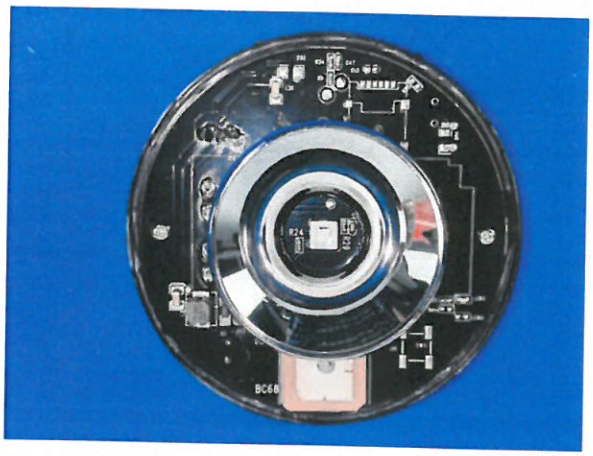

Visual check ET20260313001-2/2 (IPX4)

Statement

1. The report is just responsible for the tested sample.
2. The test report is invalid without stamp of laboratory.
3. The test report is invalid without signature of person(s) testing and authorizing.
4. The test report is invalid if erased and corrected.
5. Test results of the report is valid to the test samples if sampling by client.
6. The test report shall not be reproduced except in full, without written approval of the laboratory.
7. The test report shall not be published as advertisement without the written approval of EBOTEK.
8. The contents of this report are for reference only, not as the basis for any legal regulation or as proof use, the final interpretation of this report is owned by EBOTEK.
9. If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.