

Project Summary

LUMINAIRE

CLAP M C35 30K F151 VDR
SPUW 100W

LIGHTING CLASS

M3

ARRANGEMENT

Lineal

ROAD / HEIGHT

7.0 m / 9.0 m

MAINTENANCE FACTOR


0.85

PAVEMENT / CCT

R3 / 4000 K

Transverse section

Pole height, bracket arm, luminaire tilt and roadway section

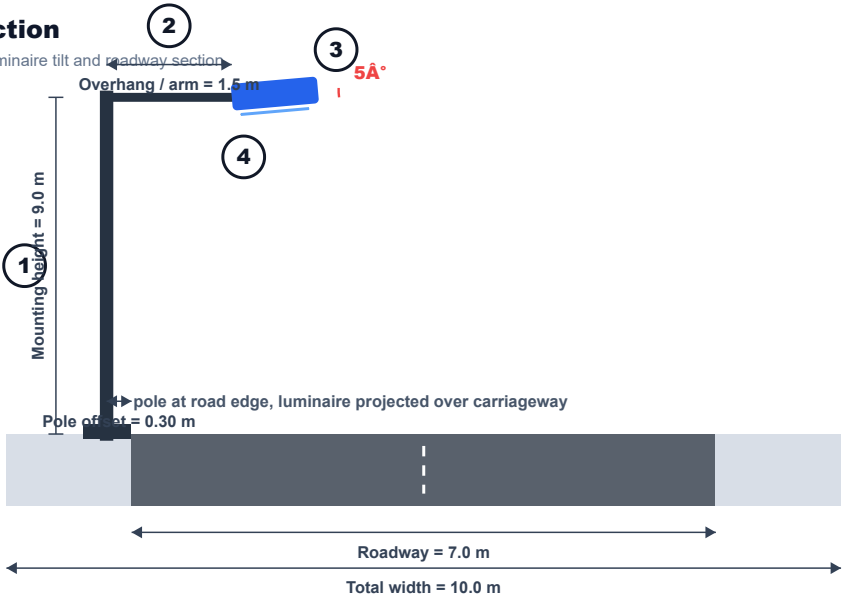

PLANNING PARAMETER	VALUE
Total width	10.0 m
Roadway width	7.0 m
Sidewalks	1.5 m / 1.5 m
Spacing	30.0 m
Pole offset / arm / tilt	0.30 m / 1.5 m / 5°

FAIL

The current road lighting configuration does not satisfy every checked criterion for class M3.

Luminaire


PROPERTY	VALUE
Manufacturer	Salvi
Model	CLAP M C35 30K F151 VDR SPUW 100W
Optic family	F151
Power	100 W
Luminous flux	15,478 lm
Efficiency	154.8 lm/W
LOR / LORL	100 %

Photometric planes are rendered as scalable SVG from the selected LDT file. The red plane identifies C0-180 and the blue plane identifies C90-270. Radial labels are separated from the curves to keep the graph readable in PDF.

I (cd/klm) - CLAP M C35 30K F151 VDR SPUW 100W

Photometric distribution, normalized per 1000 lm

Radial scale: 100, 200, 300, 400 cd/klm

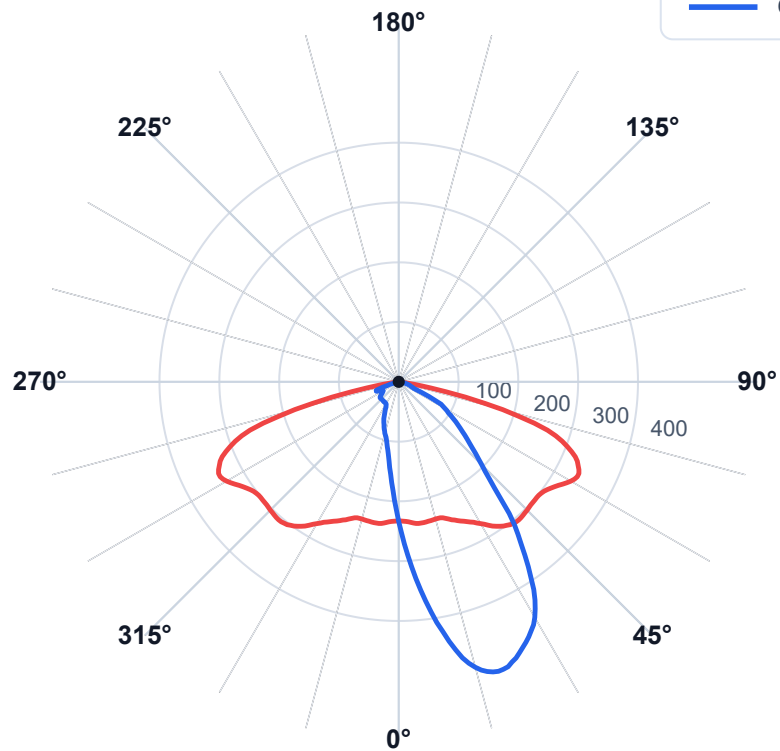

Road Planning Data


Public road profile

Sidewalk / Pedestrian area 2	Width: 1.50 m
Roadway	Width: 7.00 m, traffic lanes: 2, pavement: R3
Sidewalk / Pedestrian area 1	Width: 1.50 m
Maintenance factor	0.85

Luminaire arrangement and street geometry


Street plan view

Calculation field, carriageway, pedestrian areas and luminaire positions

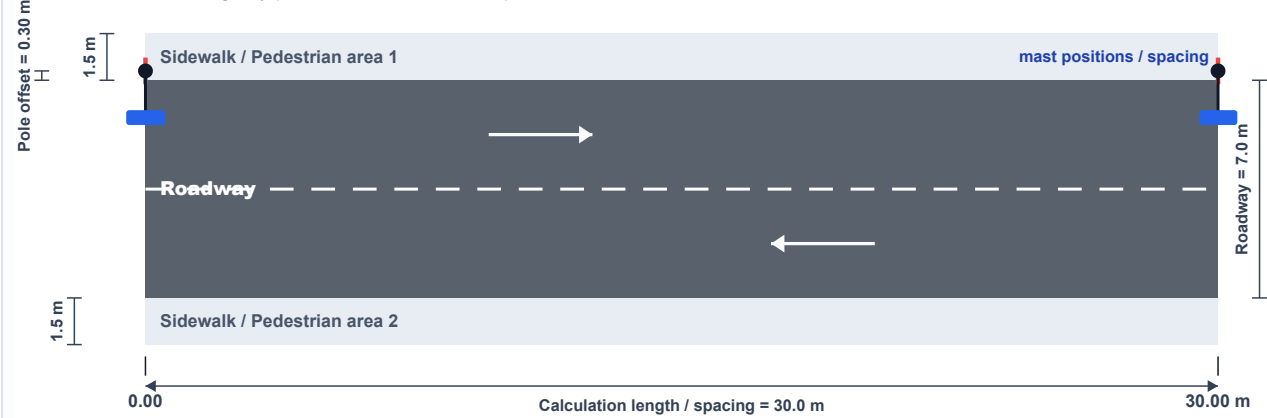

Transverse section

Pole height, bracket arm, luminaire tilt and roadway section

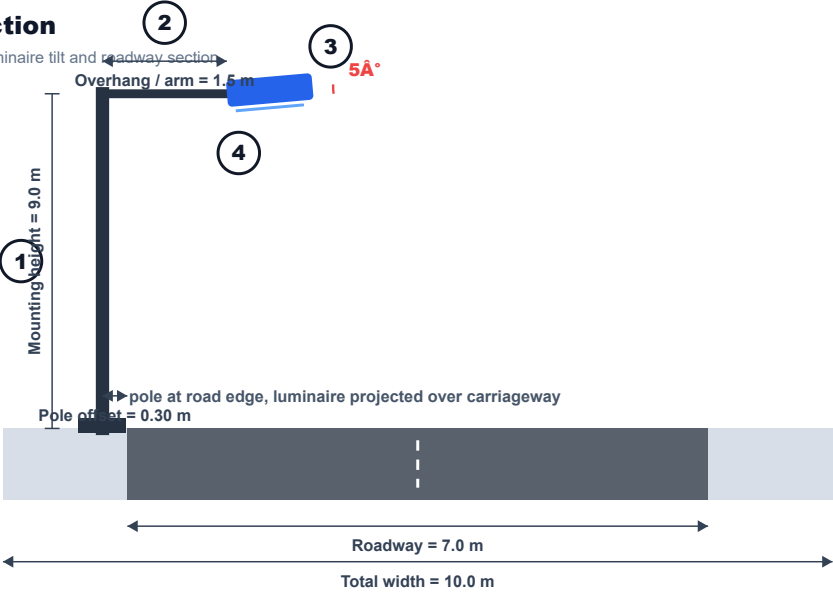

LUMINAIRE / POLE	VALUE
Luminaire	CLAP M C35 30K F151 VDR SPUW 100W
Luminous flux	15,478 lm
Power	100 W
Mounting height (1)	9.00 m

PLANNING RELATION	VALUE
Arrangement	Lineal
Spacing between masts	30.00 m
Road / total width	7.00 m / 10.00 m

Pole offset from road edge	0.30 m	Lighting class	M3
Overhang / saliente (2)	1.20 m	Optic / CCT	F151 / 4000 K
Head tilt (3)	5°	Overall result	FAIL
Bracket length (4)	1.50 m		
LAVG 1.93 cd/m²	UO 0.645	EM 31.07 lux	STATUS FAIL

Plan, section, luminaire position and results are shown together

Photometric Results

LAVG / LM 1.93	UO 0.645	UL 0.845	TI 4.1
SR 0.305	EM 31.07	EMIN 11.22	EMAX 67.05

CRITERION	VALUE	REQUIRED	STATUS
Lavg (cd/m²)	1.928	1.000	PASS
Uo	0.645	0.400	PASS
UI	0.845	0.600	PASS
TI (%)	4.081	15.000	PASS
SR	0.305	0.500	FAIL
Overall compliance			FAIL

FAIL

One or more criteria fail. Review spacing, mounting height, optic, power, tilt or road geometry.

Isolines on Roadway and Pedestrian Areas



TODO: when separate pedestrian-area calculation grids are introduced, this page should split Sidewalk / Pedestrian area 1 and 2 into dedicated isoline panels. Current diagrams are generated from the roadway calculation grid and project geometry.

Calculation Points

Values in cd/mÂ². Coordinates correspond to the isoline diagram.

Y / X	X=1.2	X=3.8	X=6.2	X=8.8	X=11.2	X=13.8	X=16.2	X=18.8	X=21.2	X=23.8	X=26.2	X=28.8
Y=0.6	1.30	1.42	1.53	1.60	1.66	1.68	1.61	1.56	1.53	1.42	1.29	1.24
Y=1.8	1.88	1.95	2.03	2.06	2.12	2.17	2.09	2.07	2.12	2.09	1.89	1.83
Y=2.9	2.26	2.12	2.08	2.08	2.15	2.21	2.20	2.23	2.33	2.41	2.27	2.32
Y=4.1	2.42	2.11	1.93	1.88	1.93	2.04	2.11	2.13	2.27	2.44	2.37	2.53
Y=5.2	2.19	1.92	1.74	1.70	1.77	1.85	1.94	1.98	2.00	2.13	2.12	2.29
Y=6.4	1.83	1.66	1.55	1.53	1.58	1.63	1.67	1.66	1.68	1.71	1.81	1.91

The table shows the first calculation mesh points used for the technical diagram. Coordinates are expressed in metres along the longitudinal x axis and transverse y axis.