
# 5X7 Dot Character VFD Module

# CU40026-TW200A

- 2 Lines of 40 Characters 5mm High **High Speed Parallel/Serial Interface**
- Operating Temp -40°C to +85°C
- Single 5V Supply
- High Brightness Blue Green Display
- **ASCII, Katakana & Extended Character Font**
- 2 User Definable Character RAM

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates up to 19,200 with or without parity. Two character font tables can be hardware or software selected. User defined characters and many control commands are available.

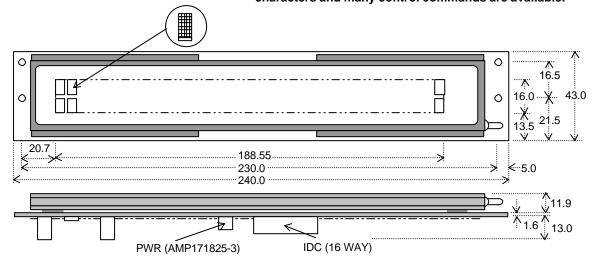

Dimensions in mm & subject to tolerances. Mounting holes 3.5mm dia.

International Font

### **ELECTRICAL SPECIFICATION**

Parameter	Symbol	Value	Condition							
Power Supply Voltage	Vcc	5.0VDC +/- 5%	GND=0V							
Power Supply Current	lcc	500mADC typ.	Vcc=5V							
Logic High Input	ViH	2.0VDC min.	Vcc=5V							
Logic Low Input	VIL	0.8VDC max.	Vcc=5V							
Logic High Output	Vон	4.4VDC min.	loh = -2.0mA							
Logic Low Output	Vol	0.5VDC max.	lol =2.0mA							

The power on rise time should be less than 100ms. The inrush current at power on can be 2 x lcc.

## **OPTICAL and ENVIRONMENTAL SPECIFICATIONS**

Parameter	Value				
Character Size/Pitch (XxY mm)	3.3 x 5.05/4.75 x 9.95				
Dot Size/Pitch (XxY mm)	0.5 x 0.55/0.7 x 0.75				
Luminance	700 cd/m <sup>2</sup> (204 fL) Typ.				
Colour of Illumination	Blue-Green (Filter for colours)				
Operating Temperature	-40°C to +85°C				
Storage Temperature	-40°C to +85°C				
Operating Humidity (non condensing)	20 to 80% RH @ 25°C				

### SOFTWARE COMMANDS

COLITIVATE COMMINATED										
Instruction	D0-D7	Instruction	D0-D7							
Back Space	08H	International Font	18H							
Horizontal Tab	09H	Katakana Font	19H							
Line Feed	0AH	Euro Currency Mark	1AH							
Form Feed	0CH	Escape	1BH							
Carriage Return	0DH	➤ Send User Font	+43H							
Clear Display	0EH	➤ Position cursor	+48H							
Increment Write Mode	11H	➣ Software Reset	+49H							
Vertical Scroll Mode	12H	➤ Luminance	+4CH							
Horizontal Scroll Mode	13H	➣ Flickerless Write	+53H							
Underline Cursor On	14H	➤ Cursor Blink Speed	+54H							
5x7 Block Cursor On	15H	Character Data	20H+							
Cursor Off	16H	User Character Data	00H+							
Cursor Blinking	17H		-							

### TIMING PARAMETERS (min)

	\·····
Data Set Up To Write	100ns
Write Pulse Width	160ns
Hold After Write	10ns

Subject to change without notice. Detailed specification on request. IUK Doc Ref:4406 Iss:1 13Aug03

# **CHARACTER FONTS**

_	1 1/	<u> </u>	<u> </u>	<u>. – </u>	<u> </u>	<u> </u>	41,	_					CITIC		ui i	<u> </u>	_	, , , ,	antic	mai	···	unu	iu i	OIIL
	00	10	20	30	40	50	60	70	80	90	AO	во	co	DO	ΕO	FO	80	90	AO	во	co	DO	EO	FO
00				0	0	P		p	Ë	Σ		==	À	Ð	à	á	Б			-	9	]111		
01			1	1	А	Q	ņ	9	•	Ω		+1	Á	М		n		3	E3	Ρ.	+	Ċ.	M,	
02			11	2	В	R	Ь	r	Ť	===	#	2	Ā	Ò	ā	்	П	Ю	Г	4	ij	$\times$	果	
03			#	3		S	<u></u>	5	Ţ.	$\times$	£	m,	Ħ	Ó		់	X	Я			Ŧ	H	#	
04			\$	4	D	T	T	†	Ŀ	÷	$\square$	٠.	Ξ	Ö	:::	ä	3	9	N	Н		÷	#	
05			7.	5	Е	U	₽	U	O.	ា	¥	Э,	Ĥ		a 🏗	ੋ	И	(3)	=		<b>†</b>	1	(H	
06			8:	6	F	Ų	f	Ų	ľ	਼	1		Æ	$\Box$		ö	Й	Ð	7	₽.				
07			7	7	6	IJ.	9	IJ.	Ó	E	-	٠	Ģ	$\times$	Ç			0	7	#-	77	. JH	111	
08			(	8	Н	Χ	Н	×	€	<u></u>			È	Ø	è	<b>#</b>	П	.ii.	4	ņ	#	IJ	Ĥ	
09			)	9	I	Y		Y	ħ,	-		₩.	Ė	Ù		ं		#	÷	Ļ٦	۳,	Ш		Ŧ
0A			*	:	J.	Z		Z	9	##		81		Ú		ं	0	. <del></del> .	<b>II</b>	[]	m	12	į.U	4.
ов			+		К	Ľ	-X	{	A.	Ţ	4	0	E			ា	Щ	4	7	<b>‡</b> >.			÷	÷
oc			,		L.	٠.	т.	1	TE	a		_3	Ì	Ü		ៈ		Ш	†7	n.	J	ŋ	#	†
OD				::::	M	I	m	>	Ţ	J.		-21	Í	Ŷ	í	Ÿ				Z	^,			÷
0E				>	И	^	n	-	ф	00	0		Ι	þ		þ		#	3	p.,	#:		#	**
0F			/	?	0		ា	#	0	**		ं	Ϊ	p	ï	Ÿ	Ъ	馮	,	$  \cup  $	7		়	j)
P	CB	JL	JMI	PE	RS	(0)	PEI	N (L	)INF	(				- 10	C	DA	λT/	A C	ON	INE	EC1	ΓΟΙ	₹	

( )								
Baud	J2	J	1	J0				
19200	0	(	)	0				
9600	0		)	L				
4800	0		_	0				
2400	0	L	_	L				
1200	L		)	0				
Parity	J4	J3						
EVEN	0		0					
ODD	0		L					
NONE	NONE L							
F		JA						
Interr		L						
Kata		0						

## 3 PIN POWER CONNECTOR

Pin	Sig
1	Vcc(5V)
2	SIN/TEST
3	GND (0V)

Additional Katakana Font

Pin	Sig	Pin	Sig
1	D7	9	/WR
2	D6	10	/CS
3	D5	11	SIN/TEST
4	D4	12	BUSY
5	D3	13	GND (0V)
6	D2	14	GND (0V)
7	D1	15	Vcc(5V)
8	D0	16	Vcc(5V)

## CONTACT

Noritake Sales Office Tel Nos Nagoya Japan: +81 (0)52-561-9867 Canada: +1-416-291-2946 Chicago USA: +1-847-439-9020 Munchen (D): +49 (0)89-3214-290 Itron UK: +44 (0)1493 601144 Rest Europe: +49 (0)61-0520-9220 www.noritake-itron.com