

# **Operations & Maintenance Manual**

**Manual P/N 571150-0001**



## **MODEL 1150 CONVENTIONAL VHF OMNIRANGE (CVOR)**

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION  
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSES WITHOUT WRITTEN  
PERMISSION FROM ALENIA MARCONI SYSTEMS (ASI) INC.

Original Issue November, 1990  
Reissued September, 1992  
Rev. A January, 1993  
Rev. B April, 1994  
Rev. C August, 1994  
Rev. D January, 1997  
Rev. E October, 1998  
Rev. F January, 2003

Copyright, Alenia Marconi Systems (ASI) Inc. 1991-2003

**ALENIA MARCONI SYSTEMS (ASI) INC.**  
11300 West 89th Street  
Overland Park, KS U.S.A. 66214

THIS SHEET INTENTIONALLY BLANK

**Alenia Marconi Systems (ASI) Inc.**  
11300 W. 89th Street  
Overland Park, KS 66214

DATE: January, 2003

TO: Holders of the Model 1150 Conventional VHF Omnidrange (CVOR) Operations and Maintenance Manual (Part. No. 571150-0001).

### **REVISION F HIGHLIGHTS**

Pages which have been revised, together with the highlights of this revision, are outlined below. Remove the affected pages and replace them with these revised pages. Retain all revision highlights pages. They should be inserted in the manual immediately following the Record of Revisions.

<u>Page No.</u>	<u>Description of Change</u>	<u>Effectivity</u>
Entire Manual	Updated entire manual	All

THIS SHEET INTENTIONALLY BLANK

## LIST OF EFFECTIVE PAGES

<u>Page No.</u>	<u>Issue</u>	<u>Page No.</u>	<u>Issue</u>
*Title	January, 2003		
Blank	January, 2003		
Effective Pages	January, 2003		
Blank	January, 2003		
*Record of Revisions	January, 2003		
Blank	January, 2003		
Safety Summary	January, 2003		
Warranty	January, 2003		
*i thru xiv	January, 2003		
1-1 thru 1-34	January, 2003		
*2-1 thru 2-150	January, 2003		
3-1 thru 3-60	January, 2003		
4-1 thru 4-4	January, 2003		
5-1 thru 5-2	January, 2003		
6-1 thru 6-22	January, 2003		
7-1 thru 7-32	January, 2003		
8-1 thru 8-4	January, 2003		
9-1 thru 9-54	January, 2003		
10-1 thru 10-2	January, 2003		
11-1 thru 11-2	January, 2003		

\*An asterisk indicates pages changed, added, or deleted by the latest revision.

### ALENIA MARCONI SYSTEMS (ASI) INC.

11300 West 89th Street  
Overland Park, KS U.S.A. 66214

THIS SHEET INTENTIONALLY BLANK

**ALENIA MARCONI SYSTEMS (ASI) INC.**

## **RECORD OF REVISIONS**

**Model 1150 CVOR**

THIS SHEET INTENTIONALLY BLANK

**Record of Revisions 2**

This document contains proprietary information and such information may not be disclosed to others for any purposes without written permission from Alenia Marconi Systems (ASI) Inc.

**Rev. F January, 2003**

## **SAFETY SUMMARY**

The following are general safety precautions that are not related to any specific procedures and therefore do not appear elsewhere in this publication. These are recommended precautions that personnel must understand and apply them during many phases of operation and maintenance.

### **ELECTROSTATIC SENSITIVE DEVICES PRECAUTIONS**

Since most modules used in all models of equipment have Electrostatic Discharge (ESD) sensitive devices included in them, all modules should be considered sensitive to electrostatic discharge. Handling in the field shall be the same as in the factory. Each system is shipped with a wrist strap that must be worn while maintaining the equipment. The wrist strap shall be fastened to the equipment chassis either in the designated plug-in or attached to the equipment chassis with the alligator clip. The wrist strap must be used before any modules are removed from the equipment and at all times while handling the modules until they are placed in a protective environment such as an anti-static bag. Modules or boards must not be placed on any non-conducting surface such as wooden work benches, painted metal work benches, plastics, or technical manuals. Any work surface to be used must have a conducting mat placed on it and attached to earth ground. The mat and additional wrist straps can be obtained from Alenia Marconi Systems (ASI) Inc.

### **KEEP AWAY FROM LIVE CIRCUITS**

Operating personnel must at all times observe all safety regulations. Under no circumstances should any person remove any protective covers that expose lethal voltages. Do not replace components or make adjustments inside the equipment with primary power supply turned on. Under certain conditions, dangerous potentials may exist when the power is in the off position, due to charges retained by capacitors. To avoid casualties, always remove power and allow time for the capacitors to discharge before touching it.

### **DO NOT SERVICE OR ADJUST ALONE**

Under no circumstances should any person reach into or enter the enclosure for the purpose of servicing or adjusting the equipment except in the presence of someone who is capable of rendering aid.

### **RESUSCITATION**

Personnel working with or near high voltages should be familiar with modern methods of resuscitation.

### **WARNING**

Electronic components on assemblies 030363-0002, 030364-0001, and 030398-001 use beryllium oxide as a constituent in their construction. Do not grind, file, or machine these parts. If inhaled or ingested, beryllium oxide can cause berylliosis. Beryllium oxide is a suspect human carcinogen. Use caution when working with these parts. For more information, contact bioenvironmental engineering at your medical center.

### **MODEL 1150 CONVENTIONAL VOR OMNIRANGE EQUIPMENT**

The equipment is supplied by Alenia Marconi Systems (ASI) Inc. For replacement parts and repair service, contact Alenia Marconi Systems (ASI) Inc.

## **HOW TO ORDER REPLACEMENT PARTS**

When ordering replacement parts, you should direct your order as indicated below and furnish the following information insofar as applicable. To enable us to give better replacement service, please be sure to give us complete information.

### **INFORMATION REQUIRED**

1. Alenia Marconi Systems (ASI) Inc.. model number, type and serial number of equipment.
2. Unit sub-assembly number (where applicable).
3. Item or reference symbol number from parts list or schematic.
4. Alenia Marconi Systems (ASI) Inc. part number and description.
5. Manufacturer's code, name and part number (where applicable).
6. Quantity of each replacement part required.

### **Contact Information/Correspondence/Shipping Address:**

Alenia Marconi Systems (ASI) Inc.  
11300 W 89<sup>th</sup> Street  
Overland Park KS, 66214, USA

Main Switchboard:	(913) 495-2600
Main Fax:	(913) 492-0870
Toll free:	(800) 331-2744
CSM Direct Phone:	(913) 495-2625
CSM Cell Phone:	(913) 269-5018
CSM E-mail:	Sullivan@us-amsjv.com
World Wide Web URL:	<a href="http://www.amsjv.com">www.amsjv.com</a>

**ALENIA MARCONI SYSTEMS (ASI) INC.  
MANUFACTURER'S WARRANTY**

A. The Manufacturer warrants to the original purchaser, subject to the limitations and exclusions stated below, that all mechanical and electrical parts of products which it manufactures (the "Products") will be free of defects in materials and workmanship for a period of (i) one year from the date of installation or (ii) eighteen (18) months from the date of shipment, whichever first occurs (the "Warranty Period").

B. If the Customer believes a Product is defective, notice thereof shall be provided to the Manufacturer's Customer Service Department at the address provided on the cover page and (if applicable) to the selling Distributor. A defect in materials and workmanship covered by this warranty shall be deemed to have occurred only if, and as of the time when, the Manufacturer is notified in writing by the Customer, within the Warranty Period, that the Product has become defective, and the Manufacturer's personnel verify that the said Product, in fact, does not comply with the warranty provided hereunder and it is determined that:

- (i) The Products, during the entire Warranty Period, have been operated within normal service conditions recommended by the Manufacturer and recognized in the industry, and
- (ii) The Products have been installed and adjusted according the Manufacturer's procedures as stated in the Instruction Manual or other instructions supplied in writing by the Manufacturer.

C. Failures caused by lightning or other acts of God, or power surges, are not considered to be defects in materials and workmanship and are not covered under this warranty. Routine maintenance and calibration are also not considered to be defects in materials and workmanship and are not covered under this warranty. Any change, modification or alteration of the Manufacturer's Products not specifically authorized by the Manufacturer will void this warranty.

D. Any circuit board or module returned to the factory for warranty coverage, must be enclosed in an electrostatic sensitive device (ESD) protective wrapping. If circuit board or module is not received in an ESD protective wrap, any and all warranty will be null and void.

E. If it is determined that the conditions for warranty coverage, as described above, have been satisfied, the Manufacturer shall repair or replace the defective Products or parts thereof in accordance with the following procedures:

- (i) Customer will contact the Manufacturer's Customer Service Department which will issue the Customer a Return Authorization (RA) number.
- (ii) The component, defective part, or Product, as appropriate, shall be returned to the Manufacturer for inspection, freight prepaid by the Customer. The RA number must be clearly displayed on the exterior of the shipping container. No shipments will be accepted without a RA number. All customs duties, fees, etc. will be paid by the Customer.

**ALENIA MARCONI SYSTEMS (ASI) INC.**  
**MANUFACTURER'S WARRANTY**  
**(Cont)**

(iii) If, upon inspection, it is determined by Manufacturer's personnel that the Product or component thereof is indeed defective and covered by this warranty, then Manufacturer, at its option, may either repair the Product or defective component thereof and return the same to the Customer or ship a replacement for the defective Product or part thereof, freight paid. All customs duties, fees, etc. will be paid by the Customer. The Product or component thereof will be returned to the customer utilizing a shipping mode similar to that used by Customer to ship the same to the Manufacturer.

(iv) If, upon inspection by Manufacturer, it is determined that the Product or component thereof was not defective or was not covered by this warranty, then the cost of all of Manufacturer's inspections and the return shipping charges will be charged to Customer.

F. The Manufacturer reserves the right to make modifications and alterations to Products without obligation to install such improvements on, in, or in place of theretofore manufactured Products of Manufacturer.

G. Manufacturer does not warranty any Products, components, subassemblies, or parts not of its own manufacture. Manufacturer hereby transfers to Customer any and all warranties (if any) which it receives from its suppliers.

H. This warranty applies only to the original purchaser and, unless Customer receives the express written consent of an officer of Manufacturer, this warranty may not be assigned, transferred, or conveyed to any third party, even if the third party is a bona fide purchaser of the Products.

I. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, WHETHER STATUTORY OR OTHERWISE, INCLUDING AND IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL THE MANUFACTURER BE LIABLE FOR INDIRECT, INCIDENTAL, COLLATERAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES OF ANY KIND, WHETHER ARISING OUT OF CONTRACT, TORT, NEGLIGENCE, STRICT LIABILITY, OR OTHER PRODUCTS LIABILITY THEORY.

J. CUSTOMER'S SOLE REMEDY FOR ANY BREACH OF THE WARRANTY SHALL BE THE REPAIR OR REPLACEMENT OF THE PRODUCTS BY THE MANUFACTURER AS PROVIDED HEREIN, AND IN NO EVENT SHALL THE MANUFACTURER BE REQUIRED TO INCUR COSTS FOR THE REPAIR OR REPLACEMENT OF ANY PRODUCT IN EXCESS OF THE PURCHASE PRICE OF SUCH PRODUCT, PLUS ANY TRANSPORTATION CHARGES ACTUALLY PAID ATTRIBUTABLE TO SUCH PRODUCTS.

## TABLE OF CONTENTS

<u>Paragraph #</u>	<u>Description</u>	<u>Page</u>
1	0GENERAL INFORMATION AND REQUIREMENTS .....	1-1
1.1	INTRODUCTION .....	1-1
1.2	EQUIPMENT DESCRIPTION. ....	1-2
1.2.1	Electronics Cabinet. ....	1-2
1.2.1.1	Status Display Panel Assembly (1A1).....	1-6
1.2.1.2	RF Monitor Assembly (1A2). ....	1-7
1.2.1.3	Carrier-Plus-Sideband (CSB) Power Amplifier Assembly (1A3, 1A19). ....	1-7
1.2.1.4	Frequency Synthesizer Assembly (1A4, 1A20).....	1-7
1.2.1.5	Sideband Generator Assembly (1A5, 1A21). ....	1-7
1.2.1.6	Audio Generator CCA (1A7, 1A23). ....	1-8
1.2.1.7	Monitor CCA (1A8, 1A24). ....	1-8
1.2.1.8	Modem CCA (1A9) Part Number 012101-1001 .....	1-8
1.2.1.9	Serial Interface CCA (1A10) .....	1-8
1.2.1.10	Facilities CCA (1A11) .....	1-9
1.2.1.11	Test Generator CCA (1A12).....	1-9
1.2.1.12	Central Processor Unit (CPU) CCA (1A13).....	1-9
1.2.1.13	Low Voltage Power Supply (LVPS) CCA (1A14, 1A15, 1A16) .....	1-10
1.2.1.14	RSCU Control Interface CCAs.....	1-10
1.2.1.14.1	1138 RSCU Control Interface CCA (1A26) Part Number 012741-1002 .....	1-10
1.2.1.15	Battery Charger Power Subsystem (BCPS) (1A33, 1A34).....	1-10
1.2.1.16	Power Panel Assembly .....	1-10
1.2.2	Interface Enclosure Assembly (Unit 2).....	1-11
1.2.3	Field Monitor and Ground Check Antenna .....	1-12
1.2.3.1	CVOR with Semi-Automatic Ground Check Kit .....	1-12
1.2.3.2	CVOR with Automatic Ground Check Kit.....	1-12
1.2.4	Semi-Automatic Ground Check Indicator .....	1-12
1.2.5	Transmitter Antenna System.....	1-14
1.2.5.1	Balun.....	1-17
1.2.5.2	Tuning Stub.....	1-17
1.2.5.3	Positioning Piece.....	1-18
1.2.5.4	Pedestal .....	1-18
1.2.5.5	Radome .....	1-18
1.2.6	Battery Backup (Unit 3) (Optional) .....	1-18
1.2.7	Counterpoise (Optional).....	1-20
1.2.8	Equipment Shelter (Optional) .....	1-20
1.3	EQUIPMENT SPECIFICATION DATA.....	1-21
1.3.1	Transmitter and Antenna System.....	1-21
1.3.1.1	Transmitter .....	1-21
1.3.1.2	Antenna System .....	1-23
1.3.1.3	Field Monitor .....	1-24
1.3.1.4	Monitor .....	1-24
1.3.1.5	Mechanical and Electrical.....	1-25

**TABLE OF CONTENTS (Continued)**

<u>Paragraph #</u>	<u>Description</u>	<u>Page</u>
1.3.2	Remote Maintenance Monitor and Control System.....	1-25
1.3.2.1	Design Features.....	1-25
1.3.2.2	Specifications: .....	1-26
1.3.2.3	Remote Terminal Specifications:.....	1-26
1.3.3	Remote Receiver Monitoring.....	1-27
1.3.3.1	Design Features.....	1-27
1.3.3.2	Controls and Indicators .....	1-27
1.3.3.3	Receiver Specifications.....	1-27
1.3.4	Environmental.....	1-28
1.3.4.1	Operating Temperature .....	1-28
1.3.4.2	Relative Humidity .....	1-28
1.3.4.3	Wind.....	1-28
1.3.4.4	Ice and Snow .....	1-28
1.3.4.5	Altitude: .....	1-28
1.4	EQUIPMENT AND ACCESSORIES SUPPLIED .....	1-28
1.5	EQUIPMENT REQUIRED BUT NOT SUPPLIED .....	1-29
1.6	OPTIONAL EQUIPMENT.....	1-29
2	TECHNICAL DESCRIPTION .....	2-1
2.1	INTRODUCTION .....	2-1
2.2	OPERATING PRINCIPLES .....	2-1
2.3	THEORY OF OPERATION.....	2-4
2.3.1	Simplified System Block Diagram .....	2-4
2.3.1.1	Electronics Cabinet (Unit 1) .....	2-7
2.3.1.1.1	Cabinet Insert (A18) .....	2-7
2.3.2	Detailed System Block Diagram.....	2-7
2.3.2.1	Frequency Synthesizer (1A4, 1A20) Block Diagram Theory.....	2-9
2.3.2.1.1	Frequency Synthesizer (1A4, 1A20) Detailed Circuit Theory .....	2-11
2.3.2.2	Audio Generator CCA (1A7, 1A23) Block Diagram Theory .....	2-16
2.3.2.2.1	Micro controller and Memory Circuits Block Diagram Theory .....	2-18
2.3.2.2.2	Reference and Sideband Generator Circuits Block Diagram Theory .....	2-20
2.3.2.2.3	Reference Modulation Circuit Block Diagram Theory.....	2-22
2.3.2.2.4	Sideband Modulation and Phase Control Circuit Block Diagram Theory.....	2-22
2.3.2.2.5	Voice and Test Tone Circuit Block Diagram Theory .....	2-23
2.3.2.2.6	Audio Generator CCA (1A7, 1A23) Detailed Circuit Theory .....	2-25
2.3.2.3	CSB Power Amplifier Assembly (1A3, 1A19) Block Diagram Theory.....	2-34
2.3.2.3.1	CSB Power Amplifier Assembly (1A3, 1A19) Detailed Circuit Theory.....	2-34
2.3.2.3.2	Exciter CCA (A3) Block Diagram Theory .....	2-35
2.3.2.3.3	Exciter CCA (A3) Detailed Theory .....	2-36
2.3.2.3.4	Power Amplifier CCA (A2) Block Diagram Theory.....	2-37
2.3.2.3.5	Power Amplifier CCA (A2) Detailed Circuit Theory.....	2-38
2.3.2.3.6	Bias Regulator/Exciter Modulator CCA (A4) Block Diagram Theory .....	2-40

**TABLE OF CONTENTS (Continued)**

2.3.2.3.7	Bias Regulator/Exciter Modulator CCA (A4) Detailed Circuit Theory .....	2-41
2.3.2.3.8	Power Amplifier Modulator CCA (A1) Block Diagram Theory .....	2-43
2.3.2.3.9	Power Amplifier Modulator CCA (A1) Detailed Circuit Theory .....	2-44
2.3.2.3.10	Modulator Bias CCA (A5) Block Diagram Theory .....	2-45
2.3.2.3.11	Modulator Bias CCA (A5) Detailed Circuit Theory .....	2-46
2.3.2.4	Low Pass Filter Assembly (1A35, 1A36) Block Diagram .....	2-46
2.3.2.4.1	Low Pass Filter Assembly (1A35, 1A36) Detailed Theory .....	2-47
2.3.2.5	Bi-Directional Couplers (1DC1, 1DC2) .....	2-47
2.3.2.6	Sideband Generator Assembly (1A5/1A21) Block Diagram Theory .....	2-47
2.3.2.6.1	Sideband Generator Assembly (1A5/1A21) Circuit Partitioning .....	2-48
2.3.2.6.2	Sideband Amplifier (1A5A2/A4, 1A21A2/A4) Block Diagram Theory .....	2-51
2.3.2.6.3	Sideband Amplifier (1A5A2/A4, 1A21A2/A4) Detailed Theory .....	2-53
2.3.2.6.4	Sideband Controller (1A5A1/A3, 1A21A1/A3) Block Diagram Theory .....	2-56
2.3.2.6.5	Sideband Controller (1A5A1/A3, 1A21A1/A3) Detailed Theory .....	2-59
2.3.2.6.6	RF Monitor CCA (A1) Block Diagram Theory .....	2-67
2.3.2.6.7	RF Monitor CCA (A1) Detailed Circuit Theory .....	2-69
2.3.2.7	Backplane CCA (1A17) .....	2-72
2.3.2.8	Central Processing Unit CCA (1A13) Block Diagram Theory .....	2-73
2.3.2.8.1	Central Processing Unit CCA (1A13) Detailed Circuit Theory .....	2-74
2.3.2.9	Facilities CCA (1A11) Block Diagram Theory .....	2-77
2.3.2.9.1	Facilities CCA (1A11) Detailed Circuit Theory .....	2-79
2.3.2.10	Serial Interface CCA (1A10) Block Diagram Theory .....	2-83
2.3.2.10.1	Serial Interface CCA (1A10) Detailed Theory .....	2-85
2.3.2.11	Test Generator CCA (1A12) Block Diagram Theory .....	2-87
2.3.2.11.1	Test Generator CCA (1A12) Detailed Circuit Theory .....	2-89
2.3.2.12	Modem CCA (1A9) (Part No. 012101-1001) Block Diagram Theory .....	2-92
2.3.2.12.1	Modem CCA (1A9) (Part No. 012101-1001) Detailed Circuit Theory .....	2-92
2.3.2.13	RSCU Interface Assembly (1A26) (Optional) .....	2-94
2.3.2.13.1	RSCU Control Interface CCA (012741-1002) Block Diagram Theory .....	2-95
2.3.2.13.2	RSCU Control Interface CCA (012741-0001) Detailed Circuit Theory .....	2-96
2.3.2.14	Low Voltage Power Supply CCA (1A14, 1A15, 1A16) Block Diagram Theory .....	2-99
2.3.2.14.1	Low Voltage Power Supply CCA (1A14, 1A15, 1A16) Detailed Circuit Theory .....	2-100
2.3.2.15	Jack Assembly (1A38) .....	2-101
2.3.2.16	Display Panel Assembly (1A1) .....	2-101
2.3.2.16.1	Display CCA (A1, A2) Block Diagram Theory .....	2-101
2.3.2.16.2	Display CCA (A1, A2) Detailed Circuit Theory .....	2-102
2.3.2.17	Blower Assembly (1A39) .....	2-103
2.3.2.18	Field Detector Assembly (1A27, 1A28) .....	2-104
2.3.2.18.1	Field Detector CCA (A1) Block Diagram Theory .....	2-104
2.3.2.18.2	Field Detector CCA (A1) Detailed Circuit Theory .....	2-105
2.3.2.19	Monitor CCA (1A8, 1A24) Block Diagram Theory .....	2-106
2.3.2.19.1	Monitor CCA (1A8, 1A24) Detailed Theory .....	2-115

**TABLE OF CONTENTS (Continued)**

<b><u>Paragraph #</u></b>	<b><u>Description</u></b>	<b><u>Page</u></b>
2.3.2.20	Power Panel .....	2-122
Rev F January, 2003		
2.3.2.21	Battery Charger Power Subsystem (1A33, 1A34) .....	2-122
	The information contained in this document (which may not be disclosed to others for any purposes without written permission from Alenia Marconi Systems (ASI) Inc.)	ii

**Model 1150 CVOR**

2.3.2.21.1	Base Unit.....	2-123
2.3.2.21.2	UPS Module.....	2-124
2.3.2.21.3	48 Vdc Module .....	2-126
2.3.2.21.4	28 Vdc Module .....	2-126
2.3.2.22	Interface Enclosure Assembly (Unit 2).....	2-127
2.3.2.22.1	Transient Suppressor Assembly (2A1) .....	2-127
2.3.2.23	Battery Backup (Unit 3) (Optional) .....	2-128
2.3.2.24	Field Monitor Antenna (Unit 4).....	2-128
3	OPERATION .....	3-1
3.1	Introduction.....	3-1
3.2	REMOTE CONTROL STATUS UNIT (RCSU).....	3-1
3.3	REMOTE STATUS UNIT (RSU) .....	3-1
3.4	PORTABLE MAINTENANCE DATA TERMINAL (PMDT) .....	3-1
3.4.1	Equipment Turn On & Shutdown.....	3-2
3.4.1.1	Equipment Turn On .....	3-2
3.4.1.1.1	Connecting the PMDT .....	3-2
3.4.1.1.2	Starting the PMDT Application .....	3-2
3.4.1.1.3	Turning On the VOR.....	3-3
3.4.1.2	Equipment Shutdown.....	3-3
3.4.1.2.1	Equipment Turn Off.....	3-3
3.4.1.2.2	PMDT PC Turn Off .....	3-3
3.4.2	PMDT Screens .....	3-3
3.4.2.1	General.....	3-3
3.4.2.1.1	Menus.....	3-3
3.4.2.1.2	System Status at a Glance; Sidebar Status and Control .....	3-5
3.4.2.1.3	Screen Area .....	3-6
3.4.2.2	Configuring the PMDT .....	3-6
3.4.2.3	Connecting to the VOR.....	3-7
3.4.2.3.1	Security Levels.....	3-7
3.4.2.3.2	PMDT Logon via Direct or Modem Connection .....	3-8
3.4.2.4	RMS Status Screens .....	3-9
3.4.2.5	RMS Data Screens .....	3-11
3.4.2.5.1	RMS Maintenance Alerts Screen.....	3-11
3.4.2.5.2	Analog-to-Digital Data Screen .....	3-12
3.4.2.6	RMS Logs Screen .....	3-13
3.4.2.6.1	Operational Summary Screen .....	3-13
3.4.2.6.2	Alarms Log Screen .....	3-14
3.4.2.6.3	Maintenance Alerts Log Screen .....	3-15
3.4.2.6.4	Command Activity Screen .....	3-16
3.4.2.6.5	Parameter Change Log Screen .....	3-17

**TABLE OF CONTENTS (Continued)**

<b><u>Paragraph #</u></b>	<b><u>Description</u></b>	<b><u>Page</u></b>
3.4.2.7	RMS Configuration Screen.....	3-18
3.4.2.7.1	General RMS Configuration Screen - Refer to Figure 3-13 .....	3-19
3.4.2.7.1.1	General Configuration the VOR .....	3-20
3.4.2.7.2	Station Configuration Screen .....	3-22

The information contained in this document and such information may not be disclosed to others for any purposes..... without written permission from Alenia Marconi Systems (ASI) Inc.

3.4.2.7.3	A/D Limits Configuration Screen.....	3-24
3.4.2.7.4	Security Codes Configuration Screen .....	3-25
3.4.2.7.4.1	User Account Maintenance .....	3-26
3.4.2.7.4.2	Add a User Account.....	3-26
3.4.2.7.4.3	Change a User's Password.....	3-26
3.4.2.7.4.4	Delete a User's Account. ....	3-27
3.4.2.8	RMS Commands .....	3-28
3.4.2.9	Monitor Configuration Screens.....	3-30
3.4.2.9.1	Monitor Alarm Limit Configuration Screen .....	3-30
3.4.2.9.2	Monitor Offsets and Scale Factor Configuration Screen .....	3-31
3.4.2.10	Monitor Commands .....	3-32
3.4.2.11	Monitor Data Screens .....	3-33
3.4.2.11.1	Integrity Data Screen .....	3-33
3.4.2.11.1.1	Test DATA Screen.....	3-34
3.4.2.11.1.2	Monitor Certification Test Results Screen.....	3-35
3.4.2.11.1.3	VOR Ground Check Data Screen .....	3-36
3.4.2.11.1.4	VOR Ground Check Data Advanced Screen .....	3-38
3.4.2.11.1.5	VOR Fault History Screens.....	3-38
3.4.2.11.1.6	Fault History Monitor Data Screen .....	3-39
3.4.2.11.1.7	Fault History System Status Screen .....	3-40
3.4.2.12	Transmitters Data Screens .....	3-41
3.4.2.12.1	Transmitter Data Screen .....	3-41
3.4.2.13	Transmitters Configuration Screen .....	3-42
3.4.2.13.1	TX 1 & 2 Offsets & Scale Factors .....	3-43
3.4.2.14	Transmitters Nominal Screens .....	3-44
3.4.2.15	Transmitter Commands.....	3-45
3.4.2.16	Controlling the Transmitter via the PMDT .....	3-47
3.4.2.16.1	General Transmitter Control .....	3-47
3.4.2.16.2	Change the Azimuth Index .....	3-48
3.4.2.16.3	Change the CSB Output Power.....	3-48
3.4.2.16.4	Change the Voice Depth of Modulation .....	3-48
3.4.2.16.5	Change the Identification Depth of Modulation .....	3-49
3.4.2.16.6	Change the Reference Depth of Modulation.....	3-49
3.4.2.16.7	Change the Sideband Power Level .....	3-49
3.4.2.17	Diagnostics Screen.....	3-50
3.4.2.17.1	Power-Up Diagnostics Results .....	3-50
3.4.2.17.2	Fault Isolation Test Results.....	3-51
3.5	RMM.....	3-51

## TABLE OF CONTENTS (Continued)

<u>Paragraph #</u>	<u>Description</u>	<u>Page</u>
3.6	STATUS PANEL/ POWER CONTROL.....	3-52
3.7	REMOTE MAINTENANCE SUB-SYSTEM (RMS) CCA (1A13) .....	3-53
3.8	MONITOR CCA (1A8, 1A24) .....	3-53
3.9	SYNTHESIZER CCA (1A4, 1A20) .....	3-54
4	STANDARDS AND TOLERANCES .....	4-1
4.1	Rev. F January, 2003 INTRODUCTION The information contained herein is proprietary information and such information may not be disclosed to others for any purposes.....	4-1

**Model 1150 CVOR**

5	PERIODIC MAINTENANCE.....	5-1
5.1	INTRODUCTION .....	5-1
5.2	PERFORMANCE CHECK SCHEDULE.....	5-1
6	MAINTENANCE PROCEDURES .....	6-1
6.1	INTRODUCTION .....	6-1
6.2	PERFORMANCE CHECK PROCEDURES .....	6-1
6.2.1	Test Equipment .....	6-1
6.2.2	Battery Backup Transfer Performance Check .....	6-1
6.2.3	Carrier Output Power Performance Check .....	6-1
6.2.4	Carrier Frequency Performance Check.....	6-2
6.2.5	30 Hz and 9960 Hz Modulation and Deviation Ratio Performance Check .....	6-2
6.2.6	Operating Frequency Performance Check .....	6-2
6.2.7	Antenna VSWR Performance Check.....	6-3
6.2.8	Automatic Transfer Performance Checks .....	6-3
6.2.9	VOR Monitor Performance Check .....	6-4
6.2.10	Certification Test VOR Monitor.....	6-4
6.2.11	RSCU Operation Performance Check .....	6-5
6.2.11.1	Single Equipment Performance Check .....	6-5
6.2.11.2	Dual Equipment Performance Check.....	6-5
6.2.12	Checking Battery on CPU (1A13) CCA .....	6-5
6.2.13	Station Identification Checks .....	6-5
6.3	OTHER MAINTENANCE PROCEDURES .....	6-6
6.3.1	Equipment Inspection .....	6-6
6.3.1.1	Site Inspection.....	6-6
6.3.1.2	Inspection of Antenna System .....	6-7
6.3.1.3	Inspection of the Field Monitor Antenna.....	6-7
6.3.1.4	Equipment Inspection .....	6-7
6.3.1.5	Inspection of Battery Backup Unit .....	6-7
6.3.1.6	Maintenance of Blowers and Air Filters .....	6-8
6.3.1.7	Reassign Main/Standy Transmitters (Dual Systems Only).....	6-8
6.3.1.8	Verification of BITE VSWR Calibration. - .....	6-8
6.3.1.9	Verification of BITE Frequency Counter Calibration .....	6-9
6.3.1.10	Verification of BITE Wattmeter Calibration .....	6-10
6.4	SPECIAL MAINTENANCE PROCEDURES .....	6-11
6.4.1	Replacement of Assemblies with 1/4 Turn Fasteners.....	6-11
6.4.2	Replacement of CCA without 1/4 Turn Fasteners .....	6-12

**TABLE OF CONTENTS (Continued)**

<b>Paragraph #</b>	<b>Description</b>	<b>Page</b>
6.4.3	Cabinet Backplane Connector Adjustment .....	6-12
6.4.4	Replacing CPU (1A13) CCA.....	6-13
6.4.5	Update of CVOR Software .....	6-13
6.4.6	Changing the Station Rotation (Azimuth) .....	6-14
6.4.7	Changing the Monitoring Offsets .....	6-14
6.4.8	Changing the CPU (1A13) CCA Lithium Battery .....	6-15

**Model 1150 CVOR**

6.4.9	Test Generator Check with a VOR Phasemeter.....	6-16
6.4.10	Modulation Reading Change .....	6-16
6.4.11	DME Keying Check.....	6-16
6.4.12	Monitor Detector Alignment.....	6-16
6.4.13	CVOR Frequency Synthesizer Alignment.....	6-17
6.4.14	CVOR Sideband Amplifier Alignment for New Frequency.....	6-18
6.4.15	Semi-Automatic Ground Check.....	6-20
7	CORRECTIVE MAINTENANCE .....	7-1
7.1	INTRODUCTION .....	7-1
7.2	TEST EQUIPMENT REQUIRED.....	7-1
7.3	ON-SITE CORRECTIVE MAINTENANCE.....	7-1
7.3.1	General Troubleshooting Information .....	7-1
7.4	OFFSITE REPAIR.....	7-5
7.5	PACKING INSTRUCTIONS .....	7-5
8	PARTS LIST .....	8-1
8.1	INTRODUCTION .....	8-1
9	INSTALLATION, INTEGRATION, AND CHECKOUT .....	9-1
9.1	INTRODUCTION .....	9-1
9.2	SITE INFORMATION .....	9-1
9.2.1	Shelter Requirements .....	9-1
9.3	UNPACKING AND REPACKING .....	9-2
9.3.1	Environmental Considerations .....	9-2
9.4	INPUT REQUIREMENT SUMMARY .....	9-2
9.5	INSTALLATION PROCEDURES .....	9-2
9.5.1	Tools and Test Equipment Required.....	9-2
9.5.2	Counterpoise and Shelter Foundation Installation .....	9-3
9.5.3	Shelter Installation .....	9-5
9.5.4	Counterpoise Installation .....	9-6
9.5.5	Radome and Obstruction Light Installation.....	9-6
9.5.6	Initial Conditions .....	9-7
9.5.7	Four-Loop Antenna Array Installation .....	9-7
9.5.8	Interface Enclosure Assembly Installation .....	9-8
9.5.8.1	Coaxial Bridge Assembly Installation .....	9-9
9.5.8.2	Semi-Automatic Ground Check Installation Kit (Optional).....	9-10
9.5.8.3	Automatic Ground Check Installation Kit (Optional) .....	9-10
9.5.9	DME Antenna Installation (Optional) .....	9-11

**TABLE OF CONTENTS (Continued)**

<u>Paragraph #</u>	<u>Description</u>	<u>Page</u>
9.5.9.1	CVOR/DME Obstruction Light Interconnect .....	9-12
9.5.10	Unistrut Rail Mounting Procedures .....	9-12
9.5.11	Air Conditioner Installation .....	9-13
9.5.12	Transmitter Cabinet Installation .....	9-13
9.5.13	Interior Interface Enclosure .....	9-13
9.5.14	Battery Back Up Installation.....	9-16
9.5.15	DC Voltage and Battery Installation .....	9-18
9.5.16	AC Voltage Installation Rev. F January 2003 This document contains proprietary information and such information may not be disclosed to others for any purposes.....	9-18

**Model 1150 CVOR**

9.5.17	Collocated CVOR/DME Wiring Interconnect.....	9-20
9.5.18	Transmitter to Commutator Cable Connections .....	9-20
9.6	INSPECTION .....	9-21
9.6.1	Visual Inspection .....	9-21
9.7	INITIAL STARTUP AND PRELIMINARY TESTING.- .....	9-22
9.7.1	Strapping Battery Charger Power Subsystem (BCPS) for 240 Vac Operation .....	9-22
9.7.2	Input Voltage Checks.....	9-22
9.7.3	Checking Battery Charger Power Subsystem for 28 Vdc Output.....	9-23
9.7.4	Checking Battery Charger Power Subsystem for 43 or 48 Vdc Output .....	9-24
9.7.5	Low Voltage Power Supply Output Voltage Checks.....	9-25
9.7.6	Installing Modules in Transmitter Cabinet .....	9-26
9.7.7	Setting Transmitter Frequency .....	9-26
9.7.8	Lithium Battery Jumper Removal.....	9-29
9.7.9	PMDT Setup and Hookup.....	9-29
9.7.10	CVOR Station Power-Up.....	9-29
9.7.11	Log-On Procedure.....	9-30
9.7.12	Setting Date and Time .....	9-30
9.7.13	Setting Station's Name .....	9-30
9.7.14	Password Change .....	9-30
9.7.15	Setting System Configuration .....	9-30
9.7.16	Transmitter Tune-up Procedures.....	9-30
9.7.16.1	Checking Output Frequency of Frequency Synthesizer.....	9-30
9.7.16.2	Amplitude Adjustment.....	9-31
9.7.17	SETTING NO. 1 TRANSMITTER OPERATING PARAMETERS .....	9-36
9.7.17.1	Setting No. 1 Transmitter Azimuth (Az) Index .....	9-36
9.7.17.2	Setting No. 1 Transmitter Ident Code .....	9-37
9.7.17.3	Setting No. 1 Transmitter Voice Modulation.....	9-37
9.7.17.4	Setting No. 1 Transmitter Ident Modulation.....	9-37
9.7.17.5	Setting No. 1 Transmitter Reference Modulation.....	9-38
9.7.17.6	Setting No. 1 Transmitter SBO Modulation .....	9-38
9.7.17.7	Saving No. 1 Transmitter Operating Parameters .....	9-38
9.7.18	SETTING MONITOR ALARM LIMITS .....	9-38
9.7.18.1	Setting Monitor Az Angle Low Limit .....	9-38
9.7.18.2	Setting Monitor Az Angle High Limit.....	9-39

**TABLE OF CONTENTS (Continued)**

<u>Paragraph #</u>	<u>Description</u>	<u>Page</u>
9.7.18.3	Setting High Monitor 30 Hz Mod Low Limit.....	9-39
9.7.18.4	Setting Monitor 30 Hz Mod High Limit .....	9-39
9.7.18.5	Setting Monitor 9960 Hz Mod Low Limit.....	9-39
9.7.18.6	Setting Monitor 9960 Hz Mod High Limit .....	9-39
9.7.18.7	Setting Monitor 9960 Hz Dev Low Limit.....	9-40
9.7.18.8	Setting Monitor 9960 Low LZ Dev. High Limit .....	9-40
9.7.18.9	Setting Monitor Field Intensity Low Limit.....	9-40
9.7.18.10	Setting Monitor Field Intensity High Limits.....	9-40

9.7.18.11	Saving Monitor Alarm Limits.....	9-41
9.7.19	SETTING MONITOR CERTIFICATION LIMITS.....	9-41
9.7.20	SETTING MONITOR TEST GENERATOR .....	9-41
9.7.20.1	Setting Monitor Test Gen Az Angle .....	9-41
9.7.20.2	Setting Monitor Test Gen 30 Hz Modulation .....	9-41
9.7.20.3	Setting Monitor Test Gen 9960 Hz Modulation .....	9-42
9.7.20.4	Setting Monitor Test Gen 9960 Hz Deviation .....	9-42
9.7.20.5	Setting Monitor Test Gen Ident Modulation.....	9-42
9.7.20.6	Setting Monitor Test Gen Ident Control .....	9-42
9.7.20.7	Setting Monitor Test Gen Audio Modulation .....	9-42
9.7.20.8	Setting Monitor Test Gen Audio Frequency.....	9-42
9.7.20.9	Saving Monitor's Test Generator Setup Parameters .....	9-42
9.7.21	SETTING NO. 2 TRANSMITTER OPERATING PARAMETERS .....	9-43
9.7.21.1	Setting No. 2 Transmitter Azimuth (Az) Index .....	9-43
9.7.21.2	Setting No. 2 Transmitter Power Out.....	9-43
9.7.21.3	Setting No. 2 Transmitter Ident Code .....	9-43
9.7.21.4	Setting No. 2 Transmitter Voice Modulation.....	9-44
9.7.21.5	Setting No. 2 Transmitter Ident Modulation.....	9-44
9.7.21.6	Setting No. 2 Transmitter Reference Modulation.....	9-44
9.7.21.7	Setting No. 2 Transmitter SBO Modulation .....	9-44
9.7.21.8	Saving No. 2 Transmitter Operating Parameters .....	9-44
9.8	Reference to Sideband Phasing.....	9-45
9.9	INSTALLATION VERIFICATION TEST.....	9-46
9.9.1	Records .....	9-46
9.9.2	Special Tests .....	9-46
10	SOFTWARE .....	10-1
10.1	INTRODUCTION .....	10-1
11	TROUBLESHOOTING SUPPORT .....	11-1
11.1	INTRODUCTION .....	11-1

## TABLE OF FIGURES

<u>Figure # #</u>	<u>Description</u>	<u>Page</u>
Figure 1-1.	Model 1150 Dual Conventional VHF Omnidirectional (CVOR) Station.....	1-1
<b>Figure 1-2.</b>	<b>CVOR Cabinet (Front View) .....</b>	<b>1-3</b>
Figure 1-3.	CVOR Cabinet.....	1-4
Figure 1-4.	Location of Major Assemblies in the Electronics Cabinet (Front View).....	1-5
Figure 1-5.	Interface Enclosure Assembly .....	1-11
Figure 1-6.	Field Monitor Antenna.....	1-13
Figure 1-7.	Semi-Automatic Ground Check Indicator .....	1-14
Figure 1-8.	Cylindrical Slot Antenna.....	1-15
Figure 1-9.	Four-Loop Antenna.....	1-16
Figure 1-10.	Balun, Tuning Stub, and Positioning Piece.....	1-17
Figure 1-11.	Battery Backup Assembly.....	1-19
Figure 1-12.	Counterpoise .....	1-20
Figure 2-1.	RF Spectrum of a Conventional VOR .....	2-2
Figure 2-2.	Phase Relationship of CVOR Course Forming Signals.....	2-3
Figure 2-3.	Received and Detected AM and FM Signals by Aircraft Receivers A, B, C and D .....	2-4
Figure 2-4.	Simplified CVOR System Block Diagram .....	2-6
Figure 2-5.	CVOR Synthesizer Block Diagram .....	2-9
Figure 2-6.	Carrier RF Generation Loop .....	2-11
Figure 2-7.	Carrier Phase Control Loop .....	2-14
Figure 2-8.	Audio Generator CCA, Block Diagram .....	2-17
Figure 2-9.	Audio Generator CCA Block Diagram .....	2-18
Figure 2-10.	Audio Generator CCA Block Diagram .....	2-20
Figure 2-11.	Audio Generator CCA Block Diagram .....	2-22
Figure 2-12.	Audio Generator CCA Block Diagram .....	2-23
Figure 2-13.	Audio Generator CCA Block Diagram .....	2-24
Figure 2-14.	CSB Power Amplifier Assembly Block Diagram.....	2-34
Figure 2-15.	Exciter CCA Block Diagram .....	2-37
Figure 2-16.	Power Amplifier CCA Block Diagram .....	2-39
Figure 2-17.	Bias Regulator/Exciter Modulator CCA Block Diagram .....	2-41
Figure 2-18.	Power Amplifier Modulator CCA Block Diagram .....	2-43
Figure 2-19.	Modulator Bias CCA Block Diagram .....	2-45
Figure 2-20.	Low Pass Filter Assembly Block Diagram .....	2-46
Figure 2-21.	Sideband Generator Assembly (1A5) Block Diagram.....	2-49
Figure 2-22.	Sideband Generator Assembly Interconnect Diagram.....	2-50
Figure 2-23.	Sideband Amplifier CCA Block Diagram .....	2-52
Figure 2-24.	Sideband Controller CCA Block Diagram .....	2-57
Figure 2-25.	RF Monitor Assembly Block Diagram .....	2-66
Figure 2-26.	RF Monitor CCA Block Diagram.....	2-68
Figure 2-27.	Backplane CCA Pin Functions .....	2-72
Figure 2-28.	CPU CCA Block Diagram .....	2-73
Figure 2-29.	Facilities CCA Block Diagram .....	2-78
Figure 2-30.	Serial Interface CCA, Block Diagram .....	2-84



## TABLE OF FIGURES (Continued)

<u>Figure # #</u>	<u>Description</u>	<u>Page</u>
Figure 2-31.	Test Generator CCA, Block Diagram .....	2-88
Figure 2-32.	Modem CCA (012101-1001), Block Diagram .....	2-91
Figure 2-33.	RSCU Control Interface CCA (012601), Block Diagram .....	2-95
Figure 2-34.	Low Voltage Power Supply CCA, Block Diagram .....	2-100
Figure 2-35.	Display CCA, Block Diagram .....	2-102
Figure 2-36.	Blower Assembly, Block Diagram .....	2-104
Figure 2-37.	Field Detector CCA, Block Diagram.....	2-104
Figure 2-38.	Monitor CCA, Block Diagram (sheet 1).....	2-108
Figure 2-39.	Monitor CCA, Block Diagram (sheet 2).....	2-109
Figure 2-40.	Monitor CCA, Block Diagram (sheet 3).....	2-111
Figure 2-41.	Monitor CCA, Block Diagram (sheet 4).....	2-112
Figure 2-42.	Monitor CCA, Block Diagram (sheet 5) (Current Version) .....	2-114
Figure 2-43.	Power Panel .....	2-123
Figure 2-44.	Battery Charger Power Subsystem .....	2-125
Figure 2-45.	Transient Suppressor Assembly, Block Diagram .....	2-127
Figure 3-1.	Screen Depicting Sidebar Data .....	3-5
Figure 3-2.	Modem Configuration Screen.....	3-7
Figure 3-3.	Modem Dial Screen .....	3-9
Figure 3-4.	Log In Screen .....	3-9
Figure 3-5.	VOR/DME Status Screen .....	3-10
Figure 3-6.	RMS Maintenance Alerts Screen.....	3-11
Figure 3-7.	RMS A/D Data Screen.....	3-12
Figure 3-8.	Operational Summary Screen .....	3-13
Figure 3-9.	Alarm Log Screen .....	3-14
Figure 3-10.	Maintenance Alert Logs.....	3-15
Figure 3-11.	Command Activity Log Screen .....	3-16
Figure 3-12.	Parameter Change Log Screen.....	3-17
Figure 3-13.	General Configuration Screen.....	3-19
Figure 3-14.	Station Configuration Screen.....	3-22
Figure 3-15.	Synthesizer Switch Setting Screen.....	3-23
Figure 3-16.	A/D Limits Configuration.....	3-24
Figure 3-17.	Security Codes Screen .....	3-25
Figure 3-18.	RMS Commands .....	3-28
Figure 3-19.	DME Commands .....	3-29
Figure 3-20.	Monitor Alarm Limits Screen.....	3-30
Figure 3-21.	Monitor Offsets and Scale Factors.....	3-31
Figure 3-22.	Monitor Commands .....	3-32
Figure 3-23.	Integrity Data Screen .....	3-33
Figure 3-24.	Monitor Test Data Screen .....	3-34
Figure 3-25.	Certification Test Results Screen.....	3-35
Figure 3-26.	Ground Check Screen .....	3-37



## TABLE OF FIGURES (Continued)

<u>Figure # #</u>	<u>Description</u>	<u>Page</u>
Figure 3-27.	Advanced Ground Check Screen .....	3-38
Figure 3-28.	Fault History, Monitor Data.....	3-39
Figure 3-29.	Fault History, System Status.....	3-40
Figure 3-30.	Transmitter Data Screen .....	3-41
Figure 3-31.	Transmitter Offsets and Scale Factors .....	3-43
Figure 3-32.	Transmitter Nominal Screen .....	3-44
Figure 3-33.	Transmitter Commands.....	3-45
Figure 3-34.	Transmitter Commands, Antenna Control .....	3-46
Figure 3-35.	Transmitter Ident Control .....	3-47
Figure 3-36.	Power Up Diagnostics Results.....	3-50
Figure 3-37.	Fault Isolation Test Results.....	3-51
Figure 3-38.	Synthesizer Front Panel .....	3-55
Figure 3-39.	Sideband Generator Controls.....	3-56
Figure 7-1.	RF Monitor Assembly (A2) .....	7-6
<b>Figure 7-2.</b>	<b>RF Monitor Assembly (A2) .....</b>	<b>7-7</b>
<b>Figure 7-3.</b>	<b>Waveform - Sideband Generator Assembly (A5/A21) .....</b>	<b>7-7</b>
<b>Figure 7-4.</b>	<b>Waveform - Sideband Generator Assembly (A5/A21) .....</b>	<b>7-8</b>
Figure 7-5.	Waveform - A7/A23 TP1 Signal Generator Output Connected to A38 MIC input .....	7-8
Figure 7-6.	Waveform - A7/A23 TP2 Signal Generator Output Connected to A38 MIC input .....	7-9
Figure 7-7.	Waveform - A7/A23 Signal Generator Output Connected to A38 MIC input .....	7-9
Figure 7-8.	Waveform - A7/A23 TP11 Signal Generator Output Connected to A38 MIC Input. ....	7-10
Figure 7-9.	Waveform - A7/A23 Signal Generator Output Connected to A38 MIC input .....	7-10
Figure 7-10.	Waveform - A7/A23 TP6 Signal Generator Output Connected to A38 MIC input ...	7-11
<b>Figure 7-11.</b>	<b>Waveform - Audio Generator CCA (A7/A23).....</b>	<b>7-11</b>
<b>Figure 7-12.</b>	<b>Waveform - Audio Generator CCA (A7/A23).....</b>	<b>7-12</b>
<b>Figure 7-13.</b>	<b>Waveform - Audio Generator CCA (A7/A23).....</b>	<b>7-12</b>
Figure 7-14.	Waveform - A7/A23 TP9 1020 Hz Identity Tone .....	7-13
<b>Figure 7-15.</b>	<b>Wveform - Audio Generator CCA (A7/A23).....</b>	<b>7-13</b>
Figure 7-16.	Waveform - A11 TP1 Two Second Period .....	7-14
Figure 7-17.	Waveform - A12 TP1 Normal Appearance for Monitor Calibration.....	7-14
Figure 7-18.	Waveform - A12 TP1 Re-configuring for Generator Test of Monitor .....	7-15
Figure 7-19.	Waveform - A12 TP2 Sync Signal .....	7-15
Figure 7-20.	Waveform - A12 TP3 983.04 kHz Clock .....	7-16
Figure 7-21.	Waveform - A8/A24 TP1 and TP2 Voice Output .....	7-16
Figure 7-22.	Waveform - A8/A24 TP3 600 Hz Voice .....	7-17
Figure 7-23.	Waveform - A8/A24 TP5 Composite Signal .....	7-17
Figure 7-24.	Waveform - A8/A24 TP3 Audio Signal Level (ID Only) .....	7-18
Figure 7-25.	Waveform - A8/A24 TP8 Ident Signal Level .....	7-18
Figure 7-26.	Waveform - A8/A24 TP9 ID Square Pulse.....	7-19
Figure 7-27.	Waveform - A8/A24 Monitor CCA TP9 and TP8.....	7-20
Figure 7-28.	Waveform - A8/A24 TP10 Continuous ID Tone .....	7-20

## TABLE OF FIGURES (Continued)

<u>Figure #</u>	<u>Description</u>	<u>Page</u>
Figure 7-29.	Waveform - A8/A24 TP6 Half Wave Rectified .....	7-21
Figure 7-30.	Waveform - A8/A24 TP7 30 Hz AM Squared Signal .....	7-21
Figure 7-31.	Waveform - A8/A24 Monitor CCA TP12 .....	7-22
Figure 7-32.	Waveform - A8/A24 TP11 and TP12 .....	7-22
Figure 7-33.	Waveform - A8/A24 TP14 DC Voltage .....	7-23
Figure 7-34.	Waveform - A8/A24 TP13 Half Wave Rectified 30 Hz FM .....	7-23
Figure 7-35.	Waveform - A8/A24 TP15 30 Hz FM Squared Signal.....	7-24
Figure 7-36.	Waveform - A8/A24 TP15 and TP7 (0 Degrees) .....	7-24
Figure 7-37.	Waveform - A8/A24 TP15 and TP7 (90 Degrees) .....	7-25
Figure 7-38.	Waveform - A8/A24 TP15 and TP7 (180 Degrees) .....	7-25
Figure 7-39.	Waveform - A8/A24 TP15 and TP7 (270 Degrees) .....	7-26
Figure 7-40.	Waveform - A8/A24 TP16 300 Hz Clock Pulse.....	7-26
Figure 9-1.	Typical Shelter Foundation Drawing.....	9-4
Figure 9-2.	Shelter Grounding Diagram.....	9-5
Figure 9-3.	Radome Installation Kit Diagram .....	9-6
Figure 9-4.	Four-Loop Antenna Array Installation Kit Diagram .....	9-7
Figure 9-5.	Interface Enclosure Assembly Installation Diagram .....	9-8
Figure 9-6.	Coaxial Bridge Assembly Installation Diagram .....	9-9
Figure 9-7.	Automatic ground Check Switch Installation Diagram .....	9-10
Figure 9-8.	VOR Collocated with DME Antenna Installation Diagram .....	9-11
Figure 9-9.	CVOR/DME Obstruction Light 120 Vac Interconnect Diagram .....	9-12
Figure 9-10.	CVOR/DME Obstruction Light 240 Vac Interconnect Diagram Intl' Use Only .....	9-12
Figure 9-11.	Unistrut Layout for Interior Shelter Wall .....	9-14
Figure 9-12.	Transmitter Cabinet to Shelter Wall Installation Diagram .....	9-15
Figure 9-13.	Battery Installation Diagram.....	9-16
Figure 9-14.	Battery Backup Wiring Diagram .....	9-17
Figure 9-15.	Dual Battery Backup Wiring Diagram.....	9-17
Figure 9-16.	AC & DC Interconnect Wiring Diagram .....	9-19
Figure 9-17.	Detector Wiring .....	9-21
Figure 9-18.	Terminal Layout for BCPS 1A33/1A34 .....	9-24
Figure 9-19.	Typical Diagram of Improperly and Properly Adjusted Waveforms .....	9-33
Figure 9-20.	Typical Diagram of Improperly and Properly Adjusted Waveforms .....	9-34
Figure 9-21.	Frequency Generator; Front Panel View .....	9-35
Figure 9-22.	Sideband Generator, Front and Side Panel View.....	9-36
Figure 9-23.	Monitor CCA, Signal at 1A8TP5.....	9-45

## LIST OF TABLES


<u>Figure No.</u>	<u>Description</u>	<u>Page #</u>
Table 1-1.	CVOR Equipment Specifications (Transmitter) .....	1-21
Table 1-2.	CVOR Equipment Specifications (Antenna System) .....	1-23
Table 1-3.	CVOR Equipment Specifications (Monitor) .....	1-24
Table 1-4.	CVOR Equipment Specifications (Mechanical and Electrical).....	1-25
Table 1-5.	Equipment and Accessories Supplied .....	1-29
Table 1-6.	Equipment Required but Not Supplied .....	1-29
Table 1-7.	Optional Equipment .....	1-30
Table 2-1.	DAC Binary Code to V <sub>ref</sub> Conversion .....	2-28
Table 2-2.	Listing of Facilities CCA Signals .....	2-81
Table 2-3.	CCA 012741 Tone Control to 1138 RCSU .....	2-98
Table 2-4.	CCA 012741 Tone Controls from 1138.....	2-99
Table 3-1.	PMDT Interconnect Cable .....	3-2
Table 3-2.	PMDT Available Functions .....	3-4
Table 3-3.	VOR Security Levels .....	3-7
Table 3-4.	General Configuration Parameters.....	3-20
Table 3-5.	Monitor Certification Test Criteria .....	3-36
Table 3-6.	Dual Equipment Control Panel Functions .....	3-52
Table 3-7.	RMS CCA (1A13) Controls and Indicators.....	3-53
Table 3-8.	Monitor CCA (1A8, 1A24) Controls and Indicators .....	3-53
Table 3-9.	Synthesizer CCA (1A4, 1A20) Controls and Indicators.....	3-57
Table 3-10.	Sideband Generator (1A5, 1A6, 1A21, 1A22) Controls and Indicators .....	3-57
Table 4-1.	Standards and Tolerances .....	4-1
Table 5-1.	Performance Check Schedule .....	5-1
Table 6-1.	Test Equipment .....	6-1
<b>Table 7-1.</b>	<b>Onsite Corrective Maintenance .....</b>	<b>7-3</b>
Table 7-2.	Test Point Data.....	7-6
Table 8-1.	Model 1150 Dual CVOR .....	8-1
Table 8-2.	Dual 1150 CVOR Parts List .....	8-1
Table 8-3.	Model 1150 CVOR Kits and Optional Equipment .....	8-2
Table 9-1.	Tools and Test Equipment .....	9-2
Table 9-2.	Tools Needed for Installation.....	9-3
Table 9-3.	Frequency Selection Chart .....	9-27
<b>Table 11-1.</b>	<b>Schematic Diagrams .....</b>	<b>11-1</b>

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE NOR FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM ALENIA MARCONI SYSTEMS (ASI) INC.

## CVOR (DUAL)

99V3CDXXXXX

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	RELEASED PER ECO VC00256	3/25/94	G.W.H.
A	REVISED PER ECO 1150-615	11/30/94	LW
B	REVISED PER ECO 1150-650	11/30/94	LW
C	REVISED PER ECO 1150-924	12/2/96	ROTH WELL
D	REVISED PER ECO 1150-1184 REVISED PER ECO 1150-1327	7/9/02	ROTH WELL
E	REVISED PER ECO 1150-1440	1/23/03	ROTH WELL

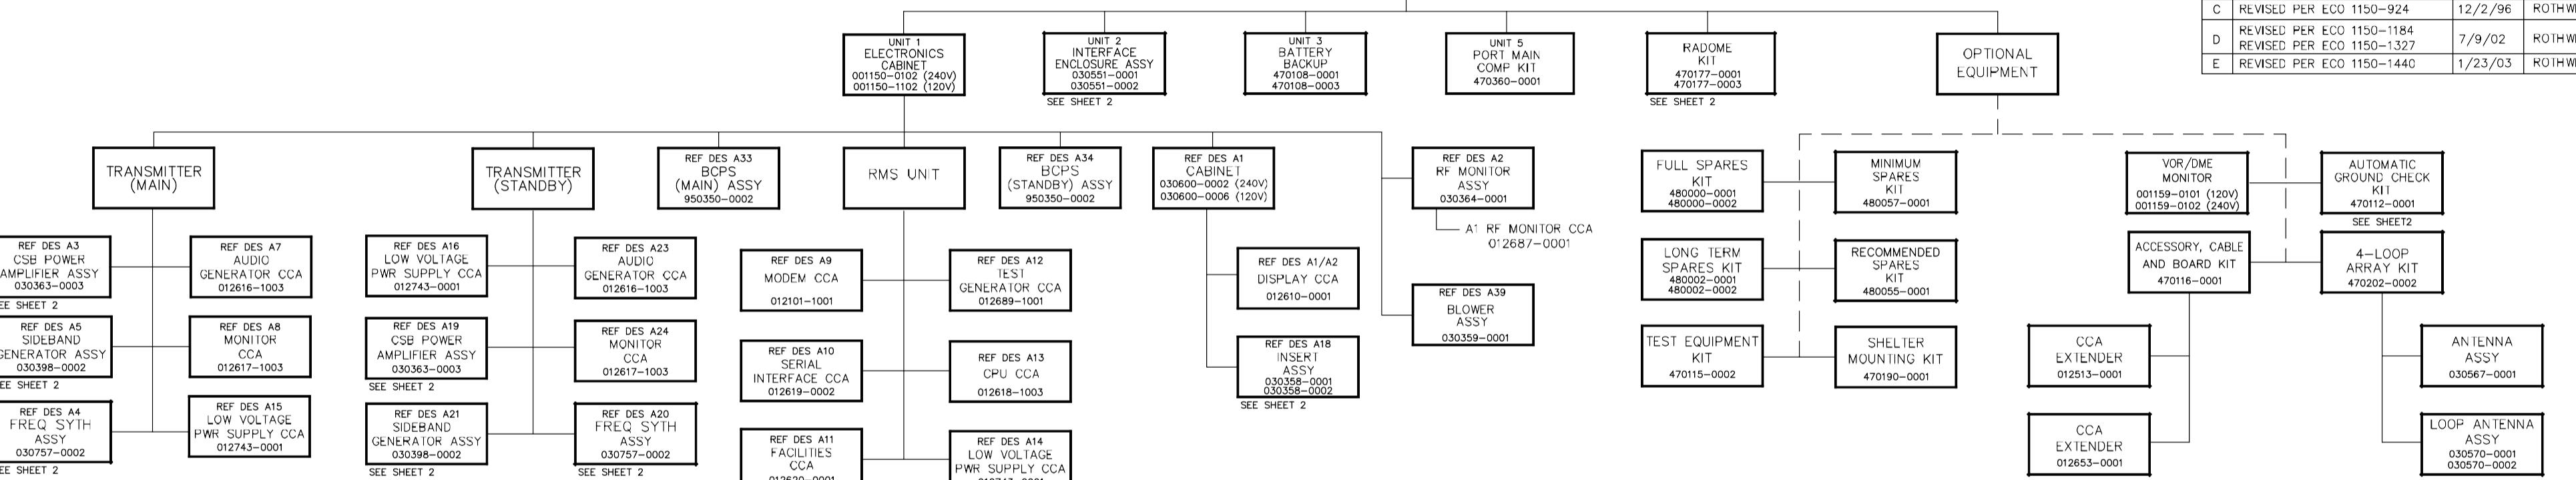

— — — DESIGNATES OPTIONAL EQUIPMENT

11300 W. 89TH St.  
Overland Park, KS 66214



 Alenia Marconi  
systems  
(ASI) inc

MODEL 1150 DUAL CVNTL  
VOR FAMILY TREE

SIZE	CAGE CODE	DWG NO.
G	64415	502023
REV	E	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGLES $\pm 3^\circ$ DECIMALS .XX	CONTRACT NO.
.XXX	
APPROVALS	DATE
DRAWN DMB	90/8/21
CHECKED BRASE	94/4/28
MATERIAL:	
DASH NO.	NEXT ASSY
USED ON	
FINISH:	
ENGR G.W. HAUENSTEIN	94/4/28
APPLICATION	AUTOCAD GENERATED
SCALE NONE	SHEET 1 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE NOR FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM ALENIA MARCONI SYSTEMS (ASI) INC.

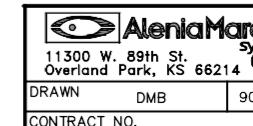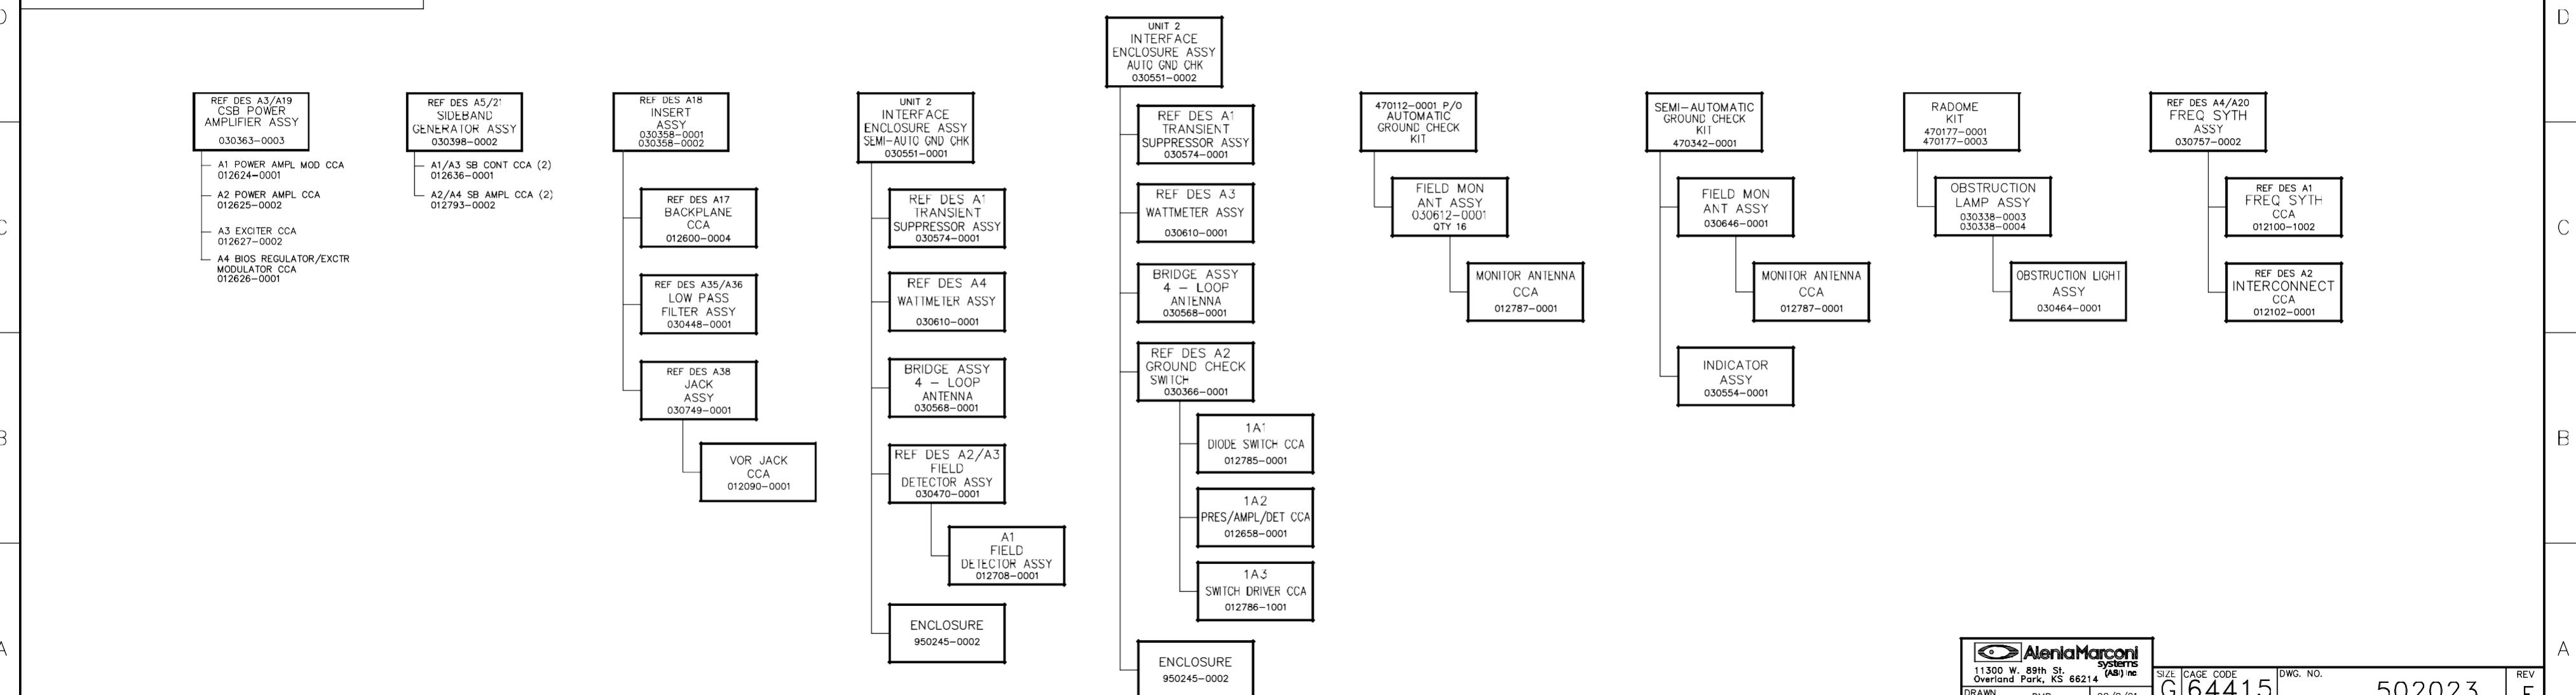

SIZE	CAGE CODE	DWG. NO.
G	64415	502023
SCALE	NONE	SHEET
		2 OF 2

# 1 GENERAL INFORMATION AND REQUIREMENTS

## NOTE:

The nomenclature Systems Control and Interface Processor (SCIP) has been replaced by Remote Maintenance System Processor (RMS) in order to be consistent with the 2100 ILS Product.

## 1.1 INTRODUCTION

This manual provides the data required to operate and maintain the Model 1150 Dual Conventional VHF Omnidirectional Range (CVOR) Station (Figure 1-1). Included are equipment description and specifications, block diagram level theory of operation, operating procedures, standards and tolerances, periodic maintenance procedures, corrective maintenance procedures, parts list, schematics, and other diagrams.



**Figure 1-1. Model 1150 Dual Conventional VHF Omnidirectional Range (CVOR) Station**

## **1.2 EQUIPMENT DESCRIPTION.**


The CVOR system provides a reference from which aircraft bearing can be determined. To do this, a carrier is radiated in the 108 to 118 MHZ band and modulated by two 30 Hz signals. One amplitude modulates and the other frequency modulates (also called the variable phase and reference phase signals, respectively) the carrier signal. This is done in such a way that the phase difference of the 30 Hz signals varies degree for degree with the magnetic bearing around the VOR station.

The CVOR system consists of one electronics cabinet with sub-assemblies, an interface enclosure assembly, a portable maintenance data terminal (PMDT), a transmitting antenna system and one to sixteen field monitor antenna(s), and interconnecting cables.

There are two antenna systems that can be used with the CVOR: a cylindrical slot antenna ([Figure 1-8](#)) or a Four-Loop Antenna array ([Figure 1-9](#)). The slot antenna system is mounted to a pedestal which is installed on the shelter counterpoise. A walk-in weather proof radome protects the antenna from the elements. For more information on the slot antenna, refer to instruction manual ([Part No. 570000-0001](#)). The Four-Loop Antenna array consists of four pedestal-mounted square-loop antennas which are attached to the shelter counterpoise. All the loop antennas are protected from the elements by a walk-in weatherproof radome. For more information on the Four-Loop Antenna array, refer to instruction manual ([Part No. 570001-0001](#)).

### **1.2.1 Electronics Cabinet.**

Refer to [Figure 1-2](#). The electronics cabinet is 42 inches high, 19 inches wide, and 15 inches deep. A removable, locking front door on the front provides access to the assemblies and circuit card assemblies (CCAs).

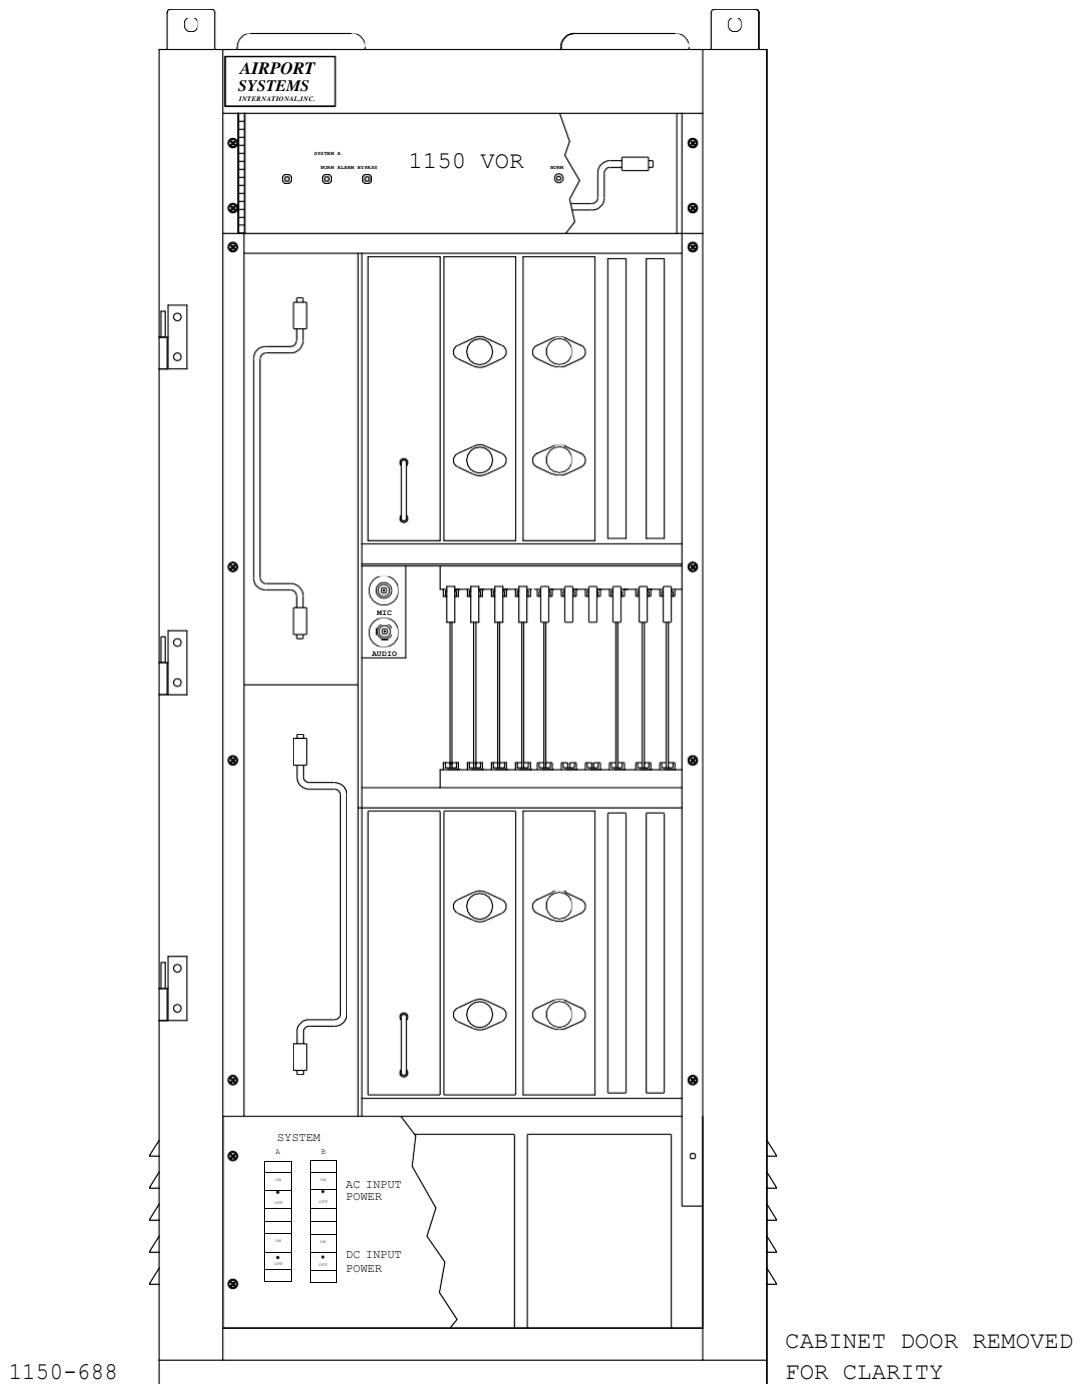


**Figure 1-2. CVOR Cabinet (Front View)**

## Model 1150 CVOR


The left side panel (Figure 1-3) contains the blower assembly for cooling the carrier/sideband (CSB) power amplifier assemblies. Ambient air is drawn through a replaceable air filter by two fans that blow the air over the CSB power amplifier heat sinks.

The rear panel fastens to the cabinet with eight screws. This panel when removed, provides access to cabinet wiring, sideband RF circulators, changeover relays, directional couplers, terminal boards, etc. Early versions of the VOR system have two field detectors mounted inside the cabinet. Later versions have the field detectors located in the interface enclosure assembly.

Ambient air is drawn through a replaceable air filter by the battery charger power subsystem (BCPS) fans. These fans provide cooling air for the BCPS assemblies. [Figure 1-4](#) illustrates the location of major assemblies of the electronics cabinet with the front cover removed.

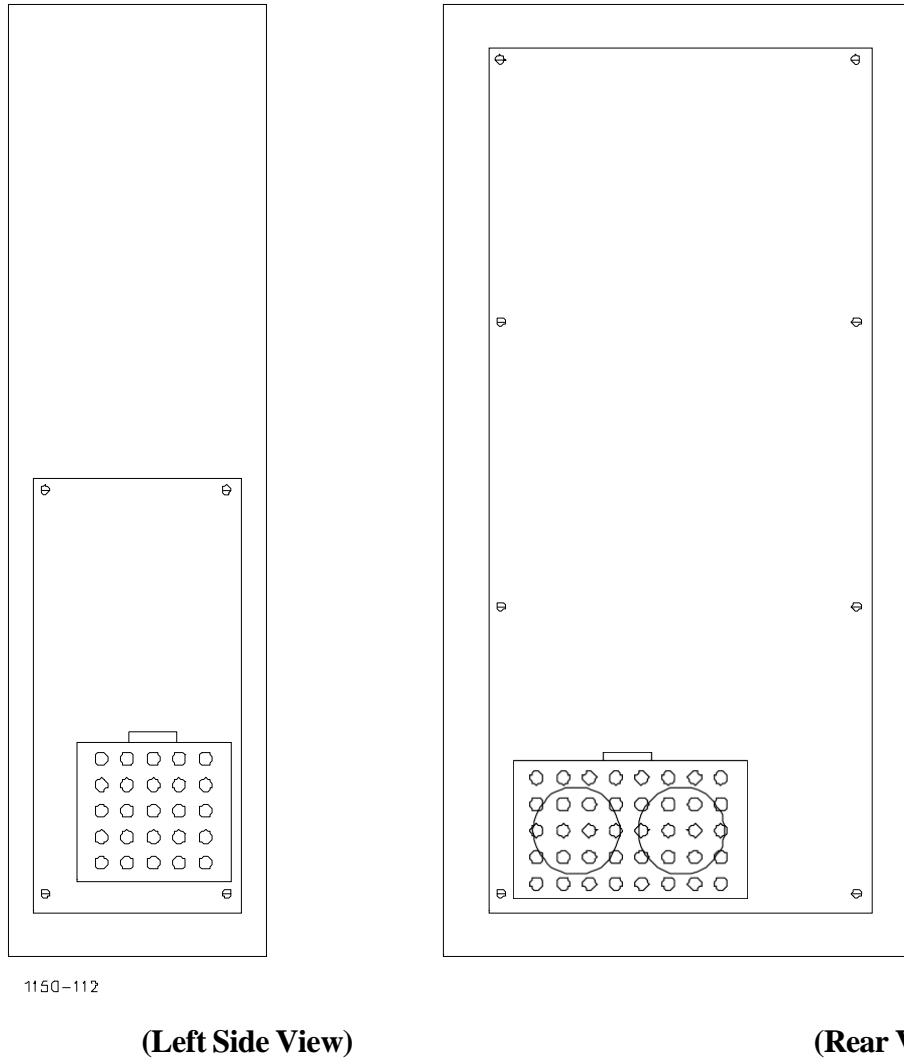

**Figure 1-3. CVOR Cabinet**

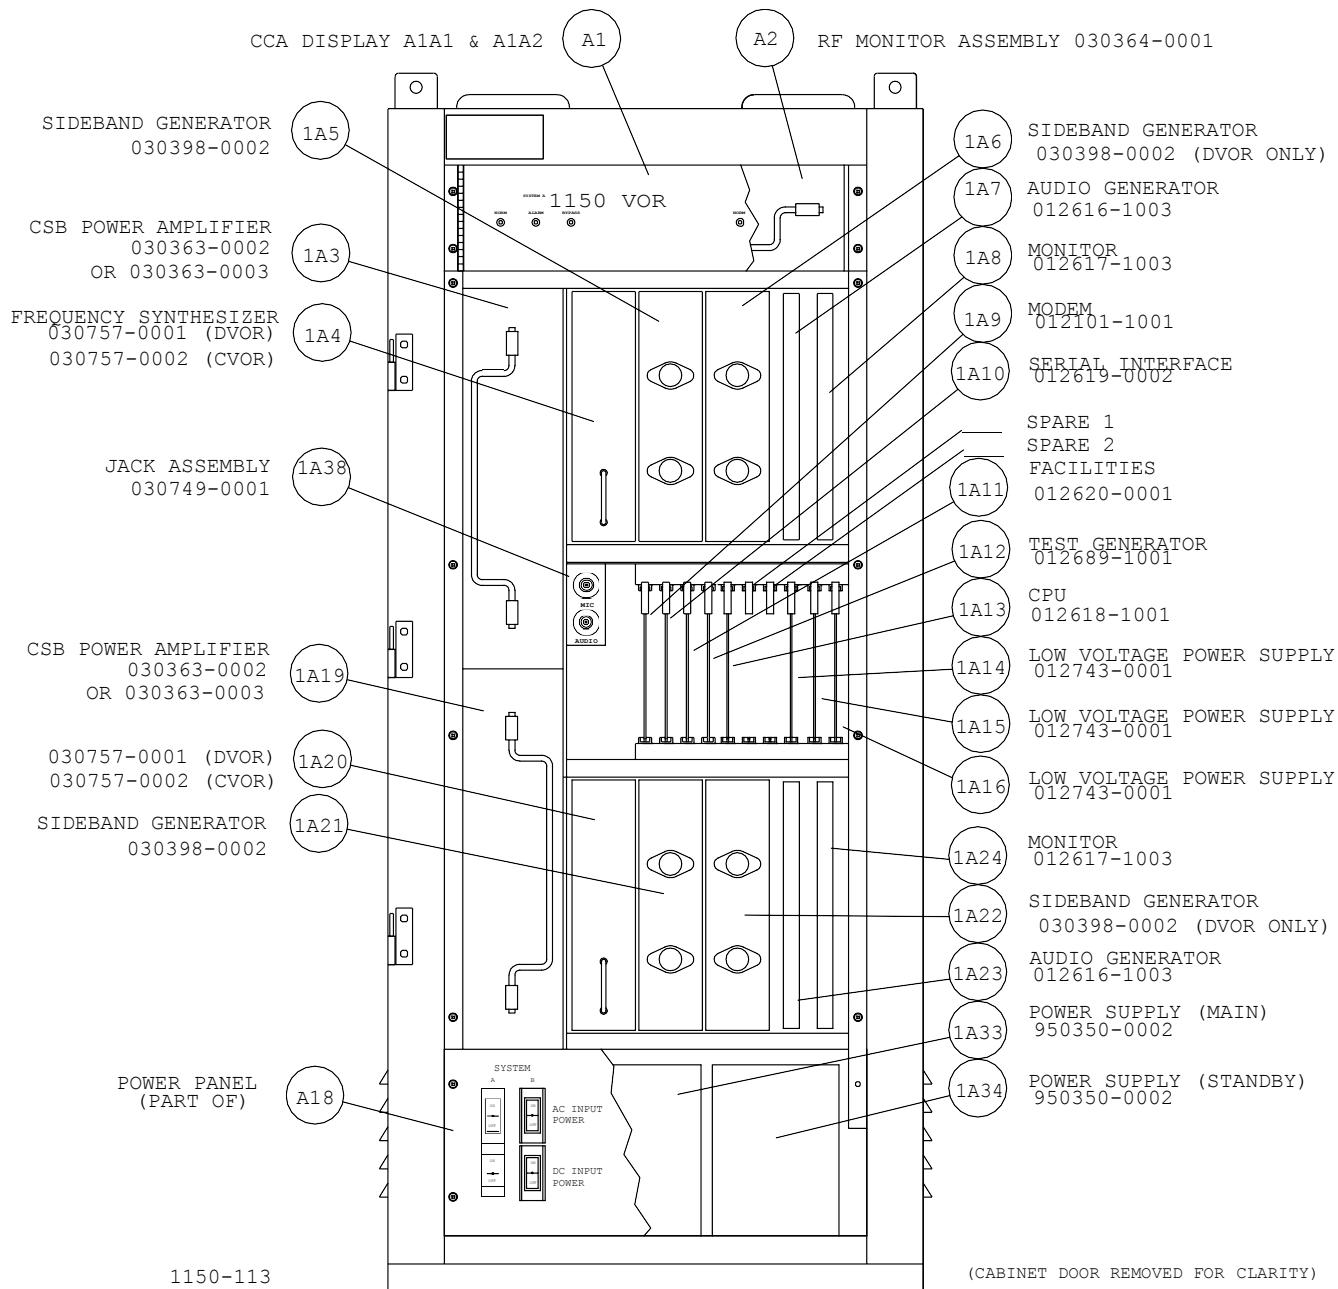

**Figure 1-4. Location of Major Assemblies in the Electronics Cabinet (Front View)**

RF connections between the electronics cabinet and the interface assembly are via coaxial adapters located on top of the cabinets.

Most of the assemblies slide into the cabinet from the front and mate with a backplane assembly or connectors of the main interconnect wiring harness assembly.

Two redundant battery charger power subsystems (BCPS) are on the floor of the electronics cabinet behind the power panel assembly. Operating in conjunction with an optional battery bank, the BCPS supplies uninterrupted dc power to the CVOR.

## **Model 1150 CVOR**

The dual CVOR contains two complete sets of assemblies comprising two dual redundant transmitters:

Audio Generator (2)	Sideband Generators (2)
Frequency Synthesizer (2)	VOR Monitor (2)
CSB Power Amplifier(2)	Low Voltage Power Supply (2)

Either transmitter may be designated as “main”.

Additionally, the CVOR uses a single Remote Maintenance System (RMS), consisting of these major CCAs:

Central Processor Unit (CPU) (1)	Facilities (1)
Serial Interface (1)	Low Voltage Power Supply (1)

The following CCAs mate with the RMS backplane but are independent of RMS functions:

Modem (1)	Test Generator (1)
RSCU Control Interface (Optional)(1)	

Three coaxial latching relays, on a panel directly behind the RF monitor, are used to transfer station operation to standby or main equipment.

### **1.2.1.1 Status Display Panel Assembly (1A1).**

Refer to [Figure 1-4](#). The status display panel assembly (A2) is located at the upper portion of the cabinet and measure 14-1/8 inches wide and 3-3/4 inches high. The assembly contains two circuit card assemblies that provide a visual status of the CVOR monitor.

### **1.2.1.2 RF Monitor Assembly (1A2).**

The RF Monitor assembly is located at the top of the electronics cabinet and measures 13-3/8 inches wide, 9-1/4 inches deep, and 3-1/4 inches high. The RF monitor assembly functions as an RF detector/amplifier and distributor of the detected RF signals. The RF monitor assembly has a high power dummy load for the carrier mounted to a heat sink that is attached to the assembly chassis. There are two locations for the two medium power sideband dummy loads. On early equipment these loads were mounted to the RF Monitor assembly chassis. On later equipment two connectorized loads are mounted directly to the coaxial relays.

There are three test connectors on the front of the assembly. These connectors provide access for external test equipment.

### **1.2.1.3 Carrier-Plus-Sideband (CSB) Power Amplifier Assembly (1A3, 1A19).**

The CSB power amplifier assembly is located on the left side of the cabinet and measures 3-1/2 inches wide, 10-1/8 inches deep, and 11-15/16 inches high. The CSB power amplifier assembly amplifies and modulates the carrier RF signal to its final operating level. This assembly contains four CCAs: a power amplifier modulator, a bias regulator/exciter modulator, an exciter, and a power amplifier.

### **1.2.1.4 Frequency Synthesizer Assembly (1A4, 1A20).**

The frequency synthesizer assembly is located to the right of the CSB power amplifier and measures 2-1/4 inches wide, 9-1/2 inches deep, and 8 7/8 inches high. The frequency synthesizer assembly generates the operational RF frequencies which consists of the carrier, the upper sideband, and the lower sideband frequencies using a frequency synthesizer. This assembly contains two CCAs: the synthesizer CCA and an interconnect CCA.

### **1.2.1.5 Sideband Generator Assembly (1A5, 1A21).**

The sideband generator assembly is located to the right of the frequency synthesizer assembly and measures 2-1/4 inches wide, 9-1/2 inches deep, and 8-7/8 inches high. Each sideband generator contains two sideband amplifier CCAs and two sideband controller CCAs. The sideband generators process the two separate Sideband-Only (SBO) RF signals.

#### **1.2.1.6 Audio Generator CCA (1A7, 1A23).**

The audio generator CCA measures 9 inches wide, 8-7/8 inches high, and has a 64 pin connector which connects to the main cabinet interconnecting wiring harness. The audio generator is responsible for developing and controlling the audio signals, generating the carrier modulation signals and monitoring and controlling RF power level and phase control signals used in the CVOR. In addition, DC analog voltages representing different modulation and power levels of the CVOR RF signals are applied to and analyzed by the audio generator to determine carrier power levels, sideband power levels and VSWR. An on-board micro controller and memory circuitry controls all functions within the CCA. Communication with the CVOR system CPU is via the serial interface CCA.

#### **1.2.1.7 Monitor CCA (1A8, 1A24).**

The monitor CCA measures 9 inches wide, 8-7/8 inches high, and has a 64 pin connector which connects to the main cabinet interconnecting wiring harness. The monitor CCA monitors and analyzes the detected RF signals from the field detectors and initiates an alarm status signal if the CVOR fails to operate within specified limits.

#### **1.2.1.8 Modem CCA (1A9) Part Number 012101-1001**

The modem CCA measures 6-7/8 inches deep, 4-3/16 inches high, and has a 64 pin connector which connects to the backplane and a connector that connects to the main cabinet interconnecting wiring harness. The modem CCA contains a Serial Communications Controller (SCC), a dial up modem module and a dedicated modem module, providing an interface between the CVOR system and an offsite computer terminal.

#### **1.2.1.9 Serial Interface CCA (1A10)**

The serial interface CCA measures 6-7/8 inches deep, 4-3/16 inches high, and has a 64 pin connector which connects to the backplane and two connectors that connect to the main cabinet interconnecting wiring harness. The serial interface provides the communications interface for the CPU assembly to communicate with other devices. This CCA contains four dual channel Serial Communications Controllers (SCCs) which accomplish two-way communications with: the local PMDT, audio generator for transmitter no. 1 and transmitter no. 2 and CVOR monitors no. 1 and no. 2.

#### 1.2.1.10 Facilities CCA (1A11)

The facilities CCA measures 6-7/8 inches deep, 4-3/16 inches high, and has a 64 pin connector which connects to the backplane and one connector that connects to the main cabinet interconnecting wiring harness. The facilities CCA collects and integrates the CVOR system status information and sends it to the CPU assembly for processing and storage. It also provides a unique transfer status signal to the Remote Status/Control Unit (RSCU) that signifies a transmitter transfer has occurred as well as the standard status signals. Additionally, BCPS on/off control and status signals, display panel LED driver signals, control signals from the RSCU and power supply status signals are either generated by, or applied to, this CCA for processing.

#### 1.2.1.11 Test Generator CCA (1A12).

The test generator CCA measures 6-7/8 inches deep, 4-3/16 inches high, and has a 64 pin connector which connects to the backplane and one connector that connects to the main cabinet interconnecting wiring harness. Test generator CCA performs two functions. The primary function is to provide a standard reference signal to the CVOR monitors for automatic calibration at power-up or whenever directed by the RMS CPU for monitor integrity testing.

The secondary function is an operator maintenance function, which is to allow test signals to be sent to the monitor(s), as directed by an operator through the PMDT. The operator can vary signal parameters (i.e., frequency, percent modulation, phase shift, etc.) to determine if a monitor is functioning properly and will alarm at the required settings.

#### 1.2.1.12 Central Processor Unit (CPU) CCA (1A13)

The CPU CCA measures 6-7/8 inches deep, 4-3/16 inches high, and has a 64 pin connector which connects to the backplane and one connector that connects to the main cabinet interconnecting wiring harness. The CPU is responsible for monitoring and controlling the CVOR system and directing communications with external devices. The CPU is mounted in the RMS card cage assembly where it connects to the backplane bus.

The CPU contains a micro controller, RAM, EPROM, EEPROM, bus control and power monitor circuitry. It processes the system status, directs communications with the outside world, and communicates with the CVOR monitor and audio generator assemblies.

#### **1.2.1.13 Low Voltage Power Supply (LVPS) CCA (1A14, 1A15, 1A16)**

There are three LVPS assemblies used on the transmitter cabinet. The low voltage power supply CCA measures 6-7/8 inches deep, 4-3/16 inches high, and has a 10 pin connector which connects to the main cabinet interconnecting wiring harness. LVPS 1A14 is designed to provide +/-12 Vdc and +5 Vdc power to the RMS card cage. LVPS 1A15 and 1A16 are located in the RMS card cage but do not connect to the backplane assembly. LVPS 1A15 is the low voltage power supply for transmitter 1 and 1A16 is the LVPS for transmitter 2. Each LVPS is identical in construction and operation. Each is interchangeable with the other.

#### **1.2.1.14 RSCU Control Interface CCAs**

##### **1.2.1.14.1 1138 RSCU Control Interface CCA (1A26) Part Number 012741-1002.**

The 1138 RSCU control interface CCA is located in the RMS unit, if an 1138 RCSU is used. It measures 6-7/8 inches deep, 4-3/16 inches high, and has a 64 pin connector which connects to the backplane and two connectors that connect to the main cabinet interconnecting wiring harness. The RSCU control interface CCA provides status data to and control data from a remote status and control unit. The communication from a 2138 RCSU to the VOR is directed through the modem CCA.

#### **1.2.1.15 Battery Charger Power Subsystem (BCPS) (1A33, 1A34).**

The BCPS is located on the floor of the cabinet behind the power panel and measures 5-3/8 inches wide, 13 inches deep, and 8-3/4 inches high. Operating in conjunction with the battery supply, the BCPS supplies un-interruptible +28 and +43/48 volt DC power to the CVOR, and also functions as a battery charger when AC power is applied.

On board fans provide cooling for the BCPS. Ambient air is drawn through a replaceable filter by the BCPS fans.


#### **1.2.1.16 Power Panel Assembly**

The power panel assembly is located at the lower front portion of the cabinet and measures 14-7/8 inches wide and 8-5/8 inches high. The power panel contains the AC input and DC input circuit breakers. AC input power circuit breakers control the application of AC voltage to BCPS. DC input power circuit breakers control the application of DC voltage to BCPS.

The power panel is hinge mounted to the electronics cabinet and is secured by two knurled thumbscrews. This panel must be lowered to gain access to the terminal connections, plugs and adjustment controls of the BCPS.

### 1.2.2 Interface Enclosure Assembly (Unit 2)

Refer to Figure 1-5. The interface enclosure assembly is separate from the electronics cabinet and mounts to the shelter wall. The assembly centralizes all components that send or receive signals external to the CVOR station into one location and contains an antenna RF Bridge network, automatic ground check assembly (optional), signal splitter, two field detectors, transient suppressor components and associated terminal boards mounted inside the electronics cabinet.

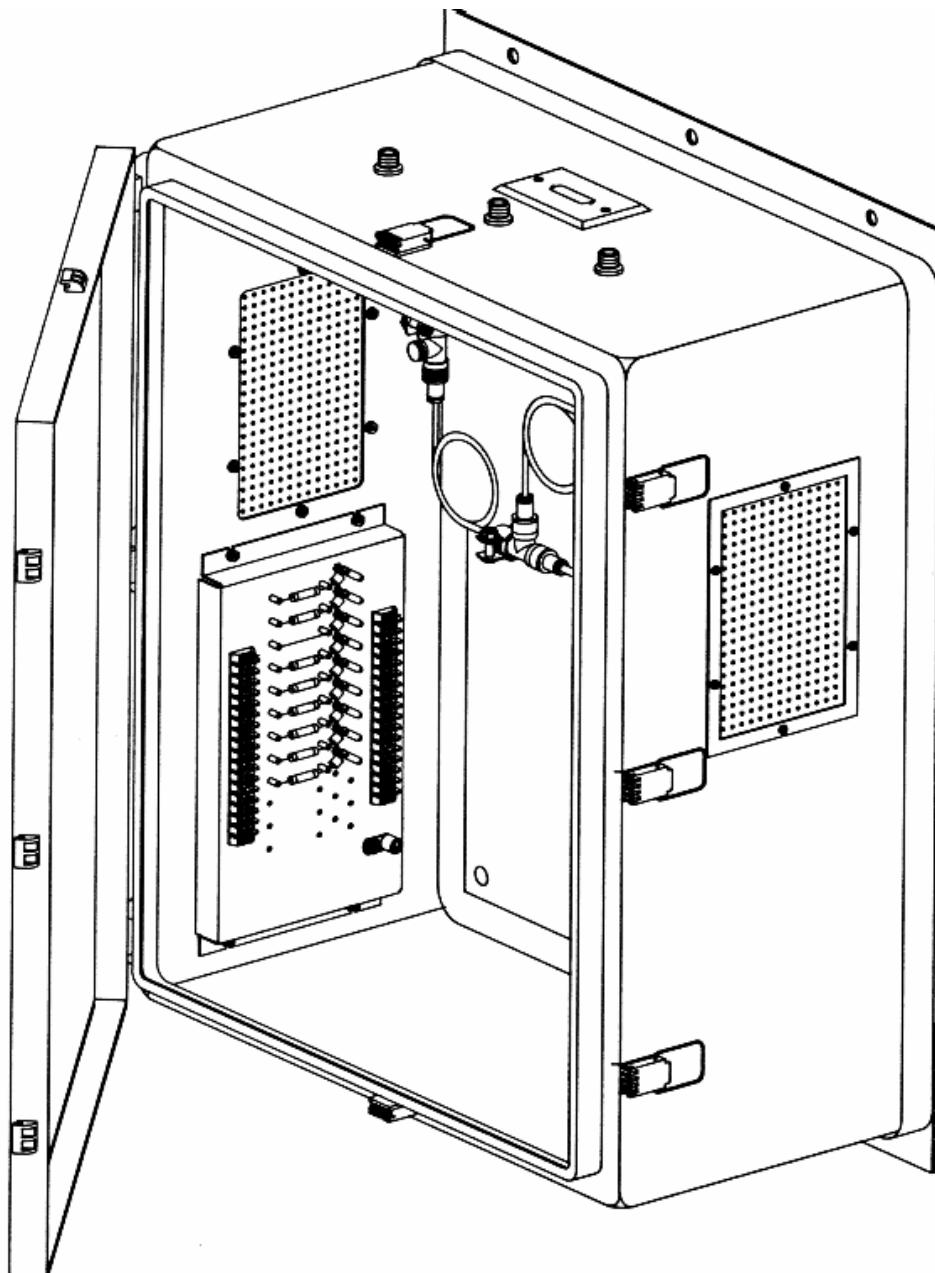

**Figure 1-5. Interface Enclosure Assembly**

### **1.2.3 Field Monitor and Ground Check Antenna**

Refer to [Figure 1-6](#). A field monitor and ground-check antenna system are provided for each CVOR. One of the following two configurations is supplied with the system.

#### **1.2.3.1 CVOR with Semi-Automatic Ground Check Kit**


The Semi Automatic Ground Check system utilizes a single, shortened-dipole, receiving antenna supported by a short pole which is mounted on one of 16 support brackets located symmetrically around the edge of the counterpoise. For normal monitoring, the antenna is installed on one of the cardinal (0°, 90°, 180° or 270°) points around the station and is connected to the two station field detector assemblies through a signal splitter. For conducting a station ground check, the antenna is removed from its support bracket and temporarily installed in succession on each of the remaining 15 brackets around the counterpoise. At each of the locations, and in conjunction with the Semi-Automatic Ground-Check indicator shown in [Figure 1-7](#), the station is commanded to take and record a monitor reading. The readings are stored within the monitor for later display or print out. On completion of the ground check, the antenna is returned to its normal monitoring position. An extension cable and extension pole are provided with the station for temporarily relocating the antenna around the counterpoise during ground check measurements.

#### **1.2.3.2 CVOR with Automatic Ground Check Kit**

The Automatic Ground Check system utilizes 16 shortened-dipole receiving antennas, each supported by a choke pole assembly which is mounted to a bracket (or simple U-bolt mount, depending on the installation) on the edge of the counterpoise. The 16 antennas are mounted symmetrically around the edge of the counterpoise. For normal monitoring, the station monitor selects one of 16 antennas connected to the Ground Check Switch Assembly to send the received RF signal to the detector portion of the switch. The signal is bandpass filtered, amplified and divided into two matched-impedance outputs for the station field detectors. For automatic ground checking, the monitor selects each of the 16 antennas in turn and takes a reading. The readings are stored within the monitor for later display and print out.

### **1.2.4 Semi-Automatic Ground Check Indicator**

Refer to [Figure 1-7](#). The Semi-Automatic Ground Check indicator is a portable control device which is used in conjunction with the extension pole and cable during ground check measurements. The device contains indicator DS1 and Audible Alarm DS2 which provide visual and audible indications of the measurement process and control switch S1 which is used to command the station to take a reading at each of the antenna locations. The indicator is supplied with a clip and long cable for attaching to the antenna extension pole during measurements.

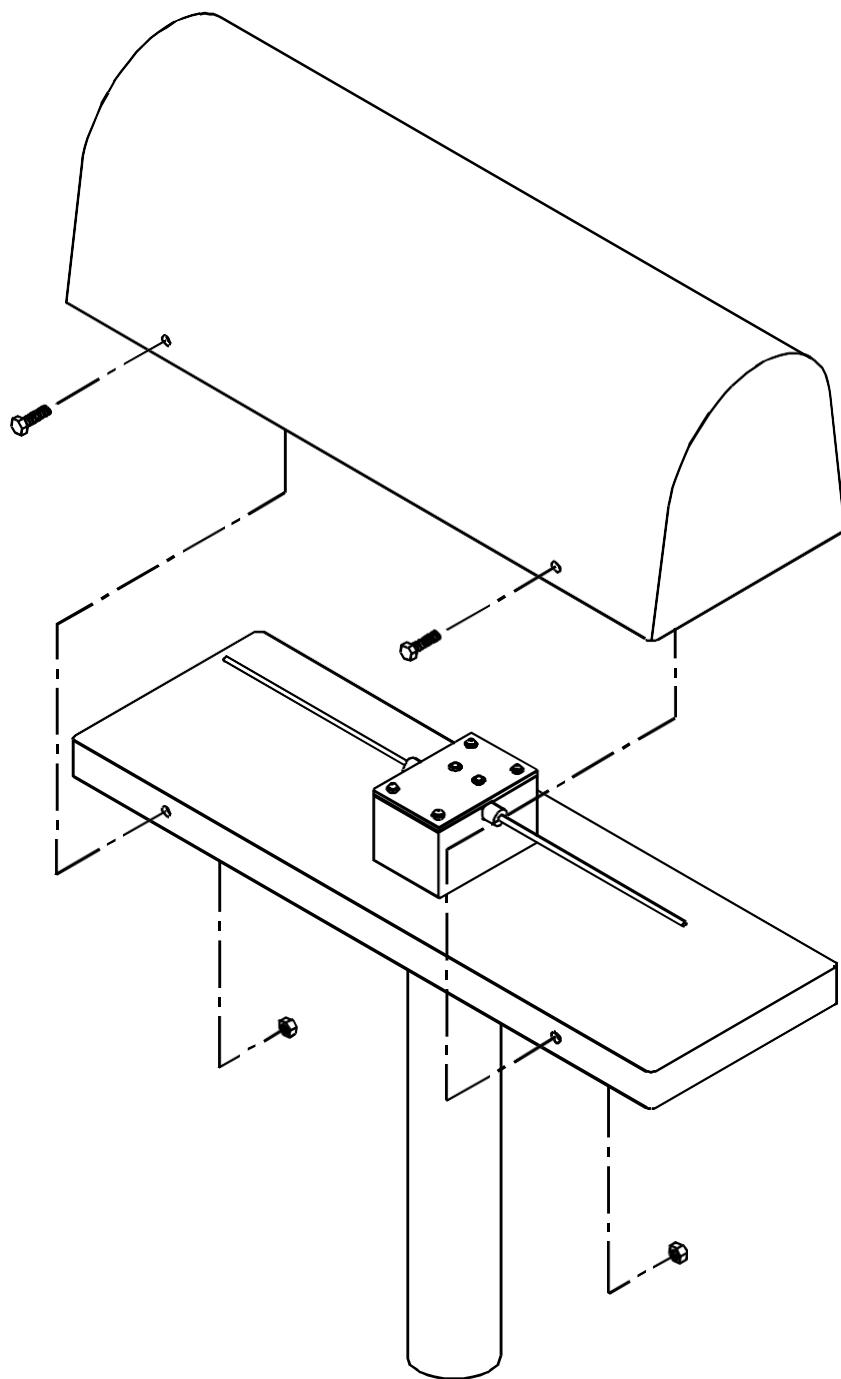

1150-588

**Figure 1-6. Field Monitor Antenna**

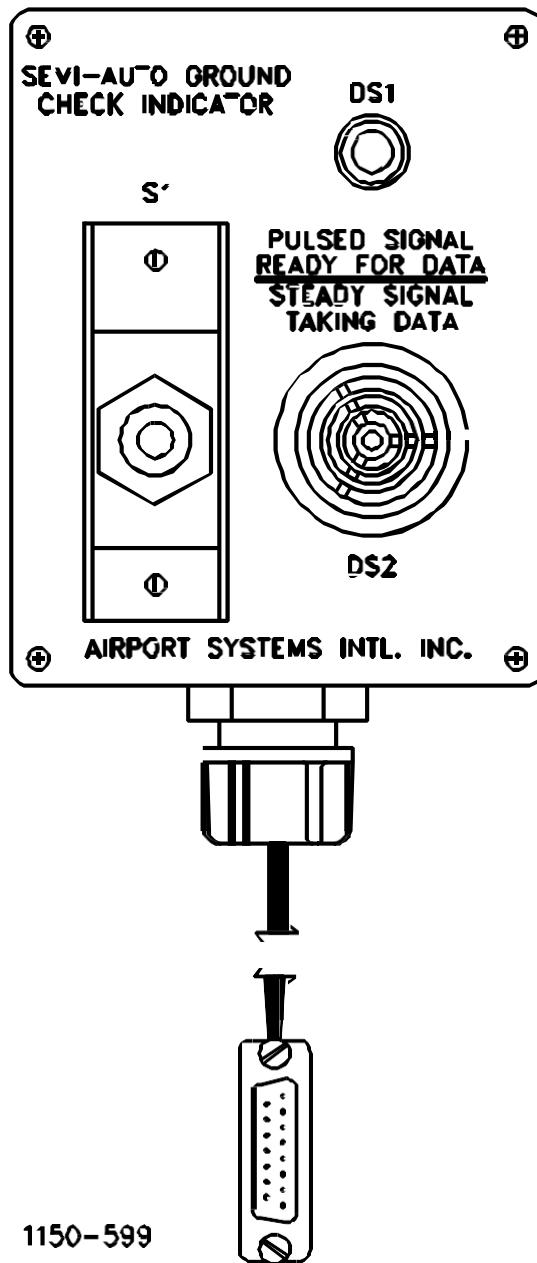



Figure 1-7. Semi-Automatic Ground Check Indicator

### 1.2.5 Transmitter Antenna System

The CVOR station antenna system consists of either a single tall cylindrical Slot Antenna assembly ([Figure 1-8](#)) or a Four-Loop Antenna System ([Figure 1-9](#)) that is mounted in the center of a standard 30 foot diameter counterpoise.

The Slot Antenna contains all impedance matching baluns, antenna tuning components and bridge networks within the antenna assembly.


The Four-Loop Antenna system has the impedance matching baluns and antenna tuning components located on the antenna system while the bridge network is located in the Interface Enclosure ([Figure 1-5](#)) within the CVOR shelter.

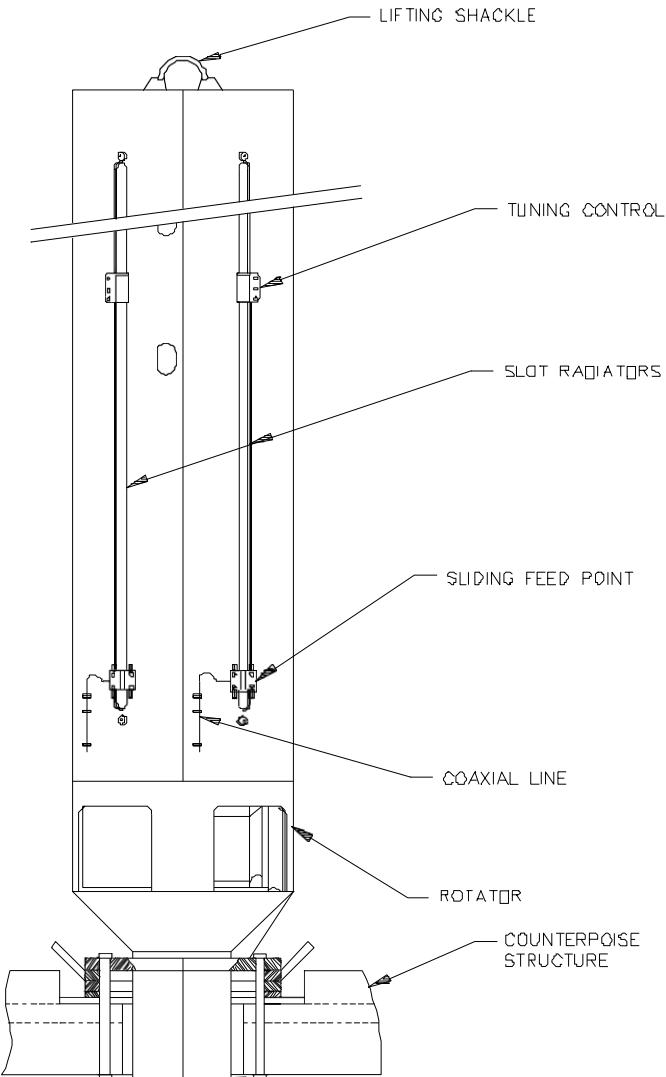

1150-578

**Figure 1-8. Cylindrical Slot Antenna**

**Model 1150 CVOR**

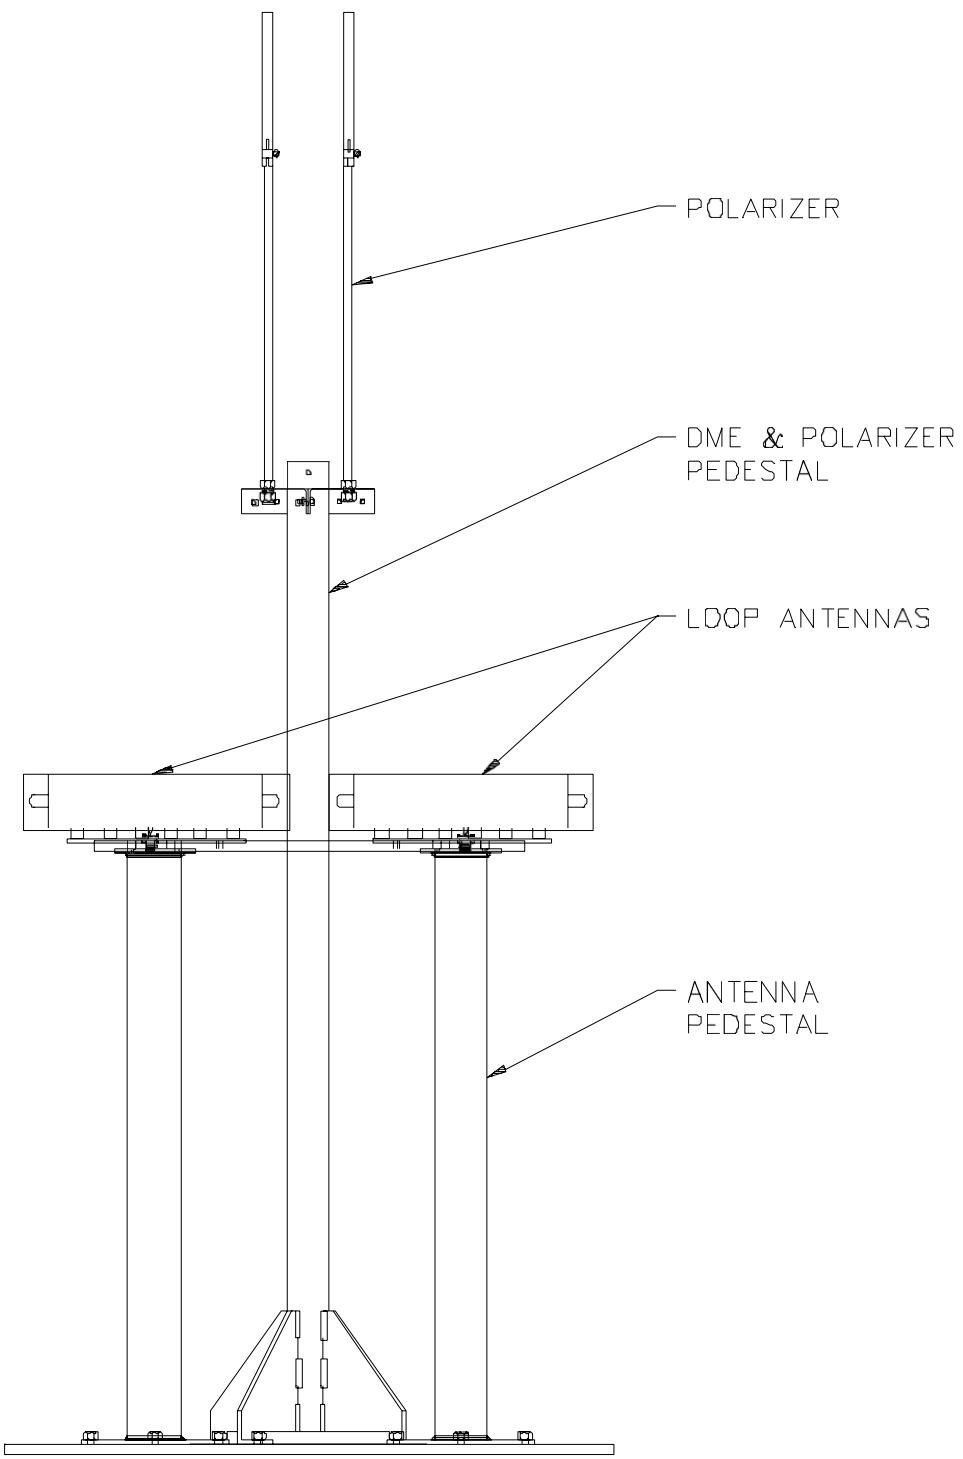


1150-579

**Figure 1-9. Four-Loop Antenna**

### 1.2.5.1 Balun.

Refer to Figure 1-10. The balun is a line section approximately 180 in length that hangs directly under the center of the antenna inside the pedestal and is used to develop a balanced signal output from a coaxial line input.

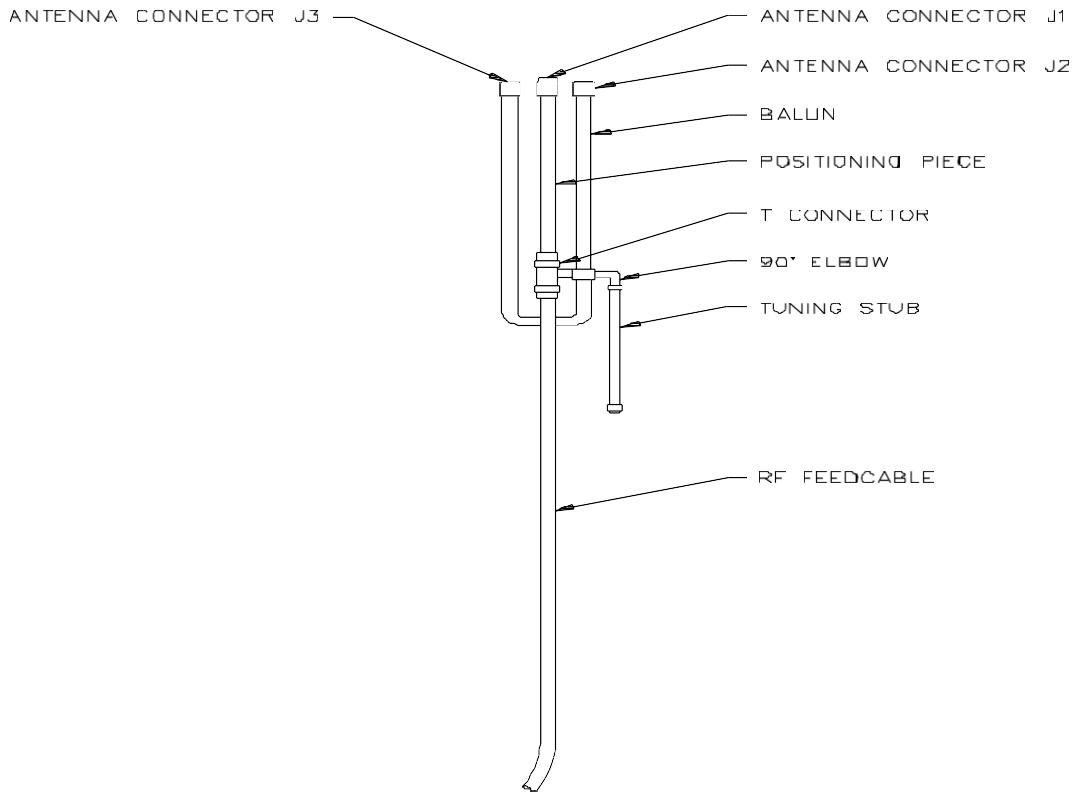

1150-176

**Figure 1-10. Balun, Tuning Stub, and Positioning Piece**

### 1.2.5.2 Tuning Stub

Refer to Figure 1-10. The tuning stub is a line section made out of RG-214 cable with a connector on one end and open at the other end. The basic function of the stub is to supply the needed capacitive reactance to make the point of the stub attachment pure resistive.

### **1.2.5.3 Positioning Piece**

Refer to [Figure 1-10](#). The positioning piece is a length of RG-214 cable with a connector at each end. The purpose of the positioning piece is to place the tuning stub at a point on the input line where the resistive component of the complex impedance is equal to the characteristic impedance of the line (50 ohms). The length of the positioning piece is factory selected for the frequency band of operation.

### **1.2.5.4 Pedestal**


Refer to [Figure 1-10](#). The pedestal is a an aluminum tube with mounting plates on each end. The pedestal supports the Alford loop antenna and provides a conduit for the feed cable, balun, positioning piece, and tuning stub.

### **1.2.5.5 Radome**

Refer to [Figure 1-10](#). The radome is a fiberglass enclosure that protects the radiating elements of the antenna from the weather and vermin infestation.

## **1.2.6 Battery Backup (Unit 3) (Optional)**

Refer to [Figure 1-11](#). The 48V DC battery backup unit consists of two battery boxes each containing two lead-acid maintenance-free batteries connected in series. Additional backup capacity can be achieved by adding additional groups.

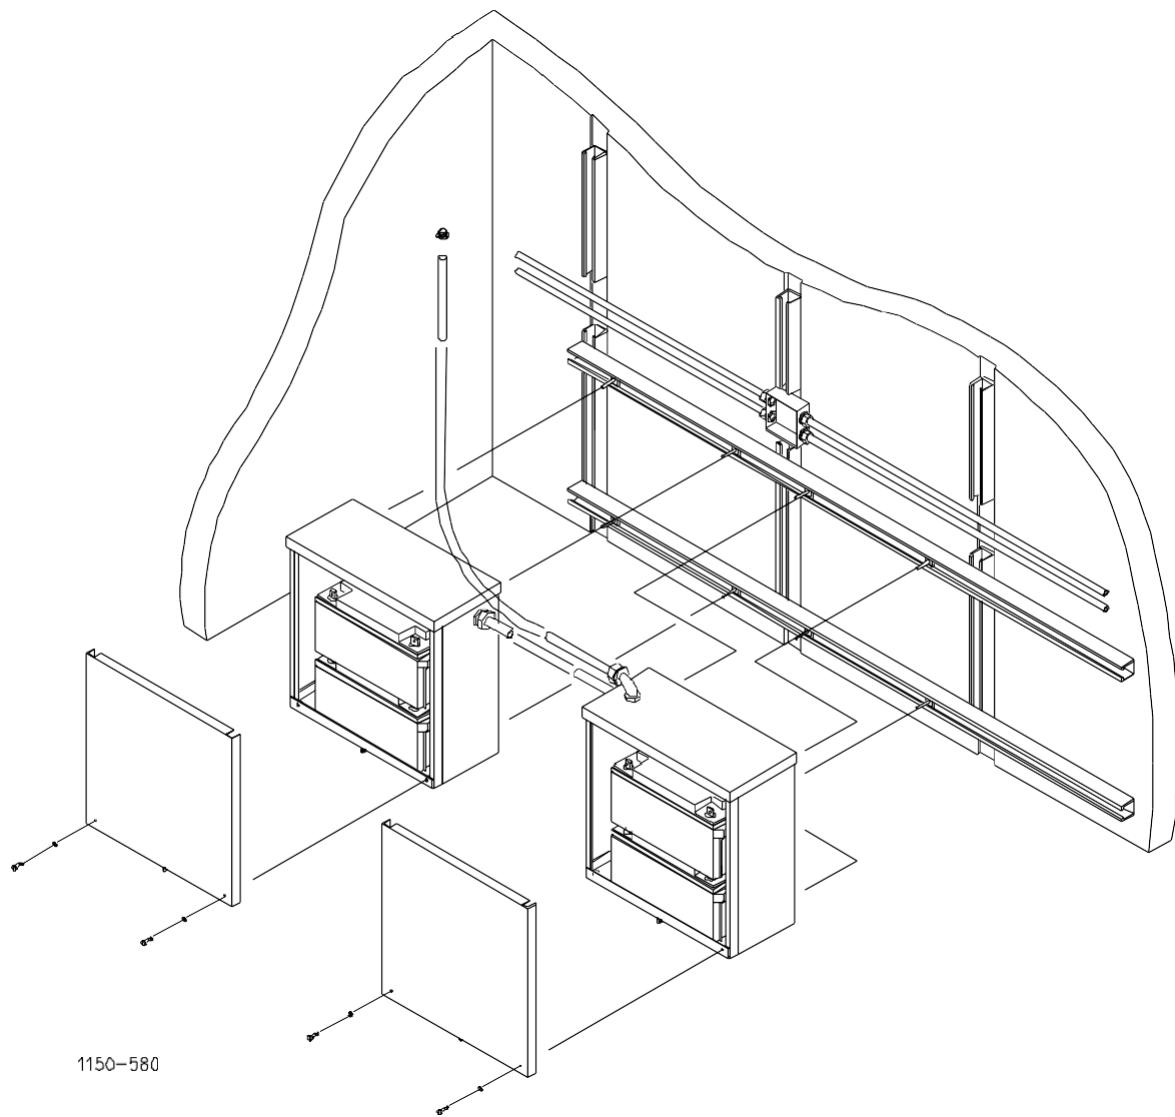


BATTERY INSTALLATION DIAGRAM

**Figure 1-11. Battery Backup Assembly**

### 1.2.7 Counterpoise (Optional)

Refer to [Figure 1-12](#). This is a circular metallic support structure upon which the transmitting antenna system is installed. The counterpoise is 30 feet in diameter, 8 to 12 feet above ground level. It is manufactured of galvanized steel and is assembled by bolting segments together.

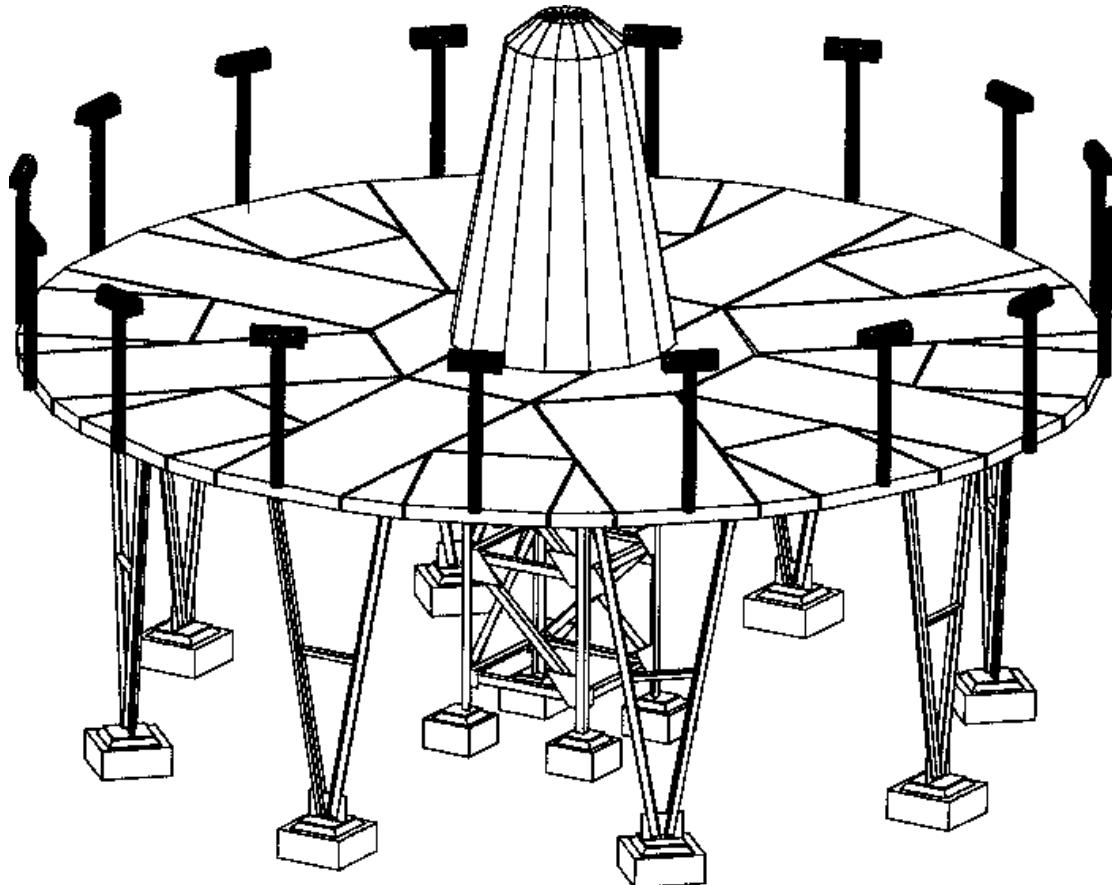

1150-680

**Figure 1-12. Counterpoise**

### 1.2.8 Equipment Shelter (Optional)

The CVOR transmitter and Interface Enclosure Assembly are normally installed in an environmentally controlled (heating, cooling, ventilation) portable equipment shelter located below the counterpoise and CVOR antennas. Various configurations of the shelter are supplied depending on the installation and customer requirements.

## 1.3 EQUIPMENT SPECIFICATION DATA

Equipment specifications are listed in Table 1-1.

### 1.3.1 Transmitter and Antenna System

#### 1.3.1.1 Transmitter

**Table 1-1. CVOR Equipment Specifications (Transmitter)**

<b>Parameter</b>	<b>Specification</b>
Input Power Requirements	115/230 Vac $\pm 15\%$ , 47 to 400 Hz, single-phase, or 48 VDC.  Four 12 volt, sealed, lead-acid batteries (65 amp/hour) in series will provide approximately 3 hours of battery operation.
	Power consumption is 1200 W with one transmitter on and batteries on trickle charge. With two transmitters on and maximum battery charging current, power used is 3000 Watts max.
Carrier Frequency Range:	108 to 118 MHZ with 50 kHz channel spacing.
Frequency Control:	Synthesizer
Carrier Frequency Tolerance:	$\pm 0.0005\%$ (5 PPM)
Carrier Output Power:	Transmitter output power adjustable from 50 to 100 Watts in 1 Watt increments (17 to 20 dB)
Effective Radiated Power:	23 dBW minimum
Carrier Level Shift:	less than 3% for modulation depth up to 80%
Duty Cycle:	Continuous
Spurious Outputs:	Greater than 77 dB below the carrier at 30% modulation
Harmonic Radiation:	Meets or exceeds U.S. FCC requirements. Harmonics of 9960 Hz meet or exceed:  Second harmonic 30 dB lower than fundamental  Third harmonic 50 dB lower than fundamental

**Table 1-1. CVOR Equipment Specifications (Transmitter)**

<b>Parameter</b>	<b>Specification</b>
	Fourth and higher harmonics 60 dB lower than fundamental
Hum and Noise:	With voice, VOR reference and identification inputs, hum and noise on the carrier are more than 30 dB below the audio level equivalent of 30% modulation.
Maximum Range:	Line-of-sight, 175 nautical miles at 37,500 feet above the facility.
Accuracy:	$\pm 2^\circ$ at a distance of three wavelengths when site meets the requirements of ICAO Annex 10.
Variable Phase Signal	(30 Hz AM)
Frequency:	30 Hz $\pm 0.01\%$
Modulation depth:	28 to 32% digitally controlled
Reference Phase Signal	(9960 Hz AM)
Frequency:	9960 Hz $\pm 0.01\%$
Modulation depth:	28 to 32%, digitally controlled
Sub-Carrier Signal	(30 Hz FM)
Center frequency:	30 Hz $\pm 0.01\%$
Deviation ratio:	16 $\pm 1$
Identification Signal	
Keyer type:	Solid State
Frequency:	1020 Hz $\pm 10$ Hz
Modulation depth:	5 to 20%, adjustable
Harmonic distortion:	less than 1.5%
Code:	2,3,4 letters in Morse Code
Rate:	8 words per minute
Repetition:	4 times/30 seconds; 3 times with co-located DME
Voice	
Frequency:	300 to 3000 Hz
Modulation depth:	up to 30%, adjustable
Harmonic distortion:	less than 2%
Input level:	-20 dBm to 9 dBm

### 1.3.1.2 Antenna System

**Table 1-2. CVOR Equipment Specifications (Antenna System)**

<b>Parameter</b>	<b>Specification</b>
Type:	Four Alford loop array with associated pedestal and fiberglass radome
Frequency Range:	108 to 118 MHZ, field-tunable
Polarization:	Horizontal
Antenna System Bearing Error:	less than 1.0°
DME Co-location:	Permits coaxial mounting of DME antenna above carrier
Weather Protection	Fiberglass radome
Type:	Two quadrature related double sideband suppressed carrier outputs
Sideband Power Level:	1 W average (at 100 W carrier output) sideband signal into an antenna cable having a VSWR of 1.10:1 as measured at the electronics cabinet output
Carrier Suppression:	More than 34 dB below the sideband power level.

**1.3.1.3 Field Monitor****1.3.1.4 Monitor****Table 1-3. CVOR Equipment Specifications (Monitor)**

<b>Parameter</b>	<b>Specification</b>
Configuration	"And", "or" user selectable
Azimuth Measurement Resolution:	$\pm 0.01^\circ$
Azimuth Measurement Range:	0 to $360^\circ$
Azimuth Measurement Accuracy:	$\pm 0.2^\circ$
Azimuth Readout Indication:	Digital, using PMDT
Phase Shift Control:	Calibrated against test generator
Monitoring of VOR signal:	at any azimuth Alarm Limits
Monitor Limits	
Bearing:	any radial, $\pm 9.9^\circ$
30Hz AM amplitude:	adjustable, 0-50°
30Hz FM amplitude:	adjustable, 12-20 (ratio)
9960 Hz subcarrier amplitude:	adjustable, 0-50%
Level Alarm:	Adjustable, 0-6 dB of nominal
Identification:	lack of ident, continuous, or level drop of 50%
Stability of Alarms	
Phase shift:	better than $\pm 0.3^\circ$
Amplitude:	better than $\pm 0.3\%$
Alarm Time Delay:	Adjustable, 4-99 seconds
Monitor Startup Time Delay:	Adjustable, 4-99 seconds

### 1.3.1.5 Mechanical and Electrical

**Table 1-4. CVOR Equipment Specifications (Mechanical and Electrical)**

<b>Parameter</b>	<b>Specification</b>
Size of Cabinet:	48.26cm w x 38.1cm d x 104.8cm h (19" w x 15" d x 41.25" h)
Weight of Cabinet:	87.5kg (193 lbs)
Primary Power:	115/230 V AC +/-15%, 47 to 400 Hz, single phase
Standby Power:	Built-in (dual) Battery Charger/Power Supply, used in conjunction with 4 lead-acid 12V batteries, 65 Amp-Hour provides approximately 3 hours operation; double battery set provides approximately 6 hours operation.
Power Consumption:	1200 Watts (1 transmitter and trickle charging batteries); 3000 Watts (2 transmitters and maximum battery charging)
Duty Cycle:	Continuous

### 1.3.2 Remote Maintenance Monitor and Control System

#### 1.3.2.1 Design Features

A Remote Maintenance Monitoring and Control feature is included with the 1150. This provides all monitored data and system control via an internal circuit card assembly modem and a dial-up telephone line to a primary remote computer using the PMDT software. The modem connects at 9600 baud and Hayes compatible. The system may be dialed at any time from the primary remote terminal for maintenance or control operations. In addition, multiple remote terminals may be used at any time for calling the facility for maintenance or control operations. An optional local printer at each of the facilities provides a permanent record of all station activity, either local or remote.

### **1.3.2.2 Specifications:**

I.	Modem:	Hayes compatible
	Telephone Line:	Standard Dial-Up line or RF data link
II	Remote Display/Control Terminal	
	Type	IBM PC compatible computer with hard drive, printer and PMDT communication software
	Display Type	Color
	Mounting	Table mounting

The PMDT and peripherals operate on 120 or 220 VAC, 60 or 50 Hz. Major control functions as well as verification and adjustment of proper transmitting parameters are available via an RS-232 communications port and a PMDT. The system is password controlled such that adjustments are not possible without entry of the proper security codes.

### **1.3.2.3 Remote Terminal Specifications:**

Modem:	Hayes compatible
Telephone Line:	Standard Dial-Up line or RF data link
Computer:	Windows operating system with PMDT software installed
Printer:	Standard "Parallel" or USB

### **1.3.3 Remote Receiver Monitoring**

#### **1.3.3.1 Design Features**

The optional 1150 remote receiver monitoring system consists of a receiver unit suitable for installation either in a standard 13.33cm (5.25") rack panel space or on a table top, VOR yagi antenna and all necessary interconnecting cables. The receiver is typically installed in a control tower cab or equipment room or other convenient location on the airport and provides on/off status of the 1150 without the use of wire lines to the facility. The receiver is based on a TSO'd aircraft VOR receiver unit for high reliability and is tunable to any of the standard VOR frequencies.

#### **1.3.3.2 Controls and Indicators**

<b><u>Controls</u></b>	<b><u>Indicators</u></b>
LAMP TEST SWITCH	VOR NORMAL
AUDIBLE ALARM BYPASS SWITCH	ALARM
SPEAKER VOLUME CONTROL	POWER ON
POWER ON/OFF SWITCH	AUDIBLE ALARM
	TUNED FREQUENCY

#### **1.3.3.3 Receiver Specifications**

Frequency Range	108 to 117.95 Hz
Sensitivity:	2.0 $\mu$ V (hard) typical 1.0 $\mu$ V (hard)
Antenna Type:	Yagi
Input Power:	120/240 V AC +-15%, 47-63 Hz 12 VDC Input for external DC backup (Front panel switch selectable)

### **1.3.4 Environmental**

The components of the 1150 are designed to meet the following environmental conditions:

#### **1.3.4.1 Operating Temperature**

- a. Indoor Equipment: -10° to +55°
- b. Outdoor Equipment: -50° C to +70°

#### **1.3.4.2 Relative Humidity**

- a. Indoor Equipment: 95% (non-condensing) at +50° C.
- b. Outdoor Equipment: 100% at +70° C

#### **1.3.4.3 Wind**

More than 100 mph (85 knots) with shelter and counterpoise on concrete foundation.

#### **1.3.4.4 Ice and Snow**

5 cm (2 in.) Ice coating causes negligible course error.

#### **1.3.4.5 Altitude:**

0 to 4500 m (0 to 15,000 ft.)

## **1.4 EQUIPMENT AND ACCESSORIES SUPPLIED**

[Table 1-5](#) is a list of all major equipment and accessories supplied.

**Table 1-5. Equipment and Accessories Supplied**

<b>Quantity</b>	<b>Nomenclature</b>	<b>Unit Number</b>	<b>Dimensions (in inches)</b>	<b>Weight</b>
1	Electronics Cabinet	1	19w x 15d x 41.25h	193 lbs
4	Transmitting Antennas	E1 thru E4	20.25w x 20.25d x 5.5h each	13 lbs
1	Field Monitor Antenna	4	Prior to assembly: 5.5w x 86d x 6.5h	20 lbs
1	Portable Terminal (PMDT) Consisting of: IBM Compatible laptop computer PMDT Software	5	13w x 13.25d x 3h	10 lbs

## **1.5 EQUIPMENT REQUIRED BUT NOT SUPPLIED**

Table 1-7 is a list of all equipment that is not supplied but is required to make the equipment operational.

**Table 1-6. Equipment Required but Not Supplied**

<b><u>Quantity</u></b>	<b><u>Nomenclature</u></b>	<b><u>Part No.</u></b>
1	Shelter, 8ft x 12ft	890123-4110
	Equipment Cabinet Mounting Kit	470190-0001
1	Counterpoise, 30 ft	470537-0001

## **1.6 OPTIONAL EQUIPMENT**

Table 1-7 is a list of optional equipment that can expand the capabilities of the VOR system or aid a technician in maintenance and troubleshooting.

Equivalent test equipment can be substituted for that recommended.

**Table 1-7. Optional Equipment**

<b><u>Quantity</u></b>	<b><u>Nomenclature</u></b>	<b><u>Part No.</u></b>
1	Battery Backup (Unit 3)	470108-0001
1	Printer (Unit 6)	950311-0003
1	950550-0001 (120 VAC) 950550-0002 (240 VAC)	
1	VOR Control (for Model 1138 RSCU)	470196-0001
1	VOR-DME Monitor	001159-0101(120 VAC) 001159-0102(240 VAC)
1	Oscilloscope Oscilloscope; 100 MHZ Dual Trace, Delayed Sweep	
1	Frequency Counter	950260-0000
1	RF Wattmeter	950258-0000, Bird Model 43
1	5-W Wattmeter Element	950268-0000, Bird 5B
1	100-W Wattmeter Element	950552-0405, Bird 100C
1	250-W Wattmeter Element	950474-0001, Bird 250C
1	RF Sampler Element	950262-0000, Bird 4274-025
1	Wattmeter Body Connector Type N-Male	950265-0000 Bird Model 4240-063
1	Digital Multimeter 3 ½ Digit	950257-0000
1	Torque Wrench (For SMA RF Connectors)	399003-0000
1	Adapter, BNC Female to Phone	180218-0000
2	Dummy Load, 5-Watt, Type N-Male	950270-0000, Bird 80M

## 2 TECHNICAL DESCRIPTION

### 2.1 INTRODUCTION

The Model 1150 CVOR system is a dual-channel transmitter system, with dual monitoring facilities. It is designed for terminal and en route navaid operation. Aurally, the VOR is identified by a specifically assigned two to four letter morse code identity and may also include voice and automatic terminal information service (ATIS) information. The CVOR can be collocated with DME to provide distance information in addition to bearing data.


The CVOR concept is based on the  $360^\circ$  radials which originate from a transmitting station and on the airborne equipment which resolves the particular radial data from the station. The resolved radial, called line-of-position (LOP) is the displacement angle between magnetic north and the aircraft, as measured from the CVOR antenna. Therefore, regardless of its heading, an aircraft which is on the  $0^\circ$  radial is north of the CVOR station. The magnetic course to the station is the reciprocal of the radial. In addition, to/from orientation data, relative to the CVOR station, is also resolved by the airborne equipment.

### 2.2 OPERATING PRINCIPLES

Operation of the CVOR is based on the phase difference between two 30 Hz signals modulated on the carrier, called the reference phase and the variable phase ([Figure 2-1](#))

The reference phase signal is obtained by amplitude modulating the carrier with a 9960 Hz sinewave signal that is frequency modulated by a 30 Hz audio tone that is referred to as the FM subcarrier. This amplitude modulated FM subcarrier signal is radiated omnidirectionally in the horizontal plane from all four loops forming the carrier antenna. The radiation pattern is a circle, and produces in the aircraft receiver a 30 Hz signal with a phase independent of azimuth ([Figure 2-2](#)).

## Model 1150 CVOR

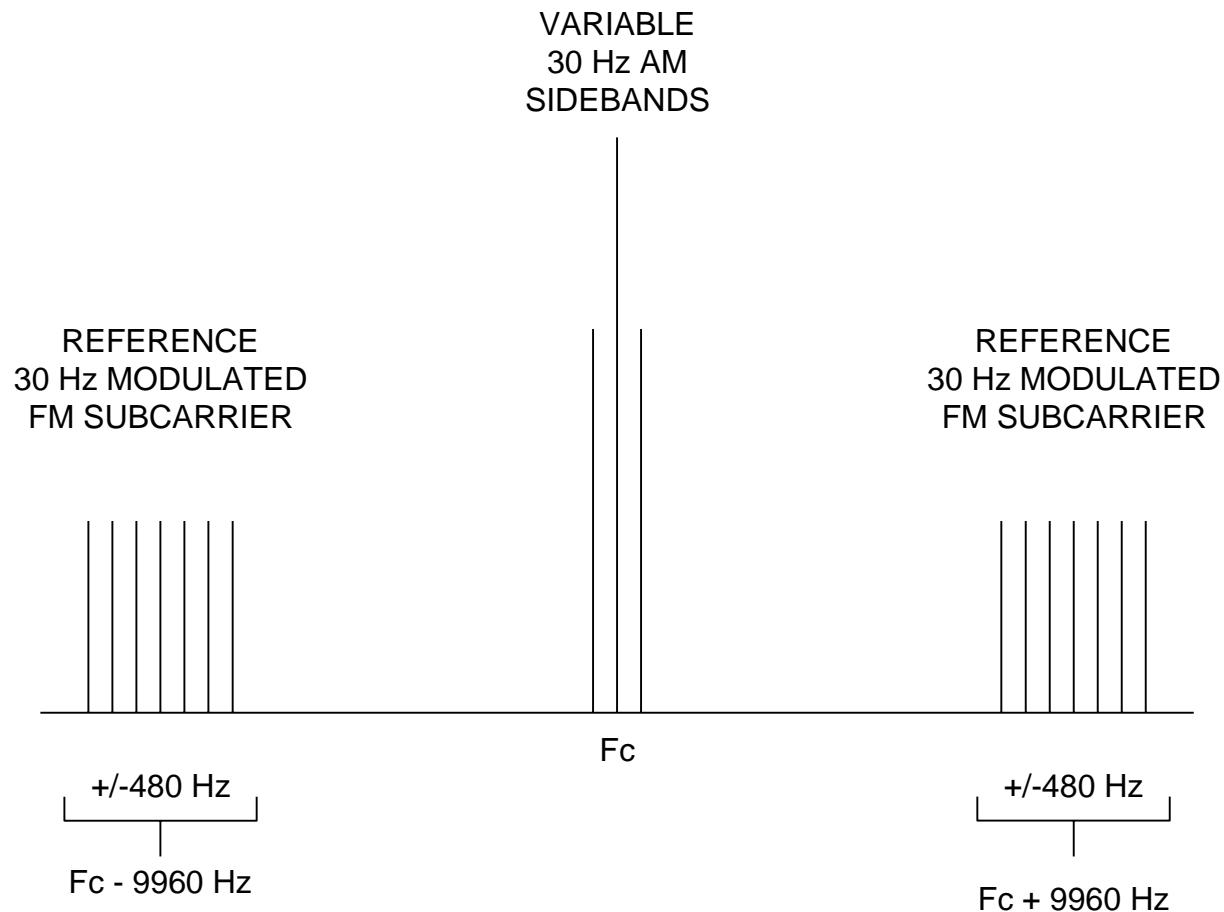


**Figure 2-1. RF Spectrum of a Conventional VOR**

The variable phase signal is obtained by radiating two 30 Hz audio phase shifted, amplitude modulated, double sideband suppressed carrier radio frequency signals which is referred to as the Sideband-Only (SBO) signals. This type of amplitude modulation of the carrier is often referred to as space modulation, since it is obtained by adding in space the omnidirectionally radiated carrier and the two separately radiated SBO signals emanating from pairs of loop antennas. The SBO signals are displaced 30 Hz above and below the carrier respectively and, when added in correct phase to the carrier, will produce a resultant signal which is amplitude modulated at 30 Hz.

The subcarrier is frequency modulated at a 30 Hz rate. The SBO signals are uniquely created to produce two sideband signals that have an audio phase difference of 90° between them.


In the aircraft receiver (Figure 2-3), a 30 Hz signal is extracted from the 9960 Hz FM subcarrier. This is the 30 Hz reference signal. The separately radiated sidebands combine with the carrier to produce a composite 30 Hz variable signal. The phase of this second 30 Hz signal varies linearly with the change of the azimuth bearing of the receiving point; for each degree of azimuth change, the phase of the 30 Hz variable phase signal changes by one degree.

The aircraft receiver determines the phase difference between the two 30 Hz signals and thus its bearing in degrees (magnetic), relative to the station, as the number of degrees by which the 30 Hz AM signal leads the 30 Hz FM signal.

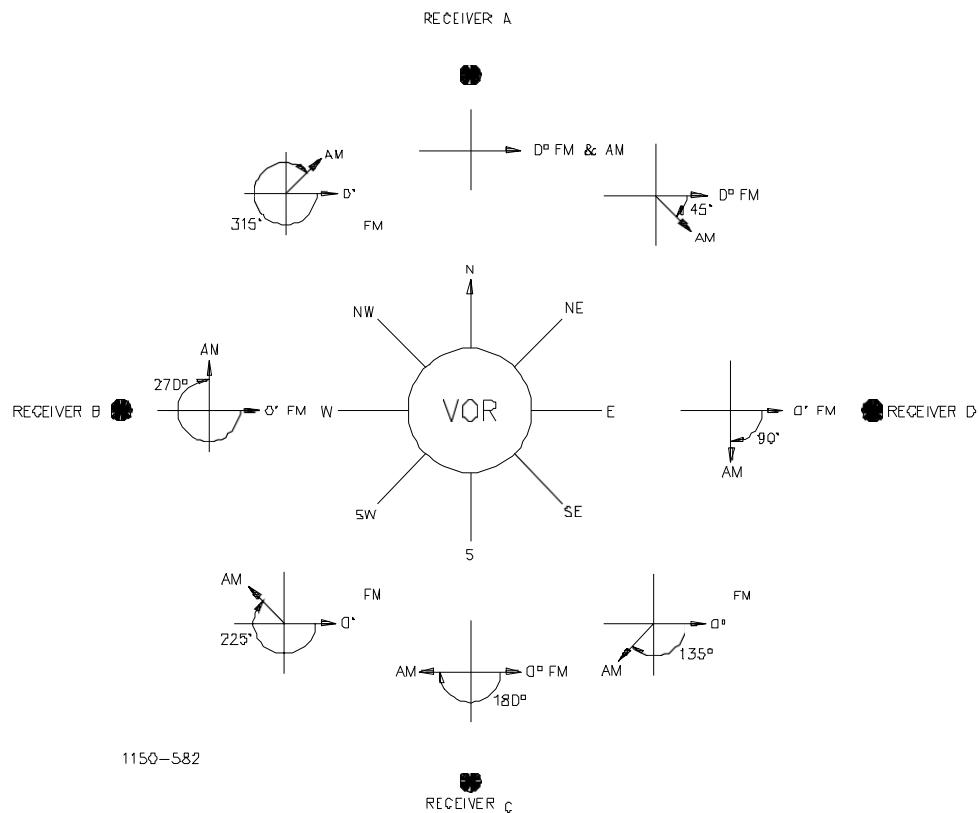

**Figure 2-2. Phase Relationship of CVOR Course Forming Signals**

## Model 1150 CVOR

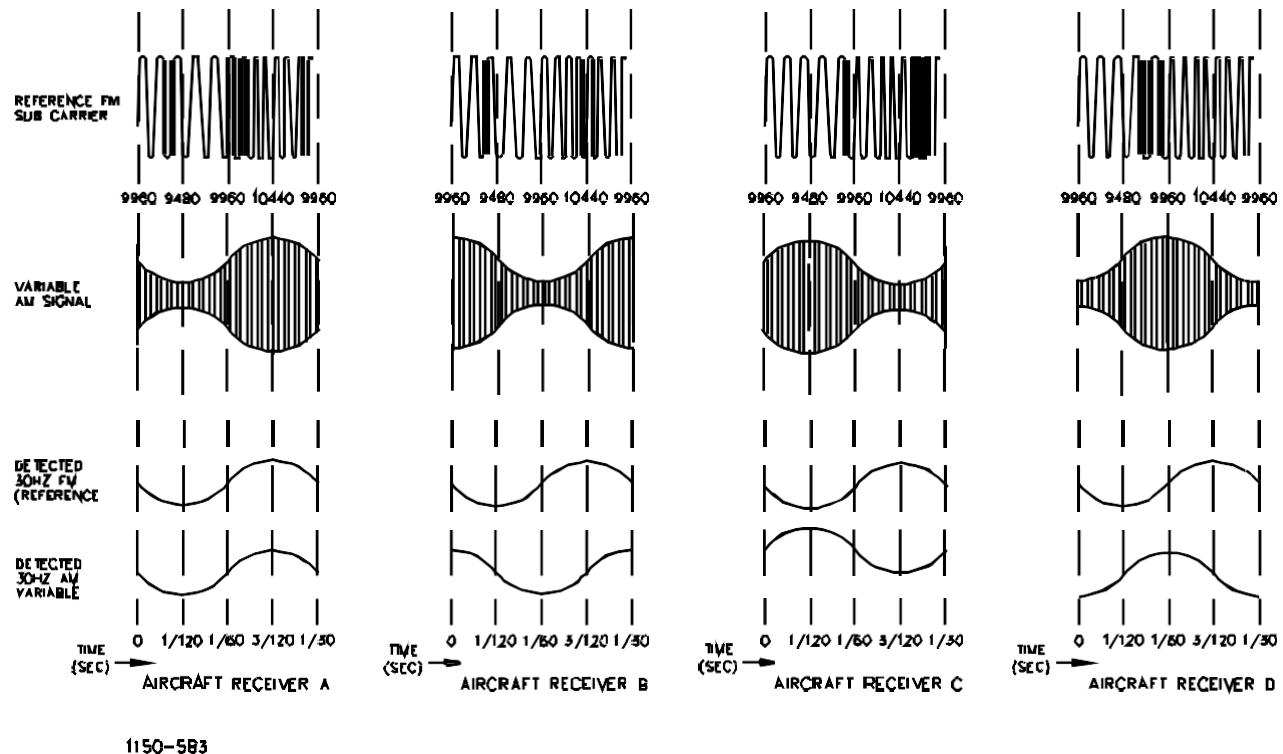

**Figure 2-3. Received and Detected AM and FM Signals by Aircraft Receivers A, B, C and D**

## 2.3 THEORY OF OPERATION

The following paragraphs provide a technical description of the Model 1150 CVOR, its individual components and accessories. Refer to [Figure 2-4](#) for simplified block diagram, [Figure 11-2](#) (single version) and [Figure 11-3](#) (dual version) for a detailed interconnect of the CVOR system.

### 2.3.1 Simplified System Block Diagram

Refer to [Figure 2-4](#) and [Figure 11-1](#). The transmitter (main and standby) consists of a frequency synthesizer assembly, CSB power amplifier assembly, low pass filter, directional coupler, audio generator CCA, and sideband generator.

The frequency synthesizer assembly produces the on-channel carrier RF signal which drives the CSB power amplifier assembly. The sideband RF signal drives the sideband generator assembly.

The CSB power amplifier assembly amplifies and modulates the carrier RF signal to the operational output level. Three versions of this assembly were built. Version 1, the 030363-0001 contains five subassemblies and is no longer produced. Version 2, the 030363-0002 and version 3, the 030363-0003 contain four subassemblies and differ in the final output transistor source of manufacture. All subassemblies will be discussed in detail in [paragraph 2.3.2.3](#).

The low pass filter assembly consists of a four pole filter network which removes spurious harmonics from the RF carrier signal. The filter also samples a portion of the RF energy to be used as an error correction that is sent back (feedback) to the frequency generator assembly.


The bi-directional coupler obtains a sample of the forward and reflected RF carrier power. The sampled forward and reflected power is directed to the RF monitor assembly where the signal is used in the detection and analysis process circuitry.

The RF monitor assembly functions as an RF detector/amplifier and distributor of the detected RF signals. The assembly also contains the dummy load for the standby transmitter carrier RF signal.

The audio generator CCA generates and processes all of the modulation signals transmitted by a CVOR transmitter and generates the power level and phase control signals needed to operate the transmitter. It is also responsible for monitoring the operational status of the transmitter.

The CVOR system uses a sideband generator assembly for each transmitter. The sideband generator contains two sideband amplifier CCAs and two sideband controller CCAs.

The sideband generator amplifies the sideband RF signal from the synthesizer to the operational output power levels. This assembly also produces amplitude and phase error signals to control distortion within the Side band RF signal.

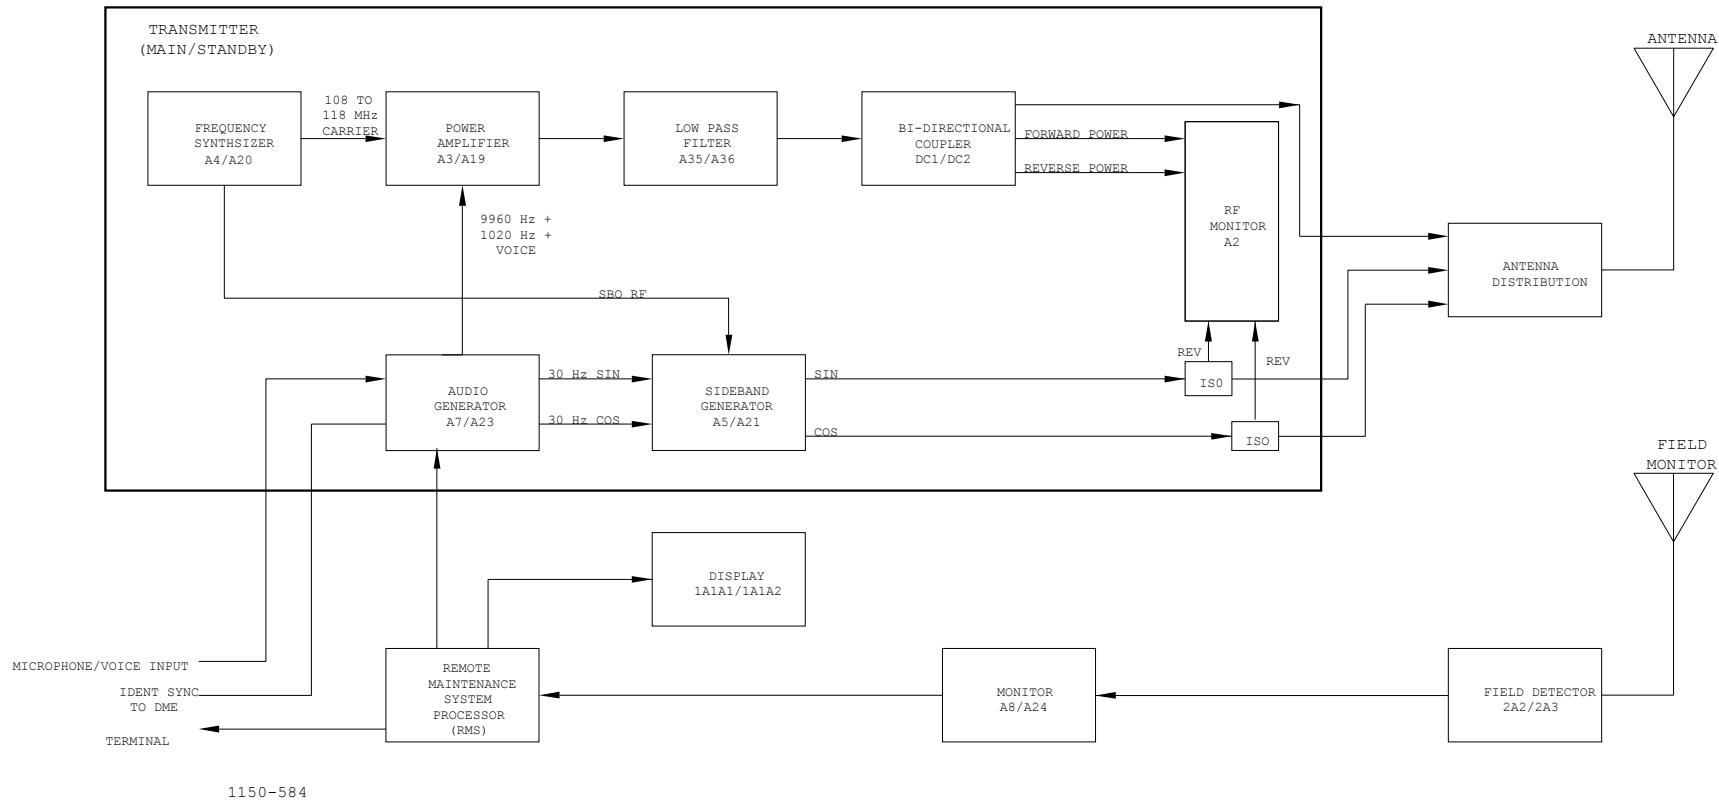

**Figure 2-4. Simplified CVOR System Block Diagram**

This document contains proprietary information and such information may not be disclosed to others for any purposes

without written permission from Alenia Marconi Systems (ASI) Inc.

The Remote Maintenance System Processor (RMS) handles all command, control, communications and information for the CVOR system.

Two field detectors detect the radiated RF signal obtained from the field monitor antenna. The detectors send their signals to the VOR monitors for processing and analysis.

The VOR monitor CCA works independently from the transmitter and from each other; however, the alarm control features of both monitors can be organized to function in a logical AND or logical OR arrangement.

### **2.3.1.1 Electronics Cabinet (Unit 1)**

The VOR electronics cabinet assembly contains all of the electronic assemblies that generate, control, and monitor the CVOR modulated radio frequencies.

#### **2.3.1.1.1 Cabinet Insert (A18)**

The cabinet insert is the cage assembly that holds the transmitter and RMS modules. It provides the means to physically secure the modules within the electronics cabinet and provides for the interconnection of the modules to the main wiring harness. Attached, but independent from it, are two voltage regulators (for the sideband amplifiers), two low pass filters (for the carrier output of each CSB power amplifier assembly), the RMS cage, and the changeover relay panel.

There are three coaxial latching relays mounted to the cabinet insert directly behind the RF monitor assembly. The relays are latched by applying a ground pulse to either the latch or release coil. The relays are powered from a common 28 volt source. The relays switch the six RF inputs (main and standby) between the antenna system and the dummy loads. They also provide DC logic signals which are used by the RMS micro controller to sense which transmitter system is connected to the antenna system. The DC logic signal is also supplied to the audio generator to enable ident to be applied from the on-air audio generator CCA.

### **2.3.2 Detailed System Block Diagram**

Refer to [Figure 2-4](#) and [Figure 11-1](#). The CVOR system block diagram depicts the main components (both optional and required) of a functional station and identifies primary signal, control and voltage paths within the station. Because the standby transmitter is an exact duplicate of the main transmitter, only components of the main transmitter are shown.

The heart of the CVOR system consists of an electronics cabinet assembly. External to these units are the PMDT, transmitting antennas, field monitor antenna, and optional assemblies (printer, and backup batteries).

The electronics cabinet is next broken down into its main components which are a status panel assembly, RMS, main and standby transmitters, VOR monitor CCAs, field detectors, RF monitor, changeover relays, battery charger power subsystems, and sideband RF isolators.

## **Model 1150 CVOR**

The status panel contains the display boards that provide a visual indication of the status of the VOR monitors.

The RMS group handles all command, control, communications, and information for the station.

The main transmitter consists of a frequency synthesizer assembly, CSB power amplifier assembly, low pass filter, directional coupler, audio generator CCA, and sideband generator. Supplying the voltage for the main transmitter is a stand-alone battery charger power subsystem, and a Low Voltage Power Supply (LVPS).

The frequency synthesizer assembly is further subdivided into the two CCAs that comprise it. This assembly produces the three interrelated RF signals used by the CVOR. The on-channel carrier RF signal drives the CSB power amplifier assembly. The sideband RF signal drives the sideband generator assembly.

The audio generator CCA generates the carrier modulation signals, monitors and controls power levels, and directs the RF phase control signals for the CVOR transmitter.

Each sideband generator is further subdivided to depict the functional arrangement of the circuit card assemblies within the assembly. Functionally, each sideband generator has two sideband amplifiers with each sideband amplifier consisting of a sideband amplifier CCA and a sideband controller CCA. Only one amplifier in each generator is shown on the block diagram for clarity. Each sideband amplifier is designed to amplify and modulate one of the two individual sideband signals used by the CVOR system.

The current CSB power amplifier assembly is further subdivided to depict the four CCAs and 6 major transistors that comprise it. The primary RF and control signals between those circuit cards and components are shown on the block diagram. The CSB power amplifier assembly amplifies the carrier RF signal to the operational power level of the station and modulates it with the specified audio signals. A separate low pass filter assembly eliminates spurious harmonics from the RF signal. The filter samples a portion of the RF energy to be used as an error correction feedback signal that is sent to the frequency generator assembly. A second sample provides a sample of the RF at a front panel test point on the RF monitor assembly. A directional coupler in the carrier feed-line allows sampling of the forward and reflected RF energy.

The RF monitor processes the main and standby RF signals for use by the audio generator and VOR monitor CCAs. Early versions of the RF monitor contained all the dummy loads, for use by the standby transmitter. Current versions include only the carrier signal load. The standby transmitter sideband signals are terminated in dummy loads at the transfer relay output.


Two sideband RF isolators are used to obtain a sample of reflected RF energy from each sideband RF cable feeding the interface enclosure transmitting antennas.

Two field detectors detect the radiated RF signal obtained from the field monitor antenna. The detectors send their signals to the VOR monitors for processing and analysis. In early versions of the CVOR, these detectors were located in unit 1. In the later versions, these detectors were located in unit 2.

Each VOR monitor CCA works independently from the main transmitter and from each other; however, the alarm control features of both monitors can be organized to function in a logical AND or logical OR arrangement.

### 2.3.2.1 Frequency Synthesizer (1A4, 1A20) Block Diagram Theory.

#### Functional Block Diagram

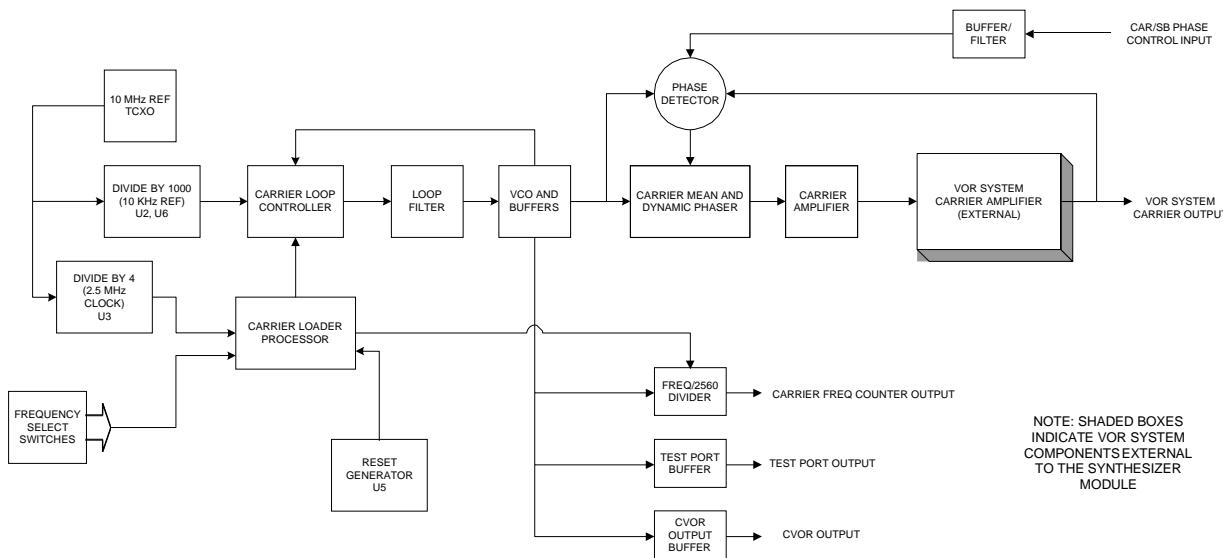

**Figure 2-5. CVOR Synthesizer Block Diagram**

Refer to Figure 2-5. The function of the frequency synthesizer assembly in the CVOR is to create the Carrier radio frequency radiated by the VOR transmitter. In addition to the PLL synthesized RF generator, there is another phase lock loop in the synthesizer. This loop is used to maintain the carrier phase relative to the reference RF signal, and correcting for amplitude modulation induced phase mod on the VOR carrier transmitter output signal. There are two boards (CCA's) in the frequency synthesizer, the 012100 synthesizer CCA, and the 012102 interconnect CCA. The majority of the circuitry is located on the 012100 synthesizer CCA; with only the test port buffer amplifier circuitry (described below) on the 012102 interconnect CCA.

There is a temperature compensated crystal oscillator, or TCXO, on the synthesizer CCA that generates a 10.000 MHz reference signal. This signal is divided by 4 to create a 2.5 MHz clock signal for the control microprocessors, and is divided by 1000 to create the precision 10 KHz synthesizer loop reference signal.

## Model 1150 CVOR

Refer to [Figure 2-6](#). The CVOR carrier frequency is generated by a PLL synthesizer, referenced to the precision 10 KHz signal. A voltage controlled oscillator, or VCO, generates the RF signal. This signal is buffered, and a portion of the signal fed back to the PLL controller, where it is divided by a programmable divider. The divided output is compared to the precision 10 KHz reference signal in the PLL controller's phase comparator. The phase comparator generates an error voltage signal that is filtered and applied to the voltage control input of the VCO, thus locking the VCO output frequency to the reference. VOR channel selection is accomplished by changing the divide ratio of the PLL controller's divider. This divide ratio is programmed into the PLL controller by the carrier control microprocessor. This microprocessor reads the channel select dip switches, calculates the proper information, and loads this information into the PLL controller IC. The output of this carrier synthesizer is split and routed to the carrier phaser, the carrier frequency counter divider, the test port buffer amplifier, and a buffer amplifier that is used to drive the CVOR sideband amplifiers.

The test port buffer amplifier is located on the 012102 Interconnect CCA, on the backside of the frequency synthesizer module. The output of this buffer is attenuated to provide the 10 mW typical carrier frequency output signal available on the front panel SMA connector. The attenuator also serves to provide a resistive load for the buffer when no external load is connected to the SMA connector. There is no other circuitry on the 012102 interconnect board, it simply serves to connect the module 25 pin D shell connector to the 30 pin header connector which mates with the 012100 synthesizer board, as well as provide the RF interconnections for the sideband sample feedback signals (only in the DVOR synthesizer assembly).

The output of the carrier phaser is amplified by the carrier buffer amplifier, and feeds the high power carrier amplifier module in the CVOR. In the process of amplitude modulation, the VOR carrier amplifier generates undesired phase modulation of the output signal. In addition, the transfer phase of the RF amplifier chain will drift due to temperature. The carrier phaser is used to counter both of these effects. Feedback from the VOR carrier output signal is routed back to the Frequency Synthesizer module. This feedback is representative of the final RF carrier output signal, and has both the 9960 Hz amplitude modulation, and the undesired phase shift information.

This carrier feedback signal is first passed through a limiter in the Frequency Synthesizer module to remove the 9960 Hz AM information. The output of the limiter is applied to a phase detector where it is compared to the direct output of the carrier PLL synthesizer. The output of this phase detector is a phase error signal, which is amplified and filtered to drive the carrier phaser. The carrier phaser is modulated to maintain the error voltage at zero volts, hence countering the undesired phase shift and phase modulation effects of the VOR carrier RF amplifier.

There is a DC offset input to the carrier phase error amplifier that has the effect of shifting the phase of the VOR carrier output signal with respect to the reference phase in the frequency synthesizer module. This allows for phase adjustment of the carrier to sideband output RF signals to optimize the signal in space characteristics of the VOR radiated signal.

The carrier frequency counter divider is also programmed by the carrier control microprocessor. It provides a fixed divide by 2560 CMOS compatible output for carrier frequency monitoring.


### 2.3.2.1.1 Frequency Synthesizer (1A4, 1A20) Detailed Circuit Theory.

#### Frequency Reference Circuitry

U1 is a temperature compensated crystal oscillator, or TCXO, which provides a precision 10.000 MHz CMOS compatible signal at it's output. There is a trim adjustment on U1 used to make fine adjustments to output frequency, and to compensate for crystal aging.

The output of U1 routes to U2a,  $\frac{1}{2}$  of a dual decade counter. This counter divides the input signal by 10, then routes it to U2b, the other half of this IC. Here it is divided by 10 again, creating a 100 KHz signal. This 100 KHz signal is applied to the input of U6a, another decade counter. This counter divides the 100 KHz input by 10, creating the 10 KHz precision reference used by the synthesized RF generator within the module.

The output of U1 is also applied to the input of U3a, a flip flop configured to divide the 10.000 MHz signal by 2. This resulting 5.000 MHz signal is applied to the input of U3b, which again divides by 2, resulting in a 2.50 MHz signal. This 2.50 MHz signal is used as a clock signal for the synthesizer loading microprocessor.

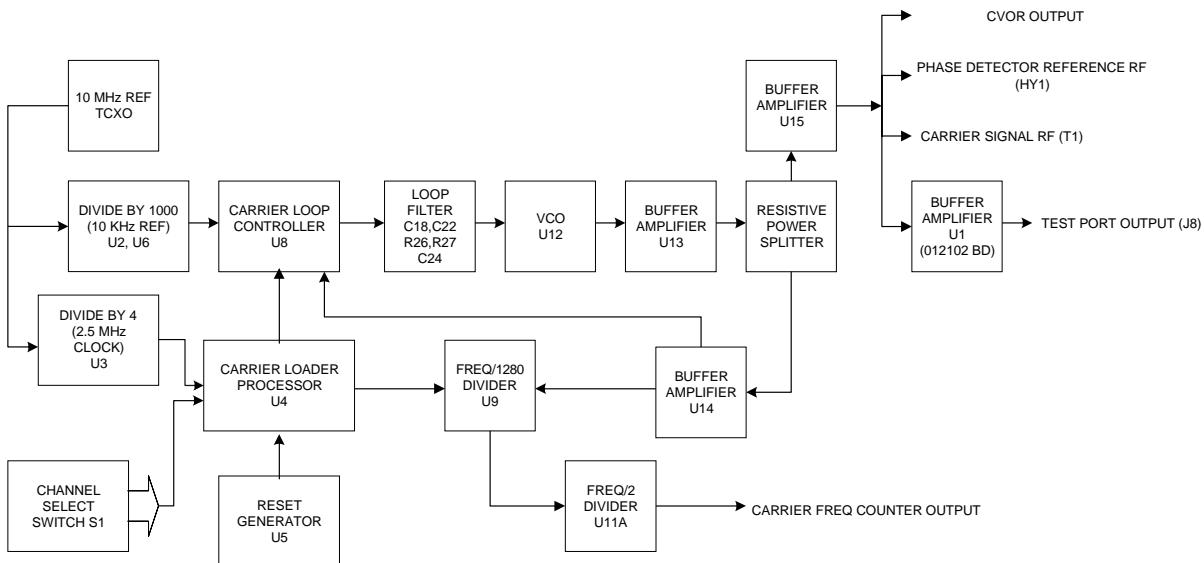

**Figure 2-6. Carrier RF Generation Loop**

#### Carrier PLL Synthesizer Circuitry

Refer to Figure 2-6, the carrier RF generation loop block diagram. The carrier radio frequency is generated by a phase lock loop synthesizer. The loop is comprised of a voltage controlled oscillator, or VCO, buffer amplifiers and power splitters, a loop controller IC, and a microprocessor.

## **Model 1150 CVOR**

Voltage regulator U10 provides a low-noise +12V supply to the VCO, U12. This regulator provides isolation from sources of power supply noise which would adversely affect the RF spectrum of the VCO output.

U12, the VCO is an oscillator that generates a RF signal, the frequency of which is proportional to a control voltage at pin 5, the tuning input. The output of this oscillator is applied to an attenuator made up of three resistors, R34, R35 and R37. This attenuator provides a broad band matched impedance to the output of the VCO, and also provides isolation to external noise influences. Buffer amplifier U13 provides gain to bring the signal back up to approximately +7 dBm, as well as providing additional reverse isolation to prevent signal degradation from noise.

The output of buffer U13 is applied to a resistive power splitter / attenuator combination made up of R40, R42 – R47. The output of R40 is amplified by U14, where it is again split and attenuated. The output of R230 is applied to U8, the synthesizer loop controller IC. The output from R47 is amplified by U15.

Voltage regulator U7 provides a +5 volt source for U8, the carrier loop controller IC. By using a separate +5V source, the sensitive charge pump output of U8 will not be affected by other VOR system +5V circuitry.

U8 provides a number of functions. It contains the programmable divider network used to set the operating frequency of the phase locked loop, the phase comparator, the charge pump output used to drive the loop low pass filter, lock detection circuitry, and a programmable divider on the loop reference frequency input. In this application, since the reference frequency is the same as the 10.00 KHz reference applied to the oscillator input of U8, the reference divider is programmed to pass the reference signal through undivided.

The variable frequency feedback signal from U14 is applied to the variable frequency input (Fin) of U8. This signal is divided in a programmable divider to match the loop reference frequency, or 10.00 KHz. For example, if the desired VOR channel is 113.000 MHz, the programmable divider will divide the incoming RF signal by 11,300. If the desired channel is 117.950 MHz, the programmable divider will divide this input signal by 11,795.

After the variable RF signal is divided by the programmable divider, it is applied to U8's internal phase comparator, where it is compared to the 10.00 KHz reference signal. If the variable RF signal phase slightly lags the 10.00 KHz reference signal, U8's charge pump output (CPO) is driven high, causing the voltage at the VCO control input to increase. This will increase the frequency of the VCO, until the phase difference between the variable signal and the reference signal is near zero. In the same manner, if the variable RF signal phase slightly leads the 10.00 KHz reference signal phase, the charge pump output is driven low, causing the voltage at the VCO control input to reduce, lowering the VCO output frequency, until the difference between the variable signal phase and the reference signal phase are near zero. This has the effect of locking the output frequency to the precision 10.00 KHz reference signal, multiplied in frequency by the number programmed into U8's input divider network.

When the variable phase and reference phase within the loop controller IC are locked together, U8 provides an output indicating that the phase locked loop synthesizer is in the locked state.

The information for programming the dividers within U8 is provided by the microprocessor U4. Microprocessor U4 reads the desired frequency information from the frequency select switch S1, calculates the required programmable divider settings, and creates the serial data stream, clock signals, and data latch signals used to program U8, the synthesizer loop controller IC.

Microprocessor U4 also examines the state of the lock indication output from U8 mentioned above. When U4 determines that the loop is indeed locked, it switches the lock detect output low, illuminating CR1 and providing a logic low output used to indicate carrier RF generation loop lock.

If microprocessor U4 senses that the carrier RF generation loop is unlocked, it switches the logic low output to a logic high indicating loop unlock, extinguishes CR1, and goes through the process to re-initialize the loop controller IC, U8.

RF signal is routed through the signal splitter / attenuator parts R31, R228, and R187 where it is applied to the carrier frequency divider U9. U9 is actually the same type part as U8, the carrier synthesizer loop controller IC. In this application, however, U9 is used simply as a frequency divider, dividing the RF signal by 1280. U9 is programmed by microprocessor U4 to operate as a fixed divide by 1280, with the output provided at pin 14, FO/LD. This output is a short duration pulse, occurring at 1/1280 of the programmed VOR channel frequency. This pulse is applied to flip flop U11a, where it is divided by two to create a square wave signal at the carrier frequency divided by 2560. This output is used elsewhere in the VOR system to monitor the frequency of the carrier synthesizer.

The output of amplifier U15 is split in a resistive power splitter / attenuator combination and is used in four separate functions. In the CVOR, the output at resistor R56 is connected to J2 via jumper JP1 for use in driving the CVOR sideband amplifiers. In the DVOR synthesizer, the output of R56 is terminated via jumper JP1 by resistor R58.

RF output is taken from R51, applied to amplifier U21, then routed through an attenuator (R97, R100, R101) where it is applied to phase detector HY1 as the reference RF phase for the carrier phase correction loop (not to be confused with the carrier RF generation loop).


RF output is taken from R50 and routed via jumper JP2 to the carrier phase shift network.

RF signal is routed through R57 and C41 to E3. E3 is a one pin connector that provides a RF feed through to the 012102 interconnect CCA.

**Note:**

*This paragraph applies to circuitry contained on the 012102 Interconnect CCA. Since this is the only active circuit contained on the 012102 board, the theory of operation has been placed here, rather than in a separate manual section. The RF signal from E3 is amplified by U1 (on the 012102 board), passes through an attenuator made up of R3, R4, and R5, then made available on the front panel of the synthesizer module via J8, Carrier Frequency Output.*

## Model 1150 CVOR

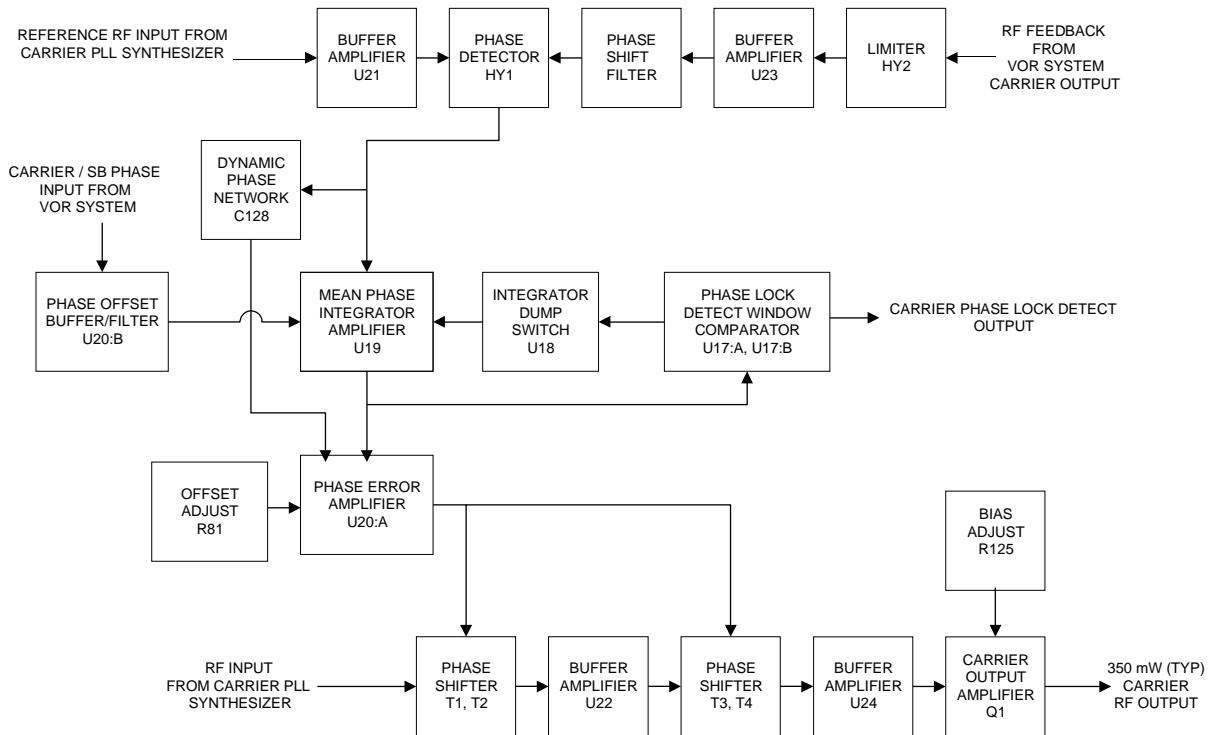

**Figure 2-7. Carrier Phase Control Loop**

### Carrier Phase Control Loop

Refer to Figure 2-7, Carrier Phase Control Loop Block Diagram. RF from the carrier frequency PLL synthesizer is applied to buffer amplifier U21, and then routed to the reference phase input of phase detector hybrid HY1.

The VOR system takes a sample of the carrier transmitter output from the system low pass filter assembly. This sample of the modulated carrier output signal is brought into the 030757 Synthesizer assembly via connector J3 on the back panel. The signal passes through limiter hybrid HY2, which serves to remove the 30 percent amplitude modulation, but leaving the phase distortion information intact. This limited signal then goes through buffer amplifier U23, a phase shift network consisting of C71, C72, C75, C77, C81, L16 and L17. This phase shift network provides approximately 180 degrees of RF phase shift to the signal. The signal is then applied to the variable phase input of phase detector HY1.

HY1 provides a DC output that is proportional to the phase difference between the reference input signal and the variable input signal. When the two signals are in quadrature (the normal operating condition), the output is zero volts. Output voltage increases with the variable phase input signal delayed with respect to the reference phase, and decreases with the variable phase input signal advanced with respect to the reference phase. Resistor R103 provides the proper terminating impedance for the hybrid phase detector output.

The output of the phase detector hybrid HY1 takes two paths. One is referred to as the "mean phase" correction path, the other the "dynamic phase" correction path.

The mean phase path is DC coupled, with a very low frequency bandwidth. This path serves to correct for any long-term phase drift with temperature, etc, within the carrier power amplifier assembly in the VOR system. The phase error voltage developed by phase detector HY1 is applied to the inverting input of integrator amplifier U19. This amplifier provides a very high gain to DC signals, with limited gain for AC components.

The output of integrator U19 is low pass filtered further by R78 and C54, then applied to the phase error amplifier U20A. The output of U20A controls the tuning voltage on the varactor diodes contained in the phase shifter network. This control voltage causes the phase shifter network to provide the proper phase shift to the synthesizer module carrier output signal to force the output of the phase detector hybrid HY1 to zero volts. This locks the DC component of the system carrier power amplifier output phase to the reference phase within the synthesizer module.

When the VOR system carrier power amplifier amplitude modulates the carrier output signal, it also causes inadvertent phase modulation. In the CVOR system, this appears as a 9960Hz phase modulation, with components at harmonics of 9960 Hz. This is referred to as the dynamic phase shift.

The output of phase detector HY1 is AC coupled through capacitor C128 and phase lead network C164 / R200 to the non-inverting input of phase error amplifier U20A. The high pass frequency response of this network is chosen to provide adequate gain to the 9960 Hz and above components of the phase error signal, but minimal low frequency (down to DC) gain to avoid interaction with the mean phase signal processing described above.

This AC coupled path is referred to as the dynamic phase correction path. The dynamic phase error signal is amplified by U20A, applied to the phase shift network, and provides a “counter modulation” effect to minimize the phase distortion in the VOR system carrier output signal.

Carrier frequency RF signal from the Carrier PLL Synthesizer is applied via JP2 to the input of the carrier phase shift network, or phaser.

For additional details on the carrier phase shift network (phaser), refer to sheet 2 of the 012100 schematic diagram, [Figure 11-11](#) RF from the carrier synthesizer loop is applied to pin 3 of transformer T1. Transformer T1 along with capacitors C59 and C61 function as a 4 port hybrid, or 90 degree power splitter. RF energy applied to pin 3 is split equally into two parts at pins 1 and 2, with 90 degrees of phase difference between pin 1 and pin 2. Pins 1 and 2 are terminated with series LC circuits consisting of L6/CR6 at pin 1, L8/CR7 at pin 2. Inductors L7 and L9 are RF chokes, providing high RF impedance with DC connections to ground for varactor diode control voltage reference. The capacitance of the varactor diodes is changed by varying the control voltage applied to the cathodes, with a RF ground provided by C60. With the purely reactive load presented to pins 1 and 2 by the two series LC networks (L6/CR6 and L8/CR7), the RF energy is reflected back into pins 1 and 2, with the phase of the reflected signal changed by the variable reactance on these pins.

The reflected signals from pins 1 and 2 are 180 degrees out of phase from each other at pin 3, the input port, and in phase at pin 4, the output port. The signals add together at the output port, and cancel at the input port. This has a net effect of a minimal loss broadband phase shift network, with the output signal shifted in phase by the varying reactance of the varactor diode / inductor networks.

## **Model 1150 CVOR**

The other three phase shifter networks function in a manner identical to the T1 circuit described above.

Attenuator networks between T1 and T2, T3 and T4 serve to provide consistent RF impedance matching as the varactor control voltage is changed. Amplifier U22 provides gain and isolation between the sections of the phase shift network.

The output of T4 is then routed to buffer amplifier U24. Amplifier U24 feeds signal to the transistor amplifier Q1. Output bias current, and amplifier gain, are adjusted by R125. Input and output impedance matching networks, along with the series RLC feedback (R129, C101, and printed circuit interconnect traces) provide broadband operation of Q1, with no frequency specific tuning required. There is sufficient gain compression in U24 and Q1 to minimize any changes in attenuation due to the small changes in loss of the phaser network with varying control voltage.


Resistor R81 is used to provide a DC offset in the output of U20A. This offset is adjusted so that the error voltage seen at the phase control loop integrator U19 output is a nominal zero volts, maximizing the useful control range of U19. This error voltage is available at a test point (TP3) on the front panel of the synthesizer module. R81 is adjusted to set the phase error voltage as measured at TP3 to a nominal zero volts, +/- 0.050 volts when the synthesizer module is installed in the VOR system cabinet.

Note that in some cases, due to the large available phase shift of the phaser network (>450 degrees) R81 can be adjusted to achieve zero volts at TP3 at two separate points. The actual phase loop control voltage (output of U20A) is measured at TP4 on the synthesizer front panel. R81 should be adjusted to provide zero volts error voltage at TP3 between 2 and 8 volts as seen at TP4. If a zero volt phase error is achieved below 2 volts or above 8 volts, re-adjust R81 to see if a lock condition can be found between these two points.

### **2.3.2.2 Audio Generator CCA (1A7, 1A23) Block Diagram Theory**

Refer to [Figure 2-8](#). The audio generator is responsible for developing and controlling the audio signals used in the CVOR. The on-board micro controller and memory circuitry control all functions within the assembly. Communications from the audio generator CCA to the CVOR system CPU is accomplished through the serial interface CCA.

Adjustment parameters from the transmitter screens are sent from the RMS to the Audio Generator at power-up and whenever a change to these screens are made. Transmitter monitoring data is sent from the Audio Generator to the RMS when the technician selects the Transmitter Data Screen.

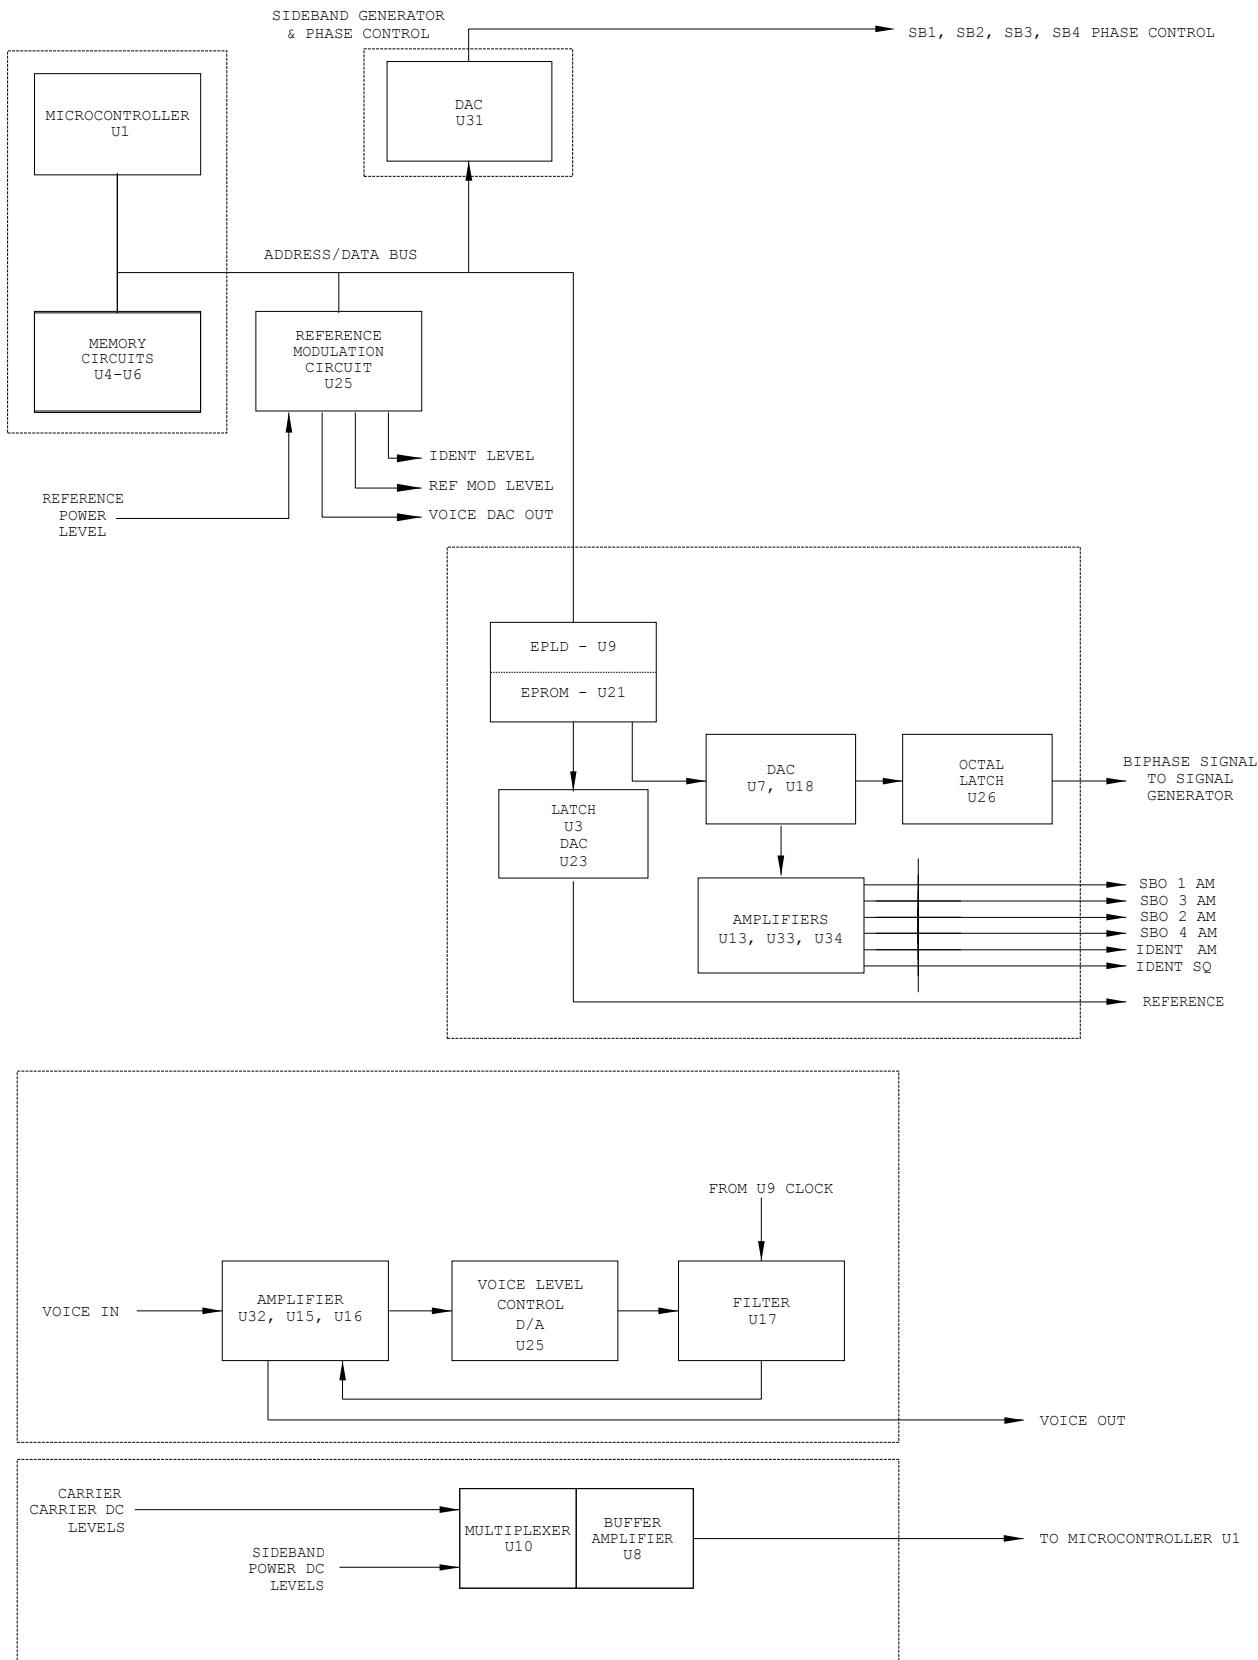


1150-172

**Figure 2-8. Audio Generator CCA, Block Diagram**

### 2.3.2.2.1 Micro controller and Memory Circuits Block Diagram Theory

Refer to Figure 2-9. U36 and U33B comprise a precision voltage reference source which provides a +5 volt reference standard and a temp/volt reference that is proportional to cabinet temperature. U1 uses this reference for analog to digital conversions. The resolution of the conversions is ( $V_{REF}/1024$ ) or 5 millivolts.  $V_{REF}$  is adjusted with R33 to 5.11 +/- 0.01 volts measured at U36 Pin 6. The output of U33 represents the cabinet temperature in the RMS data screen with a magnitude of 2.3 mV/Deg.

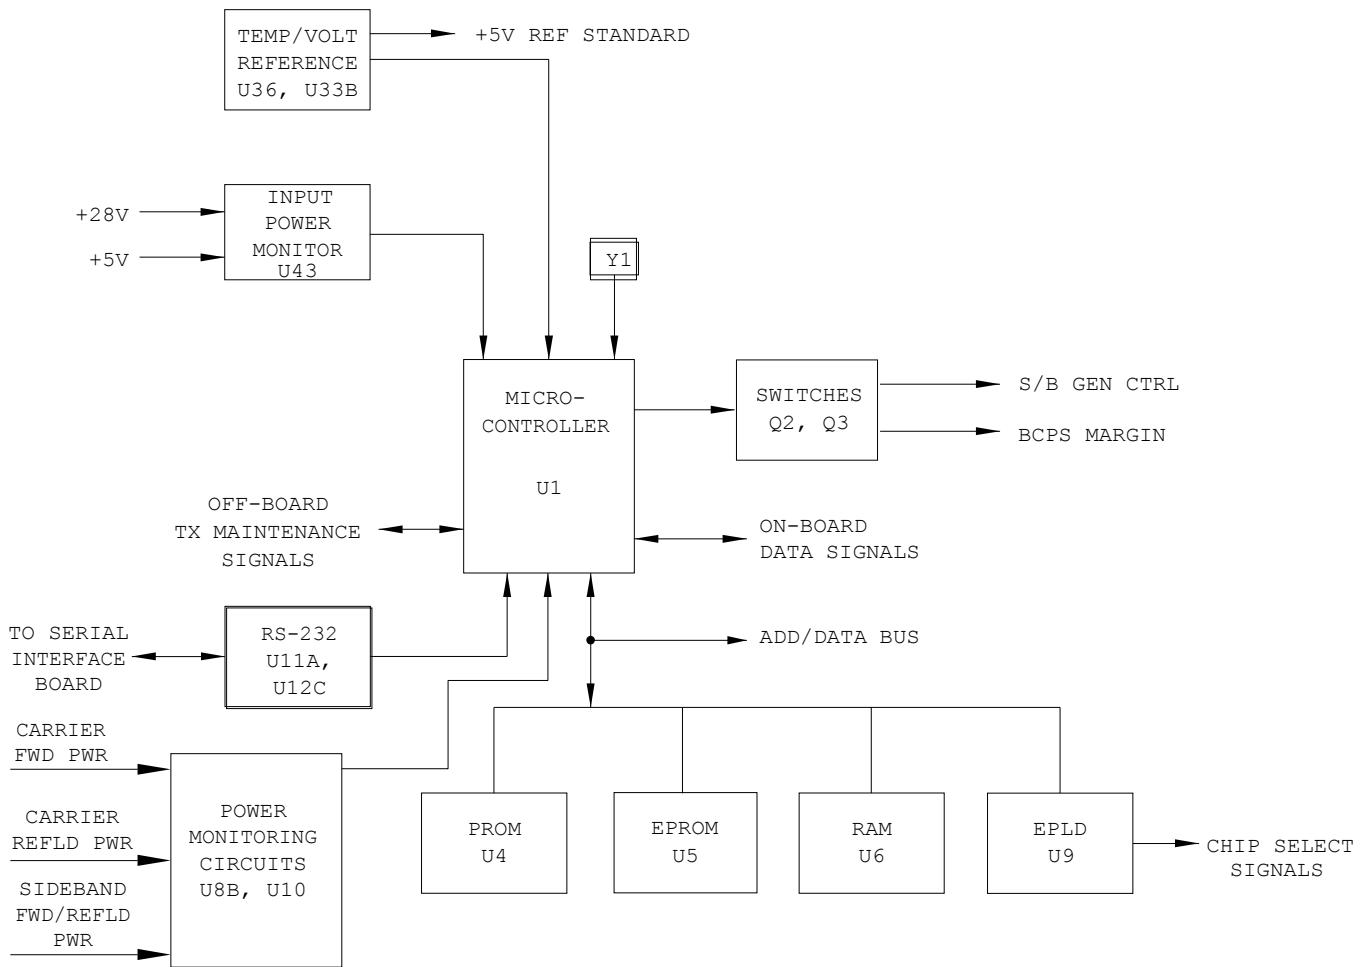

1150-060

**Figure 2-9. Audio Generator CCA Block Diagram**

(Micro controller and Memory Circuits).

Input power monitor circuit U43 compares the +28 Vdc sample, from the battery power charger subsystem (BCPS), and the +5 Vdc, from the low voltage power supply (LVPS). As long as the +28 Vdc output of the BCPS is normal the power monitor outputs a high and inverted by Q1. When the +28 Vdc output drops below +21 Vdc the change is sensed by the input power monitor and its output changes from HIGH to LOW. The LOW output of the input power monitor circuit places the micro controller (NMI) into a stop processing/continuous loop condition. If the +28 Vdc output of the BCPS is no longer abnormal, U1 will be reset and will start processing information again.

The audio generator receives DC analog voltages which represent the different modulation and power levels of the CVOR RF signals. These voltages are processed by a power monitoring circuit consisting of U10, R50, R66 through R74, C6, C8 through C17. By analyzing the outputs of the power monitoring circuit, micro controller U1 can determine carrier power levels, sideband power levels, and VSWR.

Micro controller U1 communicates with the RMS central processor unit (CPU) CCA via the serial interface CCA. Serial communications data is sent by U1 to the serial interface CCA through line driver U11A. U11A converts the TTL signals from the U1 into RS-232 signal levels. Serial communications information from the serial interface CCA is received by U1 through line receiver U12C. U12C converts the RS-232 level data to TTL levels. Periodic requests for status from the RMS to the Audio Generator occur at a 1 second rate. Failure of the audio generator to respond results in a communications error. **Failure of the RMS to request status for 5 seconds results in shutdown of the transmitter.**

Crystal Y1 supplies a 12 MHZ clock signal to micro controller U1.

The audio generator utilizes several different types of memory devices to store and manipulate data. Programmable read only memory (EPROM) U4 contains the software program for U1. Electrically Erasable memory (EEPROM) U5 stores significant variable information for each CVOR. Random access memory (RAM) U6 provides temporary storage for data manipulation, and current transmitter operational parameters.


Transistors Q2 and Q3 are controlled by U1. U1 controls the functional operation of the sideband generators by means of Q3. Under normal conditions U1 applies a LOW to Q3. This LOW keeps Q3 turned off. A HIGH applied to Q3 will turn it on and prevent the sideband generator assemblies from supplying an output.

U1 uses Q2 to control the output of the BCPS 48 Vdc power supply module. Normally, U1 applies a HIGH, which keeps Q2 turned on. This causes the 48 Vdc module of the BPCS to output 43 Vdc (margin voltage). When needed, U1 turns off Q2 which allows the 48 Vdc module of the BPCS to output 48 Vdc.

When the modulation setting in the transmitter setup exceeds 42% (sum of voice, ident and reference levels) the output voltage is set to 48Vdc. If less than 42% the output will be 43 Vdc.

### 2.3.2.2.2 Reference and Sideband Generator Circuits Block Diagram Theory

Refer to Figure 2-10. At turn-on, U1 programs EPLD U9 with data necessary to configure it for the phase adjustment and EPROM clocking for development of the azimuth signal. U9 provides two primary output signals: one drives the reference channel; the other drives the variable (sideband) channel.

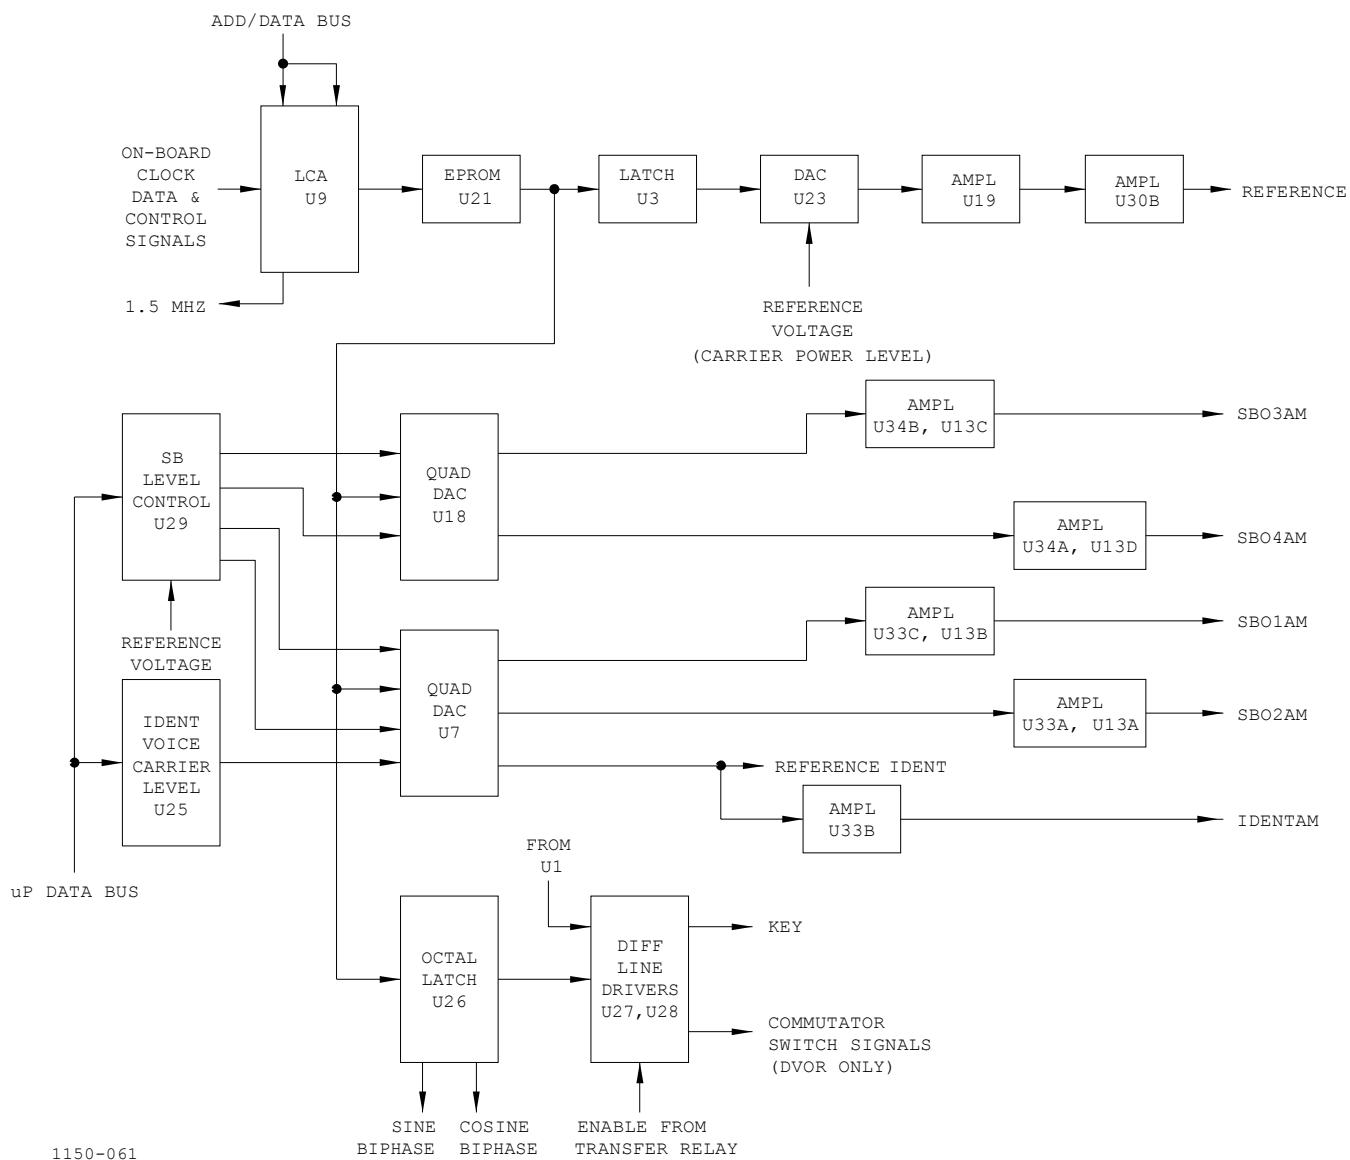

**Figure 2-10. Audio Generator CCA Block Diagram**

**(Reference & Sideband Generators).**

U9 receives on-board clock, address/data, and control signals from micro controller U1. U9 outputs a separate 1.5 MHZ clock signal. U9 outputs 2-16 bit data words to EPROM U21 for the reference channel and the sideband channel. The reference channel will be discussed first followed by a discussion of the sideband channel.

U9 provides address codes to EPROM U21. Jumper E5 selects either CVOR or DVOR mode of operation. When E5 is closed CVOR signals are produced. U21 is programmed with a digital representation of the 9960 Hz carrier modulation waveform. U21 applies the subcarrier waveform data to digital-to-analog converter (DAC) U7 and U18.

The referenced data is latched into U3 when the REF LATCH signal goes from low to high. U23 converts the digital waveform information from U3 into an analog waveform. The output of U23 is a 9960 Hz sinusoidal reproduction of the digitized waveform. The amplitude of this waveform is determined by the reference voltage applied to U23. The reference voltage for U23 is supplied by R13, U25 DAC and is representative of the combined carrier and sideband power levels. The output of U23 is applied to amplifier U19.

U19 is designed to convert the current output of the digital to analog converter to an analog voltage signal.

The 9960 Hz signal is next applied to amplifier U30B.

U30B amplifies the 9960 Hz signal and removes the dc voltage. This reference modulation is added at U33D with voice; ident and carrier (DC) signals.

EPROM U21 is also the variable (sideband) channel. It is programmed with the digital representation of two 30 Hz waveforms (one in quadrature with respect to the other), a 1020 Hz waveform, and the bi-phase switch code. The digital information supplied by U21 is applied to DAC U7 and U18 and to latch U26.

U7 converts the data from U21 into the respective variable and identity tones. U7 contains 4 DACs. Only sections B, C and D provide active outputs. Section B controls sideband output 1, section D controls sideband 2 output , and section C controls the identity tones. The reference voltage for the active sections of U7 is provided by U25. The reference voltage sets the amplitude of the modulation produced by the DACs. The uP controls the level from U25 and therefore the modulating level.

The output for the active section of U7 is applied to amplifier U33 sections A, and C. U33C functions as an amplifier/level shifter that removes any DC component from the signal. The output of U33C is the SBO 1AM signal and is applied to amplifier U13B. The output of U33A is the SBO 2 AM signal and is applied to amplifier U13A. The output of U33B is the 1020 Hz identity signal. The output of U33B is applied to U33D.


Octal latch U26 receives data from U22 and passes it to its outputs when clocked by U9. This data is the bi-phase signal. The bi-phase signals are applied to the sideband generator assemblies.

## Model 1150 CVOR

Differential line drivers U27 and U28 receive an enable signal from coaxial latching relay 1K1. Line driver U27 is used by U1 to provide identity keying for a collocated DME. This output signal is labeled KEY and is applied to an external keying circuit for a collocated DME.

### 2.3.2.2.3 Reference Modulation Circuit Block Diagram Theory

Refer to Figure 2-11. The percent modulation level of the reference signal is controlled by quad DAC U25. The reference voltages generate by U25 are Ref\_PWR\_LEVEL, REF\_MOD\_LEVEL VOICE and IDENTAM signals. The active section of U25 is controlled by U1 through U18 which provides the select signals to U25.

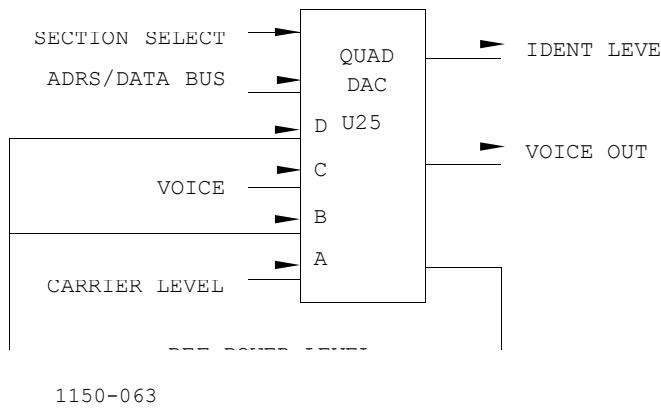

1150-063

**Figure 2-11. Audio Generator CCA Block Diagram**

**(Reference Modulation Circuit).**

U30B provides the REFERENCE signal and U33B provides the IDENT AM signal to amplifier U33D. U33B is active only when the morse code identity is transmitted. U33D can also receive a voice modulation signal called VMOD OUT signal from U15 (see [Figure 2-13](#)). This signal level is adjusted by potentiometer R55, the voice modulation percent modulation potentiometer. The output of U33D is the CAR MOD signal that is a combination of the REFERENCE, IDENT AM, and voice modulation signals riding a DC voltage that is proportional to carrier power.

### 2.3.2.2.4 Sideband Modulation and Phase Control Circuit Block Diagram Theory

Refer to [Figure 2-12](#). The output level of the Sideband and Identification signals is controlled by U25 for Identification and U29 for the Sidebands. DAC U29 reference input is the REF\_PWR\_LEVEL. This DC level sets the carrier power level and varies as the carrier power is adjusted. If the carrier power is adjusted the REF\_PWR\_LEVEL changes and therefore the sideband levels. A DC level is generated by U29 at the A, B, C and D outputs representing the sideband power level. These four outputs are controlled by the sideband power level in the Transmitter> Configuration > Nominal>SBO RF Level or Transmitter> Configuration > Offsets and Scale Factors>Sideband 1 and 2 RF Level Scale.


The 'A' DAC in both U7 and U18 is not used.

Sideband 1 modulation is generated in Quad DAC U7. The data bus from U21 to U7 defines the audio signal. With A0 at logic 1, A1 logic 0 and the Write input to DAC rising edge the data is written for Sideband 1 into DAC B of U7. The output level of Sideband 1 is controlled by U29 DAC A. The U29 DAC A output is connected to U7 VREFB input. This level is set by the entry of a value into the Transmitter> Configuration > Nominal>SBO RF Level or Transmitter> Configuration > Offsets and Scale Factors> Sideband 1 RF Level Scale menus.

Sideband 2 modulation is generated in Quad DAC U7. The data bus from U21 to U7 defines the audio signal. With A0 at logic 1, A1 logic 1 and the Write input to DAC rising edge the data is written for Sideband 2 into DAC D of U7. The output level of Sideband 2 is controlled by U29 DAC C. The U29 DAC C output is connected to U7 VREFD input. This level is set by the entry of a value into the Transmitter> Configuration > Nominal>SBO RF Level or Transmitter> Configuration > Offsets and Scale Factors> Sideband 2 RF Level Scale menus.

Sideband 1 Phase is generated in Quad DAC U31. A DC level is generated that is connected to pin P1-A28 and then to Sideband Amplifier 1. The phase level of Sideband 1 is controlled by U31 DAC C. The U31 VREFC input is connected to the fixed VREF source. The DAC C output level is set by the entry of a value into the Transmitter> Configuration> Offsets and Scale Factors> Sideband Phase Offset menu.

Sideband 2 Phase is generated in Quad DAC U31. A DC level is generated that is connected to pin P1-C8 and then to Sideband Amplifier 2. The phase level of Sideband 2 is controlled by U31 DAC B. The U31 VREFB input is connected to the fixed VREF source. The DAC D output level is set by the entry of a value into the Transmitter> Configuration> Offsets and Scale Factors> Sideband 2 Phase Offset menu.

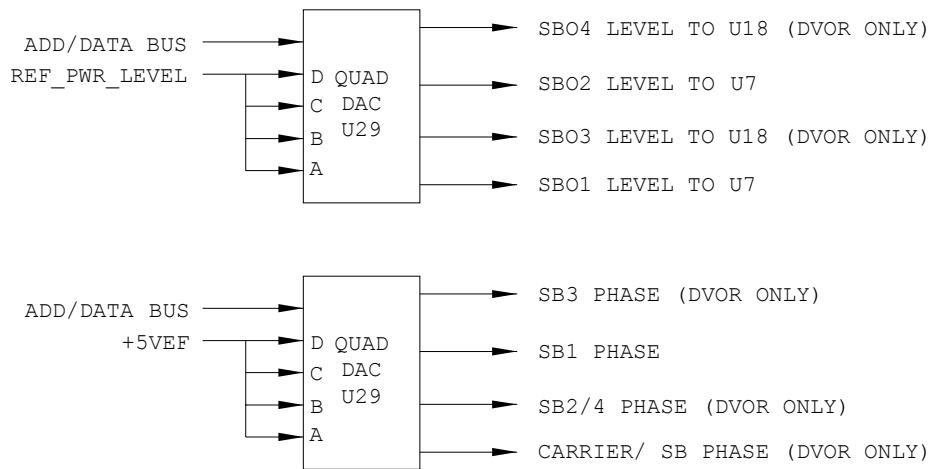

1150-062

**Figure 2-12. Audio Generator CCA Block Diagram**


**(Sideband Level & Phase Control Circuit)**

### 2.3.2.2.5 Voice and Test Tone Circuit Block Diagram Theory

Refer to [Figure 2-13](#). The voice circuitry provides for voice to be modulated onto the carrier RF signal. Voice signals are applied either through a microphone or remotely through telephone lines.

## Model 1150 CVOR

Potentiometer R7 is adjusted to prevent over driving the voice circuitry. The selected audio signal is applied to a buffer amplifier circuit which consists of U32A and B. U32A and B amplify the signal and apply it to amplifier U15.

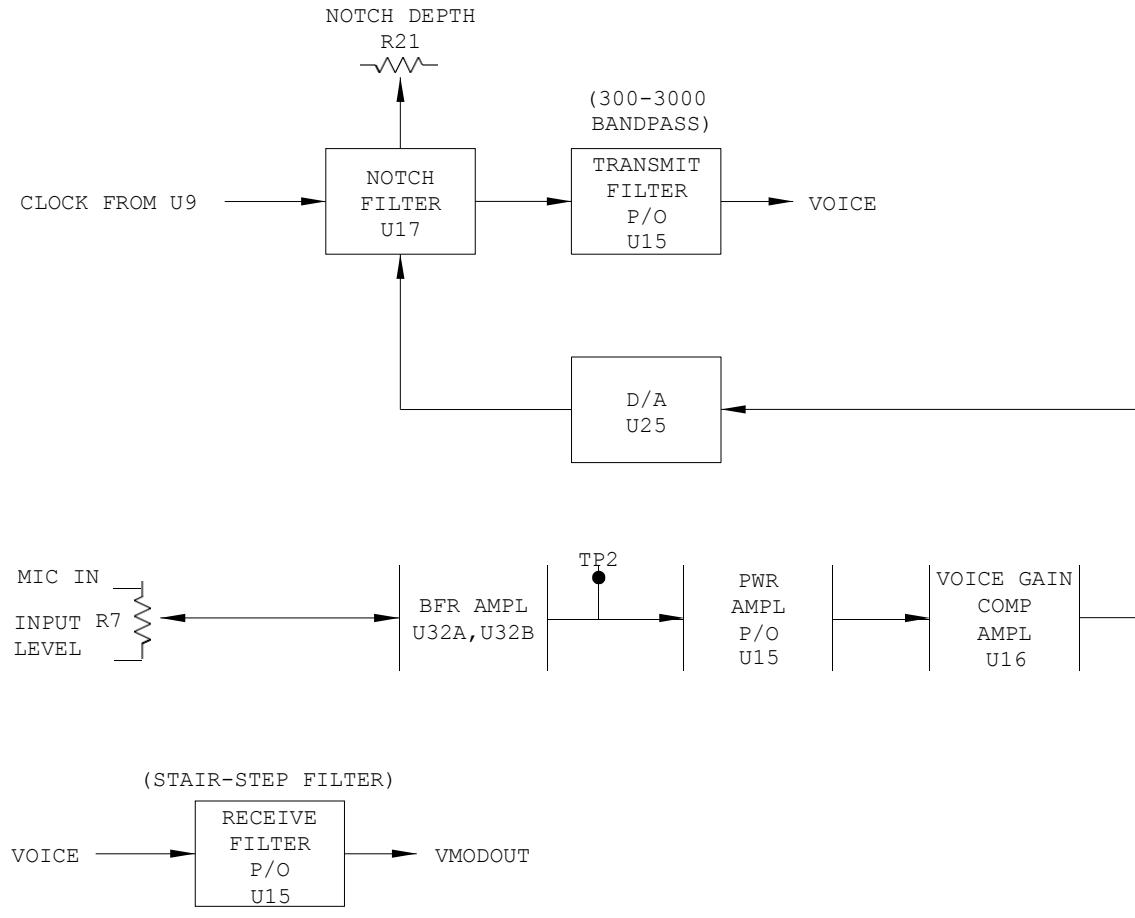

**Figure 2-13. Audio Generator CCA Block Diagram**

(Voice and Test Tone Circuits).

The primary output of U32A and B is applied to the power amplifier section of U15. The output of this section of U15 (pins 6 and 7) is applied to voice gain compression amplifier U16. U16 provides a constant amplitude over an approximate 20 dB variation in signal level. The audio output of U16 is applied to the D/A converter U25 for voice mod controls and then to input of notch filter U17.

U17 is configured to remove any frequency components between 1005 to 1035 Hz at the -3 dB points. Potentiometer R21 adjusts the center frequency of the notch and hence the attenuation of the ident and is set at the factory. Notch filter U17 requires a clock frequency that is fifty times the desired notch frequency, or 51 kHz. CPLD U9 provides this output frequency.

The output of U17 is all voice frequencies excluding the 1020 Hz  $\pm$ 15 Hz. This filtered signal is applied to the transmit filter section of U15. The output of the transmit filter section of U15 is the VOICE signal.

The filter section of U15 removes any voice modulation below 300 Hz and above 3000 Hz that may interfere with the 30 Hz and 9960 Hz navigation tones. The output signal of this section of U15 is labeled VMODOUT and is applied to the input of U33D (see [Figure 2-13](#)) through potentiometer R55.

### 2.3.2.2.6 Audio Generator CCA (1A7, 1A23) Detailed Circuit Theory

The audio generator CCA is responsible for developing and controlling the audio signals used in the CVOR. The on-board micro controller and memory circuitry control all functions within the assembly. Communications with the VOR system CPU micro controller is accomplished through the serial interface CCA.

Refer to [Figure 11-16](#) (sheet 1 of 4). Micro controller U1 accomplishes numerous tasks and housekeeping chores to maintain proper power and modulation levels for the transmitter system. PROM U4 is a 512 k bit (64 k by 8 bit) device that contains the software program for U1. EEPROM U5 is a 16 bit (2k by 8 bit) device that stores significant variable information for each VOR (i.e., percent modulation levels, power factors, identity code, etc.). RAM U6 is a 64 bit (8k by 8 bit) device that provides temporary storage locations which are used by U1 for current transmitter operational parameters, data manipulation, stack pointers, floating point operations, etc. Octal latch U2 is controlled by the address latch enable (ALE) signal from U1. U2 controls the application of addresses A0-A7 to U4, U5, and U6. U9 decodes data from address/data bus lines AD8-AD15 to provide chip select enable signals to U5 and U6. U9 provides chip select enable signals to DACs , U25, U29 and U31.

U1 operates with a clock frequency of 12 MHZ, obtained from crystal Y1. It outputs a clock signal of 6 MHZ to the clock input of U9.

Precision voltage reference source U36 provides a +5 volt reference standard, labeled +5REF, for U1 and several other devices. The +5 volt reference is set by R33. This provides compensation capability for individual circuit conditions. It also performs as a temperature transducer providing an output signal that is approximately 630 mV at 25 degree C and changes 2.1 mV per degree celsius. U1 uses this voltage to monitor the cabinet temperature of the VOR. The temperature output signal of U36 is buffered by operational amplifier U8A before it is processed by U1.

The TTL LOW output of U43A drives the non-maskable interrupt (NMI) input of U1 through Q1. A LOW on this line and makes Q1 go HIGH and places the micro controller into a stop processing/continuous loop condition. It is prevented from processing software instructions while in this interrupt state. This action is in essence a power fail notice to the micro controller to instruct it to stop processing data due to a loss of power. This also prevents U1 from storing any critical parameter data in memory which may have been calculated by using corrupted information supplied during the power failure.

U43 is an external reset circuit. The function of the reset circuit is to insure the micro controller and associated integrated circuits are properly reset and started in sync with each other when power is first applied. When power is first applied, U43 conducts applying a LOW to the reset input pin of U1.

## **Model 1150 CVOR**

U1 communicates with the RMS CPU CCA via the serial interface CCA at a band rate of 19,200. Serial communications data is sent by U1 to the serial interface CCA through line driver U11A. A line driver converts TTL level (HIGH = 5V; LOW = 0V) signals to RS-232 level (HIGH = +12V; LOW = -12V) signals. RS-232 levels are ideal for the long distances the signals must travel within the interconnect wiring harness. Serial communications information from the serial interface CCA is received by U1 through line receiver U12C. U12C converts the RS-232 level data to TTL levels.

U1 monitors the status of the frequency generator circuits by checking the level of the USB lock, LSB lock and carrier mean phase lock signals. The USB lock signal enters on connector P1-26A; LSB lock enters on connector P1-5A; OSC lock enters on connector P1-28C. Two lock signals from the sideband generators are provided to U1 to ensure the generators are functioning properly. The signal from the sideband generator that processes the LSB RF signal is labeled as SB1/2 lock. The signal from the sideband generator that processes the USB RF signal is labeled as SB3/4 lock. The SB1/2 lock signal enters on connector P1-27A; SB3/4 lock enters on connector P1-6A.

The audio generator micro controller not only monitors the operational status of the transmitter, but it also monitors the temperature the CSB power amplifier. This signal is the thermal shutdown signal that enters on connector P1-27C. It is used to notify U1 that the final RF power transistors have reached a dangerous operating temperature and a transmitter shutdown is occurring. This signal is not used by the 030757-0001 Synthesizer.

Transistors Q2 and Q3 are controlled by micro controller U1. U1 controls the output of the 48 Vdc section of the BCPS and the sideband generators for the transmitter. U1 controls the modulated RF output of the sideband generators by means of Q3. To enable the sideband generators, U1 outputs a LOW to Q3 keeping it turned off. If U1 must shut off the RF output of the sideband generators, it sends a HIGH to Q3 causing Q3 to conduct. This places a ground on the control lines to the sideband generators. This LOW will be used to shut down the sideband RF modulation drive circuits. This LOW is sent out on connector P1-9A and P1-12C. U1 uses Q2 to control the margin function of the BCPS 48 Vdc module. Operating the 48 Vdc module in the margin mode reduces the output voltage of the 48 Vdc module by 10 percent; therefore, the output voltage will decrease from 48 Vdc to approximately 43 Vdc. The VOR is designed to operate normally with a modulator voltage of 43 Vdc. When the total of Reference, voice and ident modulation exceeds 42% the micro controller will direct the BCPS 48 Vdc module to increase its output voltage to 48 Vdc. For less than 42% operation, U1 applies a LOW to the base of Q2 which keeps Q2 turned off. This allows the margin control line to float at approximately +1 Vdc. Turning on Q2 grounds the margin control line which allows the power supply module to provide 48 Vdc to the CSB power amplifier modulator section. The margin of control signal leaves on connector P1-13A.

Refer to [Figure 11-16](#) (sheet 3 of 4). The 16-bit address codes for EPROM U21 are determined by CPLD U9. Within the CPLD the oscillator controls the internal clocking of a 16-bit latch processes and holds the value provided by U1 for the amount of phase shift required for the transmitter. The CPLD internal 16-bit counter directly provides the 16-bit data code to outputs A0 thru A15 to address U21 during the time when REF LATCH is low. A 16-bit adder within the CPLD takes the output of the 16-bit counter and shifts the count in accordance with the value stored in the 16-bit latch. The 16-bit adder drives sum outputs Q0 thru A15 when the REF LATCH signal is high. A decoder within U9 determines when to latch values into U7 and U18.

The A17 input to U21 controls whether the signals will be CVOR or DVOR. With E5 Pins 1 and 2 closed CVOR signals will be generated. If open DVOR signals will be generated.

Address A16 controls whether sideband or reference signals are generated. This signal is driven from U9 Pin 113.

U9 relies on the value programmed into transmitter configuration nominal; 1 screen (azimuth index) or transmitter configuration offsets and scale factors (azimuth angle offset) to determine the appropriate amount of phase shift between the azimuth producing signals. This phase shift is required to align the 0° point of the transmitter radiated signal with magnetic north. The amount of phase shift that can be introduced is ±50.00° in increments of 0.01°. U9 holds the reference point for the address codes sent for reference constant while shifting the reference point for the address codes for the sideband signals and bi-phase signals.

U9 receives a 6 MHZ clock signal from U1 into a programmed I/O line pin 17. The 6 MHZ clock drives the oscillator and frequency divider circuit that provides a new clock signal of 1.5 MHZ. This clock is used by the voice bandpass amplifier U15 to set its internal filter.

EPROM U21 is programmed with a digital representation of a 9960 Hz waveform. EPROM U21 is also programmed with the digital representation of two 30 Hz waveforms (one is in quadrature with respect to the other), a 1020 Hz waveform, and the commutator antenna and bi-phase switching sequence codes. The 360 Hz waveforms are not true sinusoidal signals. U21 outputs 8-bit binary codes which represent the bi- phase signals.

U23 is a 8-bit multiplying DAC used in the reference channel. The DAC operates as a current device rather than a voltage device. The amount of current that each output sinks is directly related to the applied binary code. With the output impedance remaining constant, a change in current is equivalent to a change in voltage; therefore, the effective output voltage can be represented by the formula:

$$V_{out} = -V_{ref} \left| \frac{x}{256} \right|$$

## Model 1150 CVOR

where  $V_{OUT}$  is the output voltage of the DAC,  $V_{REF}$  is the reference voltage applied to the DAC and  $x$  is the decimal equivalent of the 8-bit binary code. This value ranges from 0 to 255; therefore,  $V_{OUT}$  can range from 0 volts to  $-V_{REF}(255/256)$ . Table 2-1 provides a simplified basic listing of the binary code table for unipolar operation and the corresponding analog output. This multiplying process is applicable to all of the digital-to-analog converters used in this system.

**Table 2-1. DAC Binary Code to  $V_{ref}$  Conversion**

### DAC DATA INPUT

MSB								LSB	ANALOG OUTPUT
1	1	1	1	1	1	1	1	-Vref (255/256)	
1	0	0	0	0	0	0	1	-Vref (129/256)	
1	0	0	0	0	0	0	0	-Vref (128/256) = -Vref/2	
0	1	1	1	1	1	1	1	-Vref (127/256)	
0	0	0	0	0	0	0	1	-Vref (1/256)	
0	0	0	0	0	0	0	0	-Vref (0/256) = 0	

The reference voltage applied to U23 is the carrier level DC voltage which is representative of the actual carrier power level. The 8-bit digital code applied to this device from U21 determines what proportion of the reference current will be sunk by the positive output port,  $Io_+$ , and the negative output port,  $Io_-$ . With  $Io_-$  grounded, the output from the DAC, working in conjunction with operational amplifier U19, acts as a negative low impedance output circuit. With the  $Io_+$  output connected directly to the inverting input of U19 and the non-inverting input grounded, there will be almost no signal voltage present at the  $Io_+$  output. However, the output current will vary as a sinusoidal reproduction of the digitized 30 Hz waveform.

Operational amplifier U19 is specifically selected for its special characteristics of high slew rate, fast output response and excellent settling time which make it ideal for use as a DAC output amplifier. U19 will convert the changing current output of U23 into an amplified voltage waveform without distorting the original signal. U19 has an effective gain of 2.5.

U30B is a non-inverting, level translation, summing amplifier. It is a non-inverting amplifier to the audio signal acting with a gain of one. It is also a summing amplifier with level translation that has unity gain. The carrier level DC voltage is summed with the positive DC offset voltage of the audio signal from U19. These DC voltages cancel which has the effect of performing a level translation on the audio signal from a positive DC reference to a zero volt reference. The output of U30B is the amplified 30 Hz audio signal referenced at zero volts DC. This signal can be measured at test point TP10 and is labeled REFERENCE.

U7 is a quad 8-bit multiplying DAC. Only sections B, C and D provide active outputs. Active outputs are those which are affected by the 8-bit word applied to the DAC. Each section of U7 contains an internal latch that holds the most recent 8-bit word that was written to that section. This allows section B to continue to output a signal level while section C is receiving a new 8-bit word and changing levels. Section B processes the sideband 30 Hz sin signal, section D processes the sideband 30 Hz cos signal and section C processes the 1020 Hz identity tone signal. The reference voltages for the active sections of U7 are the levels obtained from DACs U25 and U29. These levels set the sideband and identity signals in proper ratio to the carrier power level. As the carrier level changes, the sideband and identity levels will change likewise. The combination of the levels of the data select outputs of U9 (S0 and S1) and the write output of U9 determine the sequence selection of the four sections of U7. U9 selection sequence is: latch sideband 1, sideband 2, and then identity. This means that three sections of U7 are activated in the following sequence: section B (sideband 1), section C (identity 2) then section D (sideband 2). When S0 and S1, or the write line are set HIGH, U7 is placed into a hold condition. This hold condition causes all section data latches to retain the data that was present on the bus line just prior to the HIGH transition. Therefore, during the latch output state select of U9, U7 is active with the last valid data supplied by U21. This hold state provides the necessary time for U9 to address U21 to send the bi-phase signals to data latch U26.

DAC U7B drives the non-inverting input of U33C. U33C provides unity gain and level shift. U33C feeds U13B. The output signal has now been level translated to a zero volt DC reference. The output of U13B is a 30 Hz sinewave signal. This will become the modulation signal for sideband amplifier 1. It is measured at test point TP7 and is referred to as the 30 Hz sin signal.

U7C functions identically to U7B. U33A, U13A are functionally identical to U33C and U33B. U7C also provides a 30 Hz sinewave signal; however, this signal is shifted 90° in phase with respect to the sideband output 1 signal. This signal is measured at test point TP8 and is the modulation signal for sideband amplifier 2. This signal is referred to as the 30 Hz cos signal.

The output of U7C is the 1020 Hz identity frequency that rides a positive DC voltage level. With U7C active, the analog identity tone is developed and amplified by U33B. Again, the carrier level DC voltage is summed with the audio DC offset voltage to produce a zero volt DC reference for the audio signal in the output of U33B. The output of U33B is an amplified 1020 Hz identity tone. This is the identity modulation signal which will sum at U33D and modulate the RF carrier signal. It is measured at test point TP9.

U26 is a D-type octal latch that is also connected to the 8-bit data output of U22. However, U26 will not process any data that appears on this bus until it is enabled by U9. This occurs when U9 provides a clock pulse to U26 at pin 11. A LOW to HIGH transition of the clock pulse causes the data that appears at the data inputs of U26 to be clocked to the Q outputs of U26. This data will remain latched at the outputs until another rising clock pulse occurs. Then the current data on the inputs will be latched into the outputs. The low order nibble (D0-D3) of the 8-bit word that is sent to U26 consists of: a sine bi-phase bit.

## Model 1150 CVOR

The bi-phase signals are square waves that are synchronized with the 30 Hz sin and 30 Hz cos audio signals. The bi-phase signal will be a TTL logic HIGH whenever the audio signal makes a negative to positive transition through its zero average reference point. The bi-phase signal will switch to a TTL LOW whenever the audio signal makes a positive to negative transition through its zero average reference point. U26 output Q0 is the sin bi-phase signal that provides a synchronous timing signal to sideband amplifiers 1 and 3. This signal leaves on connector P1-18C. U26 output Q1 is the cos bi-phase signal that provides a synchronous timing signal to sideband amplifiers 2 and 4. This signal leaves via connector P1-16A.

Outputs Q2-Q7 send the antenna switching control signals to quad differential line drivers U27 and U28. Differential signal outputs are used to reduce the effects of extraneous noise interfering with the switching signals. The differential antenna switching output signals of U27 and U28 for system A are paralleled with those of system B. To ensure that only the on-air audio generator CCA controls collocated DME keying, U27 and U28 of the on-air audio generator CCA receive a CVOR enable signal from coaxial latching relay 1K1. The enable input of U27 and U28 is pulled HIGH by means of a pull-up resistor. Relay 1K1 will provide a LOW via connector P1-15C only to the on-air audio generator. This LOW enables the outputs of U27 and U28.

U27 has three inputs and three outputs. The micro controller provides an identity keying signal into U27A(+), labeled DME KEY, is used as a key command signal that drives switching transistor U20. U20 is part of an external keying circuit for a collocated DME.

Refer to [Figure 11-16](#) (sheet 4 of 4). The percent modulation level of the reference signal is controlled by quad 8-bit multiplying DAC U25. U25 is a 10 bit DAC with 2 bits grounded thus making it an 8 bit DAC. U1 and U9 jointly control the selection of this device. U9 provides the DAC select signal. The micro controller provides additional selection through address lines A0 and A1. The reference voltages for sections A, B, C, and D of U20 are the +5REF, Ref\_Pwr\_Level, Voice\_Dac\_In and Ref\_Pwr\_Level signals, respectively.

When U25A is selected, a fractional portion of the applied +5 volt reference voltage is applied to V out A. The amount of voltage applied is proportional to the 8-bit binary code on address/data lines AD0-AD7. A change to the value programmed into parameter transmitter>configuration>nomin screen (output power) will change the 8-bit data that is latched into U25A. The output of U25A is a DC voltage which will be proportional to the carrier power level and will be mixed with the audio modulation signals to control the carrier RF output from the CSB power amplifier.

U25B provides the reference modulation drive signal and U25D provides the identity modulation drive signal to DAC U7C. U25D is only active when the VOR morse code identity is transmitted. The non-inverting input of U34C can also receive the audio voltage from the voice output signal of U15. This signal level is set by the voice percent modulation potentiometer R55. Potentiometer R55 is adjusted to produce a carrier RF signal that is modulated by a voice signal to the depth of modulation as set on the PMDT. Example: if transmitters configuration > nominal > voice modulation displays 30%, an audio signal is injected into the audio generator voice circuits. R55 must be adjusted to produce a 30% aural modulated carrier RF signal. This calibrates the voice modulation circuit. If voice modulation is later changed to 15%, micro controller U1 will adjust the output of U25C to provide the correct voice modulation signal level to U33D. Therefore, the output of U33D, labeled CARMOD, is the combination of the REFERENCE, voice and identity modulation signals all riding a DC voltage level

that determines the carrier power level. This signal can be measured at test point TP6 and exits through connector P1-26C.

U25C reference voltage is the voice signal that is processed by U16. When U25C is active, a portion of the voice signal is sent to operational amplifier U34A sends the signal, labeled Voice\_Dac\_Out, back to U7 for notch filtering. It then returns from U15, labeled as VMODOUT. The VMODOUT signal can be measured at test point TP4 before it is adjusted by R55.

Sideband 1 modulation is generated in Quad DAC U7. The data bus from U21 to U7 defines the audio signal. With A0 at logic 1, A1 logic 0 and the Write input to DAC rising edge the data is written for Sideband 1 into DAC B of U7. The output level of Sideband 1 is controlled by U29 DAC A. The U29 DAC A output is connected to U7 VREFB input. This level is set by the entry of a value into the Transmitter> Configuration > Nominal>SBO RF Level or Transmitter> Configuration > Offsets and Scale Factors> Sideband 1 RF Level Scale menus. The Sideband 1 signal is connected to the non-inverting input of U33C through RN4B. The inverting input to U33C is connected to the Sideband 1 reference signal and removes DC bias and the output of U33C is referenced to ground potential. U33C output connects to the non-inverting input of U13B. The Sideband 1 audio exits on pin P1-A21 and is labeled SB1 Audio.

Sideband 2 modulation is generated in Quad DAC U7. The data bus from U21 to U7 defines the audio signal. With A0 at logic 1, A1 logic 1 and the Write input to DAC rising edge the data is written for Sideband 2 into DAC D of U7. The output level of Sideband 2 is controlled by U29 DAC C. The U29 DAC C output is connected to U7 VREFD input. This level is set by the entry of a value into the Transmitter> Configuration > Nominal>SBO RF Level or Transmitter> Configuration > Offsets and Scale Factors> Sideband 2 RF Level Scale menus. The Sideband 2 signal is connected to the non-inverting input of U33A through RN3B. The inverting input to U33A is connected to the Sideband 2 reference signal and removes DC bias and the output of U33A is referenced to ground potential. U33A output connects to the non-inverting input of U13A. The Sideband 2 audio exits on pin P1-C21 and is labeled SB2 Audio.

The voice circuitry of the audio generator CCA provides for voice to be modulated onto the carrier RF. Aural signals are obtained by means of an audio input signal that may be provided to the VOR either through the microphone input jack on jack assembly 1A38 or remotely via terminal board TB14.

Refer to [Figure 11-16](#) (sheet 2 of 4). Potentiometer R7 is adjusted to limit the level of the microphone audio signal that enters on connector P1-3A to prevent over-driving the voice circuitry. The voice circuitry is designed to accept an input signal that can range from -40 to -10 dBm (0 dBm = 1 mW at 600 ohms). The signal level can be measured at test point TP1. The selected audio signal is applied to the non-inverting input of amplifier U32A. U32A functions as a buffer between the voice input signals and the audio amplifier circuits.

The output of U32A is amplified by amplifier U32B. Potentiometer R16 is in the feedback path of U32B. R16 is the gain adjust for U32B and is set for an average signal level of -20 dBm at the output of U32B. This can be measured at test point TP2. The audio output of U32B is sent to voice bandpass filter/amplifier U15.

U15 processes the voice through its internal power amplifier circuitry. The power amplifier input is an unbalanced input (labeled PWRI). The output of the power amplifier is a differential signal (labeled

## **Model 1150 CVOR**

PWRO+ and PWRO-) that drives the differential input of voice gain compression amplifier U16. U16 is designed to maintain a constant signal level out with a signal input that can vary 20 dB. The audio output of U16 is applied to the DAC U25 Pin 2 and labeled VOICE DAC IN. The DAC U25 is controlled from the Transmitters. Configuration, Nominal, Voice Modulation Level and the Transmitters. Configuration, Offsets and Scale Factors. The output of the DAC is labeled VOICE DAC OUT and connects to the input of universal dual filter U17. This audio output signal can be measured at test point TP3.

U17 is configured to function as a notch filter. U17 is a dual device, only one half is used. U17 has a very narrow notch frequency response centered about 1020 Hz. The purpose of U17 is to remove any frequency components that range from 1005 Hz to 1035 Hz from the audio signal at the - 3 dB corners. Potentiometer R21 is used to adjust the center frequency and hence the depth of the notch and is factory set to provide a minimum of 30 dB attenuation at 1020 Hz. During factory alignment, a jumper is placed between terminals E4 Pins 1 to 2 or E4 Pins 3 to 4 to select an operational mode of U17 that will produce the best response. Eliminating the 1020 Hz frequency from the audio signal ensures that the VOR monitor will only transmit the 1020 Hz from the transmitted identity signal. This eliminates the possibility of false identity alarms from incorrectly analyzing the 1020 Hz frequency contained in a voice transmission. For proper operation of the notch filter requires a clock frequency that is fifty times the desired notch frequency. This is obtained from U9.

The output of U17 will be comprised of all voice frequencies excluding 1020 Hz ( $\pm 15$  Hz). This filtered audio signal is applied back into the transmitter filter section of U15 which is labeled VFXI. This filter section of U15 attenuates all frequencies below 300 Hz and above 3000 Hz. The output of the transmitter filter stage, labeled VFXO, is sent to U15 pin 10 (VFRI), the receiver filter stage of U15. The receiver filter stage input is labeled VFRI. The receiver filter stage is specifically designed to remove out of 300 to 3000 Hz band spurious energy that may interfere with the navigation tones.. The receive filter stage output is labeled VFRO. The output signal, labeled VMODOUT, is sent to the input of U30A through potentiometer R55.

The modulation voltage for the RF final amplifiers is normally the 43 Vdc. With the BCPS margin control line grounded, the output of the 48 volt power supply module in the BCPS is boosted from 43 Vdc to 48 Vdc. This provides the necessary voltage for the final RF transistor amplifiers. When the modulation level for reference, voice and ident in the transmitter set up screen exceeds 41% the 48 volt BCPS is boosted. When lower than 41% the BCPS voltage is decreased to 43 volts.

An auxiliary function of the audio generator CCA is to provide remote DME keying capability. Only the on-air audio generator will be capable of providing this signal. The morse code sequence from U27A+ drives the cathode of U20. This signal is usually held HIGH by the biasing arrangement of resistors R79 and R80 which keeps U20 turned off. When either a dot or dash must be transmitted by the collocated DME, U1 provides a HIGH into U27A. This makes U27A+ output go LOW which turns on U20. U20 will provide a low impedance path that will activate the external keyer circuit for the DME. U20 opto-isolator protects from reverse polarity voltages that may be applied from the DME or from induced voltages on the remote keying lines. Synchronization of DME and VOR identity keying is required for collocated systems.

Voltage regulator U45 converts +12 Vdc to +5 Vdc and supplies a separate, regulated +5 Vdc to provide the operating voltage for integrated circuit U16.


Refer to [Figure 11-16](#) (sheet 4 of 4). The audio generator CCA receives DC analog voltages which represent the different modulation and power levels of the VOR RF signals. Sampling of these analog voltages is controlled by U1. These voltages are processed by analog multiplexer U10, and operational amplifier U8B.

Multiplexer U10 has the DC analog voltages that represent sidebands 1 and 2 forward and reflected powers applied to its input terminals. Sideband 1 thru 4 forward power signals enter through connectors P1- 22A, and -23A, respectively. Sideband 1 and 2 reflected power signals enter through connectors P1- 22C, and -23C, respectively. U10 has the DC analog voltages that represent the carrier forward and reflected powers. The carrier forward power signal enters through connector P1-29A. The carrier reflected power signal enters through connector P1-30C. All signals are referenced to a common return path back to the RF monitor 1A2 via connector P1-29C.

U1 controls the address lines of U10. These address lines are labeled as MA1, MA2, MA3, and MA4.

A differential input signal that represents the modulation and RF power level of either the VOR carrier or sideband RF signal is applied to U10. U10 outputs drives amplifier U8B. By selecting various inputs and analyzing the output of U8B, U1 can determine carrier forward or reflected power level, sideband forward or reflected power. These measurements are made via port ACHO on the micro controller.

Refer to [Figure 11-16](#) (sheet 4 of 4). Voltage regulator U37 converts -12 Vdc to -5 Vdc which is used by U15 and U17 and is applied to terminal E5.

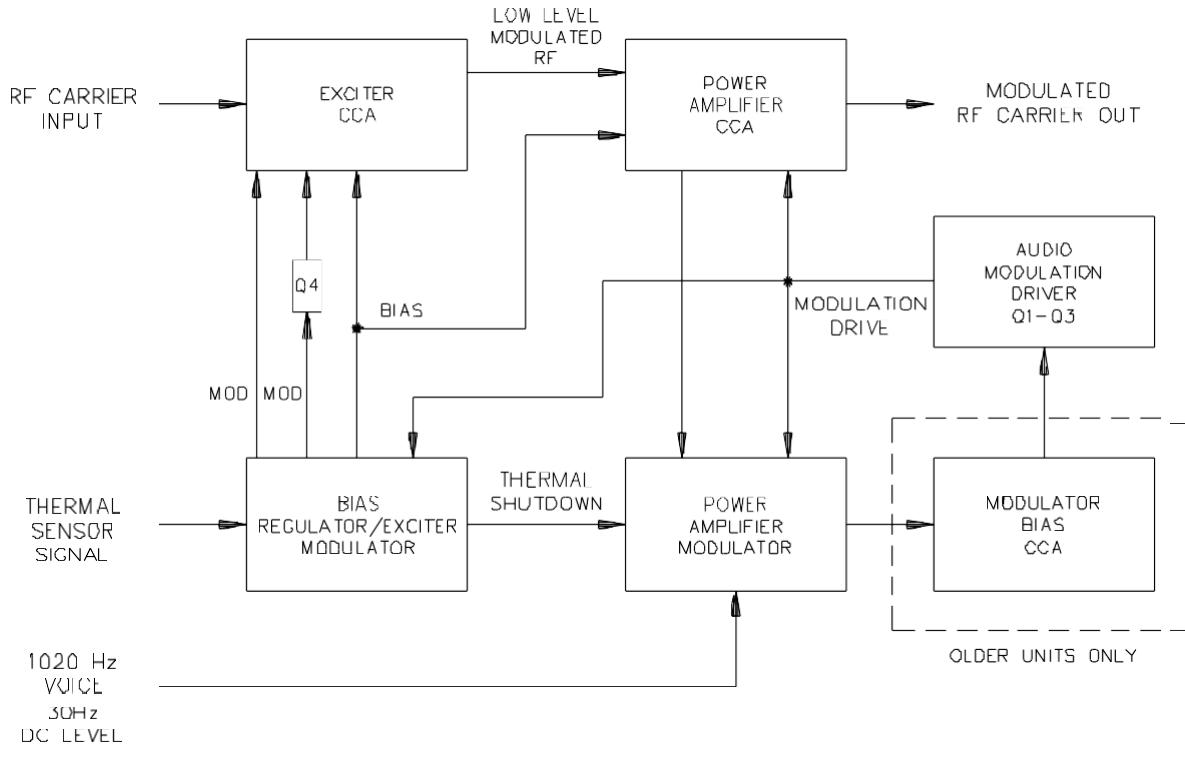

**Figure 2-14. CSB Power Amplifier Assembly Block Diagram**

### 2.3.2.3 CSB Power Amplifier Assembly (1A3, 1A19) Block Diagram Theory

Refer to Figure 2-14. The CSB power amplifier assembly amplifies the RF carrier while amplitude modulating it with 30 Hz, keyed 1020 Hz, and voice (as needed). Current production of this assembly contains 4 CCA's: an exciter CCA, a power amplifier CCA, a power amplifier modulator CCA, and a bias regulator / exciter modulator CCA. Older production units included a fifth CCA, a modulator bias CCA.

#### 2.3.2.3.1 CSB Power Amplifier Assembly (1A3, 1A19) Detailed Circuit Theory

Refer to [Figure 11-7](#). The CSB power amplifier assembly amplifies the RF carrier to a level of approximately 120 watts while amplitude modulating it with 30 Hz, keyed 1020 Hz, and voice (as needed).

The exciter CCA receives the RF power input from the frequency generator assembly. It modulates the carrier RF, amplifies it, and applies carrier RF to the power amplifier CCA. Transistor 1A3/1A19Q4 provides the low level modulation drive voltage for the final amplifier stage in the exciter CCA.

The power amplifier CCA takes the low level modulated RF signal from the exciter CCA, amplifies it, and applies it to a low-pass filter assembly.

The bias regulator/exciter modulator CCA develops the bias voltage for the exciter CCA and power amplifier CCA. It also develops the carrier thermal shutdown command control signal, and the low level modulation drive signals for the exciter CCA.

The power amplifier modulator CCA controls the RF modulation and power levels within the CSB power amplifier assembly. The power amplifier modulator CCA amplifies the audio signals which will modulate the RF signal and the DC level that will determine the final output power level. The power amplifier modulator CCA monitors the modulation signal level to the power amplifier CCA and the modulated RF signal from the power amplifier CCA. It also uses a thermal shutdown control signal from the bias regulator/exciter modulator CCA to control the RF signal.

This prevents the final RF power amplifier transistors from being pulsed with modulation when the shutdown command clears.

Power transistors 1A3/1A19Q1, Q2, Q3, Q4, Q5, and Q6 are thermally connected to the assembly chassis. The power amplifier assembly must dissipate a significant quantity of heat; therefore, a major portion of the assembly consists of heat sink material making the assembly very heavy.

The modulator bias CCA develops a bias potential for the gates of final audio modulation driver transistors Q1, Q2, and Q3.

Final audio modulation driver transistors 1A3/1A19Q1, Q2, and Q3 are a matched set. Failure of any one of these transistors requires the replacement of all three. The sources of these transistors are connected to the 43/48 volt power supply module of the BCPS and the amplified audio and DC modulation signal is applied to their gates. The audio modulation signal changes the conduction of these transistors and varies the amount of voltage available at their drains. The DC voltage establishes an average operating point which allows the RF amplifiers to produce a specific power level. This variable drain voltage is the operating voltage for the final RF power amplifier transistors 1A3/1A19Q5 and Q6. This varying voltage is high level modulation of the RF carrier signal in the power amplifier CCA.

### 2.3.2.3.2 Exciter CCA (A3) Block Diagram Theory

Refer to [Figure 2-15](#). The Carrier RF signal from the frequency generator assembly and the exciter Q1 Bias In voltage from the bias regulator modulator CCA are applied to RF amplifier Q1. Q1 amplifies the carrier RF and modulates it with the exciter Q1 modulator signal.

The modulated carrier RF from Q1 is applied to RF amplifier Q2. The bias voltage for Q2 (Exciter Q2 Bias In) is set on the bias regulator modulator CCA. The modulation drive voltage for Q2 is supplied by modulator driver transistor 1A3/1A19Q4, which is mounted on the CSB power amplifier chassis. Q2 amplifies the signal level to approximately 20 W at its output. This signal is then applied to the Power Amplifier CCA

### 2.3.2.3.3 Exciter CCA (A3) Detailed Theory

Refer to [Figure 11-9](#). The exciter CCA contains two RF transistor amplifiers which produce approximately 20 watts of modulated RF power from an input of about 300 mW CW from the frequency generator assembly.

The Carrier Rf In from the frequency generator assembly enters the CSB power amplifier assembly via RF connector J1. Input impedance matching circuitry consists of C17, C4 (which is factory adjusted for optimum input VSWR), L5, and L1. Resistor R1 applies the bias current to transistor Q1, and also provides some impedance matching of the input of Q1. Amplifier Q1 raises the input signal level to about 3 W carrier power at the output.

The bias for transistor Q1 is supplied by the bias regulator modulator CCA as Exciter Q1 Bias In voltage. This is adjusted by resistor R19 on the bias regulator modulator CCA and applied via connector P1-2. Under quiescent conditions (no RF signal applied), potentiometer R19 is adjusted to produce a voltage drop of 25 mV across test points TP3 and TP4. This corresponds to a quiescent current of approximately 50 mA through Q1.


The exciter Q1 modulator signal is the drain voltage supplied by the bias regulator modulator CCA. This voltage is a signal with a DC component corresponding to desired carrier power, with all of the AC VOR modulation removed by low pass filter components on the bias regulator modulator CCA.

Interstage impedance matching is done by C6, C8 (again, factory adjusted for optimum modulator voltage and transmitter efficiency), L2, C9, and L3. The modulated RF is applied to the gate of transistor Q2, where it is amplified to approximately 20 watts. Resistor R5 supplies the bias current to transistor Q2, and provides some impedance matching for the input of Q2. Resistor R4 and capacitor C13 provide a low-frequency feedback path around Q2, which serves to enhance amplifier stability and increases amplifier bandwidth. Output matching is accomplished by L6, C18, L4, C14, and C15. C16 is a coupling capacitor to block the DC from the output path.

The bias current transistor Q2 is supplied by the bias regulator modulator CCA. This signal is adjusted by R20 on the bias regulator modulator CCA, and is applied via connector P1-9 to the gate of Q2. Under quiescent conditions, the jumper between terminals E3 and E4 is removed. Potentiometer R20 on the bias regulator modulator CCA is adjusted to produce a voltage drop of 55 mV across test points TP1 and TP2. This corresponds to a bias current of approximately 25 mA through Q2. After the adjustment is made, the jumper is re-installed between terminals E3 and E4. Bias adjustments for Q2 are factory set, and field adjustment should not be attempted.

Exciter Q2 Modulation Drive signal is the drain voltage supplied to transistor Q2. This signal is provided by modulator drive transistor 1A3/1A19Q4, mounted on the CSB amplifier chassis. This signal is routed through connector P1 pins 11,12,13 and 14. A sample of this signal is used for feedback control of the modulator, and is routed through P1-10. As in the Q1 modulator signal, this signal consists of a DC component and the AC VOR modulation waveforms.

The approximately 20 W output is routed via E2 through a point-to-point coaxial cable to the power amplifier CCA.

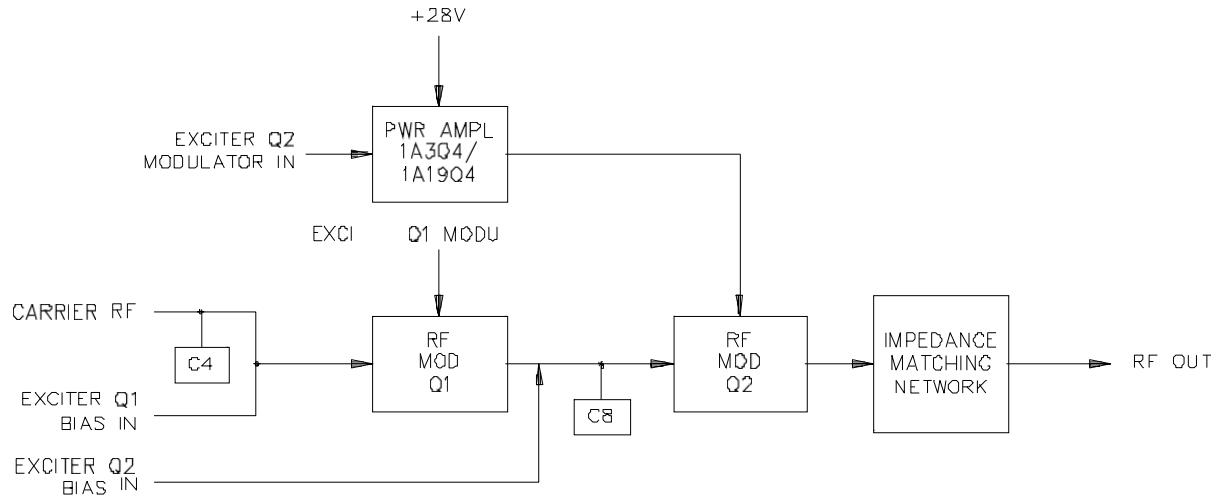

1150-079

**Figure 2-15. Exciter CCA Block Diagram**

### 2.3.2.3.4 Power Amplifier CCA (A2) Block Diagram Theory

Refer to [Figure 2-16](#). The power amplifier CCA receives the approximately 20 W signal from the exciter CCA, and amplifies it to the proper level required for the CVOR system. The modulated RF from the exciter CCA is divided into two paths for amplification. Since the two paths are identical, only one will be discussed.

The RF enters the assembly as is divided into two parallel paths. Attenuators AT1 and AT2 serve to balance any slight impedance differences between the two paths, and help the two power output devices to share the load equally.

Transformer T3 is an iron core coaxial transformer with a 9:1 impedance ratio. It also serves to drive the dual transistor Q5 in a balanced push-pull configuration. Bias for Q5 is applied via the secondary winding of T3. The output of Q5 is applied to the 4:1 impedance ratio transformer T4, which also converts from a balanced to unbalanced signal. The modulation signal is applied via the low-impedance winding of T4 to the drains of Q5.

The two outputs (T4 and T2) are connected in parallel, and impedance matched to the 50 ohm output by C29, L1, C10 and C11. A sample of the output signal is provided to the power amplifier modulator CCA for feedback control of the output signal waveform.

Thermistor RT1 is mechanically connected to the heat sink of the power amplifier assembly, and is used for over-temperature protection of the amplifier assembly.

### 2.3.2.3.5 Power Amplifier CCA (A2) Detailed Circuit Theory

Refer to [Figures 11-8](#) and [11-9](#). The power amplifier CCA takes the modulated RF signal from the exciter CCA and amplifies it to the proper levels (typically 100 W) for CVOR system operation. Two output devices are used to provide the required power. The two are driven in phase, with simple parallel signal dividers / combiners.

Attenuators AT1 and AT2 serve to balance out any small input impedance differences in the two output devices, insuring that both devices share equally in the output load. At this point the signal is split into two identical paths. Only one path will be discussed in detail.

Transformer T3 is a 9:1 impedance ratio (3:1 turns ratio) coaxial transformer. (Older -0001 and -0002 power amplifier assemblies utilized a 4:1 impedance ratio transformer) The center conductor of the coax provides the 3 turns, while the outer conductors of the coax provide the 1 turn secondary. The secondary of the transformer is center tapped, and the center tap is RF grounded through capacitor C3. This arrangement causes the transformer to act as a balun transformer, converting the unbalanced input drive to a balanced, out of phase drive for the two gates in dual device Q5. Input bias voltage is applied through the secondary of T3 to the gates of Q5. Transistor Q5 is actually a matched pair of FET transistors in one package, designed to operate as a push-pull RF amplifier.


Transistor Q5 is configured as a common source amplifier, operating in a push-pull configuration. Resistors R7 and R8, along with their leads (forming inductance) and capacitors C4 and C6, are used as low-frequency negative feedback around the device. This feedback serves to enhance amplifier stability and greatly broadens the amplifier bandwidth. The amplifier stage provides approximately 7 dB of gain, raising the 10 W input power ( $\frac{1}{2}$  of the 20 W nominal input to the CCA) to typically 50 W of output power. The modulation drive voltage for Q5 is the Modulator In 48V signal. This signal is provided by transistors 1A3/1A19 Q1, Q2, and Q3, which are mounted on the power amplifier assembly heatsink. The modulation voltage is applied to the center tap of the primary of output transformer T4.

Bias for Q5 is controlled by the bias regulator modulator CCA. Two types of bias operation have been used in the history of the power amplifier assembly. In the older -0001 and old version -0002 power amplifiers, potentiometer R21 on the bias regulator modulator CCA is adjusted to produce a voltage drop of 0.01 VDC across TP1 and TP2 for Q5 (TP3 and TP4 for Q6) with 24 volts DC applied to the Modulator In signal point, with no RF signal applied to the power amplifier assembly. This corresponds to a quiescent current of approximately 450 mA for Q5.

In the newer -0002 and -0003 power amplifier assemblies, the bias point on the output devices has been changed to a smaller level than the older amplifiers. This provides increased efficiency and reduced heat in the power amplifier assembly. The bias control potentiometers are adjusted for 0.005 +/- .0005 volts across TP1 and TP2 for Q5, and across TP3 and TP4 for Q6 under quiescent operating conditions (no RF applied, approximately 15 VDC on the Modulator In signal point). Do not be tempted to adjust older -0001 and -0002 units to this point, as it will not provide proper operation. Older -0002 assemblies can be recognized by 4:1 impedance transformers on the input matching, rather than the 9:1 units used in current production. The 4:1 transformers are made up of two pieces of rigid coax, while the 9:1 transformers are three layers of coax inside the iron cores.

**CAUTION**

**Potentiometers R21 and R22 on the bias regulator modulator CCA are factory set. Do not attempt to adjust these resistors in the field. Incorrect bias levels can destroy the final RF power amplifier transistors.**

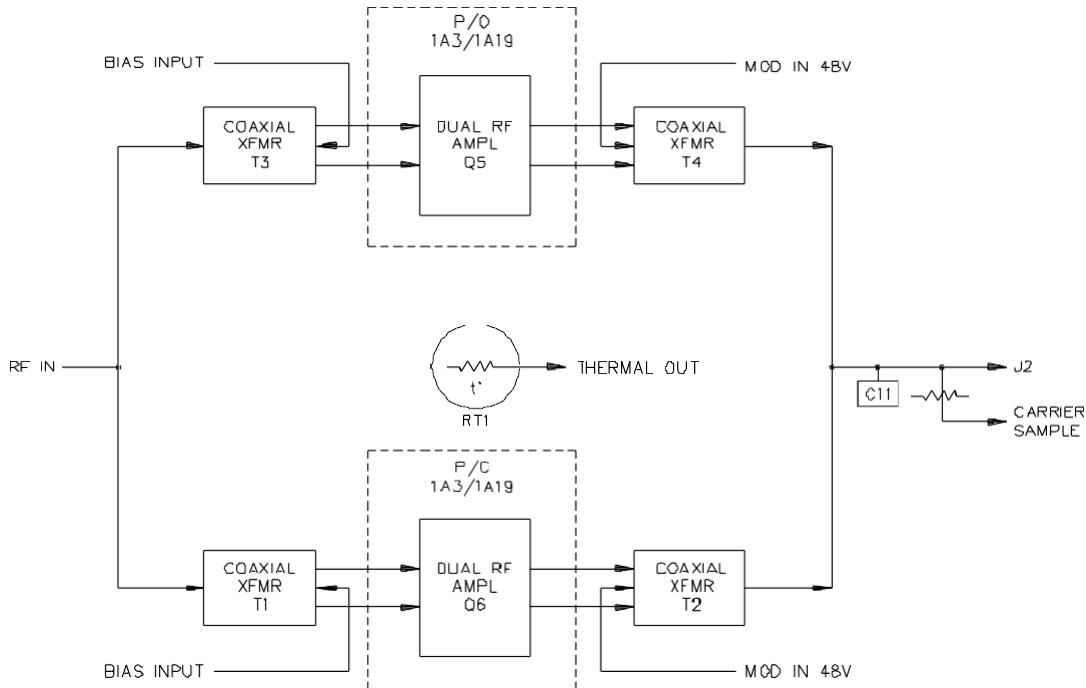

**Figure 2-16. Power Amplifier CCA Block Diagram**

Output transformer T4 has a primary to secondary impedance ratio of 1:4. This is used to match the output impedance of the transistor Q5 to the junction point impedance where the output of Q5 is added to the output of Q6. This junction point is then matched to the 50 ohm output impedance of the power amplifier assembly by capacitors C28, C29, C10 and C11, and inductor L1. Capacitor C11 is factory adjusted for optimum performance of the power amplifier CCA.

The capacitive voltage divider formed by C12 and C9 is used to provide a sample of the RF output signal to the power amplifier modulator CCA, where it is detected and used to provide feedback control of the modulator voltage.

Thermistor RT1 is thermally connected through its mounting to the amplifier heatsink. It has a value of approximately 10 K ohms at 25 degrees C (amplifier cold, room temperature). As the temperature of the heat sink rises, the resistance of RT1 reduces. RT1 is wired as part of a resistive voltage divider, hence the voltage at the thermal output signal reduces as the amplifier temperature increases. This signal is used by the bias regulator modulator CCA to shut down the power amplifier in the event of excessive heat sink temperature. This voltage is also used to provide some feedback for the bias voltage generation circuitry, reducing bias currents as the heatsink temperature increases.

### 2.3.2.3.6 Bias Regulator/Exciter Modulator CCA (A4) Block Diagram Theory


Refer to [Figure 2-17](#). The final amplifier modulation in signal from 1A3/1A19 Q1, Q2, and Q3 is used as input to the exciter modulator CCA. The AC component of the final modulation in signal is removed by R16 and C11 and the resultant DC level (representative of the carrier power in the output signal) is applied to one input of a differential amplifier made up of transistor pair Q1 and Q2. The output of the differential amplifier is further amplified by Q5. The output of Q5 is used as the modulator voltage for the exciter CCA transistor 1A3/1A19 A3Q1. The output of Q5 is also applied to the other input of the differential amplifier, where it is used as feedback control of the modulator output.

The final amplifier modulation in signal is also applied to differential amplifier pair Q3 and Q4. The output of this differential amplifier is applied to transistor 1A3/1A19 Q4, mounted on the power amplifier heatsink. The output of 1A3/1A19 Q4 is the modulator drive voltage for Q2 on the exciter CCA. The output of 1A3/1A19 Q4 is applied to the other input of the differential amplifier Q3/Q4 as feedback to control the modulator voltage.

The reflected power analog in signal from the RF monitor assembly is applied to amplifier U1. The output of U1 is applied to comparator U3B through a fast attack, slow decay circuit. U3B compares the voltage output of U1 to a 1.63 volt reference. If the voltage exceeds this reference, the output of U3B goes low, causing a reflected power shutdown.

The thermal sensor input is applied to voltage regulator U2. U2 generates the bias voltages for all of the RF power transistors in the power amplifier assembly. As the temperature of the power amplifier heatsink increases, the voltage at the thermal sensor input decreases. This causes a reduction in the bias voltage applied to the RF power transistors. The thermal input sensor signal is also applied to comparator U3A, where it is compared to a 1.2 volt reference signal. If the thermal sensor input voltage goes below 1.2 volts, indicating excessive heatsink temperature, comparator U3A output switches low, which causes a carrier thermal shutdown output.

Transistor Q6 is used to logically "OR" the outputs of the thermal shutdown detector circuit and the reflected power shutdown detector circuit. If either of these detectors switches low, the collector of Q6 is pulled to +5 volts. The collector of Q6 is the Shutdown Control Command output from the bias regulator modulator CCA. This output is applied to the sideband generators and the audio generator CCA in the CVOR to shut them down at the time of power amplifier shutdown.

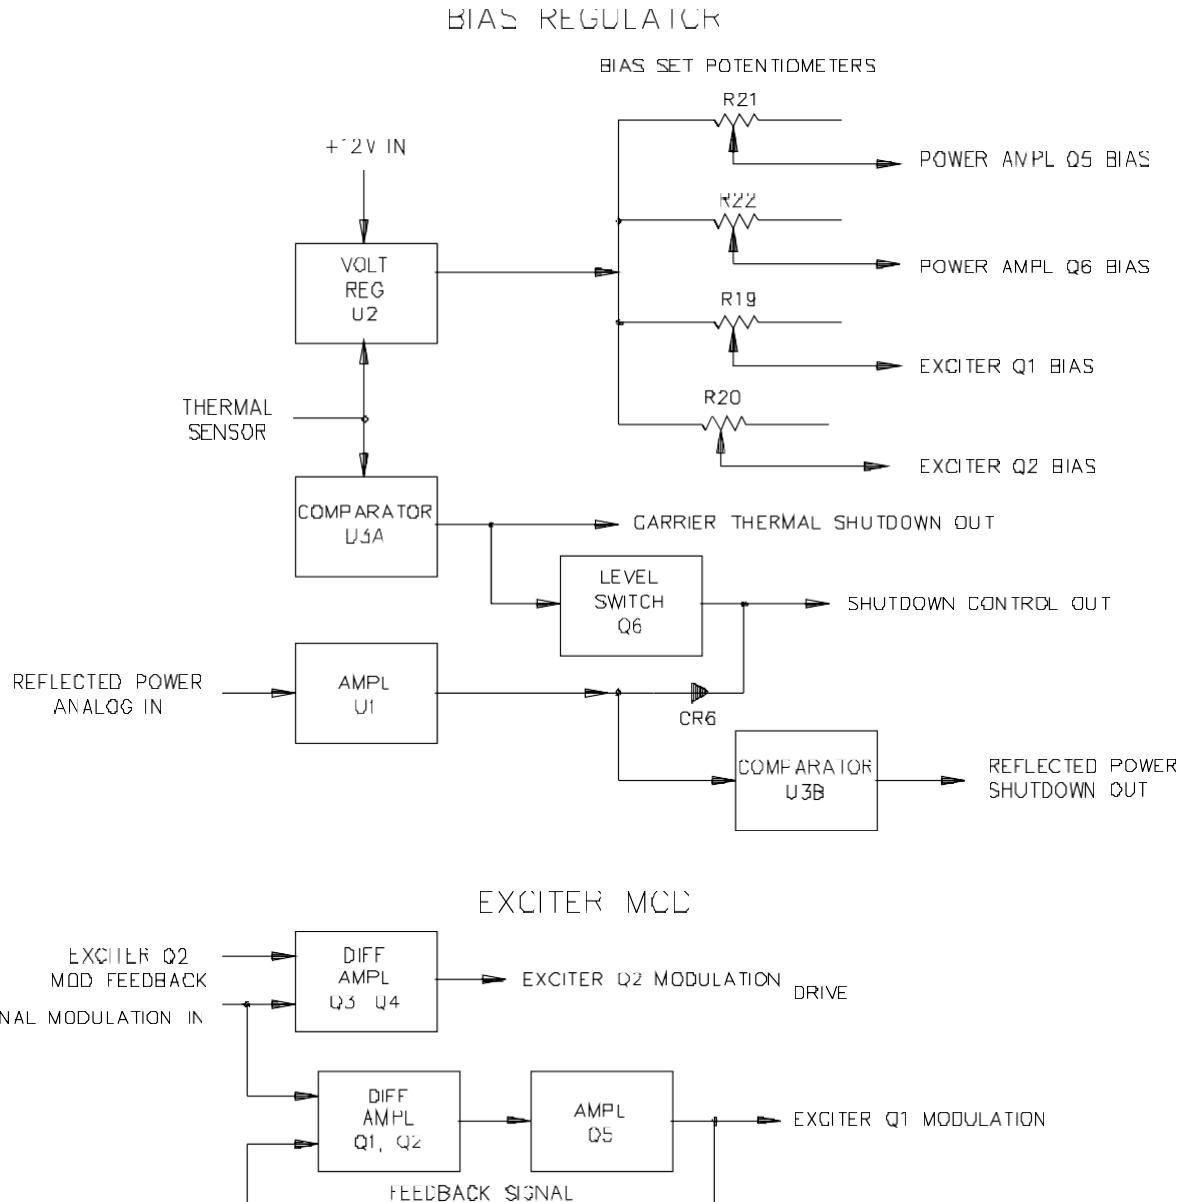

1150-078

**Figure 2-17. Bias Regulator/Exciter Modulator CCA Block Diagram**

### 2.3.2.3.7 Bias Regulator/Exciter Modulator CCA (A4) Detailed Circuit Theory

Refer to [Figure 11-10](#). The bias regulator / exciter modulator CCA is used to develop several control signals for the power amplifier assembly.

## **Model 1150 CVOR**

The output voltage from transistors 1A3/1A19 Q1, Q2, and Q3 (the final amplifier modulator transistors, mounted on the CSB amplifier chassis) is applied to the bias regulator modulator CCA as the controlling modulation input.

The modulation input is low pass filtered by R16 and C11, effectively removing the AC component of the final modulation, leaving a DC level that varies depending on power output. This signal is applied to the base of Q1, one input of the differential amplifier formed by Q1 and Q2. The output of Q1 is further amplified by Q5. The output of Q5 is the modulation drive signal for the first RF amplifier transistor on the exciter CCA. The output of Q5 is also used as feedback to the second input of the Q1/Q2 differential amplifier to control the output voltage.

The unfiltered modulation input is applied to the input of a second differential amplifier transistor pair, Q3/Q4. The output of Q3 is routed off the board through J1-21 to drive transistor 1A3/1A19 Q4, mounted on the amplifier heatsink. The output of this transistor is the modulation drive signal for the second RF amplifier on the exciter CCA, 1A3/1A19A3Q2. Feedback from the output of 1A3/1A19 Q4 is applied to the second input of the differential amplifier at the base of Q4 to control the operation of this amplifier.

The reflected power analog in signal (from the RF monitor assembly) represents the CSB reflected power. Amplifier U1 is a unit gain non-inverting amplifier that serves to buffer the incoming signal. The output of U1 is applied to a fast attack, slow decay circuit made up of CR5, C10, C8, and R35. This circuit forms a peak reflected power detector. The output of the peak detector is applied to the inverting input of voltage comparator U3B, where it is compared to a 1 volt reference. If the reflected power exceeds a safe limit, the output of U3B switches low, activating the reflected power shutdown output.

The thermal sensor mounted on the amplifier heatsink at the final amplifier CCA. This thermistor has a 10K ohm nominal impedance at 25 degrees C. It is connected with R30, R29, and R28 to control the output of voltage regulator U2. As the temperature of the heatsink rises, the resistance of the thermistor on the power amplifier decreases, decreasing the output voltage of U2.

The voltage at the thermal sensor input is also applied to voltage comparator U3A at the non-inverting input, where it is compared to a 1.2 volt reference. If the thermal sensor voltage goes below 1.2 volts, the output of U3A goes low, activating the carrier thermal shutdown output.

Both the carrier thermal shutdown output and the reflected power shutdown output are tied to the base of transistor Q6 via R39 and R40, respectively. If either output goes low, transistor Q6 is turned on, pulling the shutdown control command output to +5 volts.

Voltage regulator U2 provides a regulated output voltage of approximately +7 volts maximum. This voltage is used to produce the bias control voltages for the 4 RF power amplifier transistors in the amplifier assembly. As mentioned earlier, the output of this regulator is controlled by the thermal sensor input. The regulator has a sense voltage input which controls the output level. This sense voltage input is driven by a voltage divider made up of R30, R29, R28, and the thermistor RT1 mounted on the final amplifier CCA. As the temperature of the amplifier heatsink increases, causing a decrease in the resistance of RT1, the voltage applied to the non-inverting reference control input (pin 5) decreases, causing a decrease in the output voltage of U2. This reduction in output voltage as temperature increases causes a reduction in the bias current of the RF amplifier transistors, protecting them from thermal runaway.

Potentiometers R19, R20, R21, and R22 are used to adjust the bias currents of the RF amplifiers as discussed in the exciter CCA and the final amplifier CCA sections of this text. These adjustments are factory set, and should not be attempted in the field, as serious damage to the RF transistors may result.


### 2.3.2.3.8 Power Amplifier Modulator CCA (A1) Block Diagram Theory

Refer to [Figure 2-18](#). The power amplifier modulator compares the detected output signal of the CSB amplifier assembly to the reference audio input, and adjusts the final amplifier modulation drive to control the output waveforms of the CSB amplifier.

A sample of the CSB RF signal (from the final amplifier CCA) is envelope detected by diode CR1. This detected signal is passed through a buffer amplifier, U1A. The output of U1A is compared to the audio input signal by error amplifier U2. U2 drives transistor Q1, which provides the gate drive for final amplifier modulator transistors 1A3/1A19 Q1, Q2, and Q3, mounted on the amplifier heatsink.

The output of transistors 1A3/1A19 Q1, Q2, and Q3 is also routed back to the power amplifier modulator CCA as the Sample Modulation signal. With the jumpers configured in the test mode, this signal rather than the detected RF signal is used to control the modulator feedback loop. This mode is used in the factory to allow testing and alignment of the RF amplifier stages. In addition, there is an over voltage protection circuit, U1B, that will reduce the final modulation voltage if it starts to get excessive. This would typically happen upon failure of one or more of the RF devices in the CSB amplifier assembly.

One additional control input, the Shutdown Control In, (from the bias regulator modulator CCA) is applied to the inverting input of the error amplifier U2. When activated, this input is pulled up to +5 VDC on the bias regulator modulator CCA. This 5 volt signal applied to the inverting input of U2 causes it to shut down its output, disabling the modulation to the final amplifier stages.

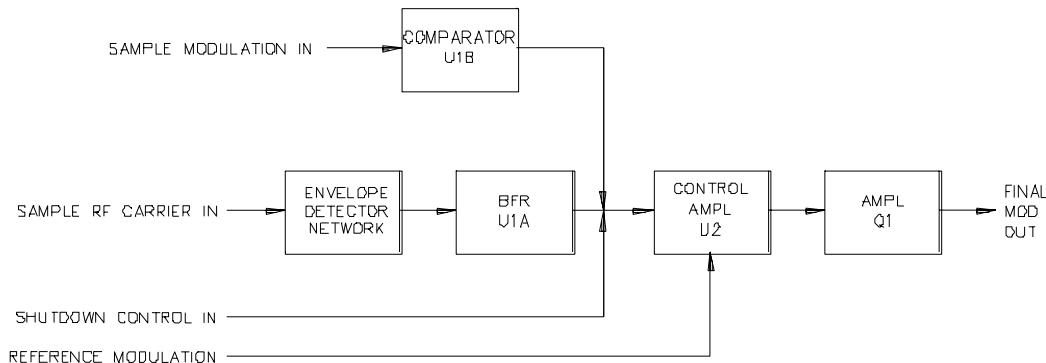

1150-077

**Figure 2-18. Power Amplifier Modulator CCA Block Diagram**

### 2.3.2.3.9 Power Amplifier Modulator CCA (A1) Detailed Circuit Theory

Refer to [Figure 11-7](#). The power amplifier modulator CCA is the feedback control amplifier that compares the detected RF output of the power amplifier assembly to the reference audio input signal. It modifies the power amplifier modulation drive signal to control the RF output of the amplifier assembly. The shutdown control in signal from the bias regulator modulator CCA causes the power amplifier modulator CCA to turn off the modulation voltage to the RF amplifier stages.

A sample of the output RF signal comes to the power amplifier modulator CCA from the final amplifier CCA. It is envelope detected by diode CR1. Diode CR1 is biased into its linear detection range by diode CR2. Diodes CR1 and CR2 are a matched pair, and must be replaced as a set if one fails. The output of detector CR1 is filtered by L2 and C3, and applied to the non inverting input of unity gain buffer U1A. The output of U1A is an analog voltage representative of the RF output waveform.

Amplifier U2 is the feedback error voltage amplifier that controls the modulation loop. The reference audio input from the audio generator card in the VOR system is applied to the non-inverting input, and the feedback control voltage is applied to the inverting input. A difference in these two signals creates an output voltage from U2, which drives the modulation transistors for the final amplifier. The feedback control voltage can come from one of two locations. During normal system operation, terminal E1 is jumpered to terminal E2, and the detected RF level discussed in the preceding paragraph is used. There is a test mode of operation available in addition to this. If terminal E3 is jumpered to terminal E2, a sample of the modulator output voltage is used as the feedback control voltage. This mode is used in the factory for test and alignment of the RF stages of the CSB amplifier assembly. The test mode should not be used for normal operation, as slight amplifier non-linearities or other such distortion are not corrected by the modulation control loop.


The sample modulator output voltage is also compared to a reference level by U1B. In the event that modulator voltage is excessive, this amplifier will apply a positive voltage to the inverting input of loop control amplifier U2, causing it to shut down or clamp its output drive signal. This would normally only happen in an event like RF transistor failure, where the modulator is greatly increasing the output voltage trying to make up for the failure. This feature protects the rest of the RF transistors in the event of a failure of this nature.

The output of amplifier U2 is further amplified by transistor Q1, which provides the gate drive for the final amplifier modulator transistors 1A3/1A19 Q1, Q2, and Q3 which are mounted on the amplifier heatsink. Resistor R17 and capacitor C8 are used to tailor the closed loop response of the feedback system, providing proper stable operation of the loop. Transistor Q1 has no on-board pull up network, and as such is configured as a current sink only.

### 2.3.2.3.10 Modulator Bias CCA (A5) Block Diagram Theory

Refer to [Figure 2-19](#). This CCA is only used in the -0001 power amplifier assemblies, and older -0002 units. The output transistor on the final amplifier modulator is configured as a current sink device only (please refer to [Figure 11-7](#), and the final amplifier modulator theory of operation). The modulator bias CCA serves to actively pull up the gates of the final amplifier modulation transistors, 1A3/1A19 Q1, Q2, and Q3. The gates of these transistors are essentially large capacitors, and the active pull up was intended to speed up the charging of these capacitors. Current versions of the CSB amplifier assembly do not use this CCA, but instead use a power resistor to pull up the gates of the final modulation transistors. In CVOR applications, the 9960 Hz modulation was being slightly distorted by the inherent time delays associated with Q1 on the modulator bias CCA, and changing to the resistor on new production units was done to eliminate this distortion.

All warranty repair work being done on CSB amplifier assemblies includes retrofitting the amplifier to remove the modulator bias CCA and replace with 1A3/1A19 R12 as shown on the power amplifier interconnect diagram, [Figure 11-6](#). All non-warranty repairs should consider returning the amplifier to the factory for updating to the latest configuration.

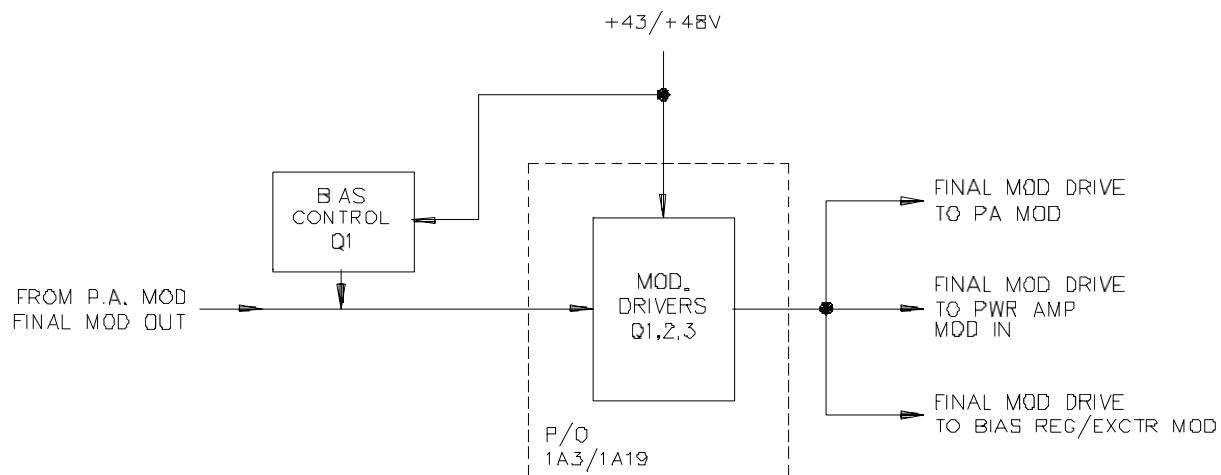


1150-080

**Figure 2-19. Modulator Bias CCA Block Diagram**

### 2.3.2.3.11 Modulator Bias CCA (A5) Detailed Circuit Theory

Refer to [Figure 11-6](#) (CSB Power Amplifier Interconnect Diagram). The modulator bias CCA develops a bias potential for the gates of power transistors 1A3/1A19Q1, Q2, and Q3. Transistor Q1 is a small signal transistor with 43/48 Vdc applied directly to the collector from terminal E4. The emitter of Q1 is connected to terminals E2 and E3. Transistor Q1 is self-biased by resistor R2 and diode CR2 which allows a fixed DC voltage to be applied to the gates of modulation drivers 1A3/1A19Q1, Q2 and Q3. This fixed bias is developed across resistor R1 and diode CR1 and the output circuitry of Q1 on the power amplifier modulator CCA. Diodes CR1 and CR2 are fast recovery diodes that are used to protect the base-emitter junction of Q1 and to provide rapid restoration of the static condition of Q1.

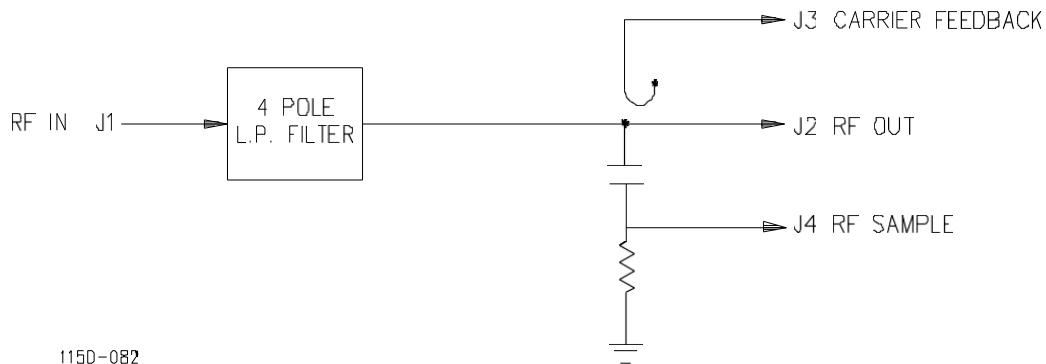

**Figure 2-20. Low Pass Filter Assembly Block Diagram**

Transistors 1A3/1A19Q1, Q2 and Q3 are MOSFET transistors wired in parallel with current balancing resistors in series with each gate. This means the capacitance of each gate is additive; therefore, the effective gate capacitance of the three devices is comparatively large. This large capacitance has the ability to store a charge and resist a change in voltage. In order to prevent any distortion of the audio modulation signal, this charge must be quickly drained off from the gates. The biasing of Q1 insures that as the changing audio modulation signal which comes in at terminal E1 is applied to the gates, the cumulative charges on each of the gates is effectively drained.

The circuitry for Q1 also provides the drain current path for Q1 on the power amplifier modulator CCA. The gates of the modulation drivers are essentially driven by the varying drain potential of Q1 on the power amplifier modulator CCA.

### 2.3.2.4 Low Pass Filter Assembly (1A35, 1A36) Block Diagram

Refer to [Figure 2-20](#). The low pass filter assembly consists of a four pole filter network that removes harmonics from the carrier RF signal.

RF carrier signal enters the low pass filter assembly via RF connector J1. The RF carrier signal is applied to a four pole filter network that removes harmonic frequencies of the carrier RF signal that may be present. The RF signal exits the low pass filter via RF connector J2.

The low pass filter assembly has a pickup loop that induces a small RF voltage into the loop. This RF signal is the carrier feedback and is applied to the frequency generator assembly via connector J3.

A sample of the RF output signal is developed by a voltage divider network. This signal is applied to the RF monitor assembly as the system A (or B) RF sample via connector J4.

#### **2.3.2.4.1      Low Pass Filter Assembly (1A35, 1A36) Detailed Theory**

Refer to [Figure 11-25](#). The low pass filter assembly consists of a four pole filter network that removes harmonic frequencies from the carrier RF signal.

The RF carrier signal from the CSB power amplifier assembly enters the low pass filter assembly via RF connector J1. The RF carrier signal is applied to a four pole filter network that removes any harmonic energy above 250 MHZ that may be present in the carrier signal. The RF signal exits the low pass filter via RF connector J2.

The low pass filter assembly has a pickup loop situated in close proximity to the primary conductor of the main RF carrier signal. The RF signal induces a small RF current into the loop which is developed across R1, a 50 ohm resistor, for impedance matching. This RF signal is applied to the frequency generator assembly as the carrier feedback signal via connector J3.

A sample of the RF output signal, for test purposes, is developed by a voltage divider network comprised of capacitor C9 and resistor R2. R2 is a 50 ohm resistor for impedance matching the signal developed across it to the coaxial cable. This signal will be approximately 100 to 300 mW for a 100 watt RF carrier power output. This RF signal is applied to the RF monitor assembly as the system A (or B) carrier sample via connector J4.

#### **2.3.2.5    Bi-Directional Couplers (1DC1, 1DC2)**

The bi-directional coupler is used to obtain a representative sample of the forward and reflected RF powers of the carrier signal (refer to [Figure 11-2](#) or [11-3](#), CVOR system block diagram). The coupler has negligible insertion loss between the input and output connectors. Internal directional pickup loops couple a portion of the forward and reflected powers to the output sampling ports. These ports provide a fixed ratio of the sampled powers to the RF monitor assembly for detection and analysis processing.

#### **2.3.2.6    Sideband Generator Assembly (1A5/1A21) Block Diagram Theory**

Refer to [Figure 2-21](#). The sideband generator contains two sideband amplifier CCAs (1A5A2, 1A5A4) and two sideband controller CCAs (1A5A1, 1A5A3). The sideband generator processes the two separate sideband only RF signals.

## **Model 1150 CVOR**

The sideband controller CCA is responsible for developing the sideband dynamic phase control voltage, modulator drive signal, the sideband manual phase control voltage, and the sideband mean phase control voltage.

The sideband dynamic phase control voltage is applied to the sideband dynamic phase control filter on the sideband amplifier CCA where it is used to set the operating point of the dynamic phase control filter.

The modulator drive signal is used as a supply voltage for transistor Q105/205 on the sideband amplifier CCA.

The sideband manual phase control voltage is used on the sideband amplifier CCA to set the operating point for the sideband manual phase control filter.

The sideband mean phase control voltage is applied to the sideband mean phase control filter on the sideband amplifier CCA where it is used to set the operating point of the sideband mean phase control filter.

The sideband amplifier CCA is responsible for producing the amplified sideband RF signal. It also produces an amplitude product detector error signal, a phase product detector error signal and a forward power detected level signal.

The amplitude product detector error signal is processed by the sideband controller CCA as a feedback signal to compensate for gradual amplitude changes in the modulation level of the sideband modulating signal.

The phase product detector error signal is processed by the sideband controller CCA as a feedback signal for the sideband mean and dynamic phase control circuits.

The forward power detector level signal is sent to the sideband controller CCA where it is sampled, buffered, and then applied to the audio generator CCA to control the sideband power level and the monitor CCA for VSWR calculations.

### **2.3.2.6.1 Sideband Generator Assembly (1A5/1A21) Circuit Partitioning**

Refer to [Figure 2-22](#). The sideband generator contains two sideband amplifier CCAs and two sideband controller CCAs. The generator creates the two separate sideband only RF signals. Since the two sideband amplifier CCAs and sideband controller CCAs are functionally identical, the circuit analysis will be limited to one sideband amplifier CCA and one sideband controller CCA.


#### **NOTE**

It is important to remember which sideband amplifier number you are adjusting.

SB1 creates an RF signal modulated by the 30 Hz sin frequency. SB2 creates an RF signal modulated by the 30 Hz cos frequency. The RF signal is supplied by the carrier/sideband drive CCA in the frequency generator assembly. The sideband RF signal enters the sideband generator assembly through RF connector J1 located on the rear plate which interconnects with terminal E45 on the A4 sideband

amplifier CCA. The 0 dBm RF input signal (minimum -1.0 dBm) is divided equally between the two amplifier groups within the sideband generator assembly. The electrical distance that the RF signal travels from terminal E46 to terminal E47 on the A4 sideband amplifier CCA and from terminal E46 on the A4 sideband amplifier CCA to terminal E47 on the A2 sideband amplifier CCA is held to close tolerances.

Each sideband generator assembly has an associated voltage regulator working in conjunction with it. The voltage regulators for sideband generator assemblies 1A5 and 1A21 are located on the cabinet insert assembly behind each sideband generator assembly. They are 1VR1 for the 1A5 module and 1VR2 for the 1A21 module. These independent regulators convert the +28 Vdc to an isolated +12 Vdc power source for each sideband generator assembly.

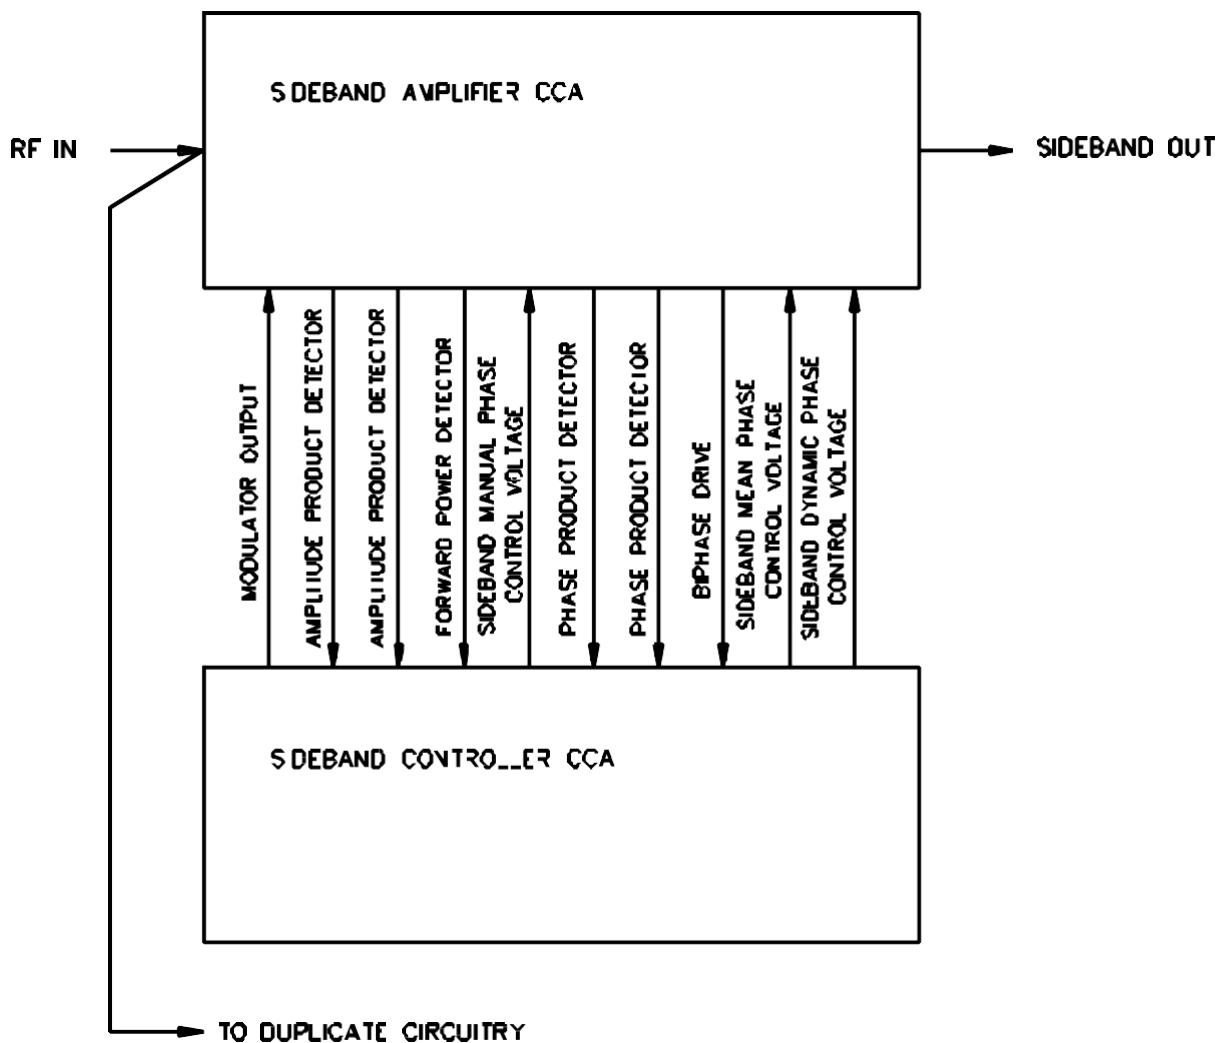

1150-143

**Figure 2-21. Sideband Generator Assembly (1A5) Block Diagram**

## Model 1150 CVOR

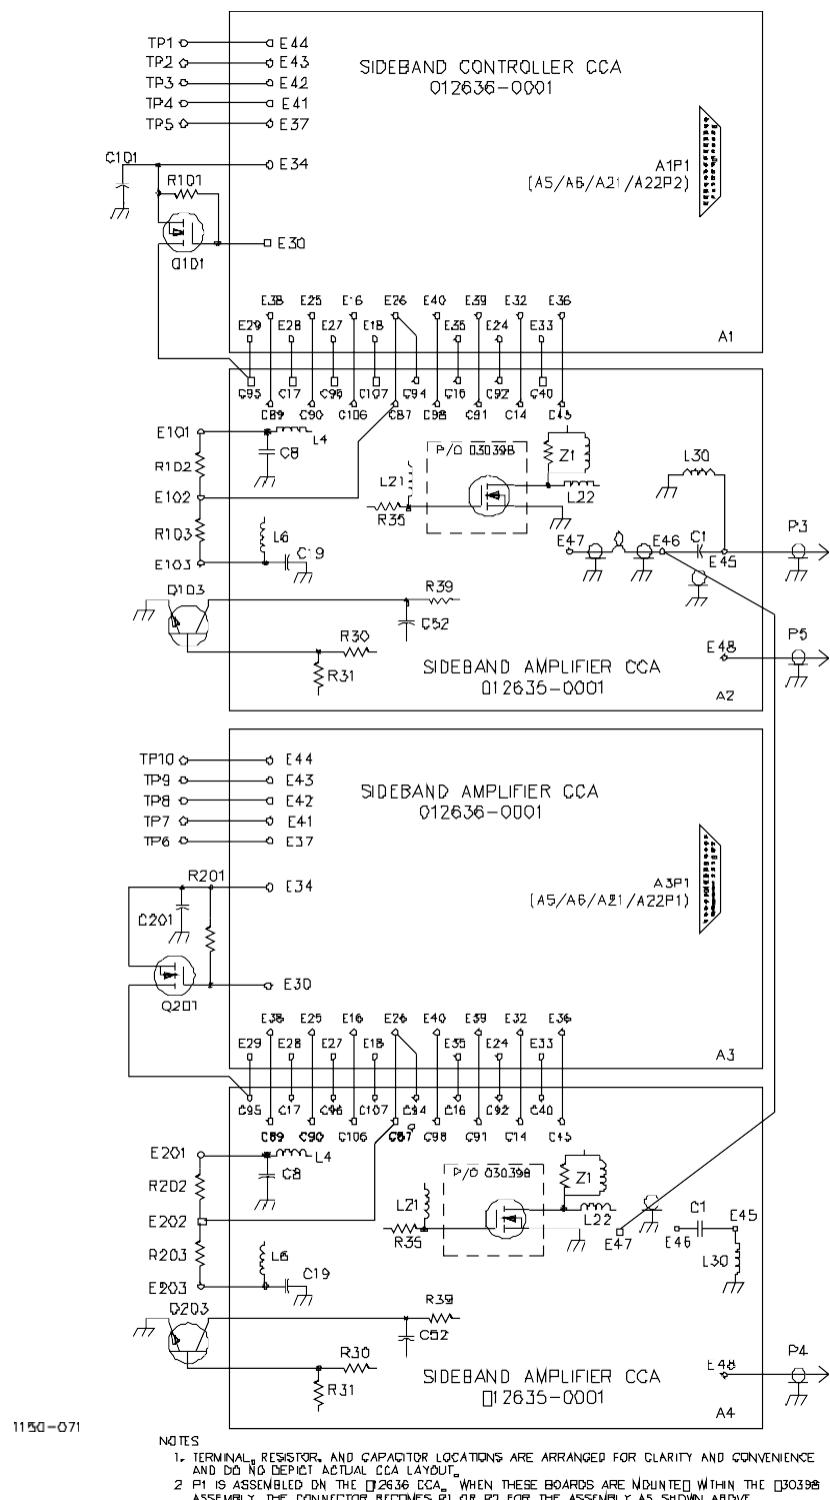


Figure 2-22. Sideband Generator Assembly Interconnect Diagram

The sideband amplifier CCA uses feed-thru capacitors which are interconnected by bus wire to terminals on the sideband controller CCA. The sideband controller CCA has the primary multi-pin connector that interconnects with the cabinet wiring harness. RF connections are made to the sideband amplifier CCA. There is no interconnection between SB1 and SB2 other than the internal RF cable between terminal A4E46 and A2E47.

Each sideband amplifier has several components mounted to the assembly that are reference designated with hundred series numbers. Specifically, one hundred series numbers is used with SB1 and two hundred series numbers is used with SB2. The mirror-image construction of the sideband generator requires each test point to have a different reference designator; although, like-function test points will be identified as paired numbers. For example, the sideband manual phase control voltage can be measured at test points TP2/TP9. TP2 is the test point for SB1; TP9 is the test point for SB2.

### 2.3.2.6.2 Sideband Amplifier (1A5A2/A4, 1A21A2/A4) Block Diagram Theory

Refer to figure 2-23. The sideband RF signal is amplified by RF amplifier Q1 before it is phase shifted by the sideband manual phase control network which consists of CR1, CR2, L2 and L3. A sideband manual phase control voltage from the sideband controller CCA sets the operating point of the manual phase control network. RF amplifier U1 amplifies the RF signal so that it can be divided between the product detector circuits and RF amplifier Q2.

Q2 amplifies the phase shifted sideband RF and applies it to a carrier suppression bi-phase modulator circuit which consists of diodes CR3, CR4, CR5, CR6, and power divider HY1. The bi-phase modulator passes the RF signal to RF amplifier U2.

U2 amplifies the RF signal from the bi-phase modulator and applies it to the sideband mean phase control filter. The sideband mean phase control filter is an electronic filter which establishes an average phase shift of the sideband RF signal. The sideband mean phase control voltage is a DC voltage that establishes the operating point of the sideband mean phase control filter.


The RF signal is next applied to the sideband dynamic phase control filter. This filter constantly adjusts the instantaneous phase of the sideband RF to eliminate any incidental phase distortion created by amplitude modulation of the sideband RF. The dynamic phase control voltage is a DC voltage that continually adjusts the operating point for this filter.

RF amplifier U3 amplifies the sideband RF from the dynamic phase control filter and applies it to RF power amplifier transistor Q103/Q203.

Q103/203 amplifies the sideband RF signal and applies it to RF amplifier modulator Q105/Q205.

The supply voltage for Q105/Q205 is the modulator output signal that is supplied by the sideband controller CCA. The output of Q105/205 drives a low pass filter network which consists of capacitor C57 thru C64, C109, and inductors L22 thru L26. This filter is designed to remove any high order harmonics from the sideband RF signal.

## Model 1150 CVOR

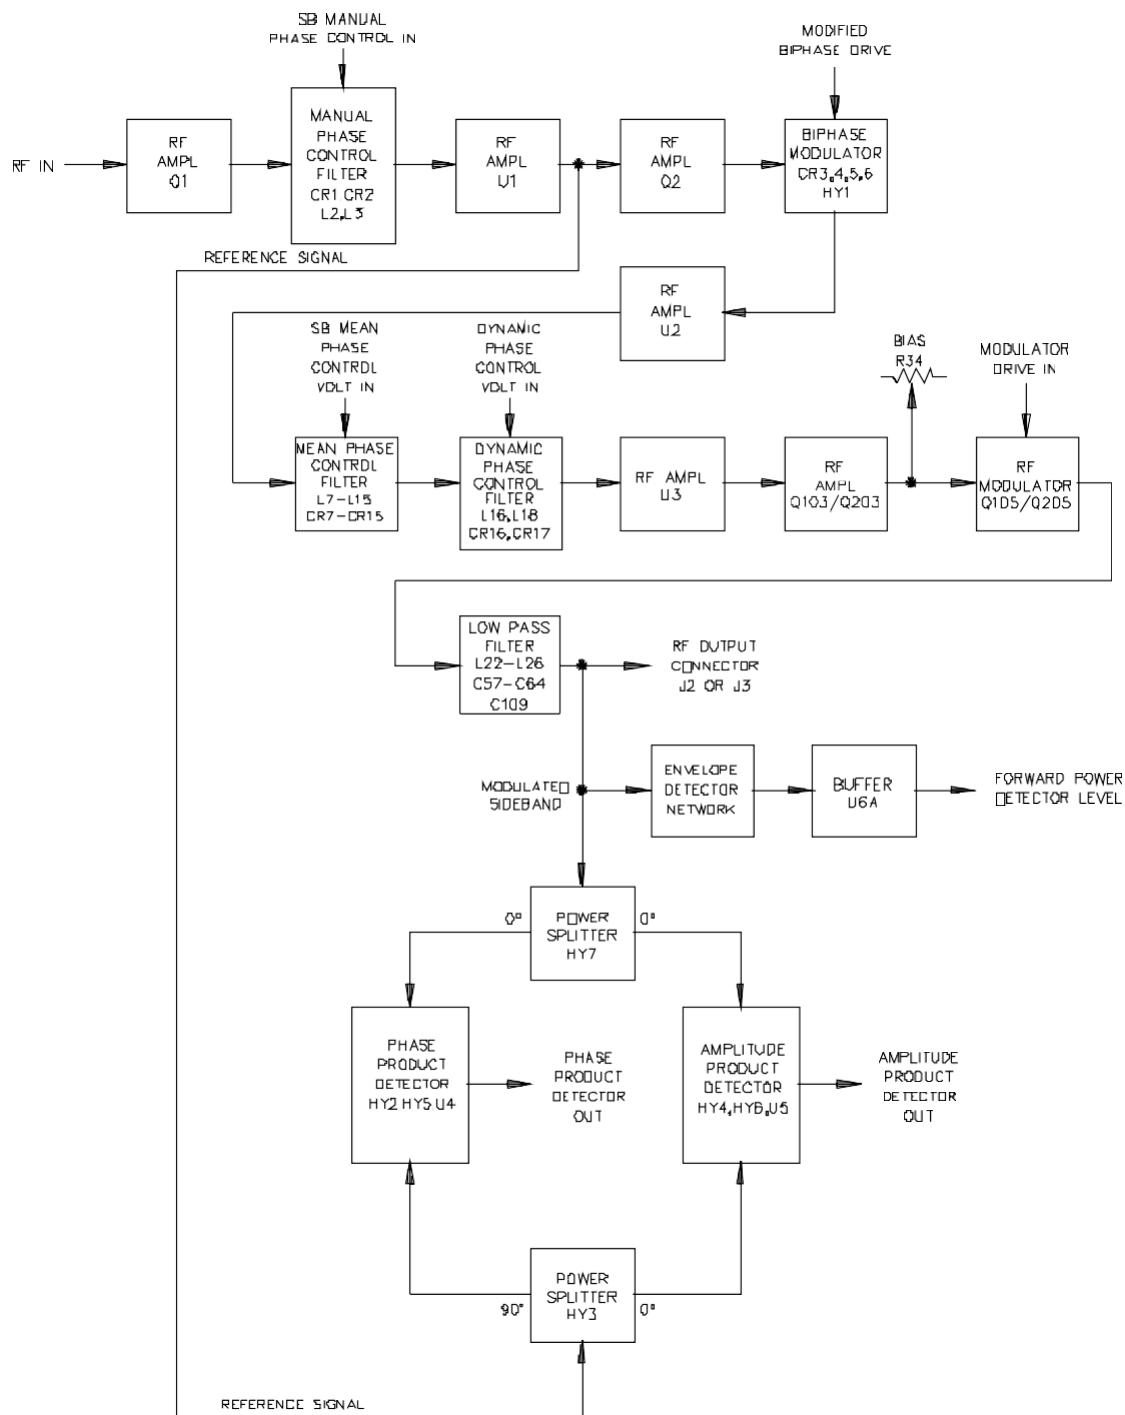

**Figure 2-23. Sideband Amplifier CCA Block Diagram**

From the low pass filter, the modulated sideband RF is sent to three separate circuits: an envelope detector network; amplitude and phase product detector circuits, and to the RF output connector on the rear plate of the sideband generator assembly as the sideband RF output signal.

The portion of the sideband RF that is applied to the envelope detector is converted back into the analog modulation signal which is buffered by U6A. This detected signal is sent to the sideband controller CCA as the forward power detector signal.

The sample portion of the modulated sideband RF signal is used as a comparator signal for the phase and amplitude product detectors. The modulated sideband RF output signal is applied to power splitter HY7 where it is divided into equal components with 0 phase shift. The two equal components are then used as the variable inputs for the phase product detector circuit which consists of HY2, HY5, and U4 and for the amplitude product detector circuit which consists of HY4, HY6, and U5.

The reference input signal which is obtained from the output of U1, is applied to 90° power splitter HY3. One output of HY3 is shifted 90° with respect to the other output signal. The two components are then used as the reference inputs for the phase product detector and the amplitude product detector circuits.

The output of the phase product detector is the phase product detector error signal which is processed by the sideband controller CCA to develop the dynamic and mean phase control DC voltages which will automatically adjust the dynamic and mean phase control filters.

The output of the amplitude product detector is the amplitude product detector error signal which is processed by the sideband controller CCA to compensate for gradual amplitude changes in the modulation level of the sideband modulation drive signal.

### 2.3.2.6.3 Sideband Amplifier (1A5A2/A4, 1A21A2/A4) Detailed Theory

Refer to figure 11-15. The sideband amplifier CCA amplifies, and modulates the sideband RF signal from the frequency generator assembly to the operational output power level required and also produces an amplitude and phase error signals to control distortion of the sideband RF signal.

The sideband amplifier CCA has a -3.0 dBm sideband RF signal present at solder pad terminal E47. From terminal E47 the sideband RF is applied to transistor Q1. Q1 amplifies the sideband RF and applies it to the sideband manual phase control filter. The sideband manual phase control filter is a two pole electronic filter which is similar in operation to the carrier phase control filters. The control voltage that sets the operating point of this filter is obtained from the sideband controller CCA via feed-thru capacitor C16.

The amount of phase shift that the sideband RF energy undergoes is determined by an entry that is programmed through the video terminal. For sideband amplifier 1, a numeric value, in degrees, that is programmed into Transmitters>>Configuration screen will change the DC voltage that is applied to the manual phase control filter on the A2 sideband amplifier CCA in the 1A5 sideband generator assembly. A numeric value representing the station frequency that is programmed into Transmitters>>Configuration screen will change the DC voltage that is applied to the manual phase control filter on the A4 sideband amplifier CCA in the 1A5 sideband generator assemblies.

## **Model 1150 CVOR**

From the sideband manual phase control filter the sideband RF signal is applied to RF amplifier U1. U1 has a fixed power gain of 12 dB. The output of U1 is approximately +7 dBm. The signal is then divided with approximately +1 dBm used as a reference signal for the phase and amplitude product detector circuits and the remainder being sent to RF amplifier Q2.

Q2 amplifies the sideband RF and then routes it to the input of power divider HY-1. HY-1 and steering diodes CR-3 through CR-6 form a Bi-phase modulator. The purpose of the Bi-phase modulator, in conjunction with the AM modulated stages, of the Sideband Amplifier is to suppress the sideband RF carrier to produce a double sideband suppressed carrier modulated RF output. This is accomplished by reversing the RF phase in synchronism with the 30 Hz modulation.

The 0 and 180 degree outputs of HY-1 are alternatively selected by diodes CR-3 through CR-6 which are driven by the Bi-phase drive signal derived from the 30 Hz modulation and originating on the sideband controller CCA and applied to CR-3 through CR-6 via E32/C14.

RF amplifier U2 is a fixed gain block amplifier with a power gain of +12 dB. The amplified RF from U2 is applied to the sideband mean phase control electronic filter. This is a nine pole filter network that functions identically as the carrier mean phase control filter. The DC control voltage for this filter is obtained from the sideband controller CCA via feed-thru capacitor C40. This filter establishes an average shift in phase of the sideband RF energy. The sideband mean phase control circuit on the sideband controller CCA monitors any average phase change incurred by the sideband RF signal after initial setup. If a phase change is detected, a correction voltage, which is the sideband mean phase control voltage, is sent to the sideband mean phase control filter to offset the detected phase shift and maintain a phase stable RF output signal. Because the filter is part of a null-seeking loop, there must always be an initial control voltage applied to the filter for proper operation. By maintaining the phase shift of the sideband RF signal to a relatively constant value with respect to the other sidebands, a significant reduction in phase distortion between the sidebands is achieved. This improves the accuracy of the azimuth generation frequencies.

### **WARNING:**

Do not attempt to field tune the mean control filter inductors.

The output of the mean phase control filter drives the input of the sideband dynamic phase control filter. The input DC voltage to this filter is constantly adjusting the instantaneous phase of the sideband RF signal to eliminate any incidental phase distortion created by amplitude modulation of the sideband RF signal. The DC voltage that controls the dynamic phase control filter is obtained from the sideband controller CCA via feed-thru capacitor C45.

RF amplifier U3 is a fixed gain block amplifier with a power gain of +8 dB. The output of this amplifier drives the base of transistor Q103/Q203.

Capacitors C110 and C49 in conjunction with L27 form a "L" network to match the input impedance of Q103/Q203 to the output impedance of U3 which is approximately 50 Ohms. Variable capacitor C49 is adjusted for best power output.

Q103/Q203 is a Class C medium power amplifier which drives the modulated output stage, Q105/Q205. L20, C53, and L21 form a "T" network to match the high output impedance of Q103/Q203 to the low impedance input of the power FET, Q105/Q205.

A quiescent DC bias is applied to the output stage to set the DC current with no RF drive to 25 mA. R34 is used to set the bias. The DC drain current of the output stage may be read by removing jumper W1 between TP3 and TP4 or alternatively the drop across the 0.2 Ohm resistor R79 may be read with a voltmeter at TP4 and TP5 and the current calculated.

The output stage Q105/Q205 is matched to approximately 50 Ohms by the network consisting of L31, L22, C57, C58, and L23. Variable capacitor C58 permits adjustment of the amplifier output match to the frequency of operation and is adjusted to obtain maximum Rf power output.

Jumper W19 may be removed to enable test of the amplifier or the output low pass filter. If power is applied to the stage there is a DC voltage at W19 so a blocking capacitor (1000 pF) should be provided to prevent any connected test equipment from shorting out the DC voltage. Modulation is applied to the DC drain voltage supply which enters the CCA via feed through capacitor C95.

The RF output from the Q105/Q205 matching network is routed to a low pass filter, C61, L24, C62, L25, C63, L26, and C64, which removes the undesired harmonics from the amplifier output.

From the low pass filter network, the modulated signal is sent to three places

- The RF output connector
- The amplitude and phase product detectors
- An envelope detector circuit

The main portion of the sideband amplifier output is nominally 2.2 watts and this signal is sent to the output connector via solder pad terminal E48. A sample of the RF output is coupled, by means of C88 and C99, to an envelope detector and also to an attenuator, R69, R67, and R66, which feeds the amplitude and phase product detectors via power splitter HY-7. The envelope detector consists of diode CR23 and associated circuitry. CR24 temperature compensates the DC threshold variation with temperature of CR23. Operational amplifier U6A scales and buffers the detector output and provides a signal proportional to RF power output to the sideband controller CCA via feed through capacitor C106.

The amplitude and phase product detectors are driven from the output of power splitter HY-7.

The modulated sideband RF is divided into equal components in 0° phase shift power splitter HY7. The two output components of HY7 are used as the variable inputs to the two product detector circuits. The reference input, which is obtained from the output of U1, is sent to 90° power splitter HY3. The output of HY3 that drives the amplitude product detector circuit has a 0° phase shift in comparison with the output that drives the phase product detector circuit. This output shifts the RF signal by 90°.

Each product detector circuit divides the reference and variable input signals further in four 180° power splitters: HY2 and HY5 for the phase product detector; HY4 and HY6 for the amplitude product detector. These power splitters feed two, dual-paired transistor networks, U4 and U5.


#### **Model 1150 CVOR**

The output of U4 is a balanced phase error signal which is processed by the sideband controller CCA as a feedback signal to the dynamic and mean phase control filters. The output of U5 is a balanced amplitude error signal which is processed by the sideband controller CCA in a negative feed back loop to linearize the modulator Q101/Q201.

The phase product detector output signal exits via feed-thru capacitors C91 and C92. The balanced amplitude product detector output signal exits via feed-thru capacitors C89 and C90.

#### **2.3.2.6.4 Sideband Controller (1A5A1/A3, 1A21A1/A3) Block Diagram Theory**

Refer to figure 2-24. The sideband controller CCA is designed to perform several control functions of the sideband amplifier, they are: Bi-Phase drive control, sideband forward power control, phase error control, and modulation drive control.

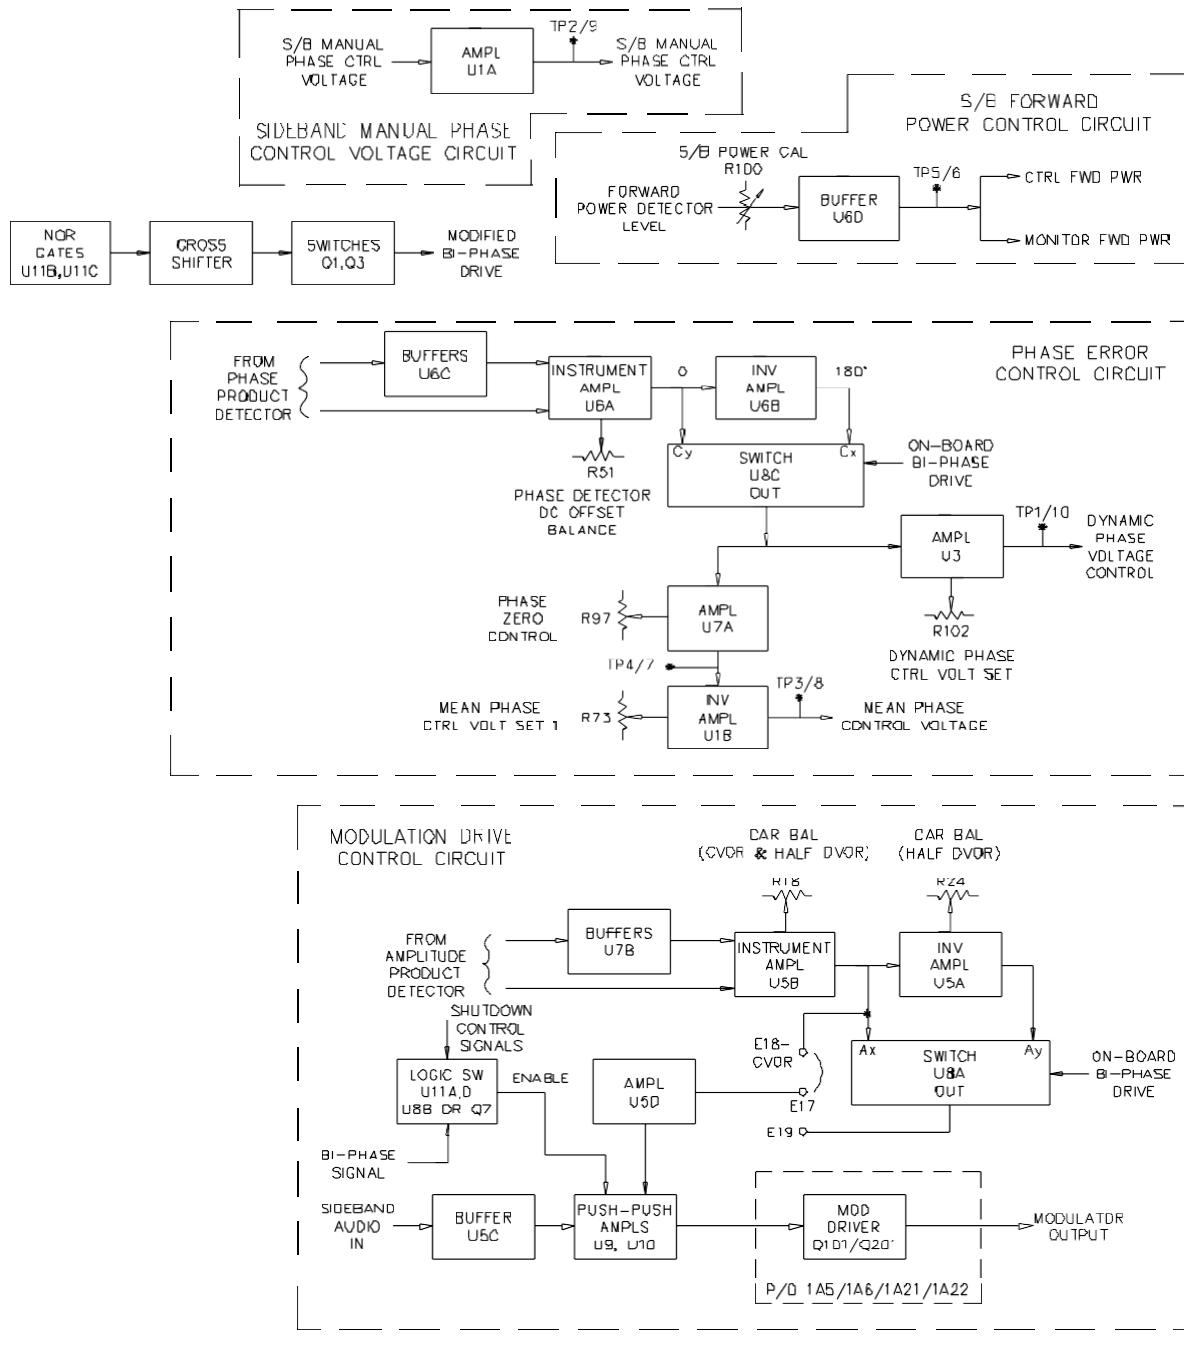

1150-145

Figure 2-24. Sideband Controller CCA Block Diagram

## **Model 1150 CVOR**

Amplification of the sideband manual phase control voltage from the audio generator CCA is accomplished by the sideband controller CCA. The sideband manual phase control voltage is applied to amplifier U1A. U1A amplifies the sideband manual phase control voltage and applies it to the manual phase control electronic filter on the sideband amplifier CCA. The voltage is measured at test point TP2/TP9. This value is directly controlled from the sideband phase setting and frequency entry in the Transmitters>>Configuration screens.

The forward power detector level signal from the sideband amplifier CCA is sent to potentiometer R100. R100 adjusts the amount of signal into buffer U6D. U6D buffers the sideband forward power detector signal from the sideband amplifier CCA and applies it to the audio generator CCA and the VOR monitor CCA as the control forward power sample and monitor forward power sample signals. The detected sideband RF output is measured at TP5/TP6.

The balanced phase product detector error signal from the sideband amplifier CCA is applied to buffer U6C and instrumentation amplifier U6A. Phase balance potentiometer R51 sums a DC offset voltage with one input to U6A to cancel phase detector offset. U6A and U6C reference the phase product detector signal to ground and apply it to the Cy input of analog switch U8C and to inverting amplifier U6B. U6B inverts the signal and applies it to the Cx input of analog switch U8C. In the CVOR application it is required to reverse the effect of the RF Bi-phase switch upon the phase error signal if the dynamic phase control loop is to operate correctly. This is the purpose of the non-inverted and inverted inputs to switch U8-C. U8-C is driven by the on-board Bi-phase switch drive signal and alternatively selects either the non-inverted or the inverted phase error signals from U6-A and U6-B in synchronism with the action of the Bi-phase modulator. This removes the effect of the Bi-phase modulation upon the operation of the dynamic phase control loop.

The output from U8C drives the inputs of amplifiers U3 and U7A. The signal into U3 is summed with a DC voltage that is set by the dynamic phase control voltage potentiometer R102. The output of U3 is the sideband dynamic phase control voltage that is applied to the dynamic phaser on the sideband amplifier CCA. It is also sent to test point TP1/10.

The input signal to U7A is summed with a DC voltage set by phase zero control potentiometer R97. The output of U7A is applied to operational amplifier U1B. This is the mean phase error voltage and is measured at test point TP4/7. U1B has a DC offset voltage applied to it by mean phase control voltage set potentiometer R73. The output of U1B is the mean phase control voltage that is applied to the mean phase control filter onto the sideband amplifier CCA. It is routed to test point TP3/8.

The amplitude product detector error signal is applied to buffer U7B and instrumentation amplifier U5B. Potentiometer R18 is called the carrier balance CVOR & half CVOR control. Its function is to sum a DC voltage with the amplitude product detector error signal that will affect the modulation drive signal to the sideband amplifier CCA. In a CVOR system, R18 controls peak balance of the modulation drive signal. R18 is an adjustment that sets the equal peaks of the sideband signals. The output of U5B drives the input (pin 12) of analog switch U8A and the input of U5A.

The output of U5-B drives one input (pin 12) of analog switch U8-A and amplifier U5-A (which are used only in the DVOR application) as well as being routed to Jumper E-15. In the CVOR application the signal is routed directly from E-15 to E-17 and then to U5-D. Thus terminals E-15 and E-17 must be jumpered for CVOR operation.

The output of U5D is an amplitude error feedback signal that is applied to push-push amplifiers U9 and U10 to control modulation signal levels. The sideband audio signal from the audio generator CCA is buffered by U5C before it is applied to the inputs of U9 and U10.

The outputs of U9 and U10 are controlled by enable signals from a logic switch network that is comprised of U8B and NOR gates U11A and U11D. The enable signals are of opposite polarity which alternately turn on U9 or U10. This alternating action causes amplification of both the positive and negative halves of the audio modulation signal; however, the negative portion is inverted.

The combined output of U9 and U10 drive the gate of modulation driver transistor Q101/Q201.

The output of Q101/Q201 is the modulator output signal which is the varying drain voltage for modulator transistor Q105/Q205 on the sideband amplifier assembly.

### 2.3.2.6.5 Sideband Controller (1A5A1/A3, 1A21A1/A3) Detailed Theory

Refer to [Figure 11-14](#). The sideband controller CCA is designed to perform several control functions of the sideband amplifier, they are: Bi-Phase drive control, sideband forward power control, phase error control, and modulation drive control.

Amplification of the sideband manual phase control voltage from the audio generator CCA is accomplished in operational amplifier U1A. The digitally developed sideband manual phase control voltage enters on connector P1-20. The sideband manual phase control voltage is applied to the non-inverting input of U1A. +28 volts is applied to a voltage divider network consisting of resistor R7 and diode CR1. Diode CR1 is a small signal diode that is forward biased to produce a small, positive offset voltage for the inverting input of U1A. CR1 will also decrease its forward voltage drop slightly as the ambient temperature of the circuit increases. This small change in the offset voltage provides a means to compensate for temperature variations within the sideband generator. U1A has an amplification gain of less than five (5). The output of U1A is the manual phase control voltage that sets the operating point of the manual phase control electronic filter on the sideband amplifier CCA. This signal is made available at terminal E35 and can be measured at test point TP2/TP9 on the front panel of the sideband generator assembly.

## **Model 1150 CVOR**

The forward power detector output from the sideband amplifier CCA enters at terminal E16 and is developed across potentiometer R100 on the sideband controller CCA. R100 is the sideband output power calibration level control. R100 is adjusted in the field by monitoring the output power of the appropriate sideband signal with a wattmeter. R100 is adjusted in small increments until the sideband forward output power displayed on the wattmeter matches the sideband forward power level calculated by the audio generator microcontroller and displayed on the Transmitters>Data screen. The calibration voltage from R100 is buffered by U6D. U6D provides the necessary drive to distribute this signal to both the audio generator CCA and the VOR monitor CCA. The signal to the audio generator CCA is identified as the control forward power signal and it leaves via assembly connector P1-6 for SB2 or SB4 or assembly connector P2-6 for SB1 or SB3. The signal to the VOR monitor CCA is identified as the monitor forward power signal. Only the monitor forward power signals from SB1 and SB2 are sent to the VOR monitor CCA for processing; therefore, the SB1 monitor forward power signal leaves via assembly connector P2-18 and the SB2 monitor forward power signal leaves via assembly connector P1-18. The detected sideband RF signal is measured at test point TP5/TP6 on the front panel of the sideband generator assembly.

The sideband controller CCA takes the balanced phase product detector signal from the sideband amplifier CCA and converts it to an unbalanced signal. The balanced phase product detector signal enters on terminals E24 and E39. Operational amplifiers U6A, U6B, and U6C process the balanced signal and reference it to ground before it is applied to analog switch U8C. U6C is a voltage follower which applies one half of the balanced phase product detector error signal to the inverting input of instrumentation amplifier U6A. The other half of the balanced signal is applied to the non-inverting input of U6A via terminal E24. The signal at the non-inverting input is summed with a DC voltage that is set by phase balance potentiometer R51. R51 is adjusted to set the AC component of the dynamic phase control signal at test point TP1/10 for a level of  $4.5 \pm 1.5$  volts in amplitude. However, it is important to remember that the adjustment of R51 affects both the mean and the dynamic phase control circuits. The output of U6A is directly applied to the input (pin 3) of U8C. U6B inverts the output of U6A before applying it to the input (pin 5) of U8C. In the CVOR system, a jumper is installed across terminals E9 and E10. This alternates the switch output of U8C, which causes U8C to select the pin 3 or pin 5 input. Therefore, the output of U8C will be in phase (alternate between pin 3 and pin 5 inputs) and inverted phase in order to eliminate the bi- phase modulation from the product detector error signal, U6B.

The output from U8C drives the sideband mean and dynamic phase lock circuits. These circuits process the phase product detector error signal, which is used as a negative feedback error correction signal, into two distinct control voltages and a status signal. The mean phase control voltage is used to compensate for phase changes to the sideband RF signal that may occur over a period of time. The mean phase control circuit also provides a status signal which is sent to the audio generator CCA that indicates if the circuit is in a phase lock state. The dynamic phase control voltage is used to compensate for instantaneous deviations of the sideband RF phase that occur from amplitude modulation of the sideband RF signal.

A portion of the output from U8C is supplied through DC blocking capacitor C32 to the dynamic phase circuit. The resultant AC signal is summed with a DC voltage obtained from dynamic phase set potentiometer R102 and applied to the inverting input of amplifier U3. R102 is adjusted to produce a nominal +4 Vdc offset for the AC component of the dynamic phase control signal at test point TP1/10. U3 operates with a gain of 16 and is selected for its capabilities to provide a wide range of output voltage and current with a small change to the input signal. The output of U3 is the sideband dynamic phase control voltage. This control voltage is applied to terminal E36 and can be measured at test point TP1/10. Terminals E13 and E14 are provided for factory tests and alignment only and must remain open for normal operation.

U8C directly drives the non-inverting input of integration amplifier U7A. Resistor R52 and capacitor C21 function as a low pass filter that removes the AC component from the signal, leaving only the average (or mean) DC voltage which represents the average phase of the sideband RF signal. This DC voltage is summed with a DC potential set by phase zero potentiometer R97. Even though R97 is in the mean phase control circuit, it does affect the dynamic phase control circuit because the phase product detector on the sideband amplifier CCA is the common source point for both signals. R97 is adjusted in conjunction with R51 to produce a clean, stable dynamic phase control signal at TP1/10. This establishes a working reference point for the mean phase control circuit. Capacitor C22 is the integration capacitor for U7A. The output of U7A drives the inverting input of amplifier U1B. This is the mean phase control error voltage which is measured at test point TP4/7.

A DC offset voltage from the mean phase control voltage adjust potentiometer R73 is applied to the non-inverting input of amplifier U1B. R73 is adjusted to produce a nominal  $0 \pm 0.05$  Vdc potential at test point TP4/7. U1B operates with a gain of 2. The output of U1B is the sideband mean phase control voltage which is applied to terminal E33. This voltage is measured at test point TP3/8 on the front plate of the sideband generator assembly.

The entire operation of the mean phase control circuit is to function initially as a null detector with a reference output. The null is measured at TP4/7 and the reference is measured at TP3/8. The DC voltage that drives the mean phase control filter on the sideband amplifier CCA is determined by R73; hence, R73 is adjusted to initially produce a null (0 volts) at TP4/7. If there is any change to the average phase of the sideband RF signal after the initial setup, the error voltage will change proportionally which will affect the mean phase control drive voltage.

As the overall phase of the sideband RF signal changes, the average DC voltage of the phase product detector error signal changes. This will be either a positive or negative change from the initial reference level into U7A causing the output of U7A to change either positive or negative in a proportional manner. This change in the error output of U7A is processed by U1B to drive the phase shift introduced by the mean phase control filter on the sideband amplifier CCA in a direction opposite to the drift. The purpose of this action is to maintain the relative output phase of the sideband RF signal constant as the internal components that can affect the RF phase change over time. The circuit is not actively null-seeking. This is based on the requirement that the amount of mean phase control drive voltage needed to offset the drift is developed from the error voltage produced by U7A. Therefore, this error voltage will not return to zero volts as the mean phase control electronic filter changes the sideband RF phase. Instead, an equilibrium point of operation occurs which appears as a change from the null point and this is maintained as a stable phase lock condition.

## **Model 1150 CVOR**

The output of U7A is sensed by the opposite inputs of dual comparators U4A and U4B. Excessive drift of the average RF phase could cause the mean phase control electronic filter on the sideband amplifier CCA to exceed its designed limits of operation. If this were to occur, the electronic filter characteristics would change so that the RF signal passing through it would be significantly attenuated. U4A and U4B are provided to sense and correct this condition.

U4A and U4B operate as a window comparator. Resistors R64 and R65 form a voltage divider network that sets a high limit trip point of +3.66 Vdc for the window comparator. This voltage is applied to the non-inverting input of U4A. The low limit trip point is set at 0 Vdc by the ground that is applied to the inverting input of U4B. The other inputs of U4A and U4B are set by the potential developed by the voltage divider network consisting of resistors R66 and R67. R66 has +12 Vdc applied to one side of it. The potential at the other end of the voltage divider is determined by the error output voltage of U7A. With the error voltage set at 0 Vdc, the voltage divider network applies +1.85 Vdc to the opposite polarity inputs of U4A and U4B and the comparator output is a logic HIGH. When the error voltage changes to approximately +2.18 Vdc, the voltage divider network applies a potential of +3.7 Vdc to the window comparator. This level is greater than the trip point of U4A causing its output to go to a logic LOW. If the error voltage changes to approximately -2.22 Vdc, the voltage divider network applies a potential of -0.01 Vdc to the window comparator. This level is less than the trip point of U4B causing its output to go to a logic LOW.

Normal phase conditions will cause the window comparator to output a HIGH. This HIGH is developed by the pull-up resistor combination of R57 and R58. This HIGH keeps transistor Q6 biased off. With Q6 biased off, a negative potential is applied to the gates of transistors Q4 and Q5 which bias them off.

A phase unlock condition also causes Q6 to be biased on by the window comparator. Q6 now applies a positive bias to the gates of transistors Q4 and Q5. When Q5 conducts it grounds the input of U7A and causes capacitor C21 to discharge. When Q4 conducts, it provides a discharge path for integration capacitor C22. These conditions force U7A to output zero volts which is the ideal setting for this circuit. Effectively, the action of Q6, Q5 and Q4 is to provide an automatic reset/restart for the mean phase control circuit. With U7A providing a zero volt output, the mean phase control voltage is again proportional to the level that was initially set by R73. The window comparator senses a normal condition and resets itself. This causes Q6, Q5 and Q4 to all turn off in an attempt to allow the mean phase control loop to maintain the sideband RF phase constant. This circuit allows the system to start up automatically and track until a lock-on condition is reached. It also allows a reset action to occur in case a momentary excessive phase shift occurs. If a faulty phase shift continues to exist, the circuit will attempt to reset again. However, the value of capacitor C33 insures that only one alarm condition is sent out. Terminals E11 and E12 are provided for factory testing only and must remain open for normal operation.

The out-of-lock alarm circuit functions as follows. When the loop is locked the open collector outputs outputs of U4A and U4B are both high which sources a +12 volt signal to the non-inverting input of U4C. The inverting input of U4C is referenced to +5 volts as is the non-inverting input of U4D.

It is desired to combine the out of lock signals from both sideband amplifiers within a module to provide a common output which will indicate if either of the amplifier mean phaser loops lose lock. This is accomplished by means of a "wired-OR" connection to R82 at the inverting input of U4D.

If the inverting input is taken low (i.e. below 5 volts) the output of U4 (pin 13) will go HIGH due to pull up R79 and indicate an out of lock condition to the audio generator which monitors the sideband amplifier phase lock condition.

The "wired-OR" is driven by the open collector output at pin 14 of U4C and will go low if the loop unlocks because the outputs of U4A and U4B will go low and this signal will be passed through U4C, to pull down the input of U4D.

Similarly, if the PLL on the other sideband amplifier unit within a module goes out of lock, the signal (from U4C on the other sideband amp CCA) enters this CCA on P1-Pin 17. It is routed to R82 and Pin 10 of U4D where it pulls the inverting input low and again causes U4D to initiate an out of lock output on P1-Pin 5.

Capacitor C33 slows the response time at the input to U4D to prevent sending out of lock signals due to momentary transients.

The balanced amplitude product detector error signal enters on terminals E38 and E25. The signal is converted from a balanced to an unbalanced signal by operational amplifiers U7B and U5B. U7B buffers one-half of the amplitude product detector error signal and sends it to the inverting input of instrumentation amplifier U5B. The other half of the balanced amplitude product detector error signal is summed with a DC voltage that is determined by potentiometer R18. Potentiometer R18 is the carrier balance CVOR & half DVOR control. R18 affects the modulation drive signal to the sideband amplifier CCA by controlling the overall amplitude feedback error signal. R18 is adjusted to set the peak balance of the output signals. U5B has a gain factor of 2. The output of U5B is a negative going signal referenced to zero volts. This signal drives the input (pin 12) of analog switch U8A and the inverting input of U5A. U5A is a unity gain amplifier. The output of U5A goes to the input (pin 13) of U8A.

A properly adjusted sideband amplifier will produce a detected sideband RF signal that appears at test point TP5/6 to be an unfiltered, full-wave rectified 30 Hz signal. Therefore, the amplitude product detector error signal will also have that same appearance. In order to accomplish proper feedback error control of the audio modulation signal, the feedback error signal must be restored to its original unrectified appearance.

For proper operation as a CVOR sideband controller, a jumper must be placed across terminals E15 and E17. The feedback error control signal is buffered by unity gain buffer amplifier U5D. The output of U5D is applied to terminal E21. For normal operation, a jumper is placed between terminals E21 and E22. Terminal E23 is for factory testing and alignment only. The jumper must never be placed between E22 and E23 during field operation of the unit. The feedback error signal from U5D is summed with a fixed bias voltage supplied by voltage regulator U12. U12 converts the on-board +12 Vdc to a regulated +5 Vdc which is applied to both the inverting and non-inverting inputs of programmable power amplifiers U9 and U10 through resistors R34 and R35. This isolated bias voltage is used to reduce intermodulation distortion between the sideband amplifiers. The error voltage from U5D is applied to the non-inverting input of U9 and the inverting input of U10.

## **Model 1150 CVOR**

The on-board bi-phase drive signal goes to one input of NOR gate U11A and is used as a timing signal. The thermal shutdown command signal from the power amplifier assembly enters on connector P1-4 (SB2 or SB4 only). The transmitter enable command from the audio generator CCA enters on connector P1-3 (SB2 or SB4 only). If both signals are HIGH, diodes CR5 and CR6 are biased off and a HIGH is available on connector P1-16 and the toggle input of analog switch U8B. Assembly connector P1-16 of SB2 (SB4) is tied to assembly connector P2-16 of SB1 (SB3). The input (pin 2) of U8B is tied HIGH and the input (pin 1) is tied LOW. A HIGH on the toggle input makes U8B select the pin 1 input signal as the output. The LOW is sent to the second input of U11A and to one input of U11D. The output of U11A drives the second input of U11D. Thus U8B functions as a inverter.

When thermal shutdown and transmitter enable signals (on/off) are normal, only the bi-phase signal is changing states. The output of U11A will be an inverted version of the bi-phase drive signal. Since this signal also goes to U11D, the output of U11D will be an original version of the bi-phase signal. U11A sends the inverted bi-phase signal to the enable input of U9. U11D sends a normal bi-phase signal to the enable input of U10. The amplitude product detector error feedback signal from U5D is applied to one set of opposite polarity inputs of U9 and U10. The sideband audio modulation signal from the audio generator CCA enters on connector P1-7. It is buffered by U5C and sent to the inverting input of U9 and the non-inverting input of U10.

U9 conducts only when the inverted bi-phase signal from U11A is HIGH. This HIGH occurs only during the negative portion of the incoming audio modulation signal. U9 is an inverting amplifier and the output is an amplified positive going waveform representing the negative portion of the original 30 Hz signal. U10 conducts only when the non-inverted bi-phase signal from U11D is HIGH. This HIGH occurs only during the positive portion of the incoming audio modulation signal. U10 is a non-inverting amplifier and the output is an amplified positive going waveform representing the original positive alternation of the original 30 Hz signal. The programmed strobing of U9 and U10 in combination with the polarity of the input signal make them operate as a push-push amplifier. The outputs of U9 and U10 are tied together to drive the gate of modulation driver transistor Q101/Q201.

The transmitter shutdown circuit will cause the sideband amplifier output to cease radiation if the signals input to CR5 or CR6 from P-1 Pin 3 or Pin 4 are a logic LOW. In early versions of the equipment section B of U8, the analog switch, was driven from these inputs and U8 supplied a logic low or high to control NOR gates U11A and U11D. In present equipment this function is performed by Q7 which is normally biased on and in saturation by R41. When a logic LOW is input via CR5 or CR6, Q7 ceases conduction and R40 supplies a logic HIGH to the inputs of NOR gates U11A and U11D. The NOR gates output a logic LOW which disable amplifiers U9 and U10 which shuts down the drive to modulator Q101/Q201 and turns off the RF amplifier Q105/Q205.

Q101/Q201 provides the modulated drain voltage for modulator transistor Q105/Q205. This signal goes to the sideband amplifier CCA via point-to-point wiring from the drain of Q101/Q201 to feed-thru capacitor C95 on the sideband amplifier CCA.

The bi-phase signal from the audio generator CCA must go to identical sideband amplifiers within each sideband generator. The sine bi-phase enters via assembly connector P2-8 of the 1A5/1A21 sideband generator. Likewise, the cosine bi-phase signal enters via assembly connector P1-8 of the 1A5/1A21 sideband generator. The bi-phase signal is applied to terminal E3. Terminals E3, E4 and E5 provide a means to test the sideband controller in the factory. Normal field operation requires the jumper to be placed in the normal position which is across terminals E3 and E4. The jumper must never be placed in the test position during field operation. Terminal E4 supplies the on-board bi-phase signal to various sections on the sideband controller CCA.


In a CVOR system, an active bi-phase signal is required for the bi-phase modulation circuit on the sideband amplifier CCA. Therefore, there is a jumper (E15) installed across terminals E1 and E2. The capability for a gross phase shift of 0 or 180 is provided by dual NOR gates U11B and U11C and terminals E6, E7 and E8.

With no active bi-phase input into U11B and U11C, all inputs are pulled to a logic LOW by pull-down resistor R8. This LOW also appears at terminal E6. The parallel gates convert the logic LOW on their inputs to a logic HIGH output. This HIGH appears at terminal E8. During factory alignment the gross phase shift jumper is installed across terminals E6 and E7 to produce a 0 phase shift control signal or between terminals E7 and E8 to produce a 180 phase shift control signal. The position of this jumper is set during factory alignment to produce the best tuning response of the sideband amplifier CCA for operation throughout the entire VOR frequency range. This jumper must not be changed from its factory set position.

A logic LOW from terminal E7 will bias Q1 off. This forces Q2 to be biased off. Q3 is now forward biased by the self-biasing action of resistors R11 and R104. With Q3 turned on, approximately -11 Vdc is applied as the modified bi-phase drive output voltage to terminal E32. CR2 prevents the negative base bias voltage on Q3 from appearing at E32.

A logic HIGH from terminal E7 will bias Q1 on. This will turn on Q2 causing the positive emitter voltage to appear at the collector of Q2. This positive voltage shuts off Q3 and forward biases CR2. With Q2 and CR2 on, approximately +11 Vdc will appear at E32.

**Model 1150 CVOR**

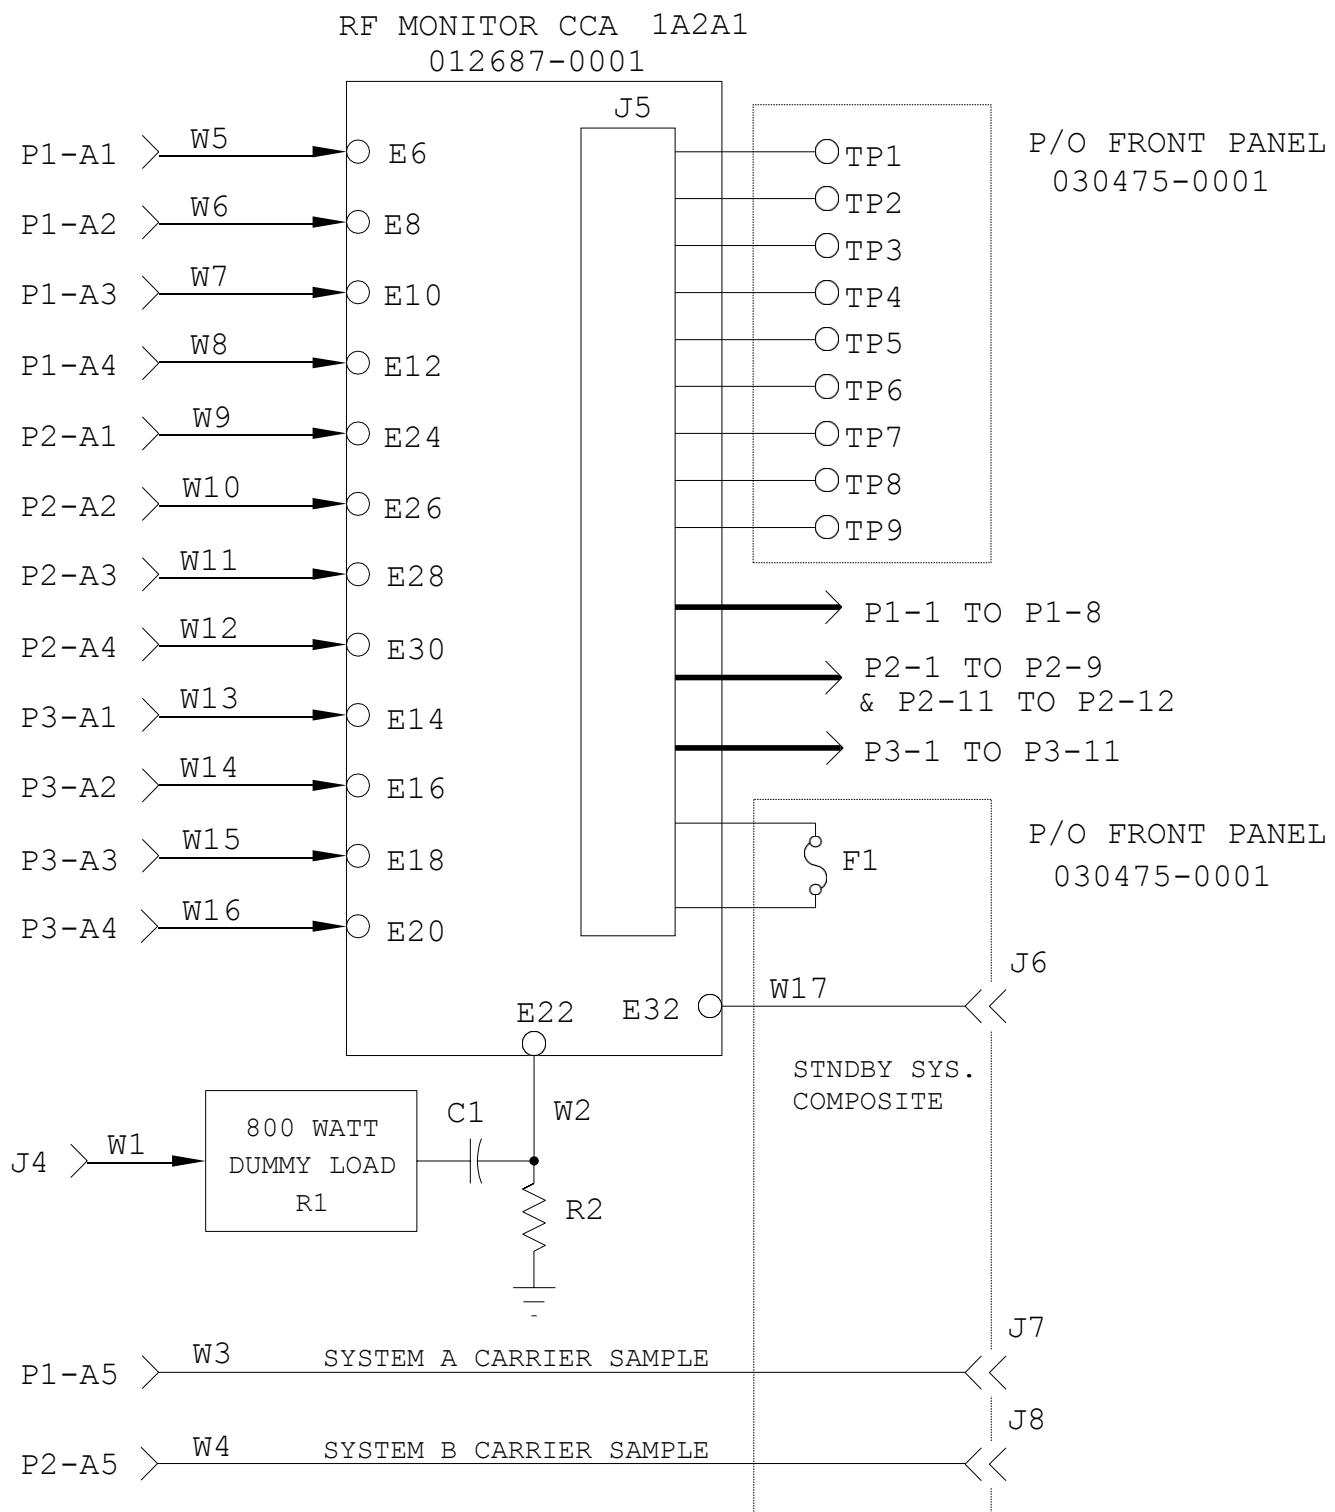

NOTES: 1. ALL Wxx CABLES ARE SHIELDED COAXIAL CABLES.

2. ALL TEST POINTS ARE THE CENTER CONDUCTOR OF  
1000pf FEEDTHRU CAPACITORS, C1 THROUGH C9.

1150-084

**Figure 2-25. RF Monitor Assembly Block Diagram**

### 2.3.2.6.6 RF Monitor CCA (A1) Block Diagram Theory


Refer to [Figure 2-25](#). The TX1 +28 Vdc and TX2 +28 Vdc signals are applied to fuse F1 through an OR gate circuit consisting of CR11 and CR12. From F1 the voltage is applied to the antenna transfer relays (1K1-1K5) and to power supply adapter PS1. PS1 converts the +28 Vdc to ±12 Vdc for use within the RF monitor CCA.

The circuitry for processing the four sideband reflected power signals are functionally identical; therefore, only a general description of the circuit used to detect the SB1 reflected power signal will be discussed. The SB1 reflected power signal is applied to an RC input impedance matching network consisting C38, and R57 thru R59. From the impedance network the SB1 reflected power is applied to impedance matching RF transformer T4. Variable capacitor C39 is between the output of T4 and the input of the envelope detector network. C39 is factory adjusted to reduce reflections from the detector circuit back to the sideband generator. This capacitor MUST NOT be adjusted in the field. RF transformer T4 matches the low input impedance of the RF signal to the high input impedance of the envelope detector. The output of the envelope detector is applied to buffer U8A. U8A supplies the detected signal to SB1 reflected power calibration adjust potentiometer R118. The voltage obtained from R118 is applied to amplifier U8B. U8B amplifies the signal and applies it to SB1 reflected power test point TP2 and to other circuits within the CVOR system.

The circuits for processing the carrier forward powers are identical, therefore only the circuit for processing the TX1 forward power is discussed. The TX1 forward power is applied to an envelope detector network.

The output of the envelope detector is applied to buffer U1A. From U1A the detected TX1 forward power is developed across TX1 forward power calibration adjust potentiometer R114. The signal obtained from R114 applied to buffer U1B and sent to TX1 forward power test point TP6 and to other circuits within the CVOR system.

## Model 1150 CVOR

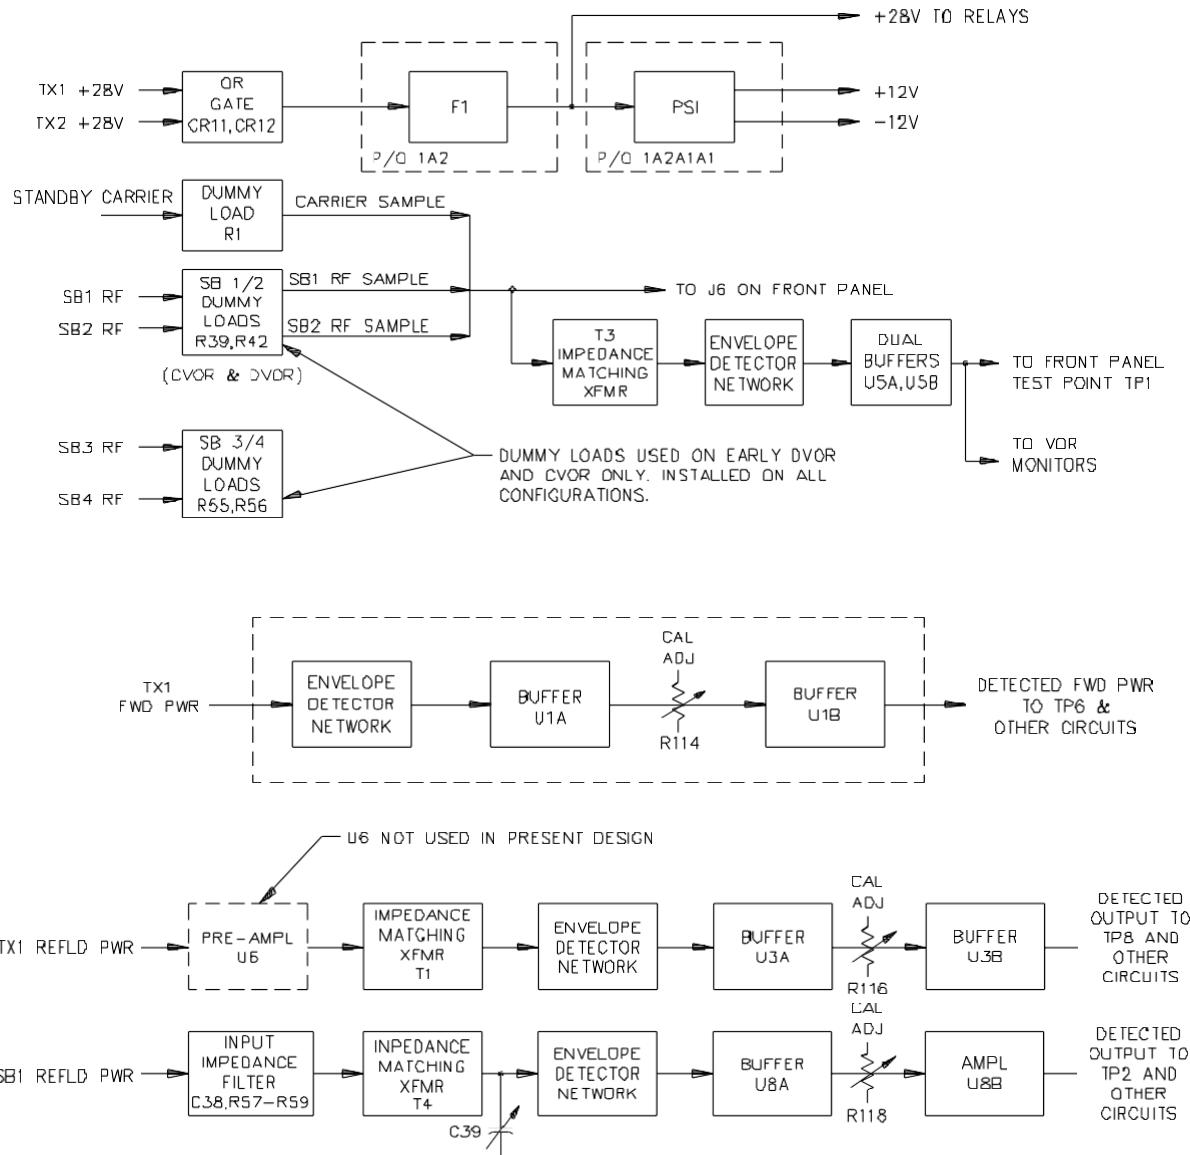

1150-086

**Figure 2-26. RF Monitor CCA Block Diagram**

The carrier reflected power circuits function identically to the forward power circuits. In early systems a preamplifier (U6, U7) was used to increase the low level of the reflected power prior to the envelope detectors. In the present systems this preamplifier has been removed because it was found to compress at very high levels of reflected power causing some error in the measured VSWR. As part of this change the unity gain buffers (U3B, U4B) were changed to gain stages to maintain the same output levels from the CCA. The circuits for processing the carrier reflected powers are identical, therefore, only the circuit used to process the TX1 reflected power is discussed. In the early equipment the TX1 reflected power was applied to a preamplifier circuit U6 which had a gain of 8 db. The signal was then routed to impedance matching transformer T1. In later equipment the preamplifier is not used and the signal is routed directly to T1. T1 matches the 50 Ohm source (the preamp or the direct input signal) to the envelope detector and in the process provides a 2X voltage gain. The envelope detector consists of CR5 which is the actual detector, and CR6 which provides a temperature matched forward bias to CR5 to ensure the detector transfer function stays constant with temperature and is not affected by the variation of diode threshold voltage with temperature. The detected output is routed via the unity gain buffer, U3A, to the calibration adjustment R116 and then to output amplifier U3B. In early equipment U3B was a unity gain stage; while in present production the gain is set to approximately 3 by feedback resistors R 30 and R131. The output from U3B is then routed to J5. J5 provides 3 outputs, one signal goes to TP8 on the assembly front panel, one goes to the audio generator card, and one goes to the CSB power amplifier.

### 2.3.2.6.7 RF Monitor CCA (A1) Detailed Circuit Theory

Refer to [Figure 11-5](#) (sheet 3 of 3). The RF monitor CCA contains the functional components of the RF monitor assembly.

Each transmitter BCPS supplies +28 Vdc to the RF monitor. The voltage from transmitter 1 enters on connector J5-28A; the voltage from transmitter 2 enters on connector J5-29A. Isolation diodes CR11 and CR12 logically "OR" the voltages to ensure a continuous power source for the RF monitor. This voltage exits via connector J5-32C to fuse F1 (of the RF monitor assembly) and returns via connector J5-1C. From J5-1C, the voltage is applied to power supply adapter CCA (A1) terminal E1. The power supply adapter contains a dc/dc converter that provides +/-12 Vdc to the operational amplifiers used on the RF monitor CCA. The +28 Vdc source is also returned to cabinet interconnection wiring harness W1 via connector J5- 2C to provide power for antenna transfer relays, 1K1 thru 1K5.

Four sideband RF signals from the standby transmitter sideband generator assemblies are applied to dummy loads R39, R42, R55, and R56 in early CVORs. External loads used in present equipment. The remaining circuitry found on [Figure 11-5](#) is not used on the CVOR system.

## Model 1150 CVOR

Refer to [Figure 11-4](#) (RF Monitor Interconnect Diagram) Coaxial cables W13, W14, W15, and W16 supply a sample of the reflected sideband signals from the on-air transmitter to the RF monitor CCA (1A8/1A24). These reflected signals are obtained from the reflected power ports of the sideband RF isolators (ISO1, ISO2). These signals are detected and converted to analog voltages by the RF monitor CCA. The sideband reflected power signals are sent to the audio generator CCA for analysis. The audio generator uses these signals to determine the relative VSWR of the sideband feed-lines to the Bridge Assembly and the antennas.

Refer to [Figure 11-5](#) (sheet 2 of 3). The circuitry for processing the sideband reflected power signals are functionally identical; therefore, only the description of the circuit used to detect the sideband 1 reflected power is discussed. The sideband reflected RF power signal enters on terminal E14 and is applied to an RC input impedance and filter network which consists of resistors R57 thru R59, and capacitor C38. This network supplies the sideband 1 reflected power to the primary of RF transformer T4. T4 matches the low impedance of the input RF signal to the high input impedance of the envelope detector network. Variable capacitor C39 is located between the output of T4 and the input of the detector. C39 is factory adjusted to reduce reflections from the detector circuitry back into the sideband circulator; hence, back into the sideband generator assembly. This capacitor must not be adjusted in the field. The output of the envelope detector is buffered by U8A. U8A supplies the detected signal to sideband 1 reflected power calibration adjust potentiometer R118. The dc voltage obtained from R118 is buffered by U8B. The output of U8B is supplied to three connectors: J5-32A (SB1 reflected detected power to audio generator 1), J5-31A (SB1 reflected detected power to audio generator 2), and J5-30A (SB1 reflected detected power) which connects to test point TP2 on the front panel of the assembly.

Each transmitter has a bi-directional coupler installed in the main RF carrier path between the low pass filter assembly and coaxial antenna transfer relay 1K1. This coupler (DC1, DC2) provides a fixed ratio sample of forward and reflected power of the carrier RF signal of both transmitters. These sample signals are applied to the RF monitor assembly via coaxial cables W5 and W6 (transmitter 1 and transmitter 2 forward power) and W7 and W8 (transmitter 1 and transmitter 2 reflected power). The circuitry for processing the forward powers for transmitter 1 and transmitter 2 are functionally the same; therefore, only the circuit used for processing transmitter 1 forward power is discussed. The TX1 forward RF power signal is applied to terminal E6. From E6 the signal is applied to an envelope detector network. The output of the envelope detector is applied to buffer U1A. U1A applies the signal across TX1 forward power calibration adjust potentiometer R114. U1B buffers the signal from R114 and supplies it to connectors J5-12A (transmitter 1 forward power to audio generator 1), J5-11A (spare, not currently used), and J5-10A which applies the TX1 forward detected power signal to test point TP6 (transmitter 1 forward power) on the front panel of the assembly.

The carrier reflected power circuits function identically to the forward power circuits. In early systems a preamplifier (U6, U7) was used to increase the low level of the reflected power prior to the envelope detectors. In the present systems this preamplifier has been removed because it was found to compress at very high levels of reflected power causing some error in the measured VSWR. As part of this change the unity gain buffers (U3B, U4B) were changed to gain stages to maintain the same output levels from the CCA. The circuits for processing the carrier reflected powers are identical, therefore, only the circuit used to process the TX1 reflected power is discussed. In the early equipment the TX1 reflected power was applied to a preamplifier circuit U6 which had a gain of 8 db. The signal was then routed to impedance matching transformer T1. In later equipment the preamplifier is not used and the signal is routed directly to T1. T1 matches the 50 Ohm source (the preamp or the direct input signal) to the envelope detector and in the process provides a 2X voltage gain. The envelope detector consists of CR5 which is the actual detector, and CR6 which provides a temperature matched forward bias to CR5 to ensure the detector transfer function stays constant with temperature and is not affected by the variation of diode threshold voltage with temperature. The detected output is routed via the unity gain buffer, U3A, to the calibration adjustment R116 and then to output amplifier U3B. In early equipment U3B was a unity gain stage; while in present production the gain is set to approximately 3 by feedback resistors R 30 and R131. The output from U3B is then routed to J5. J5 provides 3 outputs, one signal goes to TP8 on the assembly front panel, one goes to the audio generator card, and one goes to the CSB power amplifier.

### 2.3.2.7 Backplane CCA (1A17)

Refer to [Figure 2-27](#).


1A	GND	1C	+5V
2A	MCS0	2C	BAD15 I/O
3A	GND	3C	BAD14 I/O
4A	BAD13 I/O	4C	BAD12 I/O
5A	BAD11 I/O	5C	GND
6A	BAD10 I/O	6C	BAD9 I/O
7A	BAD8 I/O	7C	BA7
8A	GND	8C	BA6
9A	BA5	9C	BA4
10A	BA3	10C	GND
11A	BA2	11C	BA1
12A	BA0	12C	RING (Single Modem)
13A	GND	13C	RSTM (Single Modem)
14A	OH (Single Modem)	14C	MCS1
15A	PCS1	15C	GND
16A	PWRDWN	16C	-12V
17A	+12V	17C	BCLK
18A	GND	18C	PCS2
19A	PCS3	19C	PCS4
20A	VBB	20C	GND
21A	BDIR	21C	BWR
22A	ARDY	22C	BRD
23A	GND	23C	CD (Single Modem)
24A	INT2	24C	INT3
25A	BALE	25C	GND
26A	INT1	26C	BRES
27A	BAD7 I/O	27C	BAD6 I/O
28A	GND	28C	BAD5 I/O
29A	BAD4 I/O	29C	BAD3 I/O
30A	BAD2 I/O	30C	GND
31A	BAD1 I/O	31C	BAD0 I/O
32A	+5V	32C	GND

**Figure 2-27. Backplane CCA Pin Functions**

The backplane CCA is used within the RMS card cage assembly. It provides a common interconnection bus for any card that plugs into it. The CCAs that may interconnect into the backplane CCA are: central processing unit CCA (1A13), facilities CCA (1A11), serial interface CCA (1A10), LVPS CCA (1A14), test generator CCA (1A12), modem CCA (1A9), optional RSCU Control Interface CCA (1A26).

### 2.3.2.8 Central Processing Unit CCA (1A13) Block Diagram Theory

Refer to Figure 2-28. U1 is the micro controller. It accomplishes several functions in accordance with its software programming. A 12 MHZ crystal provides the operating clock frequency for U1. U1 outputs a clock signal to the backplane CCA that is one-half the crystal frequency.

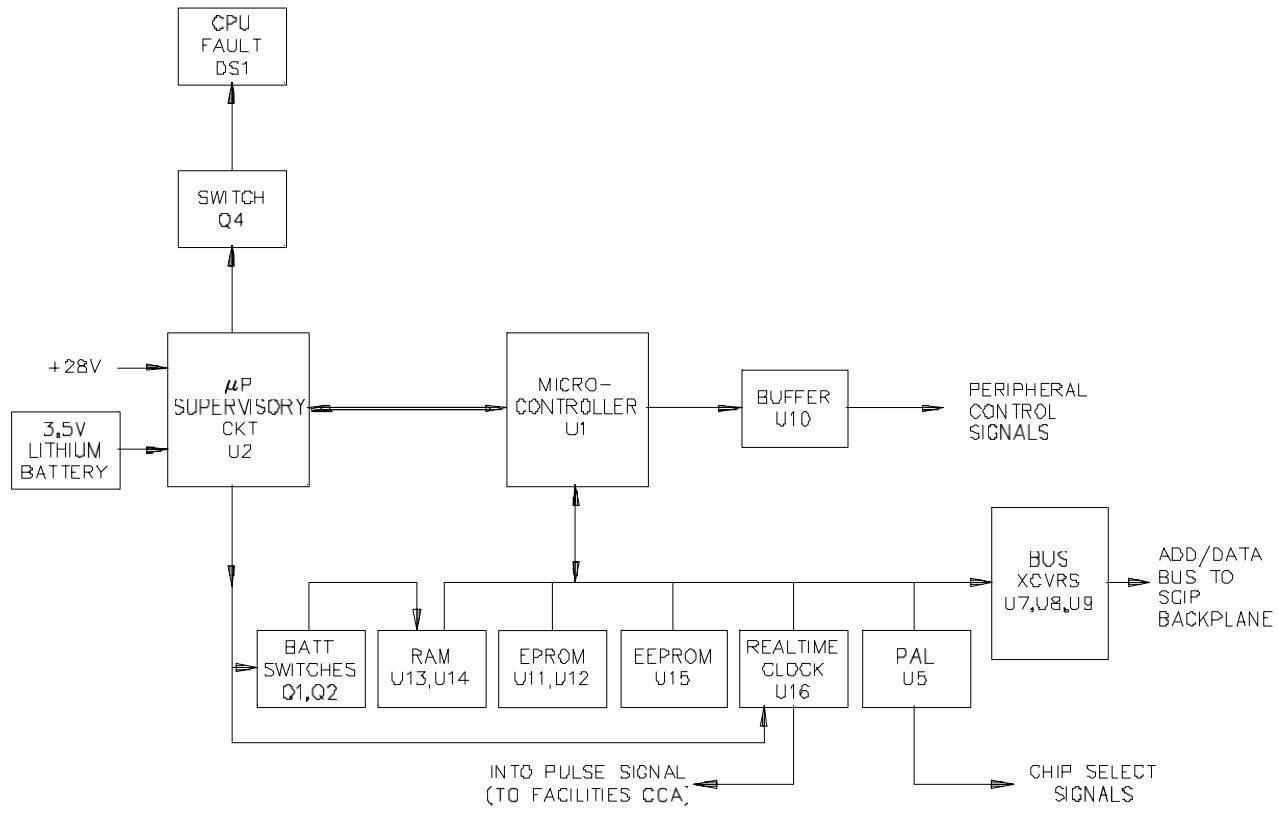

**Figure 2-28. CPU CCA Block Diagram**

U2 is a supervisory circuit that works in conjunction with U1. The supervisory circuit monitors the 28 Vdc supply voltage and determines if it is within the tolerance. If the supply voltage is not within tolerance U2 will switch from the supply voltage to the lithium battery backup. The battery supplies back-up power (3.0 to 3.5 Vdc) to real time clock U16, OR gate U18, and static RAMs U13 and U14. At power-up, U2 outputs various control signals to micro controller U1. These control signals inhibit the micro controller and other devices while the voltages and circuits are stabilizing from the application of power. They also change state after a power fail has occurred.

U2 monitors the activity of the micro controller. If U1 malfunctions, U2 will reset the micro controller forcing it to attempt to re-initialize the circuit card. If U1 malfunctions, U2 turns on transistor Q4 which causes light-emitting diode (LED) DS1 to illuminate. DS1 provides a visual indication that a CPU fault has occurred.

## **Model 1150 CVOR**

U1 performs the major function of handling address/data control for the system. The software program for operating the VOR system resides in EPROMS, U11 and U12. The micro controller also uses two static RAMs, U13 and U14, for the temporary and non volatile storage of data. The last memory circuit used is EEPROM U15. The micro controller utilizes U15 to store all local parameters such as alarm points, station identifier, station morse code call letters, etc. for the VOR system when requested by the technician in the G;13 command.

Real time clock U16 contains a day/date/time counter, an oscillator clock, an interrupt control, an 8-bit data I/O, five address inputs, and several control inputs. This device provides a true time and calendar output to the micro controller through the bi-directional 8-bit data lines. U16 also provides a timer interval signal (TINT) which is used by U1 as an interrupt signal and which is also sent to the facilities CCA.

U5 is a programmable array logic device (PAL) that is programmed to function as a chip select decoder. Octal buffer U10 interfaces the data transfer direction, reset, address latch enable, read, write, clock, and A0 bit control signals sent to the other integrated circuits on the circuit board.

Other integrated circuits used on the CPU circuit board are; octal bus transceivers U7, U8, and U9.

### **2.3.2.8.1      Central Processing Unit CCA (1A13) Detailed Circuit Theory**

Refer to [Figure 11-22](#) (sheet 1 of 2). The central processing unit (CPU) CCA is responsible for monitoring and controlling the VOR system and directing communications with peripheral devices.

The CPU CCA contains a micro controller, RAM, EPROM, EEPROM, bus control, real time clock, and power monitor circuitry. It processes the system status, directs communications with other devices, monitors collocated DME systems, and communicates with the VOR monitor and audio generator CCAs. The baud rates for the monitors and audio generators and local terminal is 4800 baud. For the remote RMM and DMEs the baud rate is 1200.

In addition to the connections made through the backplane CCA, the CPU CCA has one 14-pin connector that mates with cabinet interconnect wiring harness W1.

U1 is the micro controller; it accomplishes several major and minor functions in accordance with its software programming. Y1 is a 12 MHZ crystal; it provides the operating clock frequency for U1. U1 outputs a clock signal to the backplane CCA that is one-half the crystal frequency, or 6 MHZ.

Schmitt trigger inverter U6F is for factory use only and is not used during normal operation.

Microprocessor supervisor U2 is a watchdog, battery changeover, reset generator that works in conjunction with U1. 28 Vdc enters the board via connector J1-1 and is applied to a voltage divider network consisting of resistors R1 and R2. The power fail sense line of U2 samples a preset ratio of the supply voltage. A normal supply voltage produces a reference voltage of approximately 1.75 Vdc at the power fail input (PFI) of U2. This voltage is greater than the internal 1.25 Vdc power fail limit reference. Lithium battery BT1 is connected to U2 at the battery (Vbatt) input. If the supply voltage is normal, the VBB voltage to the board is obtained from the Vcc supply voltage applied to U2. If a power failure is sensed by U2, the source of the VBB output voltage is instantaneously switched to the lithium battery. Under the control of U2, the battery supplies 3.5 Vdc back-up power to real time clock U16, OR gate U18, and static RAMs U13 and U14.

At power up, U2 outputs an RST and (reset and NOT reset) signal to U1 and other devices on the board. These lines inhibit the micro controller and other devices while the voltages and circuits are stabilizing from the application of power. They also change state after a power fail has occurred.

U2 receives a watchdog signal from U1. The watchdog circuit monitors the activity of the microcontroller. If U1 does not toggle the watchdog input (WDI) every 1.6 seconds, the reset lines change state forcing the micro controller to attempt to re-initialize the board. If U1 malfunctions, an internal watchdog timer in U2 forces the watchdog output (WDO) LOW. This turns on transistor Q4 which causes light-emitting diode (LED) DS1 to illuminate. DS1 provides a visual indication that a CPU fault has occurred.

U2 provides control signals to several devices to indicate the circuit board is on battery power (battery on [BON] goes HIGH) and it also provides a power fail signal (PFO goes LOW) to U1 via Schmitt trigger inverter U6C and OR gate U18D. The other input of U18D is the timer interrupt 0 signal from real time clock U16. The output of U18D is applied to the interrupt 0 (INT0) line of U1. With a normal supply voltage, the PFO line is HIGH. This is inverted into a LOW by U6C and applied to U18D. The INT0 signal is a short duration positive going pulse which is passed through U18D to the INT0 input of U1. This notifies U1 that the real time clock is functioning and the supply voltage is normal. When a power failure occurs, PFO goes LOW. This LOW is inverted to a HIGH by U6C. This LOW to HIGH transition is passed by U18D and interpreted by U1 as an interrupt. To interpret the difference between a power fail condition and the normal operation of the real time clock, U1 attempts to clear the INT0 flag. If the flag remains cleared, then the HIGH was generated by U16. If the flag is again set, then the HIGH was generated by a power fail condition and U1 is forced into a data protect condition by the software program.

U1 has three other interrupts; interrupt 1 (INT1), interrupt 2 (INT2), and interrupt 3 (INT3). INT1 indicates the modem is waiting to communicate with U1. INT2 indicates the audio generator for transmitter #1 or transmitter #2, or the VOR monitor associated with transmitter #1 or transmitter #2 is waiting to communicate with U1. INT3 indicates the video terminal or DME system is waiting to communicate with U1. U1 also monitors an asynchronous ready line to insure the input/output (I/O) communications devices on the serial interface CCA are ready to transfer data.

## Model 1150 CVOR

Refer [Figure 11-22](#) (sheet 2 of 2). U1 also performs the major function of handling address/data control for the system. The program for operating the VOR system is stored in EPROMS U11 and U12 which are two 512 bit (64 k by 8 bit) memory devices. Chip select signal CS0 enables U11 and U12. The micro controller also uses two 256 bit (32 k by 8 bit) static RAM memory devices, U13 and U14, to store stack pointers, perform floating point algorithms, for the temporary storage of data, and for the storage of operational parameters, test and historical data needed for a finite duration. U1 uses this data while performing calculations and data processing. The memory circuit, EEPROM U15, a 16 bit (2 k by 8 bit) device is used to store all local parameters such as alarm points, station identifier, station morse code call letters, etc. for the VOR system. To prevent corruption of data, parameters are stored in U13, U14 and U15 with a checksum. Upon application of power the data in U13 and U14 is checked against the checksum. If the data is correct, it is used. If the data is incorrect then the data from U15 is checked against its checksum. If the data is correct, it is used. If incorrect default values from U11 and U12 are used.

Real time clock U16 contains a day/date/time counter (0.01 seconds to years), an oscillator clock, an interrupt control, an 8-bit data I/O, five address inputs, and several control inputs. This device provides a true time and calendar output to the micro controller through the bi-directional 8-bit data lines. When normal supply power is lost, 3.5 Vdc from lithium battery BT1 is applied to the power bus line by U2 to maintain the internal clock function and interrupt signal of U16.

U16 uses a 32.768 kHz clock frequency obtained from crystal Y2. Capacitor C23 is used to fine tune the clock frequency to produce a precise timer interval (TINT) signal from U16. The adjustment of C23 is performed by monitoring the signal at 1A11TP1 which is on the facilities CCA. C23 is adjusted to produce a one second positive going gate at 1A11TP1. The TINT pulse is a short duration (less than 50 microseconds) pulse that is inverted by U6A. This signal is the interrupt zero (INT0) pulse that is sent to U18D and U1 and will occur every 2 seconds. This pulse is also sent to the facilities CCA via connector J1-9.

Transistor Q3 is used to control the low order 8-bits of the address/data bus. If U2 senses a power failure, the reset (RST) signal it sends out is applied to the base of Q3. This is normally a LOW signal which switches HIGH when a reset is initiated. The HIGH cuts off Q3 which allows a pull-down resistor to apply ground potential to resistor pack RP3 which the address/data lines are connected to. If a power failure is occurring, the data on the address/data lines may become corrupted. To prevent corrupted data from possibly being written to the U15 or U16 during a power failure, the address/data lines are grounded.

Transistors Q1 and Q2 are RAM controller transistors. Their outputs are tied to the enable pins of U14 and U13 respectively. The input to Q1 is chip select signal CS2 from PAL U5. The input to Q2 is chip select signal CS3 from U5. Q1 and Q2 provide the active LOW chip select signals which allow U14 and U13 to have data written to their memory address locations. U14 and U13 receive their operational power from VBB. When a power fail occurs, U5 ceases to function by the action of U1. This removes the chip select signals from the bases of Q1 and Q2 and forces the NOT chip select inputs of U14 and U13 to go HIGH. This disables U13 and U14, preventing any arbitrary write transactions with corrupted data from occurring. The VBB voltage is now supplied from battery BT1; therefore, the data that is stored in memory is retained during the power loss. For this reason, U13 and U14 act as non-volatile memory devices.

The other integrated circuits used on the CPU circuit board are: octal bus transceivers U7, U8, and U9; octal latches U3, U4, and U17; octal buffer U10; and programmable array logic device U5.

U5 is programmed to function as a chip select decoder. Octal buffer U10 interfaces the data transfer direction, reset, address latch enable, read, write, clock, and A0 bit control signals sent to the other circuits on the circuit board.

At start-up the U2 is LOW. Once the supply voltage PFI input exceeds the internal reference, a 50 millisecond timer begins. After the 50 msec period has ended, the line goes HIGH and allows U1 to function according to the software program stored in U11 and U12. The timer insures that the voltage remains constant and is not cycling on and off. Under the control of U1, data is transferred bi-directionally through U7, U8, and/or U9. Address information is passed unidirectionally through U3, U4, and U17.

The CPU communicates with the serial interface, facilities, and the dual modem CCAs by means of the address/data bus. The CPU CCA communicates with the VOR monitor and audio generator CCA micro controllers, DMEs, through the serial interface CCA at 4800 baud. Thus, it can pass pertinent VOR monitor or audio generator information to the video terminal at 4800 baud or modem at 9600 baud. Communication from the VOR input/output terminal (IOT) passes through the serial interface to the appropriate DME.

Through the facilities CCA, the CPU CCA obtains data on the system (i.e., power supply voltages and status, communications status, transmitter status, etc.) and provides this information to the video terminal, modem, display panel, or remote status and control unit.

### 2.3.2.9 Facilities CCA (1A11) Block Diagram Theory

Refer to [Figure 2-29](#). A decoder circuit consisting of decoder U5, inverter U16B and OR gate U18D decode data on the address lines to produce the on-board chip select signals.

The main address/data line into the board is controlled by bus transceiver U1 and is selected by the CPU CCA micro controller. The direction of data flow through U1 is also determined by the CPU CCA micro controller.

U8 is a line driver. The inputs to this device are the status signals coming from the main and standby BCPS units. When selected, the condition of each status signal will be placed onto the address/data bus to be analyzed by the CPU CCA micro controller.

## Model 1150 CVOR

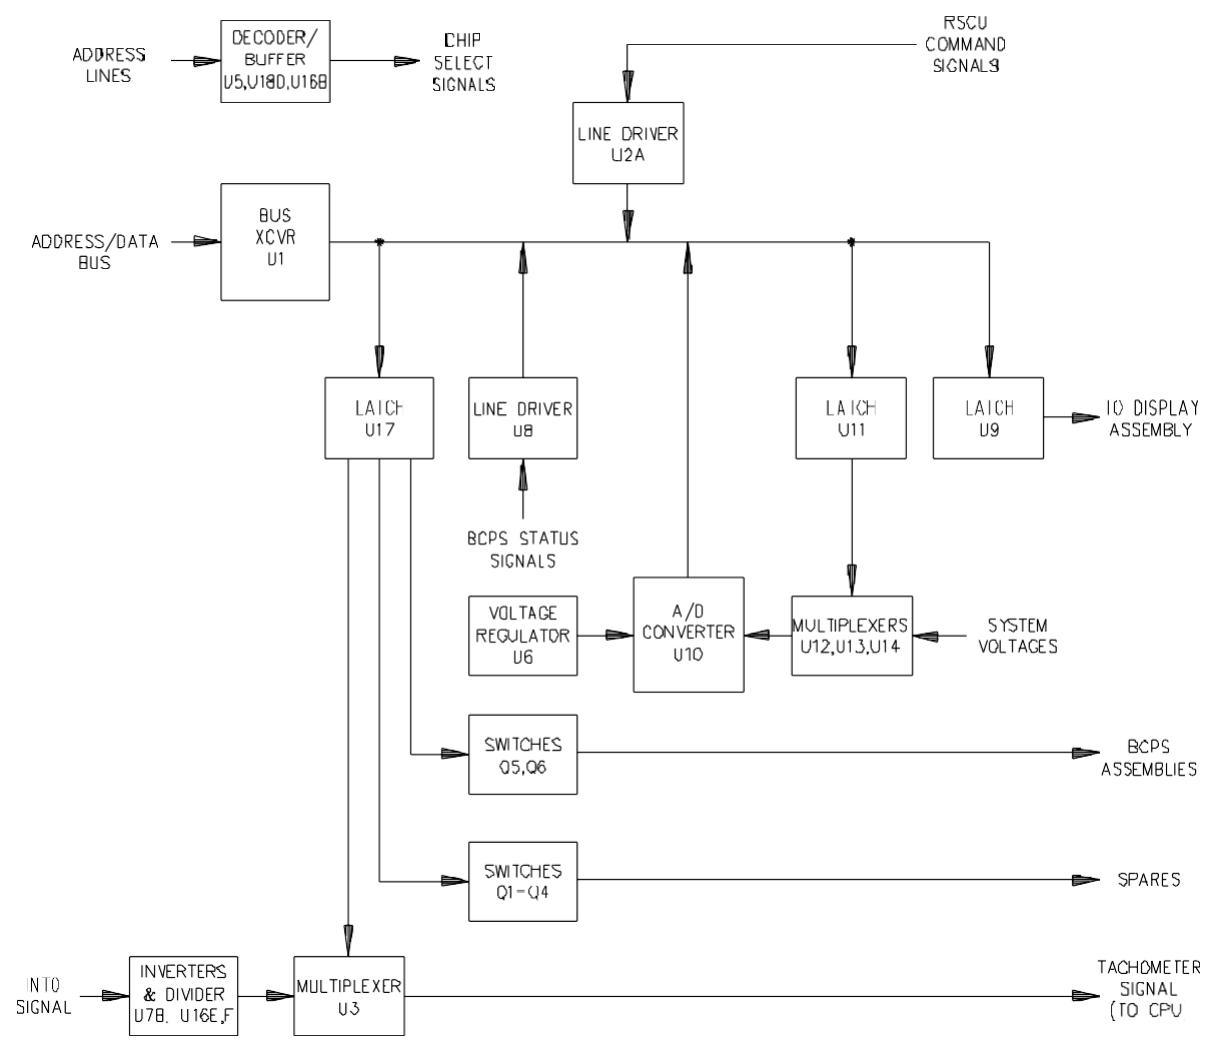


Figure 2-29. Facilities CCA Block Diagram

U9 is a latching flip-flop that takes a data word from the address/data bus and provides control signals to the display panel LED driver transistors.

U2A is identical to U8 in function. U2A applies the RSCU command signals from an optional remote control system onto the address/data bus to be acted upon by U1. These signals will turn on or turn off the VOR system.

U17 is identical to U9. The signals on the data bus at the time that U17 is enabled are latched onto its output lines. U17 outputs a transfer signal, to the optional RSCU control interface CCA, an address code, to multiplexer U3, and transistor enable signals to transistors Q5 and Q6.

U11 is also a latching flip-flop that provides address selection signals to three multiplexed multiplexers U12, U13, and U14.

The inputs to U12, U13 and U14 are representative samples of the main and standby BCPS analog voltages and weather measurement voltages (if installed) as well as the ground references. The CPU CCA micro controller selects an input by addressing U11. The output of U12 or U13 and U14 is then applied to analog to digital converter (ADC) U10.

U6 provides a precision +5 Vdc reference (VREF) source for use by U10.

### 2.3.2.9.1 Facilities CCA (1A11) Detailed Circuit Theory

The facilities CCA collects and integrates the system status information and sends it to the CPU CCA for processing and storage. It provides status signals to and receives commands from the optional RSCU interface CCA. Additionally, BCPS status signals and battery charger on/off control signals, display panel LED driver signals, power supply voltages, and antenna control will all be processed by this circuit card for the CPU CCA micro controller.

Because the facilities CCA must receive signals from all sections of the VOR system, a 50-pin connector is used to mate the board into cabinet interconnect wiring harness W1. Many of the signals have mnemonic abbreviations for the signal names. A comprehensive list of connector pin numbers, mnemonic names, and signal names is provided in [Table 2-2](#).

Refer to [Figure 11-20](#) (sheet 1 of 2). The main address/data line into the board is controlled by octal bus transceiver U1. This device is selected by the CPU CCA micro controller via peripheral chip select line #2 (PCS2). U1 also receives a direction control signal (BDIR). The condition of this signal sets the direction of data flow through U1.

U5 is a 3-to-8 line decoder. U5 decodes address bits BA4, BA5, and BA6 to produce the on-board chip select signals which enable U2A, U7B, U8, U9, U11, and U17. Each chip select signal is processed by a dedicated section of negated input NAND gates U4 or U18. A negated input NAND gate is electrically identical to an OR gate but the active signal out is a LOW (negative logic) versus the HIGH (positive logic) for the OR gate. The second input of each section of U4 or U18 is the appropriate read or write command signal for the particular device it drives. Chip select #7 (CS7) is inverted by U16B.

## **Model 1150 CVOR**

Dual quad buffer line driver U2 has four status inputs and three control signal inputs with U2A handling the status signals and U2B handling the control signals. The four status inputs to U2A are #1 ON, #2 ON, OFF, and TX IND. The CPU CCA micro controller enables U2A by setting the read (RD) and chip select #3 (CS3) lines LOW. With U2A enabled, the status signals are placed onto data bus lines ID0-ID3. The data is then transferred through U1 to the CPU CCA micro controller. These status signals come from an RSCU via the RSCU control interface CCA. U2B is always enabled. Clock, read, and write (BCLK, BRD, BWR) control signals are applied to the inputs of U2B. U2B buffers these signals before applying them to other integrated circuits on the board.

The clock output of U2B is sent to divide-by-five ripple counter U7A. The counter divides the 6 MHZ input into a 1.2 MHZ output which is used as the clock signal for analog to digital converter (ADC) U10.

U8 is an octal buffer line driver. The eight inputs to this device are the status signals coming from the main and standby BCPS units. The over temperature, on-battery, battery low, and power fail condition of each BCPS provides an 8-bit input into the line driver. When selected, it will place this data word onto the address/data bus to be passed on to the CPU CCA micro controller.

Octal, non-inverting, latching, D-type flip-flop U9 takes a 6-bit word from the address/data bus to provide the control signals to the display panel LED driver transistors. The output of U9 provides the monitor 1 and monitor 2 normal, alarm, and bypass signals to drive the green, red, and amber LEDs, respectively, on each display board.

U17 is identical to U9. The signals on the data bus at the time that U17 is enabled are latched into the output lines of U17. These signals are used as: a transfer status signal, a 2-bit address code, and transistor enable signals.

The transfer signal is sent to the optional RSCU control interface CCA via connector J1-43. This signal changes states when a transmitter transfer occurs. This change in state is interpreted by an optional remote status and control unit as a transfer alert.

S0 and S1 are a two bit address which is sent to dual 1-of-4 multiplexer U3. These two bits select the active channel of this multiplexer. The multiplexer U3 is not used in the current version.

Transistors Q5 and Q6 control the main and standby BCPS charger disconnect signals. A logic HIGH to the base of these transistors keeps them turned off. This high impedance condition allows the battery charger portion of the uninterruptible power supply (UPS) module of the BCPS to function. When U17 applies a low to the base of either Q5 or Q6 during RMS fault isolation, it turns that transistor on and a ground is applied back into the UPS module. This LOW shuts off the battery charger function of the UPS module. The battery voltage is then checked by the BCPS and the battery low status is activated. Transistors Q1, Q2, Q3, and Q4 are not currently used.

**Table 2-2. Listing of Facilities CCA Signals**

PIN #	<u>MNEMONIC</u>	<u>DESCRIPTION</u>	PIN #	<u>MNEMONIC</u>	<u>DESCRIPTION</u>
1	M48V	Sys. A BCPS 48 Vdc	2	S48V	Sys. B BCPS 48 Vdc
3	M28V	Sys. A BCPS 28 Vdc	4	S28V	Sys. B BCPS 28 Vdc
5	M12V	Sys. A LVPS 12 Vdc	6	S12V	Sys. B LVPS 12 Vdc
7	M5V	Sys. A LVPS 5 Vdc	8	S5V	Sys. B LVPS 5 Vdc
9	M-12V	Sys. A LVPS -12 Vdc	10	S-12V	Sys. B LVPS -12 Vdc
11	GENLVL	Test Generator Level	12	SPARE1	Spare 1 (future use)
13	MBCRET	Sys. A BCPS Return (N/C)	14	BARO RET	Barometer Sensor Return
15	SBCRET	Sys. B BCPS Return (N/C)	16	WIND RET	Wind Sensor Return
17	MTXRET	Sys. A Transmitter Return	18	TX OUT (OUT)	Antenna Status to RSCU
19	STXRET	Sys. B Transmitter Return	20	TACH	Tachometer
21	MBCOT	Sys. A BCPS Overtemp Status	22	MBCUPS	Sys. A BCPS UPS Status
23	MBCBL	Sys. A BCPS Battery Low Status	24	MBCPF	Sys. A BCPS Power Fail Status
25	SBCOT	Sys. B BCPS Overtemp Status	26	SBCUPS	Sys. B BCPS UPS Status
27	SBCBL	Sys. B BCPS Battery Low Status	28	SBCPF	Sys. B BCPS Power Fail Status
29	MALM	Monitor 1 Alarm	30	MNORM	Monitor 1 Normal
31	MBYP	Monitor 1 Bypass	32	SALM	Monitor 2 Alarm
33	SNORM	Monitor 2 Normal	34	SBYP	Monitor 2 Bypass
35	MBCCD	Sys. A BCPS Charger Disconnect (ON/OFF)	36	SBCCD	Sys. B BCPS Charger Disconnect (ON/OFF)
37	#1 ON	Turn-on Sys. A Signal from RSCU Control Interface CCA	38	#2 ON	Turn-on Sys. B Signal from RSCU Control Interface CCA
39	OFF	Turn-off On-Air System Signal from RSCU Control Interface CCA	40	TX IND (IN)	On-Air Transmitter Indicator Status from Relay 1K1
41	SPARE 8	Spare 8 (future use)	42	Spare 7	Spare 7 (future use)
43	TRANSFER	Transfer Status to RSCU Control Interface CCA	44	SPARE2	Spare 2 (future use)
45	SPARE3	Spare 3 (future use)	46	SPARE4	Spare 4 (future use)
47	SPARE 5	Spare 5 (future use)	48	TIME INTER-VAL	INTO Signal from CPU CCA
49	SPARE 6	Spare 6 (future use)	50	FAN2	(Disabled)

## **Model 1150 CVOR**

U11 is also identical to U9. It provides address selection signals to three multiplexers U12, U13, and U14.

The inputs to U12 and several of the inputs to U13 are representative samples of the main and standby BCPS analog voltages. The eight inputs to U12 are the main and standby 48 volt, 28 volt, 12 volt, and 5 volt levels. U13 processes the main and standby -12 volt levels. All levels are applied to a resistive voltage divider network to achieve a standardized representative level of the applied voltage. The other inputs to U13 are a +5 volt reference, and a test generator operation level signal. U14 processes the ground references for the signals applied to U12 and U13.

The CPU CCA micro controller selects a voltage input by addressing U11. This address code is latched to the output of U11. This code will enable either U12 or U13 and U14 as well as select the appropriate inputs that are to be passed. The output of U12 or U13 is then sent to the V+ input of ADC U10. The corresponding ground reference output of U14 is applied to the V- input of ADC U10.

The A/D converter may be either an integrated circuit of type ADC1205 from national Semiconductor or a printed circuit board part number 012002-0001.

For the ADC1205 A/D converter, the conversion requires two data cycles to complete. Conversion starts when the microprocessor sets the proper multiplexor channel then executes a write to the device. The microprocessor then waits approximately 20 uSec for completion then reads the data.

For the 012002 CCA the operation of A/D conversion is the same as the ADC1205 A/D. The 012002 CCA includes a MAX191 A/D converter and programmed EPLD (ATV750L) to duplicate the operation of the single chip ADC1205 entirely.

Integrated circuit U6 is a precision +5 Vdc reference (VREF) source which is trimmed by potentiometer R1 to compensate for minor component differences. Potentiometer R2 is used to adjust the zero reference operating level of the internal comparator amplifier within U10. Potentiometer R1 is adjusted for  $+5.00 \pm 0.01$  Vdc at test point TP2. Potentiometer R2 is adjusted for OVDC  $\pm 0.01$  with ADC1205 installed test point TP4. If the 012002-0001 CCA is installed then R2 is adjusted for  $-0.090 \pm 0.25$  VDC with the 012002 CCA removed during adjustment. The settings of R1 and R2 determine the input differential signal span that will produce the output digital word. The amount of the span determines the precision of the digital word. R1 and R2 are adjusted at the factory during initial alignment. Adjustment of these potentiometers outside the tolerances listed will introduce significant errors in the conversion of the analog voltages into a digital word.

VREF is used for two specific functions. First, it is measured by the CPU micro controller during fault isolation diagnostic testing of the facilities CCA. This voltage is applied to input #7 (IN7) of U13 which allows the CPU micro controller to check the reference level to ensure proper ADC upper limit operation. Secondly it is used as a common offset voltage reference to allow measurement of the -12 Vdc power supply voltages. This arrangement sets up a positive potential into U13 which can be processed by U10 into a digital word that represents -12 Vdc. The micro controller converts this data to display the value as a -12 Vdc level.

The 12-bit word that represents the converted analog input voltage is placed onto the address/data bus in two 8-bit groups. The first group contains the 8 most significant bits of the 12-bit word. During the second write cycle, the next four bits plus four dummy bits are placed onto the address/data bus. This action occurs for each parameter which is converted from an analog voltage into a digital 12-bit word.

During fault isolation of the facilities CCA by the CPU CCA, the ground reference of U10 is verified for proper ADC lower limit operation. During fault isolation of the test generator CCA, the test generator outputs a constant voltage level to the facilities CCA that is converted by U10 and verified by the CPU CCA micro controller.

Refer to [Figure 11-20](#) (sheet 2 of 2). The inputs to U15A and U15B and the operation of potentiometer R27 have been disabled. The CPU CCA micro controller is programmed to ignore this section.

The timer interval signal (INT0) from the real time clock on the CPU CCA is applied to inverter U16F. The inverted pulse which occurs once every second is applied to the divide-by-two section of decade counter U7B. U7B is enabled by the CS7 signal from U16B. U7B converts the short duration interval pulse into a square wave which is 2 seconds in duration. The square wave signal is inverted again by U16E. This two second square wave is observed at test point TP1. The one second positive going portion of the gate enables the strobe input of U3. The strobe signal enables U3 to output a signal for exactly one second. Address bits S0 and S1 from U17 determine which input port of U3 will be selected as the output signal. Currently, there are no active input ports.


### 2.3.2.10 Serial Interface CCA (1A10) Block Diagram Theory

Refer to [Figure 2-30](#). The serial interface CCA provides the communications interface for the CPU CCA to communicate with other devices.

The circuits that handle communications between the CPU CCA and the various devices within and external to the CVOR system are functionally the same; therefore, only a description of the serial communications controller (SCC) circuit that communicates with the audio generator CCA is discussed. Each SCC is a dual communications device that is capable of independent communications. However, for this manual, the term SCC refers to function and the device is specified by the section A or B tag.

U1 is an octal bus transceiver for the address/data bus going to SCC U5A. U1 transfers data to/from SCC U5A as determined by the logic level of the direction signal. When the direction signal is logic HIGH data from the address/data bus is transferred to the SCC. When the direction signal is logic LOW data from the SCC is transferred to the address/data bus.

U2 is a buffer line driver that processes various control signals that are applied to the SCC. U3 is a three to eight line decoder that decodes address data on the address lines and provides chip select signals for the SCC.

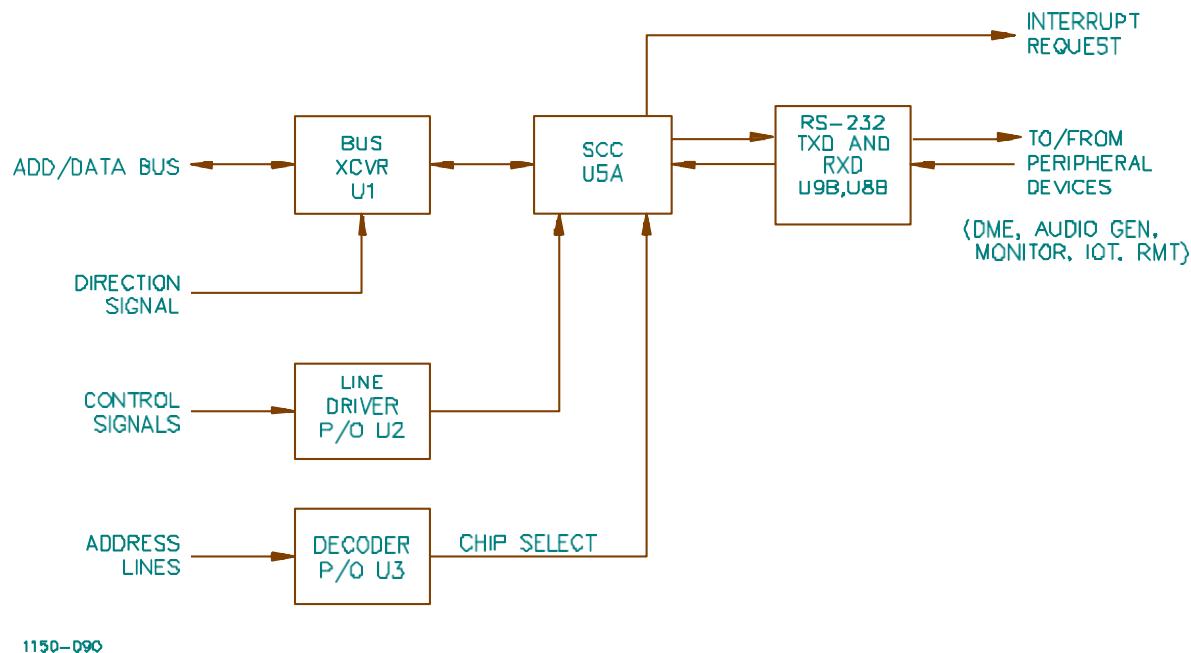

**Figure 2-30. Serial Interface CCA, Block Diagram**

**(Typical SCC Communications Circuit)**

To send data to monitor 1 the CPU micro controller applies a logic HIGH to the direction input of octal bus transceiver U1. This allows data from the address/data bus to be transferred to U5A. The parallel data transferred to U5A is converted to serial data and applied to the RS-232 TXD circuit which consists of line driver U9B. The RS-232 TXD circuit converts the TTL level serial data signal to RS-232 level serial data and applies to the audio generator CCA.

To receive data from the audio generator CCA the RS-232 level serial data is converted to TTL level data by the RS-232 RCVR circuit which consists of line receiver U8B and applies it to U5A. U5A sends an interrupt request to the CPU micro controller to notify it that information is waiting to be processed. The CPU micro controller polls all devices with the same interrupt to determine the source. U5A is checked for any information it may have. U5A converts the received serial data to parallel data and places it on the address/data bus and applies it through U1 for processing by the CPU CCA micro controller.

### 2.3.2.10.1 Serial Interface CCA (1A10) Detailed Theory

Refer to [Figure 11-19](#). The serial interface CCA provides the communications interface for the CPU CCA to communicate with other devices. Primarily, it contains four dual channel serial communications controllers (SCCs) which accomplish two-way communications with the local video terminal, DME transponders #1 and/or #2 (if installed), audio generator CCAs for transmitter #1 and transmitter #2, and VOR monitors #1 and #2.

The serial interface CCA has two multi-pin connectors. A twenty-six pin connector mates the board with the interconnect wiring harness W1.

The SCCs notify the CPU micro controller that data is ready to be received by sending an interrupt signal to the micro controller. Interrupt #2 (INT2) comes from SCC U5 or U7 and interrupt #3 (INT3) comes from SCC U4 or U6.

U1 is an octal bus transceiver for the address/data bus going to the serial communications controllers. U1 receives the peripheral chip select control signal (PSC1) from the CPU CCA micro controller via the backplane bus. U1 also receives a data direction transfer signal from U10 on the CPU CCA via the backplane bus. When U1 is selected, it can transfer data to or from an SCC dependent on the logic level of the direction signal.

Octal buffer line driver U2 processes address bits BA1 and BA2 to the particular serial communications controller circuit along with the associated clock and read or write signals.

Three to eight line decoder U3 decodes address bits BA4, BA5, and BA6 to provide four chip select signals, one for each SCC. The other four output lines are not used. This configuration allows the CPU CCA micro controller to select which SCC and which portion (A or B) of the SCC it wants active. There are two independent controllers in each SCC package.

At start-up, the software program directs the CPU micro controller to program the SCCs to prepare them for operation. Programming entails setting baud rates, data encoding protocol and data modes. Communications baud rates for the audio generators or the monitors are set at 4800 bps; rates for the DMEs are set at 1200 bps; the rate for the video terminal is set at 9600 bps.

SCC U5A handles communications with audio generator CCA #1 (labeled TX1), U5B handles VOR monitor #1 (MONITOR1), U6A handles the video terminal, U7A handles audio generator CCA #2 (TX2) and U7B handles VOR monitor #2 (MONITOR2).

The communications process with either audio generator CCA or either VOR monitor CCA is straightforward. For audio generator #1, serial data from the audio generator CCA is received on connector J2-17. The RS-232 level serial data is converted to TTL level data by line receiver U8B. The serial data goes to the receive data input of U5A. U5A sends an interrupt request (INT2) to the CPU micro controller to notify it that information is waiting to be processed. The micro controller polls U5 and U7 for any information they may have. When enabled, U5A converts the received data to parallel data and writes it onto the address/data bus for processing by the CPU micro controller. U5A is now ready to receive more data from audio generator #1.

## **Model 1150 CVOR**

The CPU micro controller sends instructions to audio generator #1 by placing the data bytes onto the address/data bus and enabling U5A with a read command to read the bus. U5A then converts the 8-bit word into serial data and outputs it via the transmit data terminal of U5A. The TTL level serial data signal is converted to RS-232 level serial data by line driver U9B. The serial data is now sent to audio generator #1 via connector J2-18 for processing.

The format for processing information through U5B, U7A and U7B is similar to the process used with U5A. Line receiver U8A and line driver U9D process input and output serial data to U5B for VOR monitor #1. Data is received on connector J2-19 and is sent out on connector J2-20. Line receiver U8D and line driver U9A process input and output serial data to U7A for audio generator #2. Data is received on connector J2-21 and is sent out on connector J2-22. Line receiver U8C and line driver U9C process input and output serial data to U7B for VOR monitor #2. Data is received on connector J2-23 and is sent out on connector J2-24.

Communications with the local video terminal is handled by U6A. Serial data from the video terminal enters on connector J2-16 and is processed through line receiver U10A to U6A receive data input. U6 uses INT3 to notify the CPU micro controller that information is waiting for processing. U6A transmit data is sent to line driver U12A which goes to the video terminal via connector J2-14.

U6A is capable of providing a data terminal ready (DTR) signal via connector J1-15. This signal is not used to complete the communications process with the video terminal that is supplied with the VOR system. A serial data handshake protocol xon/xoff is used to control data flow. The video terminal will send the xoff character to notify the VOR to stop sending characters until the video terminal is ready. This occurs often when a local printer is attached.

SCC U4 is used to communicate with collocated DME systems (if installed). Section A handles DME transponder #1 (DME1) and section B handles DME transponder #2 (DME2). The VOR monitors the DME's status signals and which system is connected to the antenna. The VOR does not serially communicate with the DME's except when the operator selects a DME either locally or remotely or either DME attempts to dial-out to the RMM facility. DME #1 receive data, which is used for the transfer of serial communications data, enters on connector J2-7 and is converted by line receiver U11B to TTL logic levels and sent to the data receive input of SCC U4A. DME #1 status input, which only provides status information, enters on connector J2-8 and is sent through SW1 section 8 to a special data control input on U4A. When directed by the CPU CCA, the micro controller polls U4A for the data which represents the status of DME #1. DME #2 receive data, which enters on connector J2-12, is converted to TTL logic levels by line receiver U11C. DME #2 status enters on connector J2-10 and is sent to a special data control input on U4B. DME antenna status enters on connector J2-9 and is sent directly to a special control data input on U4A and U4B. The logic state of the DME antenna data indicates which DME (#1 or #2) is connected to the DME antenna.

If the PMDT is logged on to the VOR, remote communications via the modem input to a DME is still possible. The CPU CCA will process both communications independently. Therefore, the PMDT can communicate to the VOR while a remote PMDT is talking to a DME, or vice versa.

An external DCD control signal is made available on connector J2-4 which then goes to SW1, section 7. The outputs of SW1, sections 7 and 8 are tied together. For normal operation, SW1, section 7 is open and section 8 is closed.

Switch SW1, sections 1 through 6, allow the operator to select the type of communications signal level to be used with the single modem or an external modem, if desired. VOR single modem CCA 1A9 utilizes TTL levels; therefore, the standard settings for SW1, sections 1 through 6 are: sections 2, 4 and 6 are set closed while 1, 3 and 5 are set open. Provisions are made to allow a separate, independent modem using RS-232 signal levels to be used with the VOR system. For RS-232 signal levels, switch SW1, sections 1 through 6 are set as follows: sections 1, 3 and 5 are set closed while 2, 4 and 6 are set open. RS-232 receive data enters on connector J1-9; TTL receive data enters on J1-2. RS-232 data carrier detect (DCD) enters on J1-10; TTL DCD enters on J1-1. RS-232 SPEED enters on J2-3; TTL SPEED enters on J1-13. External modem speed must be 1200 baud for RMS software versions earlier than 3.0.


RS-232 data is converted to TTL levels by line receivers U10B, C, and D before being applied to switch SW1. The converted RS-232 or TTL serial data is sent to U6B. Two of the three outputs of U6B are also dualized to provide TTL or RS-232 levels. TTL transmit data is sent to connector J1-3 and through line driver U12C to provide an RS-232 level signal to connector J1-11. U6B DTR output signal is sent to connector J1-4 as the TTL level DTR signal and to line driver U12B to provide an RS-232 level signal at J1-12. The single modem CCA requires a reset signal. The ready to send (RTS) output of U6B is sent to line driver U13D and line receiver U11A to provide a modem reset signal at backplane bus connector P1- 13C.

### 2.3.2.11 Test Generator CCA (1A12) Block Diagram Theory

Refer to [Figure 2-31](#). The primary function of the test generator is to provide a standard reference signal to the CVOR monitors at power-up or whenever directed by the RMS CPU for monitor testing. The test generator's secondary function is an operator maintenance function, which is to allow test signals to be sent to the monitor(s).

At turn-on, the CPU micro controller configures logic cell array (LCA) U1 to operate as a 16-bit counter, a 15 line multiplexer, a 12 line data transceiver, and a clock. PAL U5 aids the CPU micro controller during the configuration process of U1.

After U1 has its internal parameters established, the micro controller calculates the required audio signal characteristics of a VOR waveform and stores this test pattern data into RAMs U6 and U7.

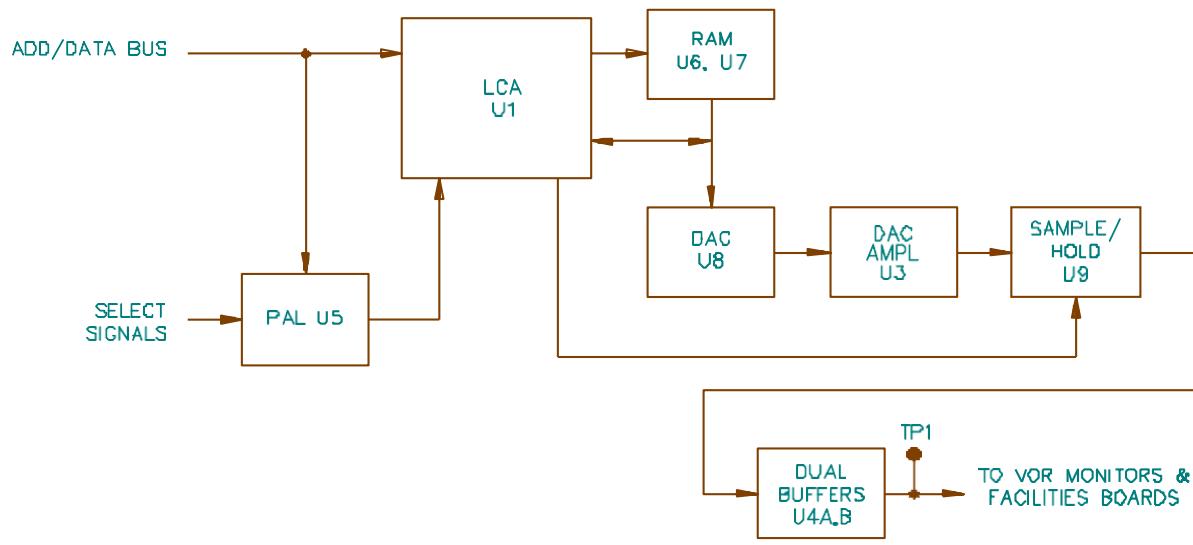

**Figure 2-31. Test Generator CCA, Block Diagram**

U1 now outputs a changing data address code. This code continuously sweeps through the memory address locations of U6 and U7 where the ideal CVOR test pattern is stored. The CVOR test pattern is used by the CVOR monitors for integrity and certification checks and diagnostics. DAC U8 converts the digital test pattern data obtained from U6 and U7 into an analog signal that is representative of a true and correct detected RF radiated signal from an ideal CVOR facility.

The output of U8 is sent to amplifier U3. The output of U3 is applied to the input of U9. U9 is a sample/hold circuit which eliminates the stepping distortion caused by the digital to analog conversion process. U9 operates from a clock signal provided by U1. The noise-free audio signal is next applied to buffers U4A and U4B.

U4A and U4B buffer the signal before it is applied to CVOR monitors #1 and #2 and also to the facilities CCA. This signal is measured at TP1 and is used for fault isolation and diagnostic checks of the VOR monitor circuits and fault isolation of the test generator.

### 2.3.2.11.1 Test Generator CCA (1A12) Detailed Circuit Theory

Refer to [Figure 11-21](#). The test generator CCA is a stand alone circuit that performs three functions. The primary function is to provide a standard calibration signal to the CVOR monitors at power-up or whenever directed by the CPU CCA. For this operation, the test generator is directed under software control to develop an ideal CVOR test signal that has these properties: a 30% 30 Hz signal; a 30% 9960 Hz signal; a 16 deviation factor for the 9960 Hz signal, and an azimuth angle that is equal to the mid-point value between the low and high azimuth angle alarm points. The test generator will reconfigure to calibrate each monitor separately. On power-up the monitor alerts the RMS that a calibration is required. The RMS calculates and stores the waveform. The RMS then alerts the monitor that the waveform is ready for the calibration.

The second function is to configure itself for monitor certification. In this operation, the test generator will configure itself to produce a CVOR test signal in accordance with the values programmed in the Monitor, Data, Cert. For a certification test of a monitor, the test generator will be set first for all the low limit values and then it will reconfigure for all the high limit values.

The last function is the operator maintenance condition. The test generator is configured by values programmed into the Monitor, Data, Test Data. This condition allows the test generator to be used as built-in test equipment by a maintenance technician to test the operation of a monitor.

Y1 is a 3.932160 MHZ crystal that is used to operate the internal clock and counter circuits of U1. Capacitor C9 is used to adjust the crystal for the specified frequency. The internal clock circuits of U1 divide the oscillator frequency by four. Capacitor C9 is adjusted for a frequency of  $983.040 \pm 0.04$  kHz at TP3.

At turn-on, the CPU micro controller configures LCA U1 to have the following functions: a 16-bit counter, a 15 line multiplexer, a 12 line data transceiver, and a clock. PAL U5 aids the CPU micro controller during the configuration process of U1. Address lines BA0, BA1, BA2, and BA6, peripheral chip select line PCS3, address/data lines AD5-AD7, read (BRD) and write (BWR) are applied to the inputs of U5. During configuration, U5 outputs signals to U1 which go to the reset, configuration clock (CCLK), AD0, and done/program (D/) inputs. U1 operates in a slave mode and programming is accomplished with serial data entering U1 on the AD0 line which is supplied by U5. CCLK provides the clock signal to U1 during configuration. The D/ line is held LOW which allows U1 to be programmed. When programming is completed, the D/ line then goes HIGH which allows U1 to operate as dictated by its configuration setup. Fault isolation of the test generator involves a reset to U1, programming U1 and checking for the done status. A constant DC level is programmed into U6 and U7 and checked with the facilities A/D converter.

## **Model 1150 CVOR**

After U1's internal parameters are established, the CPU micro controller calculates the required audio signal characteristics of a proper CVOR system and stores that information as digital data into static RAMs U6 and U7. The CPU micro controller uses the address/data bus to set a 15-bit word onto address lines A0-A14. This selects the specific memory location of U6 and U7 to be written. Next, the CPU micro controller places the digitized data for a portion of the ideal CVOR waveform onto the address/data bus. This 12-bit word is passed through the transceiver section of U1 and placed onto the 12-bit data bus which connects to the input/output ports of U6 and U7. A command is then sent to write the data to the memory address. This continues until the entire digitized waveform is stored into U6 and U7. Once programmed, the test generator will continue to output the test signal because the internal clock of U1 is continuously selecting the memory address locations of U6 and U7.

U1 outputs a changing data code on address lines A0-A14. This code continuously sweeps through the address locations of U6 and U7 where the ideal CVOR test pattern is stored. The outputs of U7 provide the lower 8 bits (B0-B7) of the 12-bit data word that is sent to DAC U8. Only output data bits D0-D3 are used in U6. This nibble is placed onto data lines B8-B11 and contains the four most significant bits of the 12-bit word to U8. The 12-bit word is the digital representation of the CVOR test waveform which is used by the CVOR monitors for integrity and certification checks and maintenance diagnostics.

DAC U8 converts the 12-bit test pattern data, obtained from U6 and U7, into an analog signal that is representative of a true and correct detected RF radiated signal from an ideal CVOR facility.

Integrated circuit U2 is a precision +5 Vdc reference source. The output of U2 is applied to the VREF+ input of U8 while the VREF- input is tied through resistors to ground. This establishes a stable reference voltage for the analog waveform to be developed.

The output of U8 is sent to inverting, high speed amplifier U3. The fast output response combined with its excellent settling time rating makes it ideal for use as a digital to analog converter output amplifier.


U9 is a precision instrumentation switched-capacitor integrated circuit device that is set up to function as a sample/hold circuit. When U8 is switching from one output level to another, noise spikes may occur at the instant the state change occurs. If these spikes are allowed to remain in the waveform, significant high frequency distortion will be present. Elimination of this stepping distortion is accomplished by sampling the output signal level of U3 after allowing U8 enough time to switch levels and settle. A 983.04 kHz clock from U1 is applied to the oscillator input of U9. U9 has internal charge-balanced switching circuits which are controlled by the internal oscillator. During the DAC transition period, U9 removes capacitor C15 from the output of U3. After the DAC has completed its level change and settled at its new output level, U9 connects C15 to the output of U3 and allows C15 to change to the new voltage level. C15 integrates the sampled voltages into a smooth output waveform that is relatively free from high frequency distortion. This process produces a truer representation of the recovered digitized wave into an analog format. The noise-free audio signal is next applied to amplifiers U4A and U4B.

U4A and U4B buffer the signal developed across C15 before it is applied to other circuits. U4A sends the test generator waveform to CVOR monitor #1 via connector J1-1. U4B sends the test generator waveform to CVOR monitor #2 via connector J1-3 and also to the facilities CCA via connector J1-5. This signal is measured at TP1 and is used for fault isolation diagnostic checks of the test generator and VOR monitor circuits.

The test generator can be used as a maintenance device under the control of an operator. Specific parameters of the test generator waveform can be entered by an operator through the video terminal. The CPU micro controller will use the operator-entered data and calculate the values needed to create the new test waveform. The CPU micro controller then takes control of U1 and uses it to store the digitized waveform information into static RAMs U6 and U7. The test generator then outputs a waveform that is configured in accordance with the operator's test specifications.

When the test generator CCA is undergoing fault isolation diagnostics testing, the CPU micro controller programs U6 and U7 memory locations so that a constant analog DC voltage will be produced by U8 which is amplified by U3. This known DC voltage is sent to the facilities CCA where it is processed back into a digital word which is read by the CPU micro controller. The micro controller compares this word against the value stored as a reference to determine if the test generator CCA is functioning properly.

Test point TP2 provides a sync pulse for an oscilloscope when performing an alignment or maintenance of the CVOR monitor CCA with the test generator signal.

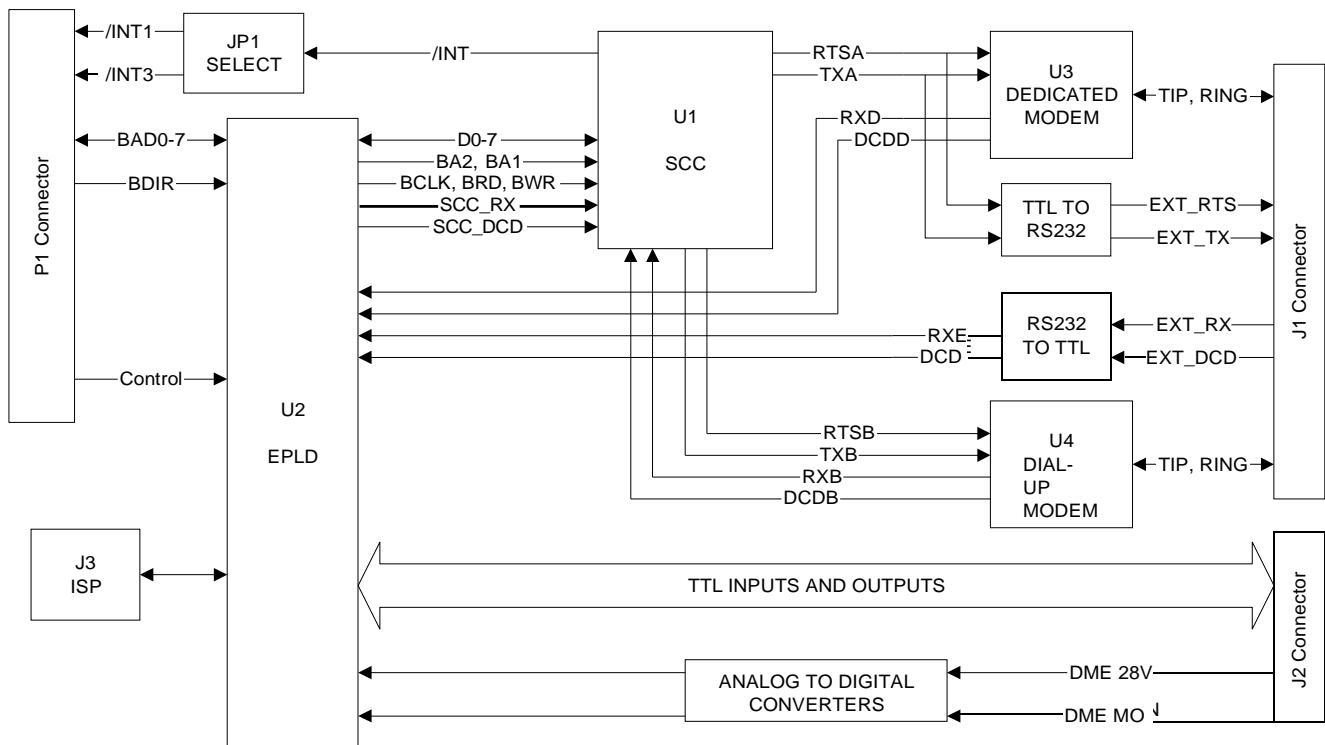

**Figure 2-32. Modem CCA (012101-1001), Block Diagram**

### **2.3.2.12 Modem CCA (1A9) (Part No. 012101-1001) Block Diagram Theory.**

Refer to [Figure 2-32](#). The modem CCA provides the capability to communicate with an offsite monitoring facility through an on-board dial-up modem. An on-board dedicated modem is also included for communications to an RCSU. The dedicated modem may be disabled in favor of an off-board external modem, selectable by software control. The on-board dedicated modem is the default power-on selection. Both on-board modems are capable of 9600 baud, 8 bits, and no parity communications with V.32 compatibility.

Signals enter from the backplane through connector P1. The U2 CPLD acts as bus transceiver and I/O decoder for the CCA. Factory programming of the U2 CPLD is accomplished via the in-system programming (ISP) connector J3. The U2 CPLD controls bus access to the U1 serial communications controller (SCC), read/write control of the TTL inputs/outputs, and enabling of the dedicated or external modem.

Buffered address, data, and control signals connect between CPLD U2 and SCC U1. The U1 SCC controls both the dedicated/external and dial-up modems. Software may select either RX and DCD from modem U3 or RX and DCD from an external modem, through U2, to SCC\_RX and SCC\_DCD of U1. Interrupts from SCC U1 are strapped to either /INT1 or /INT3 by JP1.

The dial-up, external, and dedicated modem signals enter/exit from connector J1. The external modem RTS and TX signals are converted from TTL to RS232 levels before exiting while the RX and DCD signals are shifted from RS232 to TTL levels after entering the CCA.

Connector J2 routes both TTL I/O and analog inputs on the CCA. All J2 signals may be used for environmental monitoring and DME control. The TTL I/O connects directly while the analog inputs are converted to digital signals before routing to CPLD U2.

#### **2.3.2.12.1 Modem CCA (1A9) (Part No. 012101-1001) Detailed Circuit Theory**

Refer to [Figure 11-18](#). All bus control signals including buffered direction (BDIR), buffered data (BAD0-7), buffered address (BA1-7), and processor chip select (PCS3) connect to programmable logic device (CPLD) U2. The U2 CPLD is factory programmed via connector J3 and resistors R5, R6, and R7.

The PCS3 chip select and BA1-7 address lines define the address range used by the CCA. The BDIR control determines whether data is being read from the bus or data is being placed upon the bus in conjunction with buffered read (BRD) and buffered write (BWR). Signals PCS3, BDIR, and BRD would all be logic low during a read operation, for example.

CPLD U2 processes BWR, BRD, buffered clock (BCLK), BA2, and BA1 and applies them to serial communications controller (SCC) U1. These control signals are used to determine whether SCC U1A or U1B is active and when U1 will write or read data to/from CPLD U2 on data bus D0-7. Resistor network RN3 is used as pull-ups for the data bus.

After buffered reset (/BRES) goes high, the CPU micro controller programs SCC U1 for operation. Programming entails setting baud rates, data encoding protocol, and data modes. The CPU microcontroller sends instructions to SCC U1 by placing the data bytes on the data bus and enabling U1 with a read command. The data on the bus is transferred through EPLD U2 and applied to the data inputs of SCC U1. SCC U1 reads the information on the bus, converts the 8-bit word into serial data, and outputs the data via its transmit data port.

U4 is one of the two modem modules on the CCA. It is used as an interface between the station and an offsite computer terminal. Light Emitting diode (LED) CR2 flashes when the phone line rings. SCC U1 sends the transmit data (TXDB) and the data terminal ready/request (/DTRB) signals to modem U4. The /DTRB signal notifies modem U4 that data is ready to be transmitted. The TXDB signal contains the data that modem U4 transmits over the telephone lines.

Data from the telephone line is processed by modem U4 and applied to SCC U1 as serial data. SCC U1 sends an interrupt request (/INT) to the CPU micro controller via /INT1 or /INT3, depending on the JP1 strap selection. The interrupt notifies the micro controller that information is waiting to be processed. SCC U1 converts the received data to parallel data and writes it onto the data bus when polled by the micro controller.

Modem U3 may be used for communications as a dedicated modem to an RCSU. Data processing occurs the same as for modem U3 except that LED CR1 lights when the data carrier signal is detected. Resistor R2 and transformer T1 condition the modem signals for direct connection over long distances.

Modem U3 may be bypassed entirely in favor of an external modem. TXDA and /DTDA signals from SCC U1 are converted from TTL to RS232 levels by U9B and U9C, transient protected by CR24 and CR26, then routed to connector J1. External modem signals RS232\_RX and RS232\_DCD from connector J1 are transient protected by CR25 and CR27, then converted from RS232 to TTL levels by U10B and U10C. Software may choose either the external modem or the on-board modem U3, depending on the selection made inside EPLD U2. Whichever modem is selected, its RX and DCD signals are channeled to RXDA and /DCDA of SCC U1 through EPLD U2.

The U2 EPLD directly controls outputs REM\_ON\_1, REM\_ON\_2, REMOTE\_OFF, and LOCAL\_LED. These outputs are pulled up by resistors R36–39 and connect to the gates of transistors Q1–4. The drains of transistors Q1–4 are transient protected by CR14, CR15, CR16, and CR23 before routing to connector J2. The drains will be pulled up externally by the equipment to be controlled.

SPARE\_IO1 and SPARE\_IO2 may be programmed by software to act as either inputs or outputs, depending on the selection made inside EPLD U2. Resistors R28, R33, R34, and R35 provide pull-up while CR21 and CR22 provide transient protection. As outputs, the lines may drive high or low at TTL levels.

## Model 1150 CVOR

DME1\_28VDC and DME2\_28VDC enter the CCA at connector J2 and are voltage divided by resistor networks RN1 and RN2. Capacitors C9 and C10 filter while CR17 and CR18 provide transient protection to the divided signals before presentation to comparators U6A and U6B. The divided signals are compared against a reference voltage generated by U7 and R21. If the reference voltage is less than the divided voltage, the output of the comparator is low, indicating the DME voltage is acceptable. Resistors R23 and R24 provide pull-up to the outputs, named /DME1\_VOLT\_OK and /DME2\_VOLT\_OK, if the DME voltage is not acceptable.

DME1\_MON\_LED and DME2\_MON\_LED are signals joining connector J2 and resistors R29-32 with transient protection CR19 and CR20. Resistors R29 and R32 act as pull-downs in the event of an open connection while resistors R30 and R31 act as current limiters to minimize powering of off-board equipment during power down.

Two reference voltages are created by U7, R25, R26, and R27. The higher reference voltage is at the junction of resistors R25, R26, and comparators U5A and U5C. The lower reference voltage is at the junction of resistors R26, R27, and comparators U5B and U5D. Comparators U5A and U5B define a binary code for the DME1\_MON\_LED analog input while comparators U5C and U5D perform the same for DME2\_MON\_LED. The bits of the binary code are named DME1\_B0, DME1\_B1, DME2\_B0, and DME2\_B1 at the outputs of the comparators and are defined as follows:


DME1_B1 / DME2_B1	DME1_B0 / DME2_B0	Description of DME Status
0	0	Shutdown
0	1	Alarm
1	0	Unknown / undefined
1	1	Normal

The comparator outputs are pulled up by resistors R16-19 before arriving at the U2 EPLD.

The remaining signals from connector J2 are digital inputs SMOKE\_DETECT+, INTRUSION\_SENSOR+, LOCAL\_CNTL, MAIN1\_CNTL, MAIN2\_CNTL, MONITOR\_BYPASS, DME1\_BYPASS\_LOGIC, and DME2\_BYPASS\_LOGIC. The signals are pulled up by resistors R8-15 and transient protected by CR6-13. Three of the inputs are diode isolated by CR3-5 to prevent accidental powering of the CCA during power-down. These three inputs are MONITOR\_BYPASS, DME1\_BYPASS\_LOGIC, and DME2\_BYPASS\_LOGIC. All inputs connect to EPLD U2 for processing.

### 2.3.2.13 RSCU Interface Assembly (1A26) (Optional)

The RSCU Interface CCA interfaces a VOR facility with a remote status and control unit (RSCU). The RSCU interface assembly provides status data to and control data from an RSCU. The RSCU is usually located at a designated remote monitoring facility, such as an airport control tower. Refer to [Operations and Maintenance Manual Part Number 571138-0001](#).

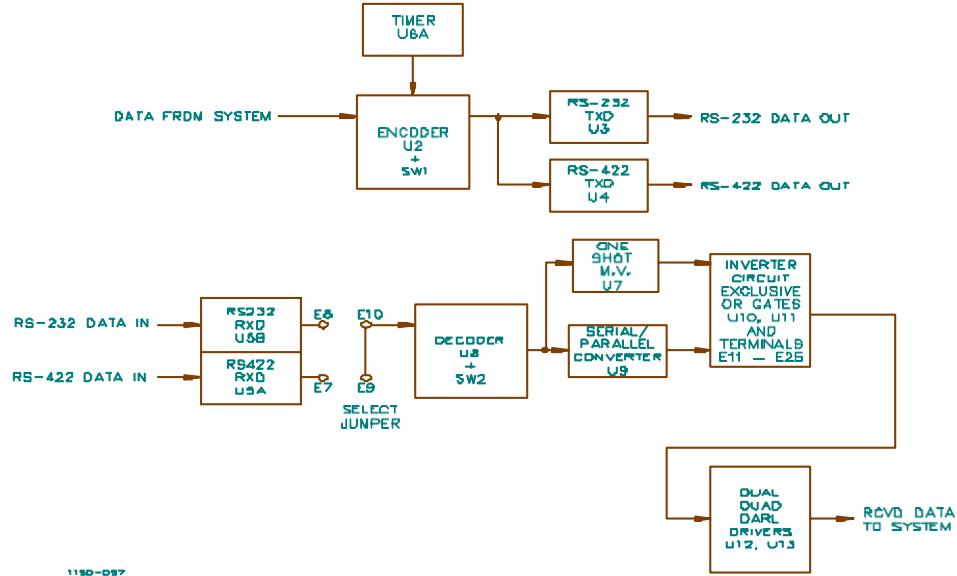

**Figure 2-33. RSCU Control Interface CCA (012601), Block Diagram**

### 2.3.2.13.1 RSCU Control Interface CCA (012741-1002) Block Diagram Theory

Refer to Figure 2-33. CVOR status signals, from the facilities CCA, and a binary count, from the encoder state/time-base generator, are applied to the tone encoder/transmitter circuit which consists of programmable array logic (PAL) U14 and dual-tone multi frequency (DTMF) generator U13.

The VOR status signals are encoded into a DTMF signal and applied to the data access arrangement (DAA) circuit as the tone out signal.

The 3.58 MHZ oscillator circuit creates the timing signal for the tone encoder/transmitter U13/U14 and the tone receiver U7. The oscillator consists of invertors U1D, U1E, and U1F, resistors R3 and R19, and crystal Y1.

The DAA circuit is an amplifier buffer circuit that consists of amplifiers U12A, U12B, and U12C and impedance matching transformer T1. The tone out signal is amplified and buffered within the DAA circuit then sent to the RSCU as a tone coded data stream. The tone coded data stream from the RSCU is applied to the DAA circuit where it is amplified, buffered, and applied to the tone receiver circuit as the tone in signal.

The tone receiver circuit consists of DTMF receiver U7 and terminal boards TB1 and TB2. U7 decodes the tone in signal into four bit binary data which is applied to the decoder circuit. Jumpers on terminal boards TB1 and TB2 are used to select the sensitivity of U7.

The decoder consists of decoders U8 and U11 and inverter U1A. U8 and U11 decode the data from U7 and generate preset or clear signals that go to the function latch/driver circuit.

## **Model 1150 CVOR**

The function latch/driver circuit consists of quad D-type flip-flops U2 and U9, positive AND drivers U3 and U10, and terminal boards TB3, TB4, and TB7. It converts the preset or clear signals to status signals and applies them to the VOR facilities CCA for processing.

### **2.3.2.13.2 RSCU Control Interface CCA (012741-0001) Detailed Circuit Theory**

Refer to [Operations and Maintenance Manual Part Number 571138-0001, Figure 11-7](#). The RSCU interface assembly provides the RSCU with information which is decoded and transformed into a visual indication of the operating status of the VOR system.

Invertors U1E, and U1F, resistors R19, and R3, capacitor C26, and crystal Y1 form a phase shift oscillator circuit which creates the 3.58 MHZ clock signal for use by DTMF generator U13 and DTMF Receiver U7. This signal is buffered by inverter by U1D before being applied to U13 and U7.

Timer U16 creates a 10 Hz signal which is applied to the A input of 4-bit binary counter U15. The B input of U15 is connected to the QA output. This cascades the divider sections of U15 to provide a maximum count length for U15. U15 is enabled by an active LOW from the Q NOT output of U9A. U9A is a function latch that processes the last bit command from the 1138 RSCU data stream to command the VOR 012741 interface CCA to send the VOR status signals back to the 1138 RSCU. Therefore, the only time U15 outputs a count is after it was directed by the remote RSCU. The 1138 acts as a master by sending command information which allows the VOR 012741 CCA to respond.

The 4-bit count from U15 drives select inputs on PAL U14. The other inputs to U14 are the VOR status inputs. The QD output of U15 also drives the clock input of U9A. This bit is used to reset U9A which causes the Q NOT output to go HIGH. With the reset inputs of U15 HIGH the outputs of U15 are all forced LOW. This, in effect, disables U15 and prepares it for the next transmit command from the RSCU.

PAL U14 selects the #1 ANT, Alarm, #2 NORM and #1 NORM signals from the facilities CCA by means of the 4-bit code from U15. Unused inputs are pulled HIGH by resistor pack R4. Each bit of the six bit status input is encoded by U14 to develop a proper row and column data signal for DTMF generator U13. Number 2 antenna input to U14 is not used.

The eight inputs of U13 are organized to represent the four rows and columns of an expanded keypad. Selecting a unique row and column combination causes U13 to generate the unique DTMF tone that is associated with that combination. The DTMF signal from U13 is the tone out signal that is applied to amplifier U12B. Potentiometer R10 is used to adjust the level of the tone out signal before it is applied to U12B. R10 should be adjusted to produce a 1 Vpp signal level on the telephone lines for that portion of the signal data stream when the RSCU interface board is replying to the RSCU. This level is approximately equivalent to -7 dBm at 600 ohms and it insures that the signal driving the tone decoder circuit in the RSCU is not distorted from being over driven.

U12B amplifies the tone out signal with an approximate gain of 1. Voltage divider network R17 and R18 establishes a reference of approximately 3 volts at the non-inverting input of U12B. The output of U12B is applied to the inverting input of U12A. The non-inverting input of U12A is also set to a reference of approximately 3 volts by voltage divider network R17 and R18. The output of U12A is applied to transformer T1.

T1 is an impedance matching transformer that matches the output impedance of U12A to the 600 ohm input impedance of the telephone lines. The signal from T1 is sent to the RSCU on the tip and ring telephone lines or data cable.

The DTMF tone signals from the RSCU enter the interface assembly via connector J1 and pass through impedance matching transformer T1. The signals are next applied to the inverting input of amplifier U12C. U12C amplifies the signals with an approximate gain of 1.5. The output of U12C is coupled to DTMF receiver U7 by capacitor C3.

Bypass capacitor C1 filters the +5 Vdc entering via connector P1-1C and P1-32C. Zener diodes VR1 and VR2 are used to eliminate telephone line transients in excess of 5.1 volts. A jumper is installed across terminal J3 which allows the RSCU interface assembly to obtain +5 VDC power from the backplane CCA and must be installed for use in the CVOR.

U7 decodes the DTMF signals into four bit binary data which is applied to decoders U8 and U11. The strobe output of U7 is used to enable U8 and U11. The strobe goes to logic HIGH after a valid tone pair is sensed and decoded at the data outputs. The strobe remains a logic HIGH until a valid end-of-signal pause occurs or when the clear input is driven to a logic HIGH. Once cleared, the strobe will not rise to a logic HIGH until a new valid tone is detected.

Jumpers on terminal boards TB1 and TB2 are used to select the sensitivity of the SIG IN input of U7 to a maximum of -38 dBm.

Decoders U8 and U11 decode the lower three bits of the 4-bit output from U7 and generate active-low preset or clear signals that are applied to the function latch/driver. The D3 output of U7 is applied to the G2A enable input of U8 and to the G2A input of U11 through inverter U1A. A LOW on this line will be seen as a LOW on the G2A input of U8, enabling U8. This LOW will be inverted by U1A and be seen as a HIGH on the G2A input of U11, disabling U11. The strobe output of U7 is applied to the G1 inputs of U8 and U11. Under normal conditions the strobe output of U7 will be HIGH enabling U8 and U11. A LOW strobe will disable U8 and U11 causing all of their outputs to go logic HIGH.

D-type flip-flops U2A, U2B, U9A, and U9B all operate the same, so only the operation of U2A will be discussed. Active LOW signals from decoder U8 are applied to either the preset (PR) or clear (CL) of U2A. A LOW on the PR input of U2A causes its Q output to go logic HIGH. A LOW applied to the CL input of U2A will cause its NOT Q output to go logic LOW. These signals are applied to terminal board TB4. Jumpers across TB4 are used to select the Q (active HIGH) or NOT Q (active LOW) outputs of U2A. This signal exits the RSCU interface assembly as the #2 ON signal via J2-8.

D-type flip-flop U9A is used to reset binary counter U15 and to clear DTMF receiver U7. Whenever a logic LOW is applied to the PR input of U9A; U9A presets causing its Q output to go HIGH and its NOT Q output to go LOW. A HIGH on the Q output sends a clear pulse to DTMF receiver U7 which forces its Strobe output to a logic LOW. This insures that U7 will not decode the RSCU interface tones which are being sent to the RSCU. A LOW on the NOT Q output is applied to the R0(2) input of binary counter U15. This LOW enables U15. The clear input of U9A is affected by the LOW to HIGH transition of the QD output of U15. When this occurs, the LOW on the D input of U9A set the Q output back to LOW and the NOT Q output back to HIGH. This allows U7 to be ready to decode the next tone sequence from the RSCU and it disables and resets U15.

**Model 1150 CVOR**

Components C2, R2, TB5, TB6, U1C U4A, U4B, U5, U6, and U12D are not used in the VOR system.

**Table 2-3. CCA 012741 Tone Control to 1138 RCSU**

Touchtone Digit output	Row/Column	Time Slot	Description of input combinations
7 (852,1209 Hz)	R3C1	1	ANT1 = 0 TX 1 into antenna
8 (852,1336 Hz)	R3C2	1 U15 QA=1	ANT1 = 1 TX 2 into antenna
D (941,1633 Hz)	R4C4	2	ALM = 0
1 (697,1209 Hz)	R1C1	2	ALM = 1
6 (770,1477 Hz)	R2C3	3 U15 QA,QB=1	NORM2=0 Defined by ANT1= 1 or both NORM1 or NORM2 =0
9 (852,1477 Hz)	R3C3	3 U15 QA,QB=1	NORM2=1 Defined by ANT1 =0 with Either NORM1 or NORM2 = 1
2 (697,1336 Hz)	R1C2	4 U15 QC=1	NORM1 = 0 Defined by ANT1=0 or both NORM1 or NORM2 = 0
5 (770,1336 Hz)	R2C2	4 U15 QC=1	NORM1 = 1 Defined by ANT1 = 1 AND both NORM1 AND NORM2 = 1


**Table 2-4. CCA 012741 Tone Controls from 1138**

Touchtone Digit input	Row/Column	Time Slot	Control from 1138 RSCU
1 (697,1209 Hz)	R1C1	1	Turn on TX No 2 Preset U2A
2 (697,1336 Hz)	R1C2	1	Do not Turn on Tx 2 Clear U2A
3 (697,1477 Hz)	R1C3	0	Do not Turn on Tx 1 Clear U2B
5 (770,1336 Hz)	R2C2	3	Do not Reset  Preset U5A
6 (770,1477 Hz)	R2C3	3	Assert Reset  Clear U5A
8 (852,1336 Hz)	R3C2	4	Turn OFF both TX Preset U9B
* (941,1209 Hz)	R4C1	4	Do not Turn OFF both TX Clear U9B
D (941,1633 Hz)	R4C4	0	Turn ON No 1 TX Preset U2B
9 (852,1477 Hz)	R3C3	8	End of transmission Prest U9A

### 2.3.2.14 Low Voltage Power Supply CCA (1A14, 1A15, 1A16) Block Diagram Theory

Refer to [Figure 2-34](#). Low voltage power supply (LVPS) CCAs 1A14, 1A15, and 1A16 are designed to provide  $\pm 12$  Vdc and +5 Vdc power. Each is totally interchangeable with each other.

28 Vdc power is applied to spike protection circuit RV1, L1. From VR1, 28 Vdc is applied to the inputs of two sealed dc/dc converter modules, PS1 and PS2. PS2 converts the applied 28 Vdc source voltage into a dual output voltage equal to  $\pm 12$  volts. PS1 converts the 28 Vdc source voltage into +5 Vdc. These dc/dc converters are highly regulated switching converters that require no adjustments, alignments, or loads for proper operation.

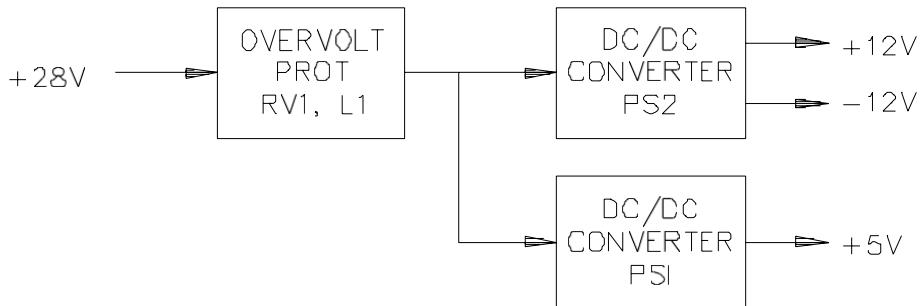

1150-059

**Figure 2-34. Low Voltage Power Supply CCA, Block Diagram**

### 2.3.2.14.1 Low Voltage Power Supply CCA (1A14, 1A15, 1A16) Detailed Circuit Theory

Refer to [Figure 11-23](#). The LVPS CCA reference designator 1A14 is designed to provide  $\pm 12$  Vdc and +5 Vdc power to the RMS card cage. LVPS CCAs 1A15 and 1A16 are located in the RMS card cage but they do not connect into the backplane CCA. LVPS CCA 1A15 is the low voltage power supply for transmitter #1. LVPS CCA 1A16 is the low voltage power supply for transmitter #2. Each LVPS is identical in construction and operation. Each is totally interchangeable with each other.

28 Vdc power enters the board via connector J1-9 and J1-10. The input voltage is conditioned by a spike, noise suppression protection circuit formed by RV1 and L1 and then applied to the inputs of two sealed dc/dc converter modules, PS1 and PS2. PS2 converts the applied 28 Vdc source voltage into a dual output voltage equal to  $\pm 12$  volts. PS1 converts the 28 Vdc source voltage into +5 Vdc. These dc/dc converters are highly regulated switching converters that require no adjustments or alignments.

The output voltages are made available to the backplane bus connector for the 1A14 CCA only, and to the front edge connectors. The +12 Vdc is available at connector J1-2; the -12 Vdc is available at connector J1- 1 and the +5 Vdc is available at connector J1-3 and J1-4. Ground occupies connector J1-5 thru J1-8.

### **2.3.2.15 Jack Assembly (1A38)**

Refer to [Figure 11-26](#). The jack assembly provides a common tie point to send or receive audio signals within the VOR system. Microphone jack J1 is used whenever an operator wishes to connect a microphone to the VOR to transmit voice. Terminal board TB1-1 and TB1-2 allow a remote-located microphone to send in the voice signal into the jack assembly. This signal is sent to 600 ohm matching transformer T1. The output of T1 is tied into jack J1 so that a local microphone will cut off the signal from a remote microphone. The microphone signal exits the jack assembly for the audio generator CCAs via terminal board TB1-3 and TB1-4.

Audio jack J2 provides a means for an operator to plug in a headset and listen to the detected audio supplied by the controlling VOR monitor CCA. Transformer T2 is a 600 ohm impedance matching transformer that allows the detected audio to be sent out to a remote location. Terminal board TB2-4 and TB3-2 handle the signals from the VOR monitors. Terminal board TB3-3 and TB3-4 are the exit points for the audio signal to a remote location.

### **2.3.2.16 Display Panel Assembly (1A1)**

The display panel assembly is located at the top front of the cabinet and it contains the two display boards that provide the visual status of the VOR monitors.

#### **2.3.2.16.1 Display CCA (A1, A2) Block Diagram Theory**


Refer to [Figure 2-35](#). The display CCA contains the circuitry that processes the monitor status signals from the facilities CCA. The display circuit contains three LED driver transistors and three colored LEDs.

Three conditions are displayed: "NORM" for a normal integrity status, "ALARM" for a fault condition and "BYPASS" for when the monitors are placed into a shutdown inhibit mode. The signals to control the transistors are directed by the micro controller on the CPU CCA and are processed via the facilities CCA.

The norm, alarm and bypass indications are grouped as System A and System B. The System A reflects the status detected by the 1A8 monitor. System B, reflects the 1A24 monitor. Each monitor checks the on air transmitter. A steady normal indication on System A indicates transmitter 1 is radiating into antenna. Likewise a steady normal indication on System B indicates transmitter 2 is radiating into the antennas. A flashing normal light indicates that the transmitter is in warm standby mode.

When the VOR monitor is functioning properly, a control signal from the facilities CCA is applied to transistor switch Q1. This signal allows Q1 to conduct which turns on "NORM" LED CR1. CR1 is the green LED used to provide the normal visual status condition.

When a fault condition is detected by the RMS CPU CCA, a control signal from the facilities CCA is applied to transistor switch Q2. This signal allows Q2 to conduct which turns on "ALARM" LED CR2. CR2 is the red LED used to indicate an alarm condition.

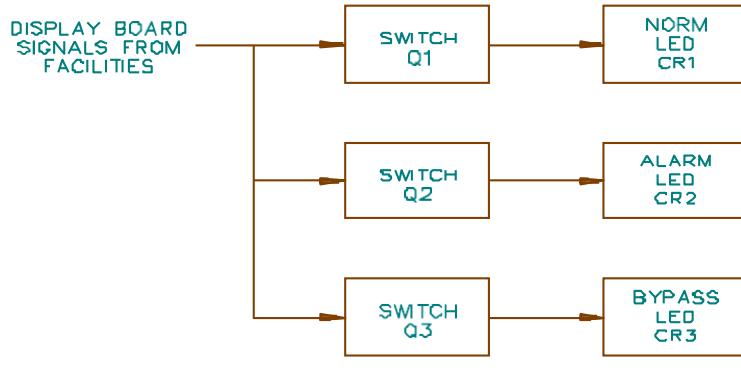

**Figure 2-35. Display CCA, Block Diagram**

When the VOR monitors are placed into a bypass condition for system maintenance or tests, a control signal from the facilities CCA is applied to transistor switch Q3. This signal allows Q3 to conduct which turns on "BYPASS" LED CR3. CR3 is the yellow LED used to provide the bypass visual status condition.

#### 2.3.2.16.2      Display CCA (A1, A2) Detailed Circuit Theory

Refer to [Figure 11-37](#). The display CCA contains the circuitry that processes the monitor status signals from the facilities CCA. The display circuit contains three LED driver transistors and three colored LEDs.

Three conditions are displayed: "NORM" for a normal integrity status, "ALARM" for a communications fault condition and "BYPASS" for when the monitors are placed into a shutdown inhibit mode. The signals to control the transistors are directed by the micro controller on the CPU CCA and are processed via the facilities CCA.

When the VOR monitor is certified to have a valid integrity status, a logic HIGH enters via connector J1-3 and is sent to the base of NPN transistor Q1. The HIGH switches Q1 on which provides a path to ground for LED CR1. The anode of CR1 is connected to a +5 Vdc source. CR1 is the green LED used to provide the normal visual status condition.

When a system fault is detected by the RMS CPU CCA, a logic HIGH enters via connector J1-4 and is sent to the base of NPN transistor Q2. The HIGH switches Q2 on which provides a path to ground for LED CR2. The anode of CR2 is connected to a +5 Vdc source. CR2 is the red LED used to provide the fault visual status condition.

When the VOR monitors are placed into a bypass condition for system maintenance or tests, a logic HIGH enters via connector J1-5 and is sent to the base of NPN transistor Q3. The HIGH switches Q3 on which provides a path to ground for LED CR3. The anode of CR3 is connected to a +5 Vdc source. CR3 is the yellow LED used to provide the bypass visual status condition.

Each display board operates from a +5 Vdc supplied by the 1A14 LVPS CCA.

### 2.3.2.17 Blower Assembly (1A39)


The blower assembly provides forced air cooling for the VOR transmitter system. There are two fans for reliability. These blowers are driven by a high-reliability brush-less motor. In current production equipment the blowers operate from the + 48 volt module of the BCPS. In dual systems, Blower B-1 is wired directly (via the harness) to A33, BCPS System A. Blower B2 is wired directly to A34, BCPS System B. The red wire from each blower goes to the positive terminal E1 on its associated BCPS. The black wire from each blower goes to the negative terminal E2 on the associated BCPS. In single equipment systems both blowers operate from the single BCPS.

Refer to [Figure 2-36](#). The blowers operated from 28 Vdc supplied individually from each BCPS transmitter system. Fan #1 red lead connects to 1A39TB1-1 and fan #2 red lead connects to 1A39TB1-4, which in turn connected to the +28 Volt power supplies via the wiring harness.

There is no speed or air flow monitor circuitry for these fans. It is necessary to insure that forced air cooling of the CSB power amplifiers is maintained. This includes appropriate filter cleaning routine and, if CSB power amplifier 1A19 is removed from the cabinet, a temporary cover from the accessory kit must be placed over the opening to direct the forced air into the 1A3 CSB power amplifier module. Failure to maintain proper airflow will cause a thermal shutdown condition to occur.


Connected to terminal board 1A39TB1 are two isolation diodes (1A39CR1 and 1A39CR2, refer to [Figure 11-2 and 11-3](#)) that logically OR the +28 Vdc from both BCPS subsystems. This common +28 Vdc is used to provide power to the RF monitor 1A2 and the LVPS CCA 1A14 for the RMS cage.

## Model 1150 CVOR

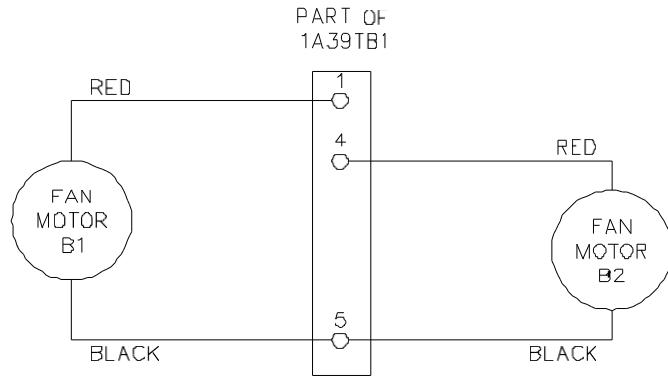

1150-08B

**Figure 2-36. Blower Assembly, Block Diagram**

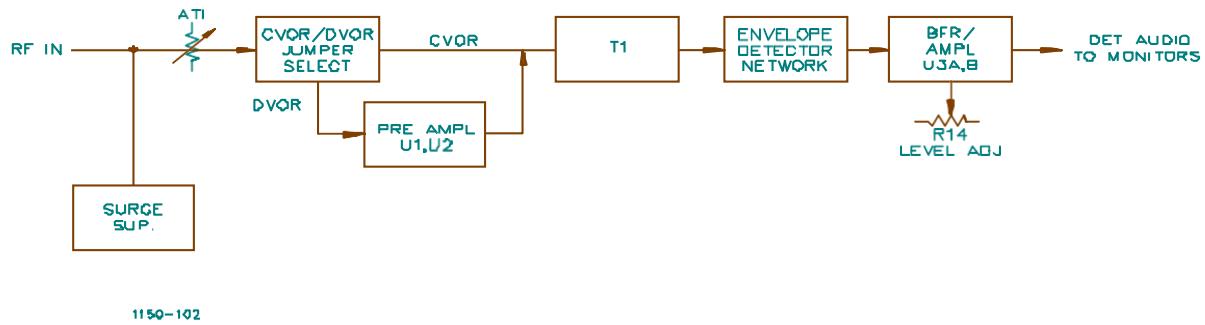

**Figure 2-37. Field Detector CCA, Block Diagram**

### 2.3.2.18 Field Detector Assembly (1A27, 1A28)

The field detector assembly detects the radiated VOR signal received by the field monitor antenna. The field detector is designed to be used with either a Conventional or Doppler VOR system.

#### 2.3.2.18.1 Field Detector CCA (A1) Block Diagram Theory

Refer to Figure 2-37. The RF signal from the field monitor antenna enters the field detector assembly and is applied to attenuator AT1. AT1 provides a means to adjust the RF level into the board. It is adjusted to provide sufficient RF drive to the detector circuits to achieve the required detected output signal level without producing any distortion or clipping of the detected signal.

From AT1 the RF signal is applied to a CVOR/CVOR jumper select circuit. The jumpers are placed in the CVOR configuration and the detected signal is routed to a preamplifier circuit consisting of U1 and U2.

U1 and U2 are RF amplifiers that are used to amplify the RF signal before it is processed by the actual detector circuitry. From U1 and U2 the signal is applied to impedance matching transformer T1.

T1 provides impedance matching of the output of U2 to the envelope detector network. The output of the envelope detector is next applied to a buffer amplifier circuit that consists of U3A and U3B

U3A and U3B buffer the output of the envelope detector circuit and amplify the signal. The output of U3B is set by potentiometer R14. R14 is adjusted for an average DC voltage level of 2.5 volts. The detected output signal is sent to both VOR monitor CCAs.

### 2.3.2.18.2 Field Detector CCA (A1) Detailed Circuit Theory

Refer to [Figure 11-31](#). The RF signal from the field monitor antenna enters the field detector assembly via RF connector J1. J1 connects directly to the field detector CCA. A gas discharge tube is wired between the input RF line and the circuit card and chassis ground to prevent induced surge voltages from near-by lightning strikes or other electromagnetic interference sources from damaging the field detector CCA.

Attenuator AT1 provides a means to adjust the RF level into the amplifier circuits located on the CCA. AT1 is adjusted to provide sufficient RF drive to the detector circuits to achieve the required detected output signal level without producing any distortion or clipping of the detected signal. AT1 is adjusted to produce a minimum drive required to produce the required audio output signal level.

The field detector assembly is usable in both CVOR and CVOR applications. CVOR installations place the field monitor antenna approximately 350 feet from the transmitter antenna system resulting in increased signal loss and a lower RF input to the field monitor.

In the CVOR application the signal from attenuator, AT1, is routed via jumpers E1 - E2 and E6 - E5 through an RF amplifier consisting of U1 and U2. This amplifier provides sufficient gain to overcome the increased path loss.

After amplification, the signal is routed to transformer T-1 which steps up the impedance to approximately the 200 Ohm level. This provides impedance gain and results in a larger input voltage to the envelope detector CR1.

CR1 is a temperature compensated envelope detector which is slightly forward biased by the drop across CR2. This has two desirable effects.

- a. The detector turn-on threshold (about 0.5 volts) is canceled out which results in much lower audio distortion.

## **Model 1150 CVOR**

- b. The change in turn-on threshold with temperature (about -1.5 millivolts per degree C) is also cancelled, since CR2 and CR1 are the same type and the turn on thresholds will track over a wide temperature range.

The output of CR1 is filtered (by C8, L3 and C9) to remove the RF and then applied to the non-inverting input of the unity gain buffer U3A. From U3A the detected RF signal is routed to the output amplifier U3B.

U3B has two adjustments. R1 is used to sum a DC offset current into the non-inverting input for the purpose of canceling out any residual DC offset due to the temperature compensation bias applied to CR1 which will appear on the output of U3A. R14 is used to set the gain of U3B so a DC level of +2.5 volts (corresponding to the transmitter carrier level) is obtained.

The detected audio signal is sent to both monitor CCAs.

### **2.3.2.19 Monitor CCA (1A8, 1A24) Block Diagram Theory**

Refer to [Figure 2-38](#). The monitor CCA is an independent unit designed to monitor and analyze the radiated signal from the CVOR and initiate an alarm status signal if the CVOR fails to operate within specified limits.

The CVOR monitors are designed for dual operation with both monitors checking the signal from the field detectors. The CVOR field monitor is normally connected with one antenna with an output RF signal split and feeding two detectors in the Interface Enclosure.

The monitor CCA has two field detector inputs one for each detector. The detector used is selected by the RMS configuration screen to allow flexibility, reliability and testing.

The monitor may be placed in a BYPASS mode to allow testing through the local or remote terminal to the RMS microprocessor.

Only one of the two monitors may be the "controlling monitor" and perform the control function. The controlling monitor operates the transfer relays and provides the audio output to the headphone jack and telephone terminal strip. The controlling monitor is set by the RMS automatically. When a particular transmitter is turned on the associated monitor is chosen to be the controlling monitor.

A 30 Hz test signal is injected into the 30 Hz bandpass filters. The phase angle of this signal is measured and stored as a reference. Once every 2 minutes this 30 Hz signal is injected to measure the phase angle of the signal. If the phase through the bandpass filters has shifted then a correction value is computed to correct in the Azimuth angle measurement. This process is called Internal Calibration

Communications with the RMS is performed serially using 19200 baud. The RMS sends requests for status once every second and sends setup information such as limits when these are changed by the technician.

The relay control is performed only by the controlling monitor and when directed by the RMS microprocessor.

Frequency Measurement is performed by the monitor on the composite signal from the chosen detector. The transmitter RF signals are measured only from the associated transmitter.

Monitor A measures the Carrier, Upper and Lower frequencies from the associated transmitter A. Likewise monitor B measures the Carrier, Upper and Lower frequencies from the associated transmitter B.

Micro controller U9 operates from 12 MHZ clock frequency supplied by crystal Y1. U1 outputs a 6 MHZ clock frequency which is applied to a divider circuit consisting of U22A, U22B, and U24. U9 also outputs a 3 kHz clock signal that is applied to dividers U42A and U42B.

U8 is a PAL that provides chip select signals to NVRAM U2, RAM U10, and timers U11 and U14. U8 also provides a clock signal to latch flip-flop U13 and section enable inputs for DAC U35.


The monitor's software program is stored in EPROM U1. U9 utilizes RAM U10 to provide temporary data storage and all of the local operating parameters for the VOR monitor. NVRAM U2 is used to store all of the offset constants and alarm limits.

U9 is responsible for setting the status of the antenna transfer coaxial latching relays. It outputs a relay latch coil signal that goes to the latch coil relay switch circuit which consists of amplifier U4B and transistor Q4. This circuit amplifies the latch coil signal and applies it to the latch coil of the coaxial latching relays to select Transmitter A. U9 also outputs a relay release coil signal that goes to the release coil relay switch circuit to select Transmitter B. The release coil relay switch circuit consists of amplifier U4A and transistor Q5. It amplifies the relay release coil signal and applies it to the release coil of the coaxial latching relays.

U11 and U14 form a dual triple timer circuit that is used to create precision gates and clock signals which are applied to various circuits within the monitor CCA. Crystal oscillator Y2 provides a 2 MHZ input clock to this circuit. The 2 MHZ signal is converted to 10 second gate pulse that is used to establish the count interval for U14. The 6 MHZ clock from U9 is converted into a 599.995 kHz and a 428.539 kHz which is used by bandpass filter U28 as the high end and low end cutoff clock frequencies, 9960 CH and 9960 CL respectively.

Frequencies from several on-board and off-board locations are sent to the input lines of multiplexer U21. A three-bit code from U12 is used to select which frequency is passed through U21 to be counted by timer U14.

## Model 1150 CVOR

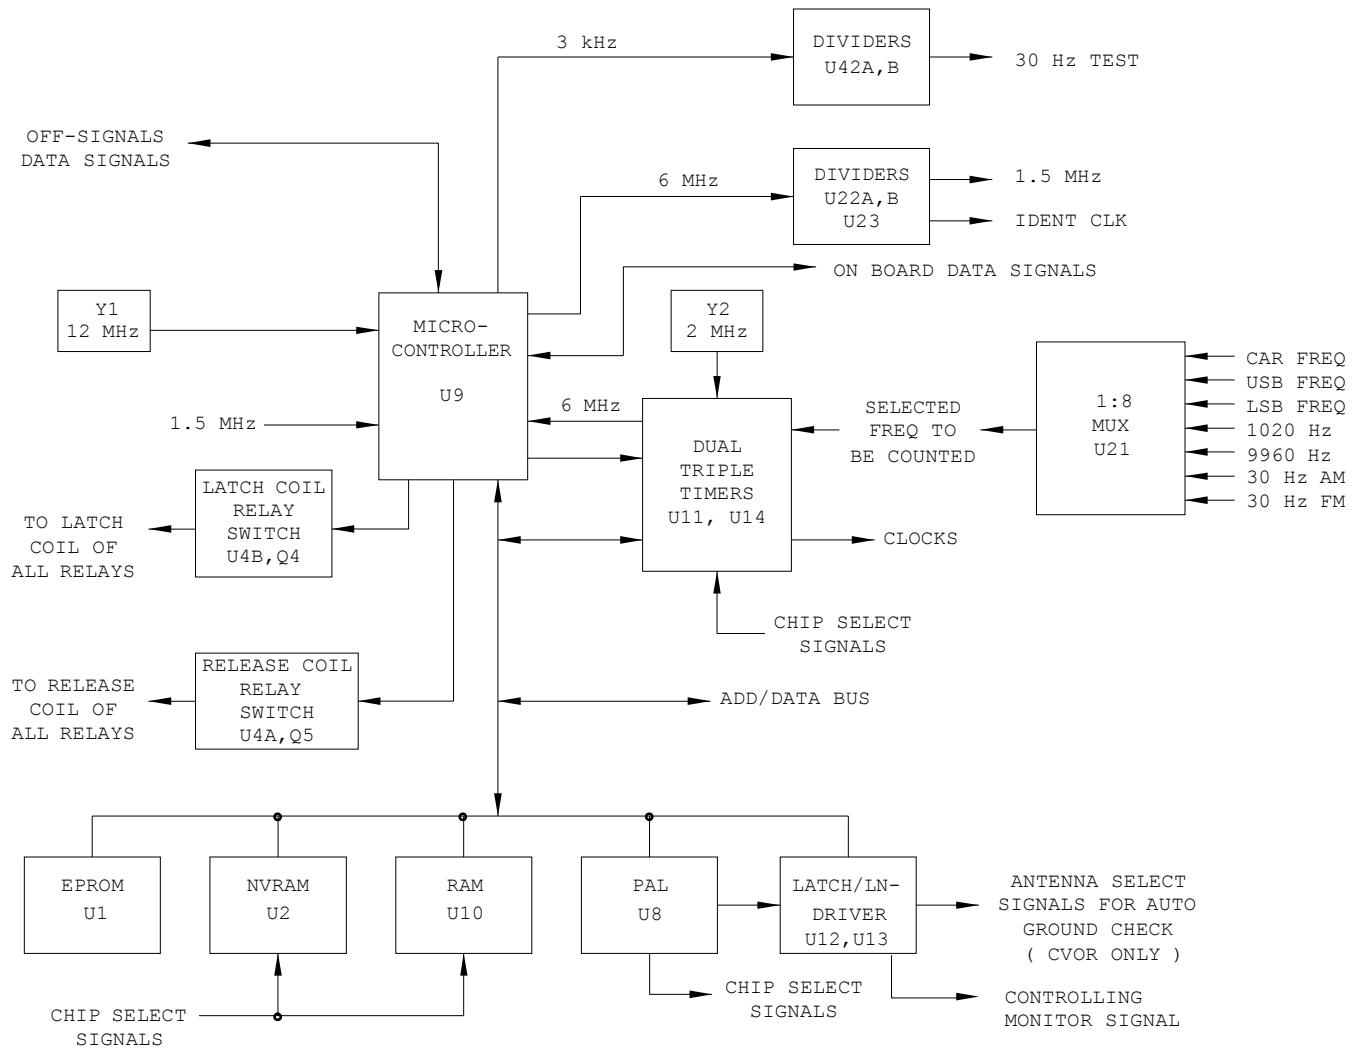

1150-111

**Figure 2-38. Monitor CCA, Block Diagram (sheet 1)**


The 6 MHZ clock from U9 is applied to a divider circuit consisting of binary counter U22A, U22B and U23. This circuit divides the 6 MHZ clock and outputs a 1.5 MHZ clock that is sent to voice bandpass filter U25 and back to U9. It also develops a 100 kHz clock labeled IDENTCLK which controls the clock inputs of ident bandpass filter U26.

Dividers U42A and U42B form a divider circuit that is used by micro controller U9 to convert a 3 kHz signal to an accurate 30 Hz signal that is used to test the 30 Hz AM and 30 Hz FM frequency filter circuits.

Refer to [Figure 2-39](#). U16 and U18 are quad input differential multiplexers. They have detected RF signals from the field detectors, and the test generator signal, applied to their inputs. U20 is also quad input multiplexer that has the sideband 1 and sideband 2 forward and reflected power analog DC voltages applied to it.

The outputs of U16 and U18 are buffered by amplifiers U15A, U15B, and U15D. The output of this circuit is an AC and DC composite of the detected RF signal. A portion of the composite signal is applied to a low pass filter that consists of capacitor C103 and resistor R103. This filter removes all AC variations from the signal. The remaining DC voltage is buffered by U7D and applied to U9 for analysis.

Decoder U24 is used by U9 to provide an address code that will activate one of the four inputs of U16 and U18.

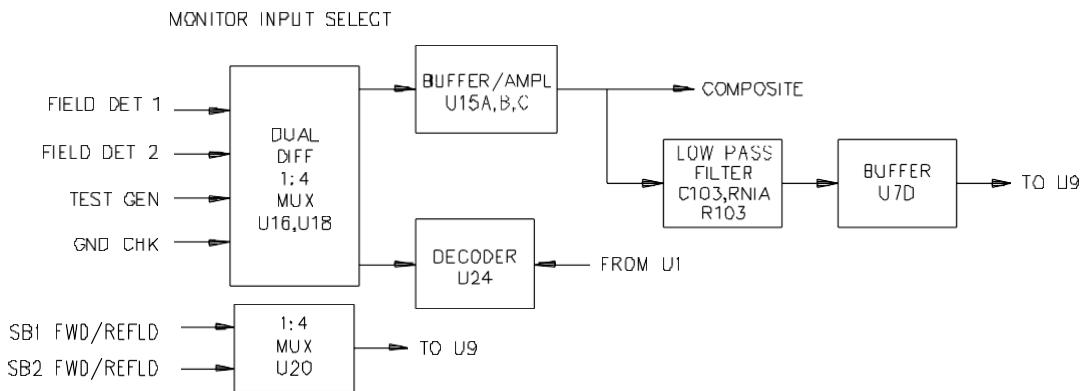

**Figure 2-39. Monitor CCA, Block Diagram (sheet 2)**

Refer to [Figure 2-40](#). A portion of the composite signal is applied to voice bandpass filter U25. U25 also has a 1.5 MHZ clock signal applied to it. The output of U25 a 300-3000 Hz aural signal which is applied to two circuits. The 300 to 3000 Hz aural output of U25 is feed back into the amplifier section of U25 along with a DC bias voltage provided by switches Q8 and Q9. If the monitor is the controlling monitor, an active LOW is sent to Q8 and Q9. This LOW causes LED CR11 to conduct and the DC bias goes to zero. Zero bias allows the audio amplifier section of U25 to function and an audio signal is sent to jack assembly 1A38. If the monitor is not the controlling monitor, Q8 is disabled which shuts off CR11 and allows Q9 to apply a negative bias on the audio amplifier input which shuts off the audio output to the jack assembly. This insures only the controlling monitor can send audio to the jack assembly.

The second section that processes the 300-3000 Hz aural signal is the identity circuitry. This filter uses a mode of operation that requires a clock frequency which is 100 times the desired bandpass frequency. The 100 kHz IDENTCLK signal from U22A is used as the clock signal for U26. The output of U26 is the ident signal centered on 1020 Hz.

## **Model 1150 CVOR**


This ident signal is equally divided between an ident peak modulation detector circuit and a zero crossing detector circuit. The ident modulation peak detector circuit consists of U27C, U27D, and diode CR9. It rectifies the ident frequency and filters it to remove any 1020 Hz ripple remaining on the DC voltage. The voltage is then buffered by U31C and applied to U9. U9 uses this input to calculate the percent modulation of the identity frequency.

Amplifier U32B and U30B operates as a zero crossing detector. The output of the zero crossing detector is a 1020 Hz pulse that occurs whenever the 1020 Hz ident signal passes through its zero crossing point. Refer to [Figure 2-41](#). The composite signal is also sent to the 9960 Hz (10 kHz) circuitry. The composite signal is applied to buffer U32A before being applied to 9960 Hz (10 kHz) bandpass filter U28.

U28 requires a clock frequency that is 50 times the high and low cutoff frequencies of the bandpass. These clock signals are the 9960CH and 9960CL signals. The clock frequencies set the high end roll-off at approximately 12000 Hz and the low end roll-off at approximately 8571 Hz. The filtered output from U28 is applied to the 9960 modulation peak detector circuit and the 9960 limiter circuit.

The 9960 modulation peak detector circuit consists of U29C, U29D, and diode CR10. It rectifies and filters the signal. Potentiometer R43 is adjusted to ensure the peaks of the rectified pulses are equal. The filter removes any residual 9960 Hz ripple and provides a pure DC voltage that represents the percent modulation level of the 9960 Hz (10 kHz) signal. The DC voltage is buffered by amplifier U31D and applied to U9. This signal is used by U9 to calculate the percent modulation level of the 9960 Hz (10 kHz) signal.

The output U29C is fed to the Notch Monitor circuit consisting of R86, R89, U44, CR18 and CR19. The Notch Monitor circuit provides a signal that contains the CVOR sideband modulation to the microprocessor U9. This signal is sampled at 48 different times when individual sideband antennas are radiating. When an antenna is not radiating correctly the signal level will change at the time when that particular antenna is radiating. R86 and R89 provide voltage division prior to entering the U44 filter input. A 200 kHz clock sets the cutoff frequency for the 6<sup>th</sup> order low pass filter at 4000 Hz. This low pass filter eliminates the 9960 Hertz component but allows the CVOR modulation frequencies of 720 and 1440 Hertz to pass. Amplifier U44B buffers the signal. CR18 and CR19 limit the signal voltage range to U9.

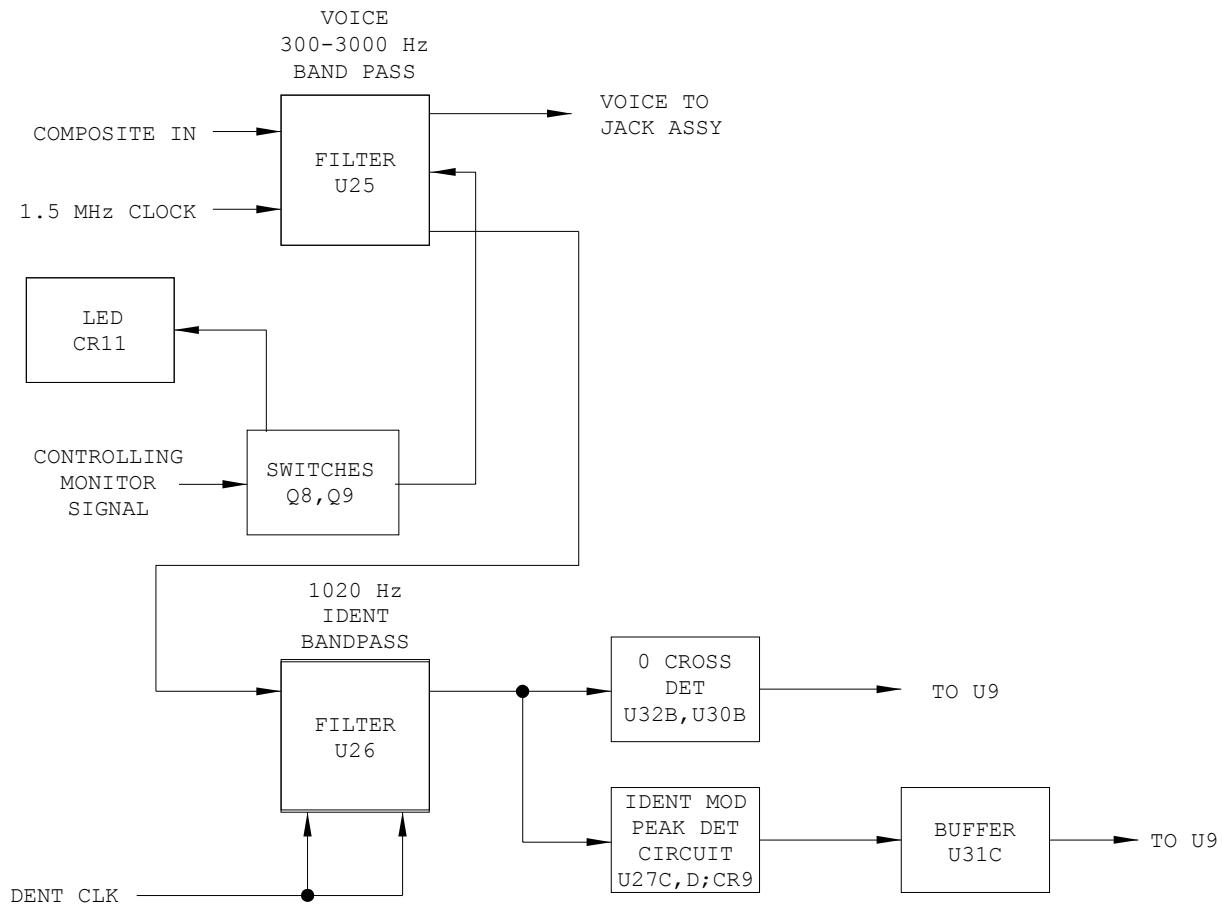


1150-115

**Figure 2-40. Monitor CCA, Block Diagram (sheet 3)**

A portion of the output of U28 is applied to the 9960 limiter circuit. This circuit consists of diodes CR34, CR35, and amplifier U32C. It squares the 9960 FM signal and applies it to zero crossing detector U32D. The output of U32D is applied to an audio detector circuit which consists of multi vibrator U30A diode CR28, and capacitor C29. The audio detector circuit is used to extract the 30 Hz FM deviation from the (10 kHz) frequency. One output of U30A is applied to multiplexer U21. The output of C29 is applied buffer U7A. U7A buffers the signal and applies it to the 30 Hz filter circuits.

Refer to [Figure 2-42](#). The composite signal is applied to analog switch U43A and the 30 Hz test signal is applied to U43C. A control signal from U9 determines which signal is applied to the HIGH-Q 30 Hz filter network. The HIGH-Q 30 Hz filter network consists of amplifier U31B and 30 Hz bandpass filters U40 and U41. The HIGH-Q 30 Hz filter network removes any residual high frequency components that may be present on the signal. From the HIGH-Q filter network the signal is applied to a low pass filter which consists of resistors R97 - R99, and capacitors C38 - C40. The output of this filter network is a 30 Hz signal.

## Model 1150 CVOR

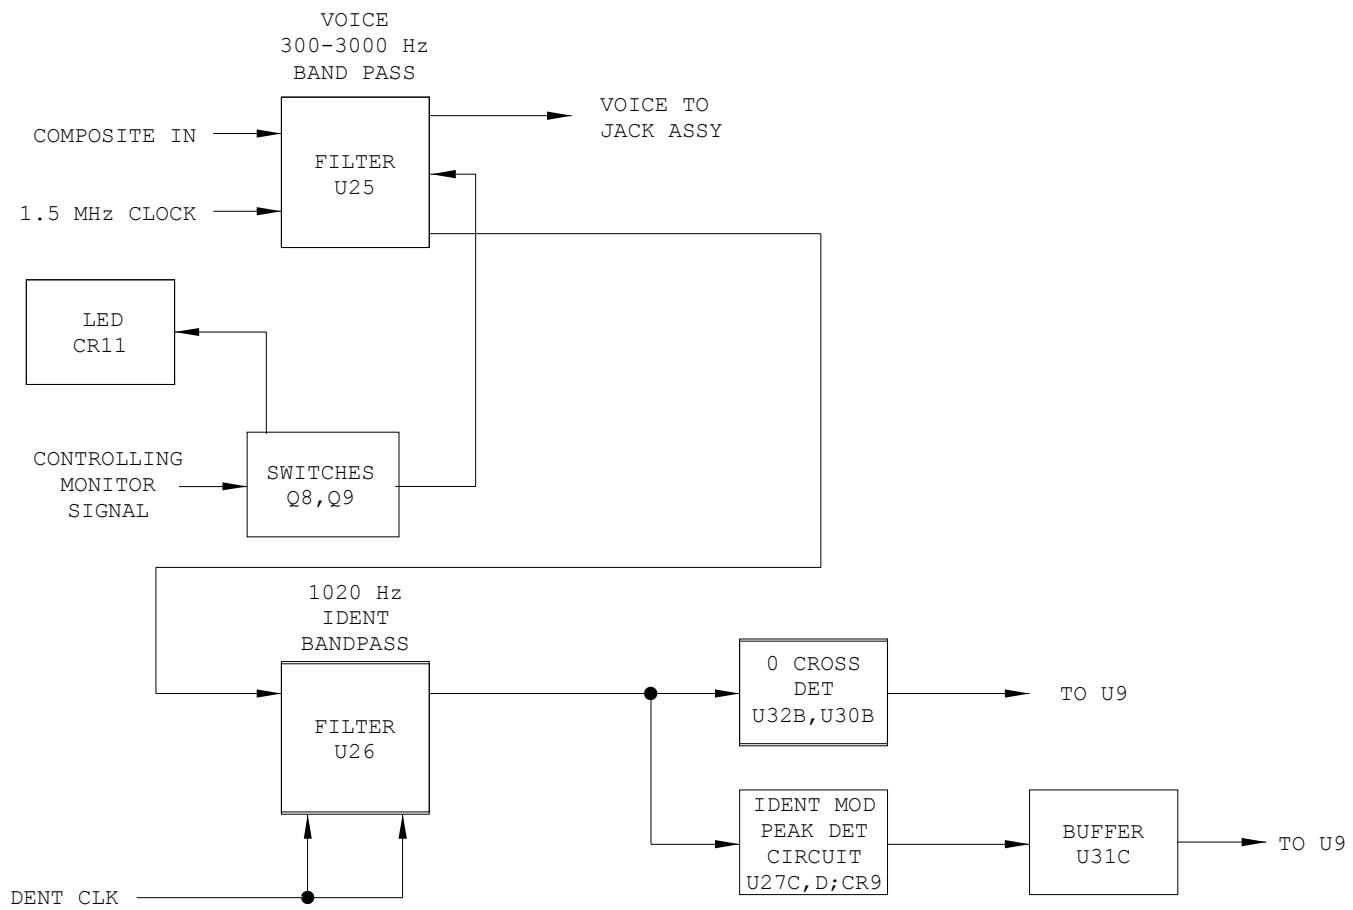

1150-115

**Figure 2-41. Monitor CCA, Block Diagram (sheet 4)**

The 30 Hz AM signal is amplified by U39C. The output of U39C is applied to DAC U35A where it is used as the reference voltage. The output of U35A is amplified by U39D and applied to two circuits. One is a half-wave rectifier consisting of resistors R62 and R91 and limiter-clipper diodes CR24 and CR25. The other is zero crossing detector U27A. The half-wave rectifier converts the full-wave 30 Hz signal into a half-wave signal that is analyzed by U9 to determine the percent modulation.


U27A converts the 30 Hz AM signal into an accurate 30 Hz square wave that changes state whenever the 30 Hz waveform crosses the zero reference point. This signal is sent to an input of frequency counter multiplexer U21 so that it can be counted by interval timer U14 and the results supplied to U9. The crossing point of the 30 Hz signal is also used by U9 to calculate the VOR azimuth from the composite signal.

The 30 Hz square wave test signal is applied to the input ports of analog switches U43C and U43D. When U9 performs a test of the 30 Hz circuits, U43C and U43D supply a 30 Hz signal to the 30 Hz AM and 30 Hz FM circuits. For normal operation, these analog switches are in an "open" state.

The 30 Hz FM signal is applied analog switch U43B. U43B is controlled by U9 which determines whether U43A will allow the 30 Hz FM signal to pass through or not. The 30 Hz FM or the 30 Hz test signal is next applied to a HIGH-Q 30 Hz filter network which consists of amplifier U7B and 30 Hz bandpass filters U37 and U38. This filter network removes any residual high frequencies that may be present on the signal. The output of the HIGH-Q filter network is applied to a low pass filter which consists of resistors R5, R6, R35 and capacitors C112 - C114. The output of the low pass filter is applied to amplifier U39B. The output of U39B is used as a reference voltage for DAC U35B. The output of U35B is applied to amplifier U39A.

The output of U35B is amplified by U39A and applied to two circuits. One is a half-wave rectifier consisting of resistors R18 and R40 and limiter-clipper diodes CR26 and CR27. The other is zero crossing detector U29A. The half-wave rectifier converts the full-wave 30 Hz signal into a half-wave signal that is analyzed by U9 to determine the percent modulation.

## Model 1150 CVOR

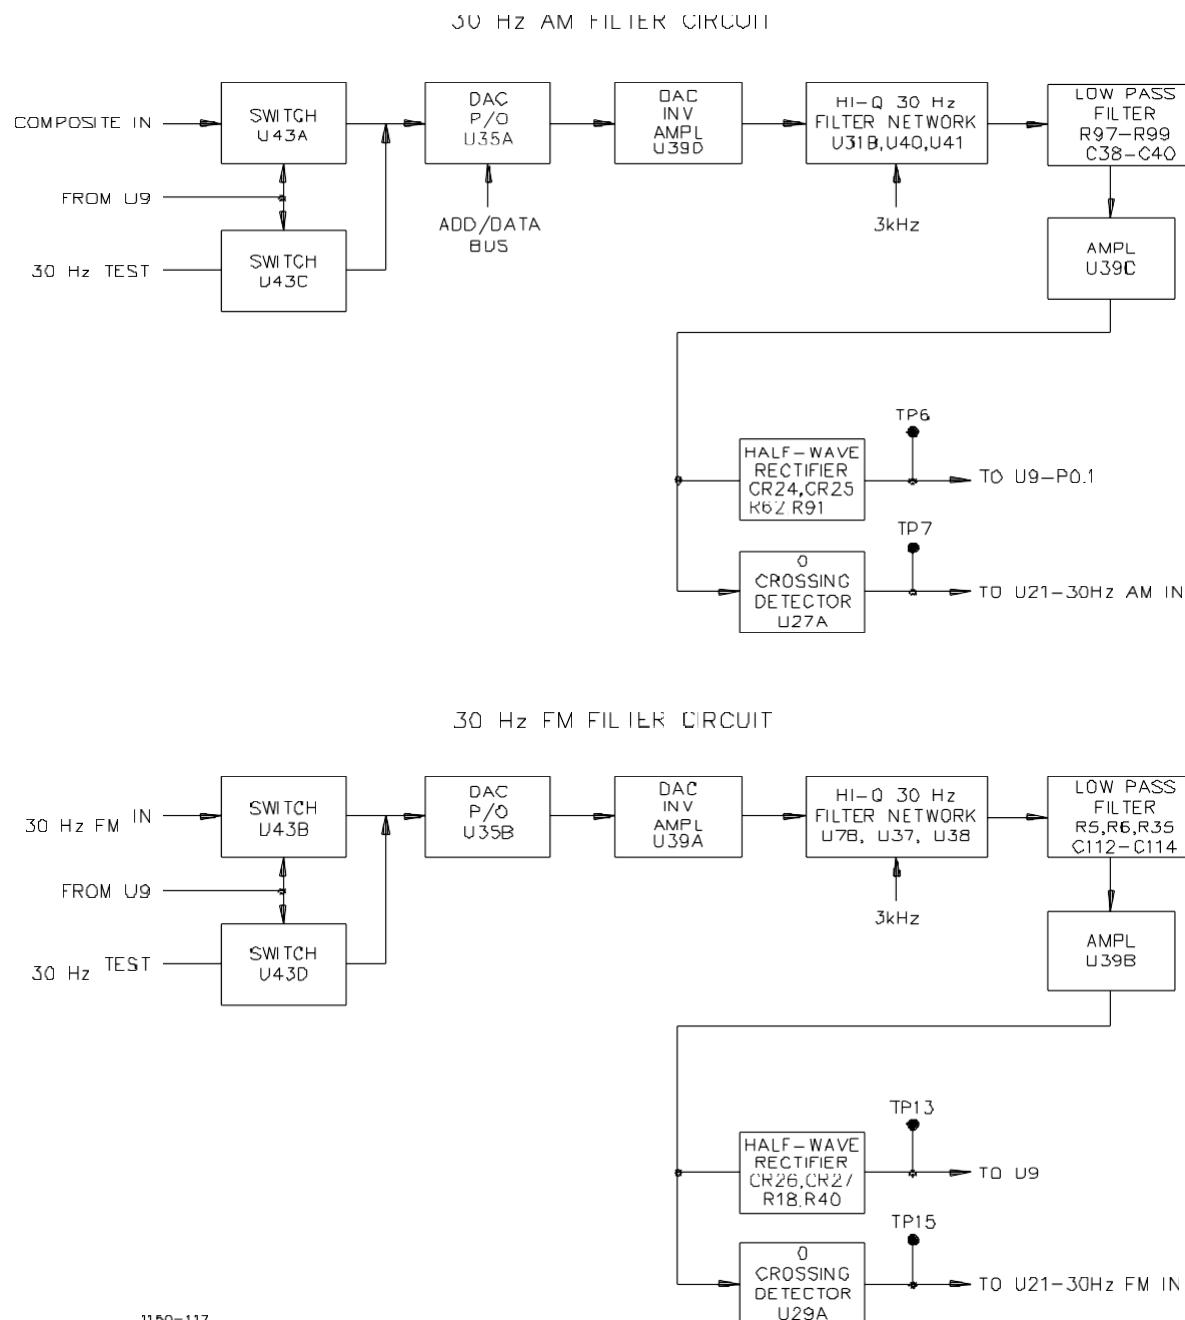

**Figure 2-42. Monitor CCA, Block Diagram (sheet 5) (Current Version)**

U29A converts the 30 Hz FM signal into an accurate 30 Hz square wave that changes state whenever the 30 Hz waveform crosses the zero reference point. This signal is sent to an input of frequency counter multiplexer U21 so that it can be counted by interval timer U14 and the results supplied to U9. The crossing point of the 30 Hz signal is also used by U9 to calculate the VOR azimuth from the composite signal.

**NOTE**

The CVOR 9960 Hz subcarrier is actually a 10 kHz frequency that may vary with a deviation that can range from  $\pm 454$  Hz to  $\pm 497$  Hz, dependent on the station frequency. To simplify the discussion of the VOR monitor CCA detailed theory, the standard values of 9960 Hz  $\pm 480$  Hz will be used.

### 2.3.2.19.1 Monitor CCA (1A8, 1A24) Detailed Theory

Refer to [Figure 11-17 \(sheet 1 of 4\)](#). The monitor CCA is an independent unit designed to monitor and analyze the radiated signal from the VOR and initiate an alarm status signal if the VOR fails to operate within specified limits.

The monitor analyzes one of several audio signals applied to it. It can select a signal from field detector 1 or field detector 2, or the test generator signal.

The monitor selects the desired composite VOR audio signal and extracts the individual audio components and DC levels to determine RF power level of the signal, percent modulation of the identity, 9960 Hz (10 kHz) subcarrier, and 30 Hz AM signals. It also determines the 9960 Hz (10 kHz) deviation ratio and the phase difference between the 30 Hz AM and 30 Hz FM signals.

There are two monitors installed in the CVOR system. The monitors can be selectively organized by the operator to function in a logical "OR" or a logical "AND" configuration. The "OR" arrangement will allow either the controlling or redundant monitor to initiate a shutdown/transfer command. The "AND" configuration requires both monitors to agree that an out-of-tolerance condition exists before a shutdown/transfer command is initiated. The monitor CCA also measures the station RF frequency for accuracy.

Micro controller U9 is identical to the micro controller used on the audio generator CCA. It handles numerous tasks and housekeeping chores to maintain monitor integrity, data analysis, and communications with the CPU CCA. Due to similarities with the audio generator CCA micro controller ([paragraph 2.3.2.2.6](#)) only a brief description of like functions are described here.

Micro controller reset is accomplished by resistor R2, capacitor C1, inverter U4E, and switching transistor Q1. Power failure monitoring is accomplished by resistive voltage divider R3 and R1, amplifier U15C, and line receiver U6C. Terminals E1 and E2 provide the capability to have the NMI input to the micro controller disabled for factory testing. U9 communicates with the serial interface CCA by means of line driver U5A and line receiver U6B. U9 operates from 12 MHZ crystal Y1 and outputs a 6 MHZ clock frequency. U3 is an octal, D-type latch that passes address bits A0-A7. U9 provides an ALE output to the enable input of U3. U8 is a PAL that provides chip select signals to NVRAM U2, RAM U10, and timers U11 and U14. It also provides a clock signal to octal D-type flip-flop U13 and the section enable inputs of DAC U35.

## **Model 1150 CVOR**

The software program for the monitor CCA is stored in 256 kbit (32 k by 8 bit) EPROM U1. Micro controller U9 utilizes RAM U10 to provide the temporary memory storage space needed for stack pointers and vectors, floating point calculations, and temporary data storage. U10 is a 256 kbit (32 k by 8 bit) memory device. NVRAM U2 is a 16 kbit (2 k by 8 bit) memory device that stores all of the calibration constants and alarm limits and all of the local operating parameters for the VOR monitor.

The controlling monitor micro controller is responsible for setting the status of the antenna transfer coaxial latching relays. U9 has two output ports which drive invertors U4B and U4A. U4B, in turn, drives the base input of darlington transistor Q4. U4A drives the base input of darlington transistor Q5. The emitters of Q4 and Q5 are grounded. The collector of Q4 goes to the latching coils of the coaxial latching relays. The collector of Q5 goes to the releasing coils of the coaxial latching relays. When Q4 is turned on by U9, a ground is applied to the latching coils of the coaxial latching relays connecting system A to the antenna array and system B to the dummy loads. When Q5 is turned on, a ground is applied to the releasing coils of the coaxial latching relays connecting system B to the antenna array and system A to the dummy loads.

Address/data bits AD4-AD6 are latched by U12 to produce a 3-bit code for the address inputs of 1-of-8 multiplexer U21. Address/data bit AD7 is used to determine the controlling monitor which controls the enable input of U13 and the amplifier section of voice bandpass filter U25.

Triple, 16-bit, programmable, interval timers U11 and U14 are used to create precision gates within which pulses of different frequencies can be counted with great accuracy. Y2 is a 2 MHZ crystal that is used with inverter U4F to form a simple oscillator circuit. The output of the oscillator goes to U11 counter 0 clock input CLK0. U11 and U14 receive their chip select signals from U8. U11 and U14 are interconnected into the address/data bus bits AD0-AD7, thereby providing a means for U9 to program the six counters and read count data stored internally. Address bits A0 and A1 and the read and write bits from U9 complete the control signals sent to U11 and U14. The three counter gate control inputs of U11 are all tied HIGH.

U11 counter 0 is programmed to divide the input frequency by a factor of 10,000. Counter 0 output OUT0 should be a 2.0 MHz frequency. Capacitor C4 is used to trim the oscillator for a frequency of 2000 MHz at test point TP16. OUT0 drives the CLK1 input of U11 counter 1. Counter 1 is programmed to divide the input frequency by a factor of 2000 which produces a precise 10 second (0.1 Hz) positive gate at OUT1. The 10 second gate sets the interval counting period for U14 counter 0 and provides an interrupt to U9 via inverter U4C. The CLK0 and CLK1 inputs of U14 are pulse trains that come from the output of U21. U14 counter 0 gate input G0 is the 10 second positive enable pulse which will establish the counter interval for U14 counter 0. At the end of the count interval, the count value is converted into a 12-bit word and placed onto the 8-bit address/data bus with two write commands under the control of U9.

When counting low frequency signals such as 30 Hz or 9960 Hz, there is no concern with overflow. However, when attempting to count the carrier sample frequency, overflow may be a problem. The output of U14 counter 0 is an overflow from 16-bit counter 0. This output is inverted by inverter U36B and applied to U14 counter 1 G1 input with the pulse train from U21 applied to CLK1. This allows the second 16-bit counter to count the overflow pulses during the entire 10 second interval. Again, at the end of the interval, the 32-bit count is converted into a 12-bit data word and sent to U9 via the address/data bus.

The 6 MHZ clock signal from U9 enters the CLK2 inputs of U11 and U14. U11 counter 2 is programmed to divide the input frequency by a factor of approximately ten. With a 6 MHZ input, the output frequency will be 599.995 kHz. This frequency is used by the 9960 Hz (10 kHz) bandpass filter U28 as the high end cutoff clock frequency which is labeled 9960CH. U14 counter 2 is programmed to divide the 6 MHZ input frequency by a factor of approximately fourteen which will produce an output frequency of 428.539 kHz. This frequency is used by U28 as the low end cutoff frequency and is labeled 9960CL.

Frequencies from several on-board and off-board locations are sent to the input lines of multiplexer U21. These signals are: on-channel carrier sample frequency; USB sample frequency; LSB sample frequency; 30 Hz AM signal frequency; 9960 Hz (10 kHz) FM subcarrier frequency; and 30 Hz FM signal frequency. A three bit code from U12 is used to select which frequency is passed through U21 to be counted by timer U14.

U34 is a three terminal voltage regulator that converts +12 Vdc to +5 Vdc. This is used as a separate regulated 5 volt source on the monitor CCA that is isolated from the general +5 Vdc (Vcc) power bus. U17 is a three terminal voltage regulator that converts -12 Vdc to -5 Vdc. U19 is a precision reference voltage source that produces a +5 Vdc reference (VREF). Potentiometer R10 is adjusted to trim the output voltage (To  $5.11 \pm 0.1$ ) which can be measured at test point TP17.

U16, U18, and U20 are quad differential input multiplexers. U16 section 1 has the audio signal from field detector #1 applied to it. U16 section 2 has the audio signal from field detector #2 applied to it. U16 section 3 is not currently used. U16 section 4 has the test generator signal applied to it. U18 sections 1, 2, 3 and 4 are not currently used. U20 has the sideband 1 and sideband 2 forward and reflected power DC analog voltages applied to it.

The differential outputs of U16 and U18 are tied together and buffered by U15B and U15D. Instrumentation amplifier U15A is a unity gain amplifier that references the signal to ground. Under normal operating conditions, this signal will be an AC and DC composite of the detected RF signal. The level of the composite output of U15A can be measured at test point TP5. A portion of the composite signal is sent through a low pass filter consisting of R103 and C41 that removes all AC variations. The remaining DC voltage is buffered by U7D before it is sent to U9 for analysis. The input to U9 is protected by a limiter-clipper circuit. This DC voltage represents the field intensity of the CVOR transmitter that is directly related to the carrier power level.

Triple analog switch U24 is used by U9 to provide a 2-bit address code that will activate one of the four inputs of U16 or U18. The third output from U24 goes directly to the enable input of U16 and is inverted by U4D before going to the enable input of U18. U9 can control which multiplexer and which input will be activated to provide the input signal to the monitor CCA. Terminals E3 and E4 provide a means to force the monitor CCA to constantly receive the test generator signal. This is used during test, alignment, or maintenance of the monitor CCA.

## **Model 1150 CVOR**

In order for the monitor CCA to select the signal from field detector #1, U9 sets the X1 and Y1 inputs to U24 to a logic LOW and the Z1 input to a logic HIGH. The switch inputs of U24 are set HIGH by pull-up resistor R27. Therefore, U24 provides a logic LOW on the X and Y outputs and a logic HIGH on the Z output. To select field detector #2, the X output of U24 must be a logic HIGH, the Y output must be a logic LOW and the Z output must be a logic HIGH. When a jumper is placed across terminals E3 and E4, the switches of U24 are set to a logic LOW. This forces U24 to select the X0, Y0 and Z0 inputs as the output signals. The X0, Y0 and Z0 inputs are all tied to VCC which is a logic HIGH. Therefore, the output of U24 instructs U16 to select the test generator input for the monitor.

The 6 MHZ clock from U9 is applied to binary counter U22B. The divide-by-four output of U22B is a 1.5 MHZ clock that is sent to voice bandpass filter U25 and to an input port of U9. The divide-by-two output of U22B is a 3 MHZ clock which drives the clock input of presetable, synchronous, 4-bit binary up/down counter U23. U23 is set to operate as a count up device and is preprogrammed with a count of one in its internal counter circuit. This means the counter will start counting from 1 up to 15 and then produce a carry output. The output of U23 is a 200 kHz signal ( $3 \text{ MHZ} \div 15$ ) which drives the clock input of binary counter U22A. The output of U22A is a 100 kHz clock signal labeled IDENTCLK which controls the clock inputs of ident bandpass filter U26.

The aural section of the monitor CCA is responsible for extracting the identity and voice components from the composite signal output of U15A. A portion of the composite signal is first applied to voice bandpass filter U25. This filter is identical to the voice bandpass filter used on the audio generator CCA so the function of the internal sections are similar. U25 has a 1.5 MHZ clock signal from U22B applied to it. The composite signal is applied to the input of the receiver filter stage VFRI. The output of the receiver filter stage VFRO directly feeds the input of the transmitter filter stage VFXI. The transmitter filter stage is a 300 to 3000 Hz bandpass filter.

The transmitter filter stage output VFXO is an aural signal that contains all the frequencies within the bandpass of 300 to 3000 Hz. This aural signal is proportionally applied to two circuits. The first circuit is the input to the power amplifier section of U25. Also tied to that input is bias control transistor Q9. The base of Q9 is driven by the collector of transistor Q8. LED CR11 is connected to the emitter of Q8. The control monitor signal from U12 is applied to the base of Q8. If this monitor is the controlling monitor, then the signal applied to the base of Q8 is a logic LOW. This turns on Q8 which allows CR11 to illuminate. CR11 is a green LED which is the visual indication to identify the controlling monitor. Turning on Q8 turns off Q9 which removes the negative potential bias voltage from the input of the power amplifier section. This allows the power amplifier section to amplify the audio signal obtained from VFXO and pass it out the power amplifier differential output ports (PWRO+ and PWRO-). Therefore, the controlling monitor will be the monitor that supplies an audio signal to the jack assembly or a remote aural monitor. If the monitor CCA is not the designated controlling monitor, a HIGH is applied to the base of Q8 which will turn it off. LED CR11 is extinguished and the HIGH is removed from the base of Q9. Q9 is now turned on by self-biasing resistor R52. With Q9 on, a negative potential is applied to the power amplifier input which effectively shuts off the power amplifier section. Potentiometer R21 is adjusted to set the gain of the power amplifier stage. The voice output signal can be measured at test points TP1 and TP2. R21 is factory set to produce 3.5 Vpp at TP4 when the test generator is set to 20% Ident and 30% Voice (1500 Hz). Adjustment of R21 to a lower output level may affect the monitoring of the ident level.

The second section that processes the 300-3000 Hz aural signal is the identity circuitry. Ident bandpass filter U26 is a 1020 Hz switched capacitor bandpass filter. This filter uses a mode of operation that requires a clock frequency which is 100 times the desired bandpass frequency. The 100 kHz IDENTCLK signal from U22A is used as the clock signal for both sections of U26. Because the desired frequency is 1020 Hz, the circuit is designed to take advantage of the error of the internal switched capacitors. Potentiometers R90 and R91 are adjusted at the factory to skew the center frequency of the switched capacitor filter from 1000 Hz to 1020 Hz. Potentiometers R90 and R91 are adjusted during ident to maximum ident output at TP8. Terminals E5, E6, and E7 are jumpered at the factory for best operation of the filter. The aural signal is applied to the input of U26A. The bandpass port (output of U26A) and is applied to the input of U26B. The bandpass port (output of U26B) is a frequency centered at 1020 Hz with over 30 dB attenuation  $\pm 15$  Hz from the center frequency. The ident signal can be measured at test point TP8.

This ident signal is equally divided between an ident peak modulation detector circuit and a zero crossing detector circuit. The ident peak modulation detector consists of a full wave rectifier, a low pass filter, and a buffer. The ident frequency is rectified by an active full wave rectifier circuit comprised of amplifiers U27C and U27D and diode CR9. The output signal is filtered by a low pass filter consisting of resistor R36 and capacitor C98 which removes any 1020 Hz or 10 kHz ripple remaining on the DC voltage. Test point TP10 is used to measure the DC voltage which represents the peak value of ident modulation at this point. The voltage is then buffered by amplifier U31C. The output of U31C drives a protected input port of U9. U9 uses this input to calculate the percent modulation of the identity frequency.

Amplifier U32B operates as a filtered zero crossing detector. The filtering action is to insure all traces of the 100 kHz clock signal are removed from the signal. Its output is sent through a limiter-clipper to the positive toggle input of one-shot multi vibrator U30B. U30B stabilizes the 1020 Hz crossover pulse from U32B before it is applied to U9. The output of U30B goes HIGH whenever the output of U32B transitions from a LOW to a HIGH. The duration of the output pulse is approximately 3 microseconds. U9 no longer requires U21 to evaluate the ident frequency; therefore, the ident pulses that go to U21 are no longer passed through to timer U14.

The composite signal is also sent to the 9960 Hz circuitry to extract the peak 9960 Hz (10 kHz) modulation and the 30 Hz FM modulation signal. The composite signal is buffered by amplifier U32A before it is applied to 9960 Hz bandpass filter U28. U28 is identical to U26. U28 requires a clock frequency that is 50 times the high and low cutoff frequencies of the bandpass. These clock signals are the 9960CH and 9960CL signals. The clock frequencies set the high end roll-off at approximately 12000 Hz and the low end roll-off at approximately 8570 Hz. This provides room for the  $9960 \pm 480$  Hz FM subcarrier signal to pass through without attenuation. The filtered output from U28 is measured at test point TP11. The signal is then applied to the 9960 level detector circuit and the 9960 limiter circuit.

The 9960 level detector uses an active full wave rectifier circuit consisting of amplifiers U29C, U29D, and diode CR10. This active rectifier circuit uses potentiometer R43 to provide an offset adjust that is factory adjusted to ensure the peaks of the rectified pulses are equal. The signal is sent through a low pass filter comprised of resistor R49 and capacitor C25. This filter removes any residual 9960 Hz or clock frequency ripple and provides a pure DC voltage that represents the percent modulation level of the 9960 Hz (10 kHz) signal. The DC voltage is buffered by U31D before it is made available for measurement at test point TP14 and applied to a protected input of U9. U9 uses this input to calculate the percent modulation level of the 9960 Hz (10 kHz) signal.

## **Model 1150 CVOR**

The output U29C is fed to the Notch Monitor circuit consisting of R86, R89, U44, U29B, CR18 and CR19. The Notch Monitor circuit provides a signal that contains the CVOR sideband modulation to the microprocessor U9. This signal is sampled at 48 different times when individual sideband antennas are radiating. When an antenna is not radiating correctly the signal level will change at the time when that particular antenna is radiating. R86 and R89 provide voltage division prior to entering the U44 filter input. A 100 kHz clock sets the cutoff frequency for the 6<sup>th</sup> order low pass filter at 4000 Hz. This low pass filter eliminates the 9960 Hertz component but allows the CVOR modulation frequencies of 720 and 1440 Hertz to pass. Amplifier U29B buffers the signal. CR18 and CR19 limit the signal voltage range to U9.

The 9960 limiter circuit consists of U32C and diodes CR34 and CR35 in the feedback path. The limiter squares the 9960  $\pm$ 480 Hz FM signal before it is applied to U32D which functions as another filtered zero crossing detector. The variable pulse width pulse train passes through a limiter-clipper before being applied to the positive toggle input of one-shot multi vibrator U30A. U30A is used to generate 9960 Hz (10 kHz) FM frequency pulses that will be counted by U9 and to recover the 30 Hz FM modulation signal.

Every LOW to HIGH transition of the output pulse from U32D causes U30A to toggle. When this happens, the Q output goes HIGH for approximately 3 microseconds. The pulses from the Q output vary in frequency between 9480 Hz and 10440 Hz. These 9960 Hz FM pulses are sent to one input of frequency counter multiplexer U21 where it will eventually be counted by interval timer U14 and the resultant count is provided to U9. The 9960 Hz (10 kHz) FM pulses, from the Q output of U30B can be measured at test point TP12.

Capacitor C29 is allowed to charge through resistor R56. The output is normally HIGH. When U30A toggles, the output goes LOW. This allows capacitor C29 to discharge through the low impedance path established by diode CR28 and the port. After U30B returns to its stable state, capacitor C29 begins to charge up again. Because the width between toggle pulses varies at the FM modulation frequency, the average voltage on C29 changes according to the modulation frequency. The charge/discharge pulses of C29 are buffered by U7A before they are sent to the 30 Hz FM filter circuit.

The 30 Hz AM filter circuit extracts the 30 Hz AM signal from the composite signal. The composite signal is sent to analog switch U43A. U43A is controlled by U9 which determines whether U43A will allow the composite signal to pass through or not. U43A is enabled, except when U9 places the monitor CCA into a test mode. During initial internal calibration and once every two minutes a reference 30 Hz signal is passed through the two filters and the phase difference is measured. If a phase change occurs after calibration the Azimuth measurement is corrected.

A tenth order active bandpass filter circuit which consists of amplifier U31B, dual switched capacitor 30 Hz bandpass filters U40 and U41, and two low pass RC filter circuits. U31B is a 30 Hz bandpass filter designed with a Q of ten. The output passes through a low pass filter comprised of resistor R102, resistor network RN9 section 7-8, and capacitor C105. This filter removes any residual high frequencies that may be present on the signal. U40 and U41 operate from a 3 kHz clock supplied by U9. The output of U41 is sent through a three pole low pass filter that rejects any residual 3 kHz clock frequency from the 30 Hz AM signal. The output signal is the 30 Hz AM frequency  $\pm$ 2 Hz at the 3 dB points.

The composite signal is applied to DAC 35A and OP Amp U39D. U35A is being used as an active attenuator that controls the level of the 30 Hz AM signal by U9. The output of U35A is inverted by amplifier U39D. The output of U39D is a fullwave 30 Hz signal. The gain of U39D is determined by the internal feedback resistor in U35A. The signal is then equally divided before being sent to the micro controller. The fullwave signal is converted into a rectified halfwave signal by limiter-clipper diodes CR24 and CR25. The halfwave 30 Hz signal is applied to an input port of U9. During calibration, U9 reads the peak value and adjusts DAC U35A for a constant level. U9 senses this level to determine the percent modulation of the 30 Hz AM signal. The halfwave signal is measured at test point TP6.

The 30 Hz AM signal is also sent to amplifier U27A which functions as a saturating zero crossing detector that converts the 30 Hz AM signal into an accurate 30 Hz square wave. This signal is measured at test point TP7. This signal is sent to an input of frequency counter multiplexer U21 where it can be counted by interval timer U14 and the resultant data is supplied to U9. The output of U27A is passed through limiter-clipper diodes CR32 and CR16 before it is sent to U9. The zero crossing point of the 30 Hz signal is used by U9 to calculate the VOR azimuth from the composite signal. U9 also uses this zero crossing as a time reference to measure the half wave signal at TP6. After a negative edge occurs U9 delays then measures the peak of the 30 Hz half wave signal.

Refer to [Figure 11-17 \(sheet 3 of 4\)](#). Micro controller U9 provides a 3 kHz signal to decade divider U42A. U42A supplies a 300 Hz signal to decade divider U42B. The output of U42B is an accurate 30 Hz signal that is used by U9 to test the 30 Hz AM and 30 Hz FM frequency circuits. The 30 Hz square wave test signal is buffered by U27B before it is applied to the input ports of analog switches U43C and U43D. Line receiver U5C is used an inverter for the micro controller control signal from U9. U5C inverts the control signal sent to the control inputs of U43C and U43D so that they operate opposite to U43A and U43B. When U9 performs a test of the 30 Hz circuits, U43C and U43D supply a 30 Hz signal to the 30 Hz AM and 30 Hz FM circuits. For normal operation, these analog switches are set to an "open" state. Once every 2 minutes the test signal is used to check the phase shift through the 30 Hz bandpass filters.


The 30 Hz FM circuit is identical to the 30 Hz AM circuit described above. The 30 Hz FM pulses which were generated by C29 and buffered by U7A are sent through analog switch U43B to the 30 Hz FM filter circuit. The active components used in the 30 Hz FM bandpass filter are: amplifier U7B and switched capacitor filters U37 and U38. The high gain amplifier is U39B. DAC U35B is the active attenuator for the 30 Hz FM signal with operational amplifier U39A as the output amplifier. Amplifier U29A is the saturated zero crossing detector that provides the 30 Hz FM square wave to U9 and U21. This signal is measured at test point TP15. (On early versions of the monitor CCA, TP15 was omitted. Therefore, the signal can be measured at the junction of U29 pin 1 and R83). The half wave 30 Hz signal is sent to U9 to monitor the level of the 30 Hz FM modulation. Test point TP13 is used to measure this signal.

### **2.3.2.20 Power Panel**

Refer to [Figure 2-43](#). The power panel, located on the lower front portion of the electronics cabinet, contains the AC input and DC input circuit breakers for system A and system B. AC input power enters the cabinet via terminal board 1TB1 terminals 1, 2 and 3. Positive DC input power wires from the optional battery backup (unit 3) enter the cabinet via terminal board 1TB1 terminals 4 and 5. The negative DC input power wires connect directly to grounding lug 1E1. Circuit breakers 1CB1 and 1CB2 control the application of AC voltage to system A and system B battery charger power subsystems respectively. Circuit breakers 1CB3 and 1CB4 control the application of DC voltage to system A and system B battery charger power subsystems respectively.

### **2.3.2.21 Battery Charger Power Subsystem (1A33, 1A34)**

Refer to [Figure 2-44](#). Each VOR transmitter system has a separate battery charger power subsystem (BCPS) installed. The BCPS is a modularized, non-repairable unit capable of operation from either 115 Vac or 230 Vac power source. With the jumper installed across terminals 1 and 2 of TB2, operation at 115 Vac is selected. The BCPS is comprised of a base unit; a 48 Vdc, 1000 W uninterruptible power supply (UPS) module; a 48 Vdc, 16 A single output module; and a 28 Vdc, 8.6 A single output module.

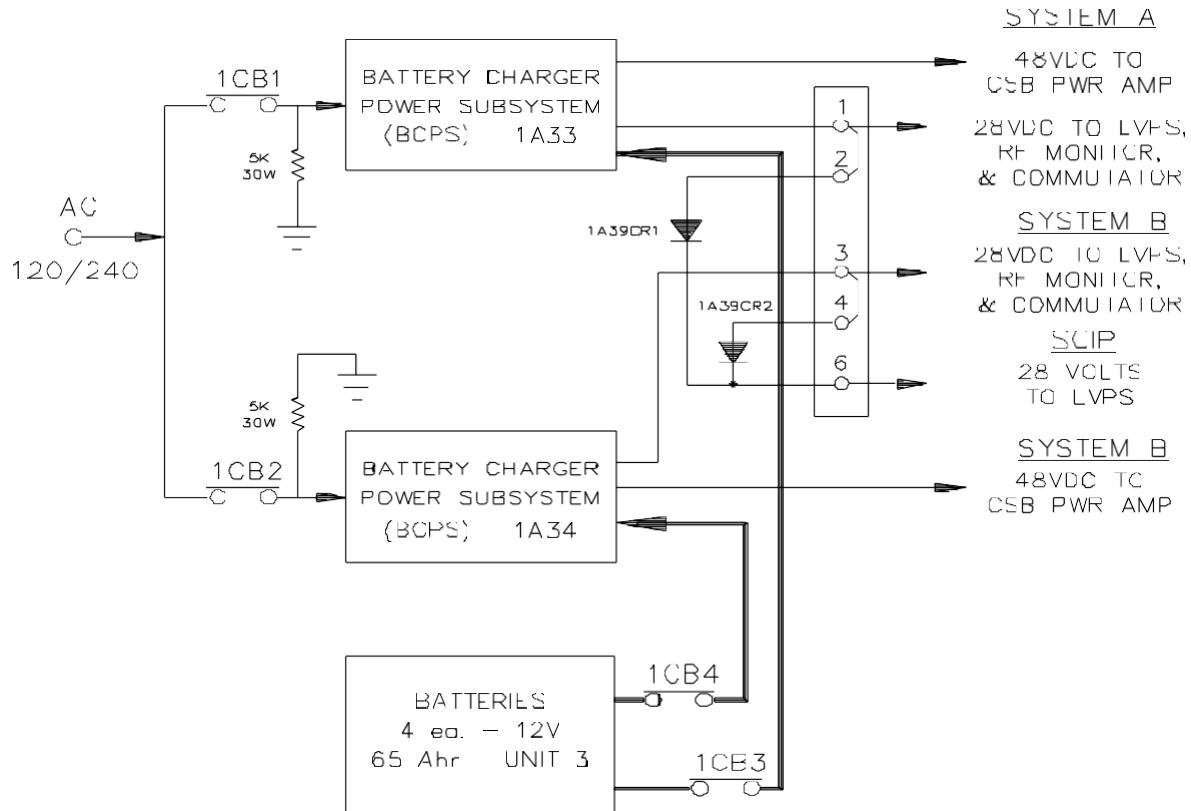

## NOTES:

1. 1CB1 & 1CB2 ARE RATED AT 30 AMPS FOR 120 VOLT CIRCUITS OR 15 AMPS FOR 240 VOLT CIRCUITS
2. RESISTORS ADDED TO REDUCE THE CHANCE OF OSCILLATION WHEN CIRCUIT BREAKERS OPENED.

1150-057

**Figure 2-43. Power Panel****2.3.2.21.1 Base Unit**


The base unit contains the main AC rectifier, electromagnetic interference (EMI) and DC filters, sync and bias supplies, a 300 Vdc isolated bus, DC fan and system control and status circuitry. The AC voltage is filtered by the EMI filter and applied to a soft start circuit which limits in-rush current. A rectifier and filter circuit converts the applied AC voltage to 300 Vdc. This is the common bus voltage used within the BCPS to power all subordinate modules and functions. A sync and bias supply inverter operates from the 300 volt bus to provide synchronous module control signals. This ensures all power supply modules sense system changes synchronously. The bias supply inverter also provides power to a separate rectifier/filter circuit which supplies power to the base unit DC fan and system control circuits.

### 2.3.2.21.2 UPS Module

The UPS module is capable of providing up to 1000 W of automatic battery backup power. This module contains a 48 volt to 300 volt DC/DC converter (UPS section), a three stage 300 volt to 48 volt automatic battery charger, and a control and logic section. Switching from AC to battery operation is automatic and transient free. This module interconnects with the 300 Vdc bus of the base unit. With AC voltage applied, the UPS module applies a trickle voltage (factory adjusted) to maintain the backup batteries in a fully charged condition. In this mode, the module is capable of monitoring the charge quality of the backup batteries.

The charge cycle of the UPS module operates in three stages. Initially, the charger will provide 4 amperes of charging current until the battery voltage rises to the overcharge voltage level (set at the factory). In the overcharge mode, the charger will maintain the voltage constant until charging current falls below 0.5 amperes. The charger will then switch to a trickle voltage. The charger will supply the trickle charge voltage for a fixed period of time and then shut off the charger circuit to measure battery voltage. If the voltage is insufficient, the trickle charge mode is enabled again. This action will continue to insure the battery system maintains its charged condition.

The UPS module also continuously monitors the status of the applied AC voltage by sampling the 300 Vdc bus voltage. Loss of the applied AC power causes the bus voltage to decrease. The UPS module senses this loss and switches from battery charger mode to UPS mode. The UPS mode converts 48 Vdc from the backup batteries to 300 Vdc. This voltage is applied to the base unit bus to provide an uninterrupted voltage source for the DC power supply modules to operate from.

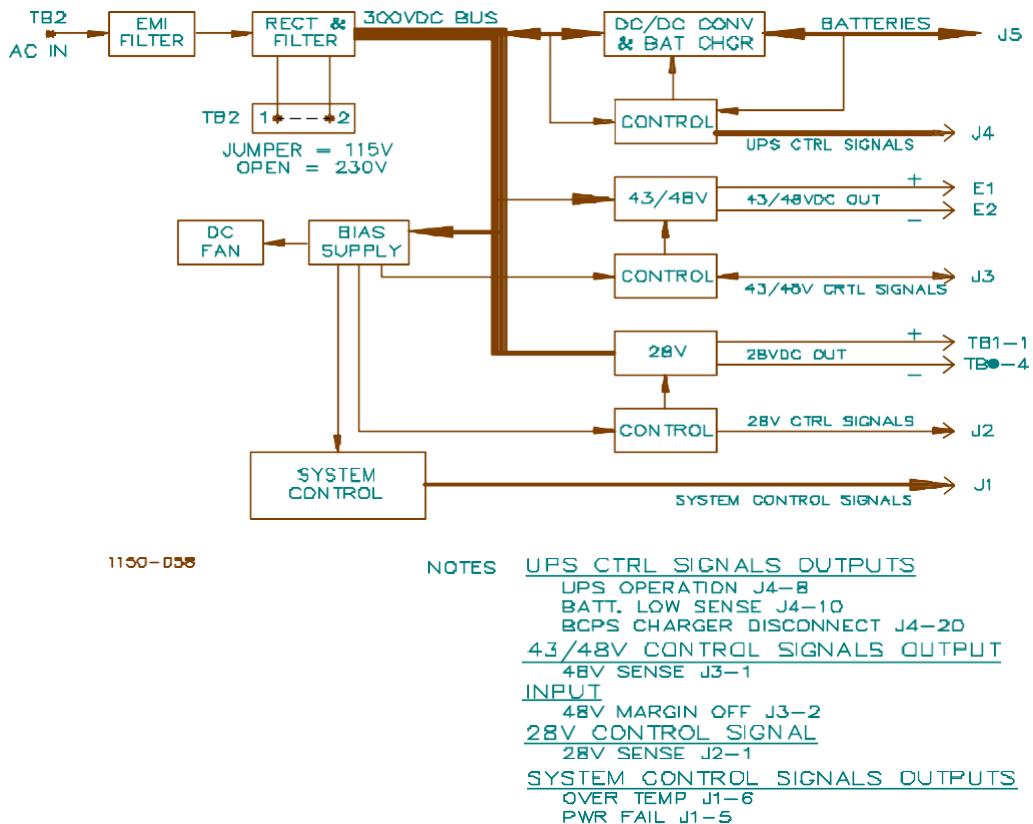

**Figure 2-44. Battery Charger Power Subsystem**

The UPS module provides two status signals to the system micro controller: a UPS on signal and a battery low signal. The UPS on signal notifies the system micro controller that the UPS module is in the UPS mode of operation. The battery low signal notifies the system micro controller that the charge quality of the backup batteries is deficient and battery inspection is needed. This status signal is present whenever the backup batteries fail to hold a sufficient charge or whenever the system has been operated from the backup batteries for a period of time sufficient enough to significantly deplete them.

The UPS module also receives a BCPS charger off command signal from the system micro controller. This command signal will shut off the charger portion of the UPS module.

The UPS module has a UPS inhibit logic input which is permanently tied low, which places the UPS module in a constant enable condition.

### **2.3.2.21.3      48 Vdc Module**

This power supply module provides a nominal 48 volts of fully regulated output voltage at a maximum current of 16 amperes. The module is factory adjusted to output 48 Vdc. This power supply module features an output voltage margin function. The margin function allows the module, under the control of the audio generator micro controller, to reduce its output voltage approximately ten percent. Within the transmitter system, the module normally operates with the margin enabled; that is, the output voltage will be approximately 43.2 Vdc. When directed by the audio generator micro controller, the margin is disabled, allowing the voltage to increase to 48 Vdc.


This module provides an output voltage sense signal to the facilities board where it is converted to a binary code that is read by the system micro controller.

This power supply module only provides output voltage to the CSB power amplifier assembly.

### **2.3.2.21.4      28 Vdc Module**

This power supply module provides a nominal 28 volts of fully regulated output voltage at a maximum current of 8.6 amperes. The module is factory adjusted for an output of 28 Vdc.

This module provides an output voltage sense signal to the facilities board where it is converted to a binary code that is read by the system micro controller. It provides the common 28 Vdc operational voltage to power the VOR transmitter, RMS and RF monitor assemblies and the Interface Enclosure.

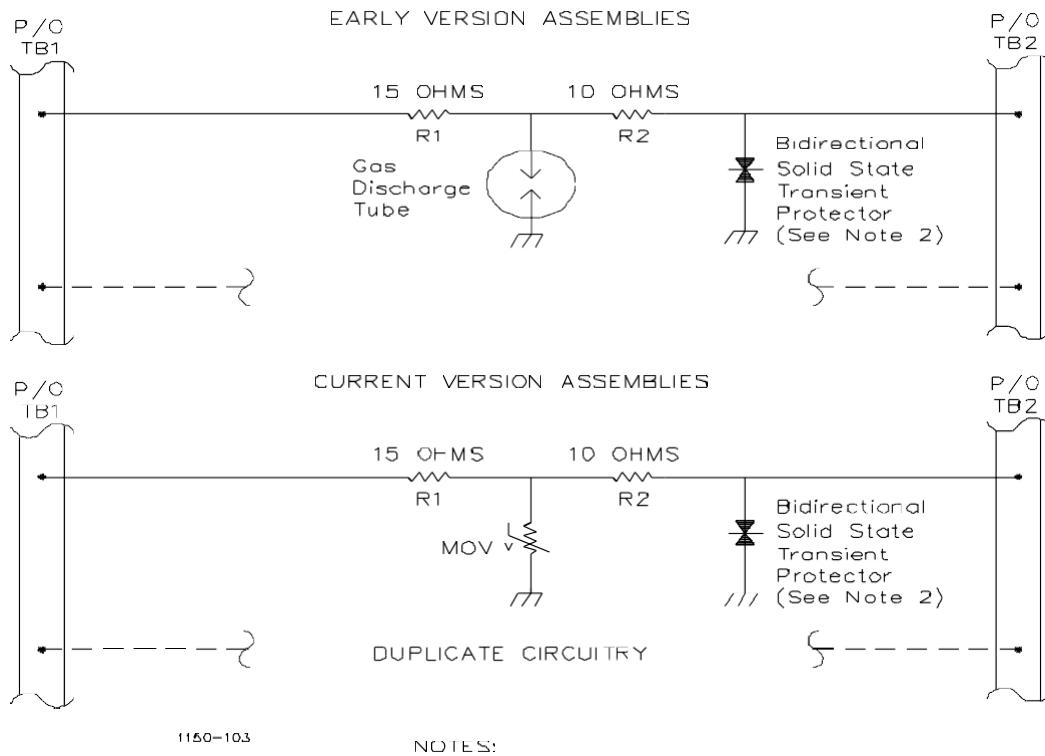

**Figure 2-45. Transient Suppressor Assembly, Block Diagram**

### 2.3.2.22 Interface Enclosure Assembly (Unit 2)

Refer to [Figure 1-5](#). The interface enclosure assembly is a fiberglass enclosure that contains: a signal splitter, a transient suppressor assembly and two field detector assemblies (later version CVOR systems only). All communications lines and RF cables pass through the interface enclosure assembly.

Signal splitter Z1 takes the RF signal from the field monitor antenna and divides it into two equal RF signals which are then sent to the field detector assemblies. When the optional automatic ground check kit is installed, Z1 and the two field detector assemblies are not used and are removed from the assembly.

#### 2.3.2.22.1 Transient Suppressor Assembly (2A1)

Refer to Figure 2-45 and [11-29](#). All communications with the outside environment must pass through the transient suppressor assembly. Two transient suppressor protection devices are connected between each incoming/outgoing communications line and earth ground. Since the circuitry is duplicated for each line, the functional operation of only one line is explained for simplicity.

## **Model 1150 CVOR**

Two low ohmage, high wattage resistors (R1 is 15 ohms and R2 is 10 ohms) are placed in series with the signal line. Resistor R1 connects to external communications line terminal board TB1 while R2 connects to the CVOR system communications terminal board TB2. Metal Oxide Varister (MOV) is connected between the junction of the two resistors and chassis ground. A bi-directional solid-state transient protector is connected between the TB2 terminal for that line and chassis ground. Both devices are included to suppress both short and long term high voltage/high current spikes that may be induced into or applied to the communications lines. This circuitry is designed to prevent these dangerous potentials or currents from entering the CVOR system and damaging vital the high value equipment.

When a large voltage spike enters via the external communications line, it encounters the resistance offered by R1. As the waveform of the voltage potential increases beyond approximately 90 Vdc, MOV V1 fires. This provides a conduction path to chassis ground for a majority of the current contained within the voltage spike. The remaining voltage is next developed across R2 and is applied to bi-directional solid state transient protector device CR1. CR1 is capable of conducting a current in either direction. The device acts as a high-resistance circuit until such time that a voltage applied across its terminals exceeds the breakdown voltage of the device which is approximately 15 Vdc. At that time, CR1 turns on. This applies a very low resistance between the communications line and chassis ground. The energy from the voltage spike is further reduced to a level that is now manageable by the internal CVOR circuits.

### **2.3.2.23 Battery Backup (Unit 3) (Optional)**

Refer to [Figure 9-14](#) and [9-15](#). Four 12 volt 65 amp/hour batteries are connected in series to provide the needed 48 Vdc backup battery voltage used with the UPS modules in the BCPSs. The standard batteries (65 amp/hour) supplied with the optional battery backup will normally provide up to 2 hours of emergency power. Longer times can be achieved by adding additional sets of four batteries in parallel.

### **2.3.2.24 Field Monitor Antenna (Unit 4)**

Refer to [Figure 11-30](#). The field monitor antenna contains all components needed to set up a receiving antenna system for the VOR. The field monitor is part of the manual and automatic ground check kits.

For the CVOR with Semi-Automatic Ground Check Kit, the basic arrangement is one shortened dipole receiving antenna. The antenna is installed on a bracket and supported by a choke pole mounted on the edge of the counterpoise and positioned on any radial. The choke pole is an aluminum support pole with a 1/4 wavelength tubular sleeve over the pole to suppress current flow in the pole. The receiving antenna sends the RF signal to a signal splitter which divides the RF signal into two matched-impedance outputs. These outputs apply the RF signal to the two field detector assemblies. For the CVOR with Automatic Ground Check Kit, refer to Ground Check Appendix (Part No. 570004-0001)

An ideal azimuth location for mounting the field monitor antenna is on a reference radial of the facility. A second best location is on a cardinal ( $0^\circ$ ,  $90^\circ$ ,  $180^\circ$ ,  $270^\circ$ ) or null ( $45^\circ$ ,  $135^\circ$ ,  $225^\circ$ ,  $315^\circ$ ) point. Lastly, is at any other azimuth radial.

## 3 OPERATION

### **3.1 INTRODUCTION**

The operation of the Model 1150 VOR is controlled by a system of local and remote controls and status displays that provides the following general capabilities:

1. Control of operational parameters and comprehensive display of operational status through the use of user friendly Windows (based graphical user interfaces on standard portable computer operator interfaces).
2. Control and display of equipment operation in the airport maintenance room and tower cab.
3. Remote control and status via modem and dial-up telephone line with the same displays and control menus as are used with local control.

### **3.2 REMOTE CONTROL STATUS UNIT (RCSU)**

This unit provides summary level control and status of the VOR equipment. The RCSU is usually located in the airport equipment maintenance room. The controls and indicators on this panel are described in the RCSU manual (572138-0001) specific to this equipment.

### **3.3 REMOTE STATUS UNIT (RSU)**

This unit displays the same summary level status as the RCSU but on a smaller panel that is suitable for installation in a console in the tower cab. The controls and indicators on this panel are described in the RCSU manual (572138-0001) specific to this equipment.

### **3.4 PORTABLE MAINTENANCE DATA TERMINAL (PMDT)**

This subsystem is comprised of an IBM ( PC compatible portable computer and associated control and monitoring software. The PMDT can be used in differing applications including:

1. Local control and status of VOR equipment in the equipment shelter. In this application the PMDT connects directly to the Remote Maintenance Subsystem (RMS) using the 070406-0001 cable.
2. Remote Maintenance Monitor (RMM). The same software and hardware used in the shelter for direct control of the equipment can be used remotely to control and monitor the equipment.

The PMDT uses software that allows the operator to easily select control parameters and monitor thresholds for display and change, and to select operation and status parameters for display. The operator can control the operational state of the equipment for maintenance purposes.

### **3.4.1 Equipment Turn On & Shutdown.**

#### **3.4.1.1 Equipment Turn On.**

##### **3.4.1.1.1 Connecting the PMDT**

When connecting directly to the VOR, the PMDT PC connects to the DB25-Male connector on the 070406-0001 cable provided in the 470116-0001 VOR accessory kit. This cable connects the DB25 Male to TB13 positions 5,6,7 and 8 at the inside bottom of the VOR cabinet. The cable between the PMDT and the DB25 is a DB9-Female (PC end) to DB25-Male (VOR end), which is a typical IBM™ modem adapter cable (ASII #950472-0000). A gender changer is also provided to use between the two cables. Refer to Table 3-1 for the pin-out of this cable. An adaptor may be provided with some lap top computers to convert a laptop computer USB output to the DB9 serial port.

**Table 3-1. PMDT Interconnect Cable**

<b>DB9-F</b>	<b>DB25-M</b>
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22

When the PMDT is used as an RMM, the connection is made by plugging a telephone connector into the line input on the PMDT modem

##### **3.4.1.1.2 Starting the PMDT Application**

Upon power up the PMDT PC will perform a standard boot sequence for an IBM ( compatible PC which results in the automatic invocation of Windows™ . Double click on the PMDT icon to start the program.

It is located on the Desktop, as well as in the Start >> Programs >> Alenia Marconi Systems (ASI) Inc. menu.

### 3.4.1.1.3 Turning On the VOR

Turn on both AC circuit breakers, and then both DC circuit breakers. The system will perform its initialization, and then start transmitting.

### 3.4.1.2 Equipment Shutdown.

#### 3.4.1.2.1 Equipment Turn Off

Log out of the PMDT by selecting System >> Logoff/Disconnect. If the VOR is currently in a non-standard mode of operation, the user will be prompted to correct the issue(s) before continuing with the logoff. Once the PMDT is logged off, turn off both DC circuit breakers, and then both AC circuit breakers.

#### 3.4.1.2.2 PMDT PC Turn Off

The power to the PMDT PC should not be removed until the Windows Shutdown sequence has been performed. This is done by selecting Start >> Shut Down... >> Shut down >> OK. When prompted, turn off the PMDT PC.

## 3.4.2 PMDT Screens

This section describes each of the screens used by the PMDT operator to control and monitor the performance of the VOR equipment.

### 3.4.2.1 General

The PMDT screens are graphical and Windows<sup>TM</sup> based. The screens presented to the operator by the PMDT software contain three sections; Menus, the Sidebar, and Screens. The screens are intended to be used with a mouse where the operator positions a cursor on a screen control symbol and clicks the left mouse button to activate the control. Clicking one of the menu items will cause the program to present screens associated with the broad category described by the function (RMS, Transmitter, Monitor, Diagnostics etc.).

#### 3.4.2.1.1 Menus

The PMDT functions are arranged in hierarchical menus such that selecting one menu will cause a lower level menu of functions to drop down. A “<” symbol to the right of a menu item indicates that a lower level menu will appear if the cursor is briefly kept on the menu item, or if that menu is selected.

## Model 1150 CVOR

Each menu item contains an underlined character. The menu item can be selected from the keyboard without using the mouse by simultaneously pressing the “Alt” key and the underlined character. This provides an alternate method for making screen selections should a mouse not be available with the PMDT. Similarly, screens containing several controls can be negotiated through the use of the arrow keys, the ‘Tab’ key, and the space bar.

Refer to Table 3-2 for a list of functions available through the PMDT.

Note that throughout this manual, the nomenclature used to indicate the navigation through the PMDT application(s) menus and selections is as follows:

System >> Connect >> Direct Using the mouse (left-click) or keyboard (highlight & press Enter), select the System menu, then the Connect menu item, then the Direct menu item.

<b>Table 3-2. PMDT Available Functions</b>	
<b>System</b>	Selects System Functions
<b>Logon RMS</b>	Log on to the VOR
<b>Logoff/Disconnect</b>	Logs off from the system. Also disconnects the RMM Modem
<b>Configuration Save</b>	Save the current configuration settings to a file
<b>Configuration Load</b>	Load the current settings from a file
<b>Configuration Print</b>	Prints the Configuration Data to the printer
<b>PMDT Setup</b>	Allows Direct and Modem Port Configuration
<b>Print Setup</b>	Allows Printer Setup by displaying the Windows Print configuration
<b>Exit PMDT</b>	Exits PMDT Software to Windows
<b>RMS</b>	Selects the RMS System Functions
<b>Status</b>	Selects RMS Status Screen
<b>Data</b>	Selects RMS Data Screen
<b>Logs</b>	Selects RMS Logs Screen
<b>Configuration</b>	Selects RMS Configuration Screen
<b>Commands</b>	Selects RMS Commands Screen
<b>Config Restore</b>	Restore data from EEPROM
<b>Config Backup</b>	Backup settings to EEPROM
<b>Monitors</b>	Displays the Integral, Standby and Maintenance Data for Monitor 1 and 2
<b>Data</b>	Selects the Fault History Screen
<b>Configuration</b>	Settings for limits, delay times and Offset/Scale Factors
<b>Fault History</b>	Displays information on the last 3 shutdowns
<b>Commands</b>	Bypass ON/OFF Abort all tests
<b>Transmitters</b>	Selects Transmitters Data Screen
<b>Data</b>	Selects Transmitters Configuration Screen
<b>Configuration</b>	Selects Transmitters Commands Screen
<b>Commands</b>	
<b>Diagnostics</b>	
<b>Power Up Results</b>	Displays the results of the last Power-Up Diagnostic tests
<b>Fault Isolation</b>	Used to run Automatic Fault Isolation and display the results
<b>Info</b>	
<b>About PMDT</b>	Displays PMDT Version and Date information

### 3.4.2.1.2 System Status at a Glance; Sidebar Status and Control

The Sidebar status and control is presented on every screen as shown in Figure 3-1. The portion of the screen under the “Connected” indication is called the “Sidebar”. The Sidebar presents the current status of the VOR. The data is refreshed approximately once per second. At a glance the technician can determine the state of the VOR. The display shown is for a Dual transmitter. If configured as a Single transmitter lower status indicators are displayed along with controls. There are areas that are drawn as buttons. Using the mouse, the technician can point to the button and use the left button on the mouse to select the function. Buttons are provided for Tx1 Main, Tx2 Main, Tx1 Antenna, Tx2 Antenna, Tx1 Load, Tx2 Load, Tx1 Off, Tx2 Off. There are two buttons for Bypass. Pressing only one of the buttons will toggle the current bypass state on BOTH monitors. The displayed data originates from either Monitor 1 or Monitor 2 and is dependant on which transmitter is operating. If Transmitter 1 is connected to the antennas then Monitor 1 will provide the data for the sidebar. The Data displayed in the sidebar comes from the monitor associated with the current transmitter (i.e. monitor 1 when Transmitter 1 in operational).

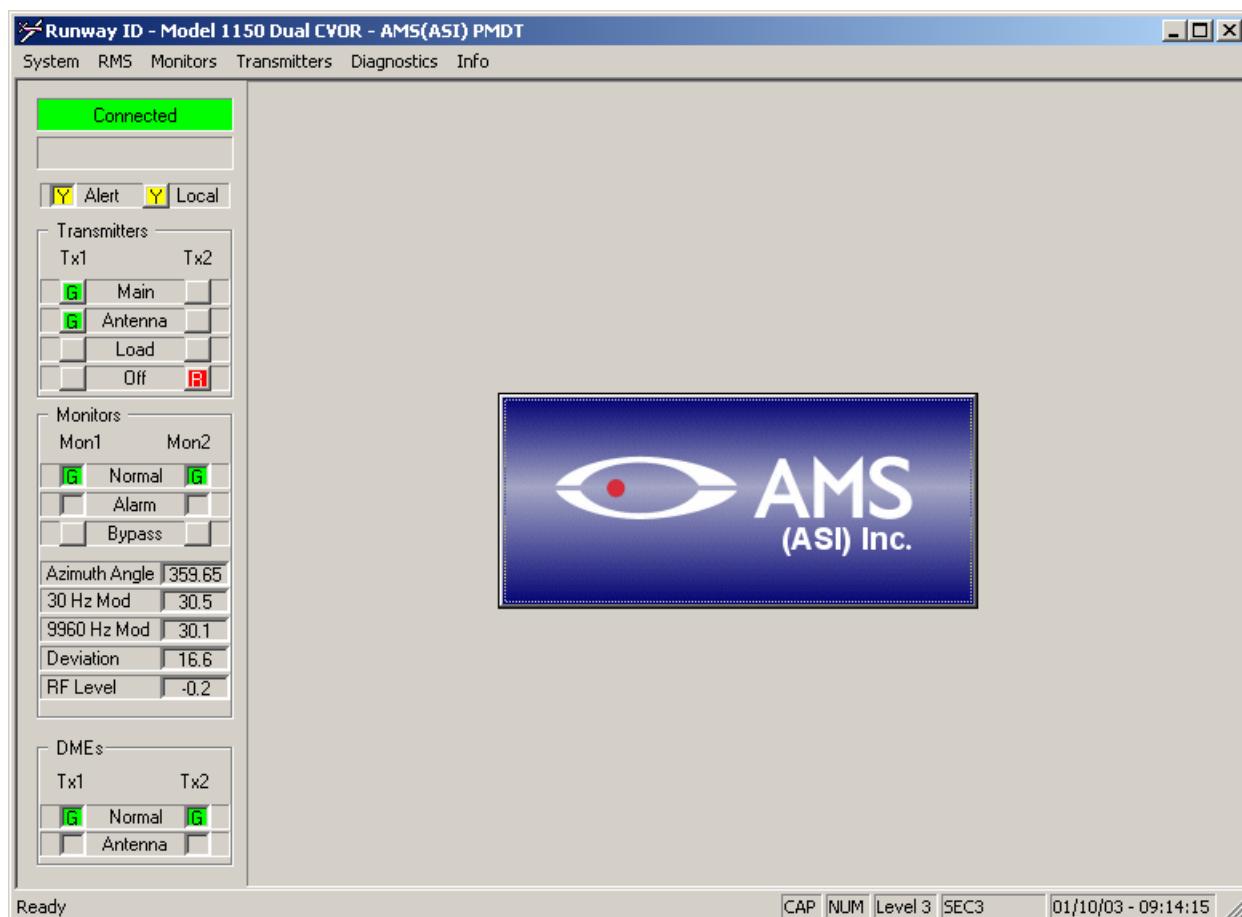


Figure 3-1. Screen Depicting Sidebar Data

### 3.4.2.1.3 Screen Area

The screen area contains selected parameters and status data that are grouped together into a common display. The screen may present tabs and buttons that allow the operator to make further selections.

Shortcuts are included in the PMDT to make the Next, Close, Apply, and Reset buttons accessible without the use of a mouse. These buttons are enabled as applicable when navigating through the various PMDT screens. When they are enabled, pressing the following function key results in the specified action:

F5	Next	Move to the next screen in the current group.
F6	Close	Close the current group of screens.
F7	Apply	Save the changes made in the current screen.
F8	Reset	Cancels any changes to the current screen, leaving the data unchanged.

The main PMDT screen also contains two buttons that are used as follows:




Print Screen - Pressing this button sends an image of the current PMDT screen, including the Sidebar, to the default printer. The printer can be configured through the System >> Print Setup command.



Copy Data to Clipboard - Available only when a block of text is displayed on a screen, such as in the RMS >> Logs screens. Pressing this button copies the text data to the Windows Clipboard, so that the user can (Paste) it into another Windows application.

### 3.4.2.2 Configuring the PMDT

The PMDT Configuration screen is used to configure the Direct Connect Port and the Modem Port, as well as any additional modem initialization commands required. To display the PMDT Configuration screen once the PMDT application is running, select the System >> PMDT Setup menu item. The PMDT Configuration Screen shown in Figure 3-2 will be displayed. Change the port settings if required.

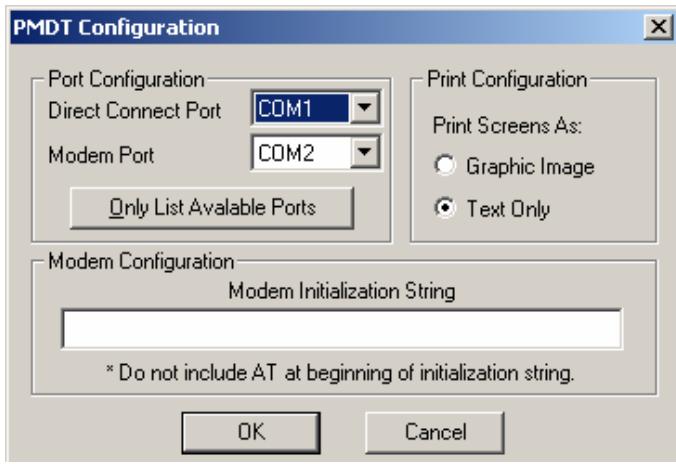

- "Direct Connect Port" to the COM port associated with the external DB9 or DB25 connection of the computer.
- Set the "Modem Port" to the COM port associated with the modem.
- No modem initialization string is normally required and this field is left blank.

**Figure 3-2. Modem Configuration Screen**

### 3.4.2.3 Connecting to the VOR

#### 3.4.2.3.1 Security Levels

Access to the VOR system via the PMDT is restricted through the use of four security levels. Level 1 is the lowest security level, and Level 4 is the highest security level. These security levels are accessed as shown in Table 3-3:

**Table 3-3. VOR Security Levels**

Security Level	Accessed by	Permissions
Level 1	Logging on with either: User ID of "GUEST", without a password, or a valid Level 1 User ID and the corresponding Password.	System Status and Parameters. At this level, the user has display-only access to all screens except for the security codes screen. The user has no control over the system
Level 2	Logging on with: A valid Level 2 User ID and the corresponding Password	Non-Critical Functions. At this level, the user has Level 1 access plus the issuance of discrete commands which do not modify the signal in space. For example, the user can turn the signal on/off, but cannot modify the course position.
Level 3	Logging on with: A valid Level 3 User ID and the corresponding Password	Critical Functions (except Passwords) - The user has access to all functions that are available in the system, except for the Security Screen.

<b>Table 3-3. VOR Security Levels</b>		
<b>Security Level</b>	<b>Accessed by</b>	<b>Permissions</b>
Level 4	Logging on with: The valid Level 4 User ID and the corresponding password.	Critical Functions - The user has access to all functions that are available in the system, including assignment of User IDs, Passwords, and Security Levels in the Security Screen.

The default Level 4 user account information, which is case-sensitive, is:

User Name: SEC4  
 Password: FOUR

The default Level 3 user account information, which is case-sensitive, is:

User Name: SEC3  
 Password: THREE

To maintain system security, this default user account information should be changed by the authorized personnel.

#### **NOTES:**

After 3 failed attempts to logon (ie. invalid User ID or Password), further logon attempts will be blocked for a period of 5 minutes.

The PMDT software contains an Activity Detector feature that will automatically log off a user after 15 minutes of inactivity (either mouse or keyboard activity).

#### **3.4.2.3.2 PMDT Logon via Direct or Modem Connection.**

To log on to the equipment directly, select System >> Connect >> Direct. The PMDT Login screen (Figure 3-4) will be displayed. Enter a valid User ID and the associated password and press OK.

To log onto the equipment remotely, select System >> Connect >> Modem. The System Directory will be displayed, as shown in Figure 3-3. This directory stores the Station Identifier and Phone Number for the last 10 systems dialed. Either select an entry from the directory, or enter the phone number for a new station to be dialed, including any required dialing prefixes such as “9”. A comma “,” can be used to insert a 1 second delay in the dialing sequence. (Note that to remove an entry from the directory, select it and press the Delete button on the directory screen.) Select either Tone or Pulse dial, and press OK. Once the PMDT’s modem connects to the system’s modem, the PMDT Login screen (Figure 3-4) will be displayed. Enter a valid User ID and the associated Password and press OK. If no telephone

number is used then the PMDT software assumes that a dedicated leased line modem is being used. This leased line configuration is supported by the 470549-0001 and 470549-0002 leased line modem kits.



**Figure 3-3. Modem Dial Screen**



**Figure 3-4. Log In Screen**

To obtain Security Level 4 access, select System >> Logon RMS and enter the Level 4 User ID and Password. If the ID and Password were entered correctly, the Initial PMDT screen (Figure 3-1) will be displayed. If the logon attempt was not successful then the PMDT will display a message indicating an unsuccessful log-on and then display the PMDT Login screen again.

**NOTE:**


Some Screens will not be displayed for Levels 1, 2, and 3. Some commands and controls will appear in a light grey color “greyed” to indicate that access to these controls is not available at the current password level.

#### 3.4.2.4 RMS Status Screens

When first accessed, the RMS Status screen is as shown in Figure 3-5. This screen contains indicators for VOR/DME status provided directly to the Remote Monitoring Subsystem including summary level status for an associated DME should one be connected.

The RMS status consists of indicators for Maintenance Alert, Power Status, Fault Analysis, Local Control, Status for the associated DME includes Power Status, Alarm, Bypass, Enabled, and Antenna connection.

## Model 1150 CVOR

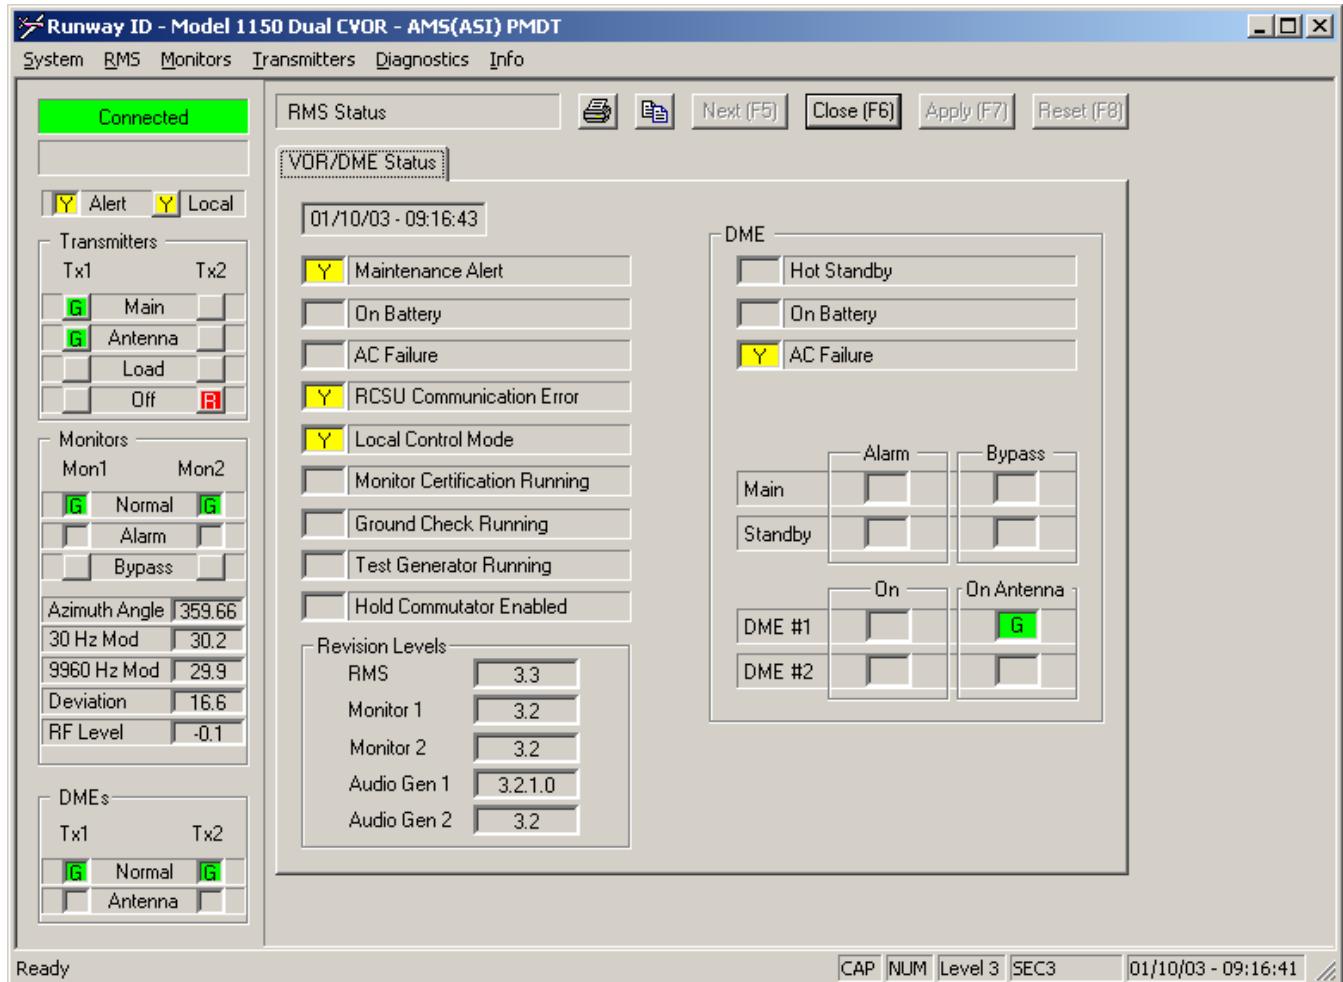

**Figure 3-5. VOR/DME Status Screen**

### 3.4.2.5 RMS Data Screens

This set of two screens is accessed by selecting the tab for the screen or by clicking the “Next” button. These screens and their contents are described below.

#### 3.4.2.5.1 RMS Maintenance Alerts Screen

Refer to Figure 3-6. This screen shows all of the maintenance alert status for the general alerts/alarms, RMS digital input alerts, monitor mismatches, and monitor specific alerts. When a maintenance alert/alarm is indicated on the sidebar, the RMS >> Data >> Maintenance Alerts/Alarms screen provides a general summation of all alerts/alarms. From this screen the operator can determine the alert/alarm and proceed to the associated screen to observe the specific data driving the alert/alarm


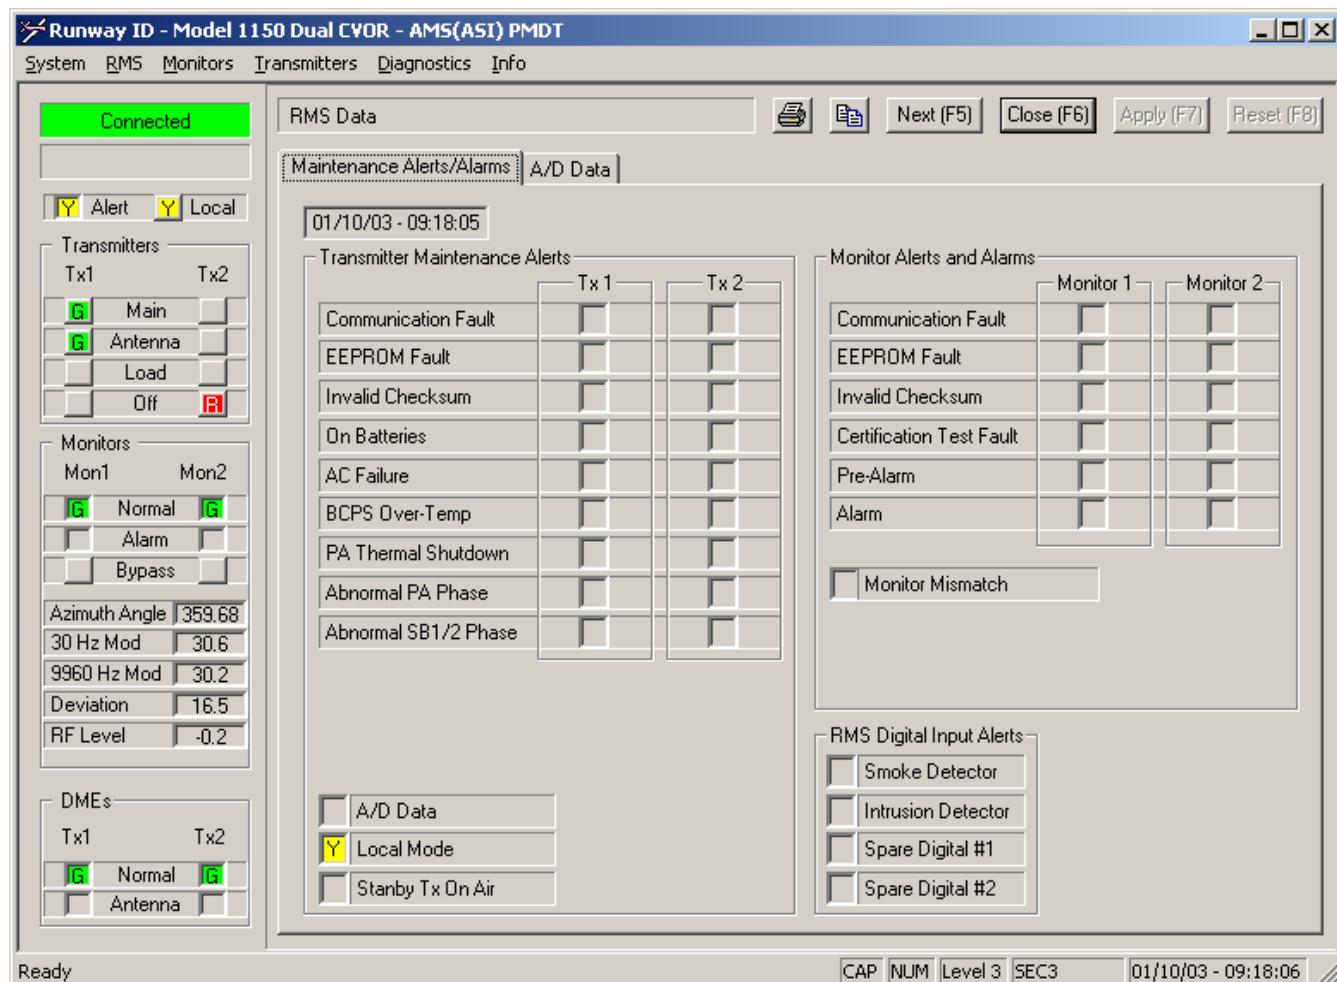


Figure 3-6. RMS Maintenance Alerts Screen

### 3.4.2.5.2 Analog-to-Digital Data Screen

Refer to Figure 3-7. This screen shows the status and limits of each of the analog signals that are digitized for limit checking.

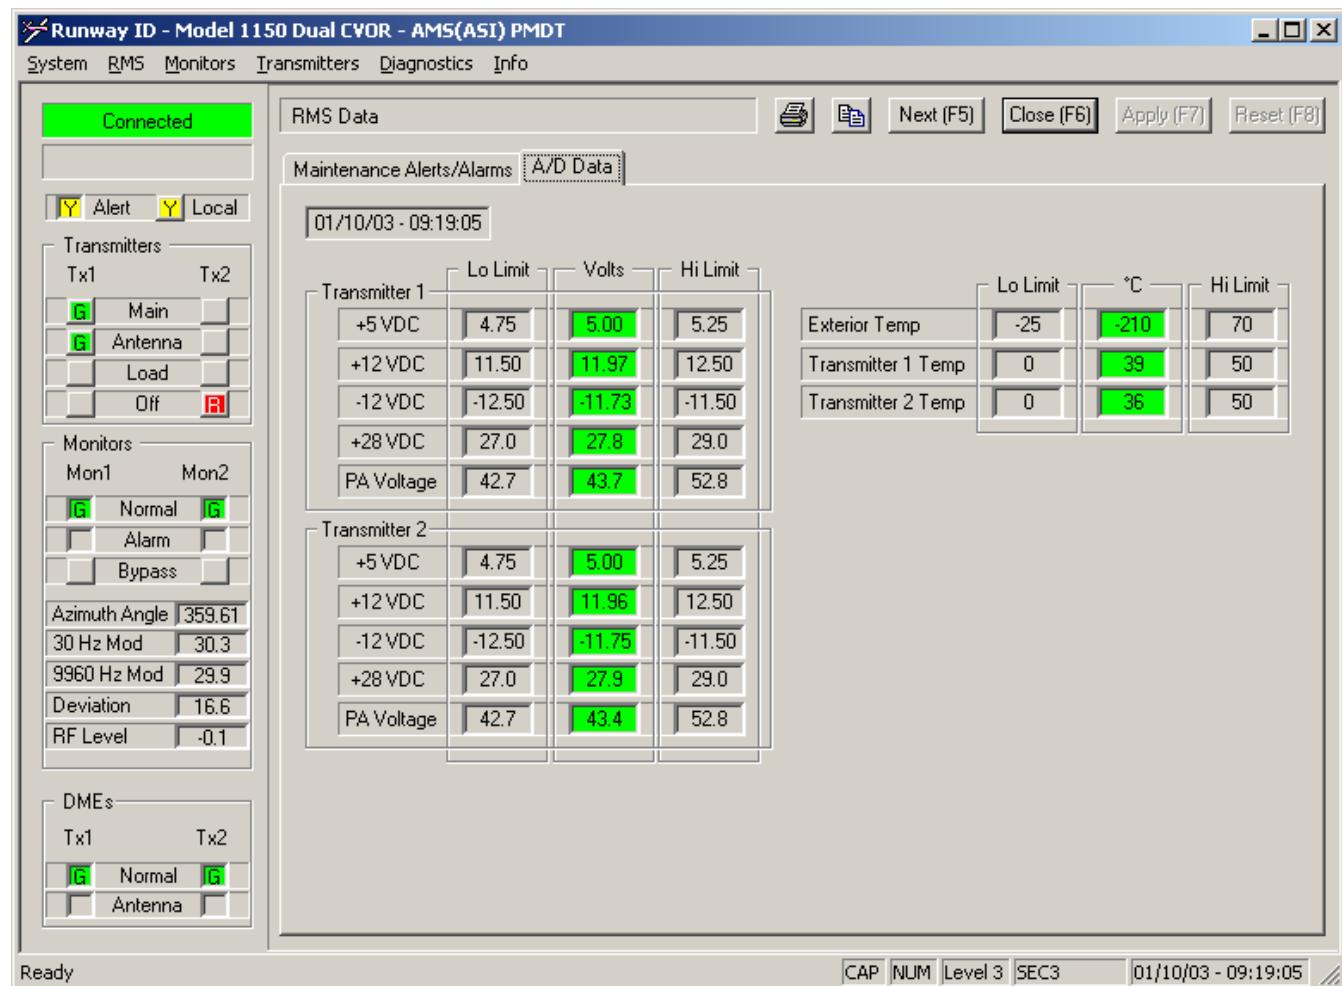

**Figure 3-7. RMS A/D Data Screen**

### 3.4.2.6 RMS Logs Screen

There are five log screens in the PMDT that serve the general purpose of providing time tagged records of changes in the system parameters and/or operating condition. The four screens and their contents are described below.

#### 3.4.2.6.1 Operational Summary Screen

Refer to Figure 3-8. This screen presents the duration that each of the transmitters has spent in each operational condition. The Reset Operational Summary button restarts all of the Operational Summary timers.


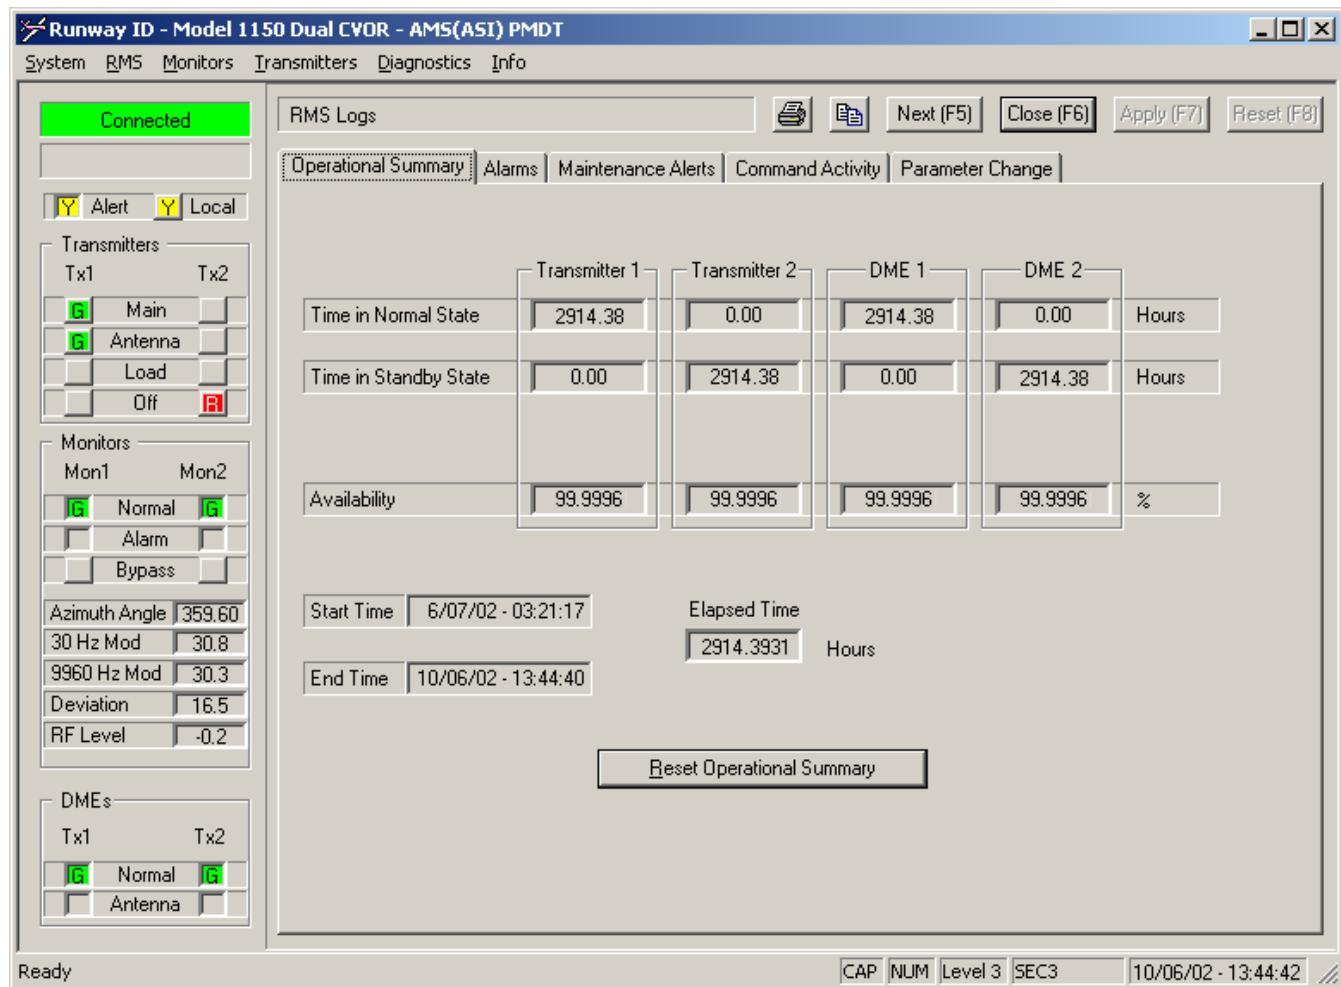


Figure 3-8. Operational Summary Screen

### 3.4.2.6.2 Alarms Log Screen

Refer to Figure 3-9. This screen provides the latest 100 alarms that have occurred. When 100 or more alarms have occurred, subsequent alarms will replace the oldest alarms in the log. Entries in the log identify the date and time the alarm occurred, the type of alarm, the test that detected the alarm, and the current status of the alarm condition. The Update button reloads the log file from the RMS and updates the display with any new entries. The Reset button clears the log file in the RMS.

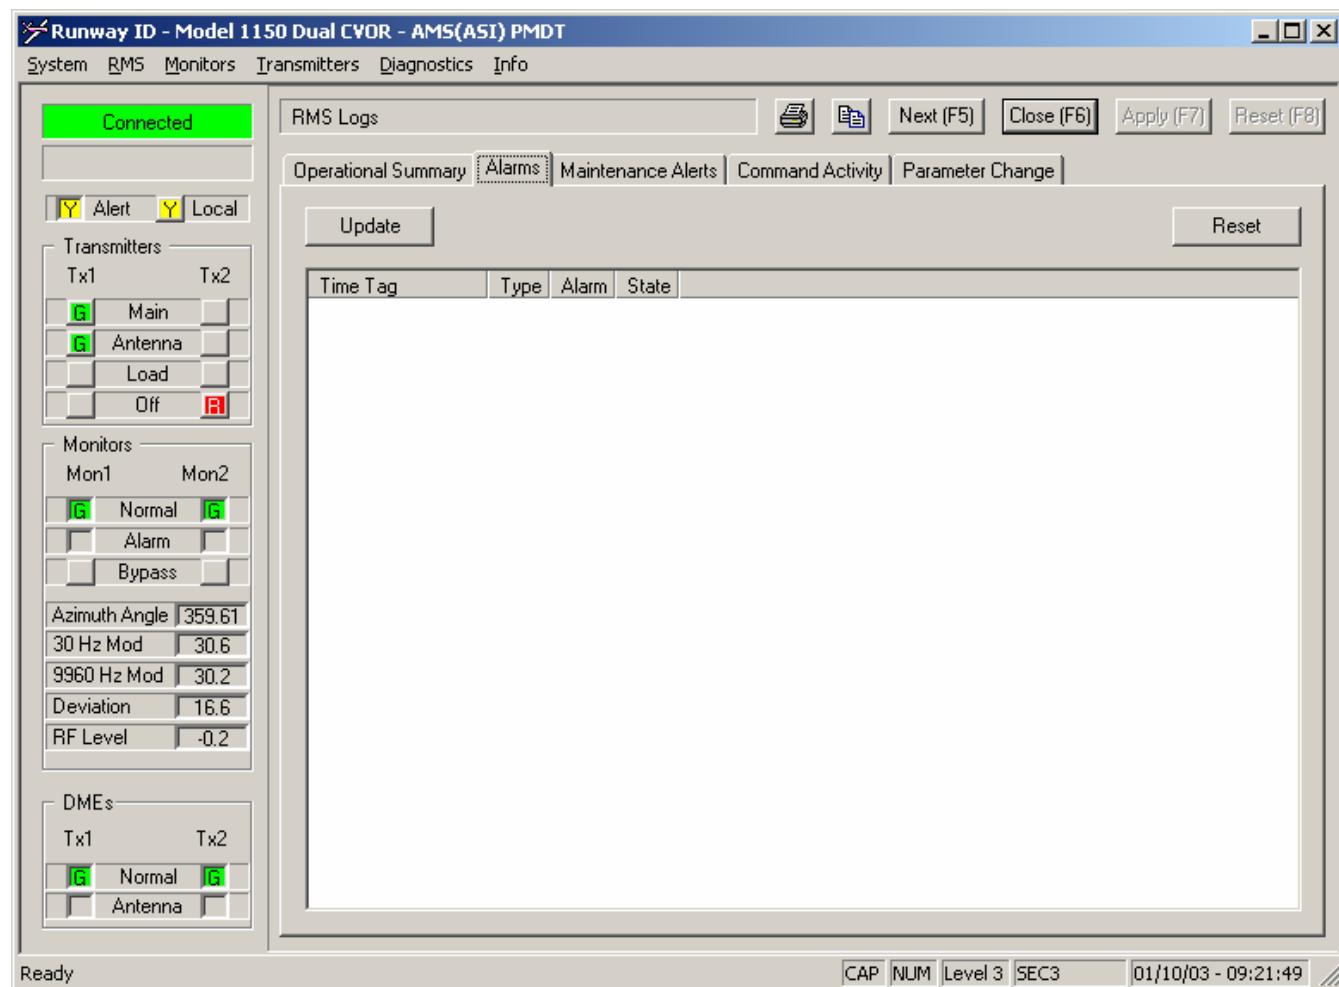

**Figure 3-9. Alarm Log Screen**

### 3.4.2.6.3 Maintenance Alerts Log Screen

Refer to Figure 3-10. This screen provides the latest 100 maintenance alerts that have occurred. When 100 or more alerts have occurred, subsequent alerts will replace the oldest alerts in the log. Entries in the log identify the date and time the alert occurred, the type of alert, and a short description of the alert, and the current status of the alert condition. The Update button reloads the log file from the RMS and updates the display with any new entries. The Reset button clears the log file in the RMS.

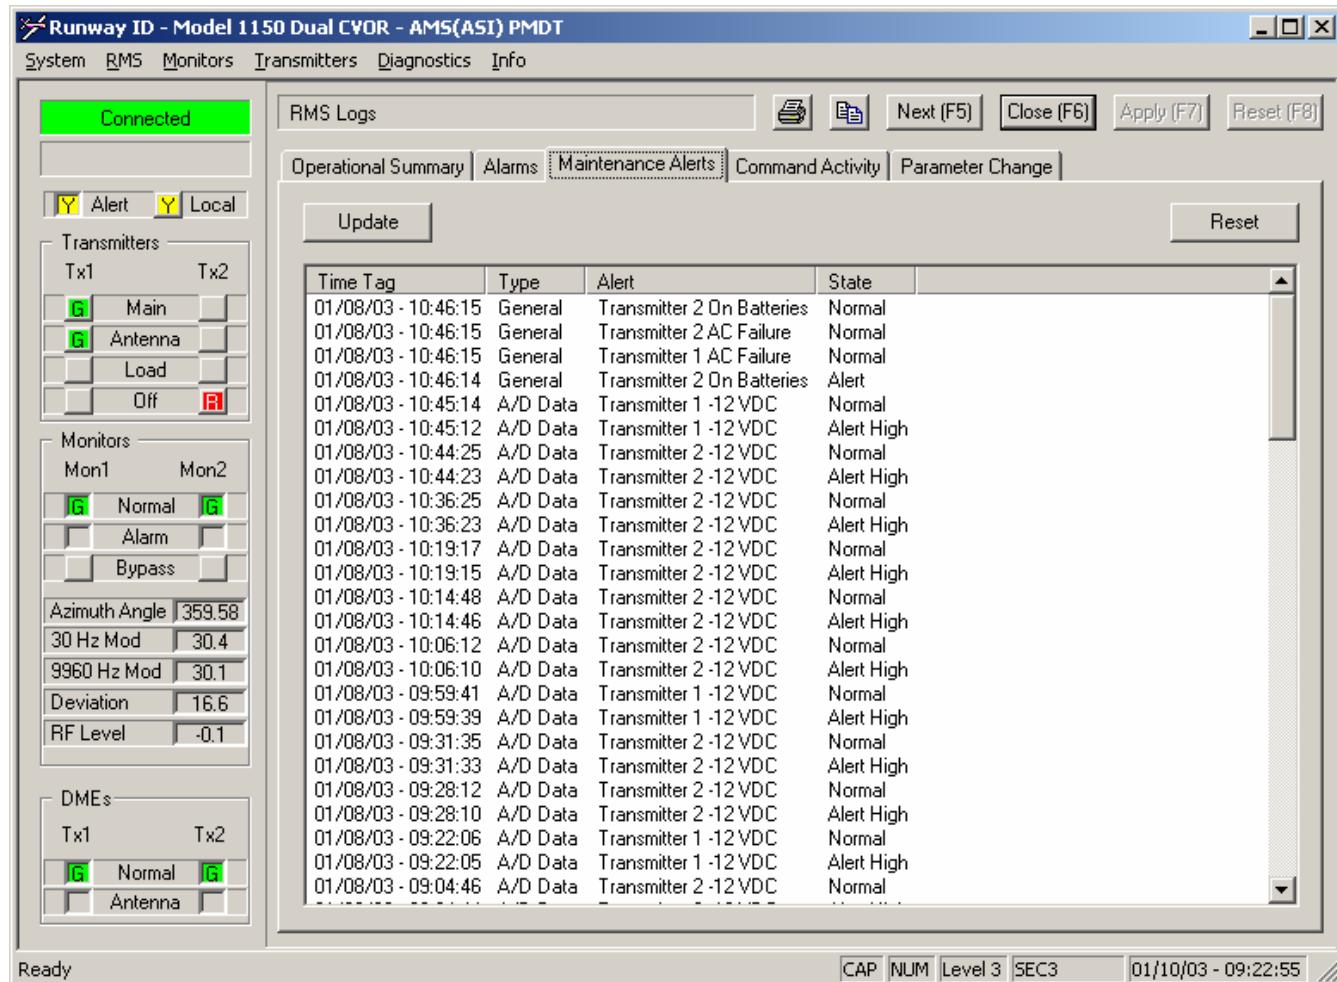


Figure 3-10. Maintenance Alert Logs

### 3.4.2.6.4 Command Activity Screen


Refer to Figure 3-11. This screen provides the latest 100 commands issued. When 100 or more commands have been issued, subsequent commands will replace the oldest commands in the log. The Command Activity Log screen specifies the date and time, identifies the operator logged on to the system when the command was issued, and the command that was issued. In addition to the User IDs configured in the Security Screen, the User Name field includes the following names:

GUEST - Commands issued from the default Security Level 1 GUEST account.

RCSU - Commands issued from the Remote Control Status Unit.

Op System - Commands issued from the RMS's Operating System.

The Update button reloads the log file from the RMS and updates the display with any new entries. The Reset button clears the log file in the RMS.

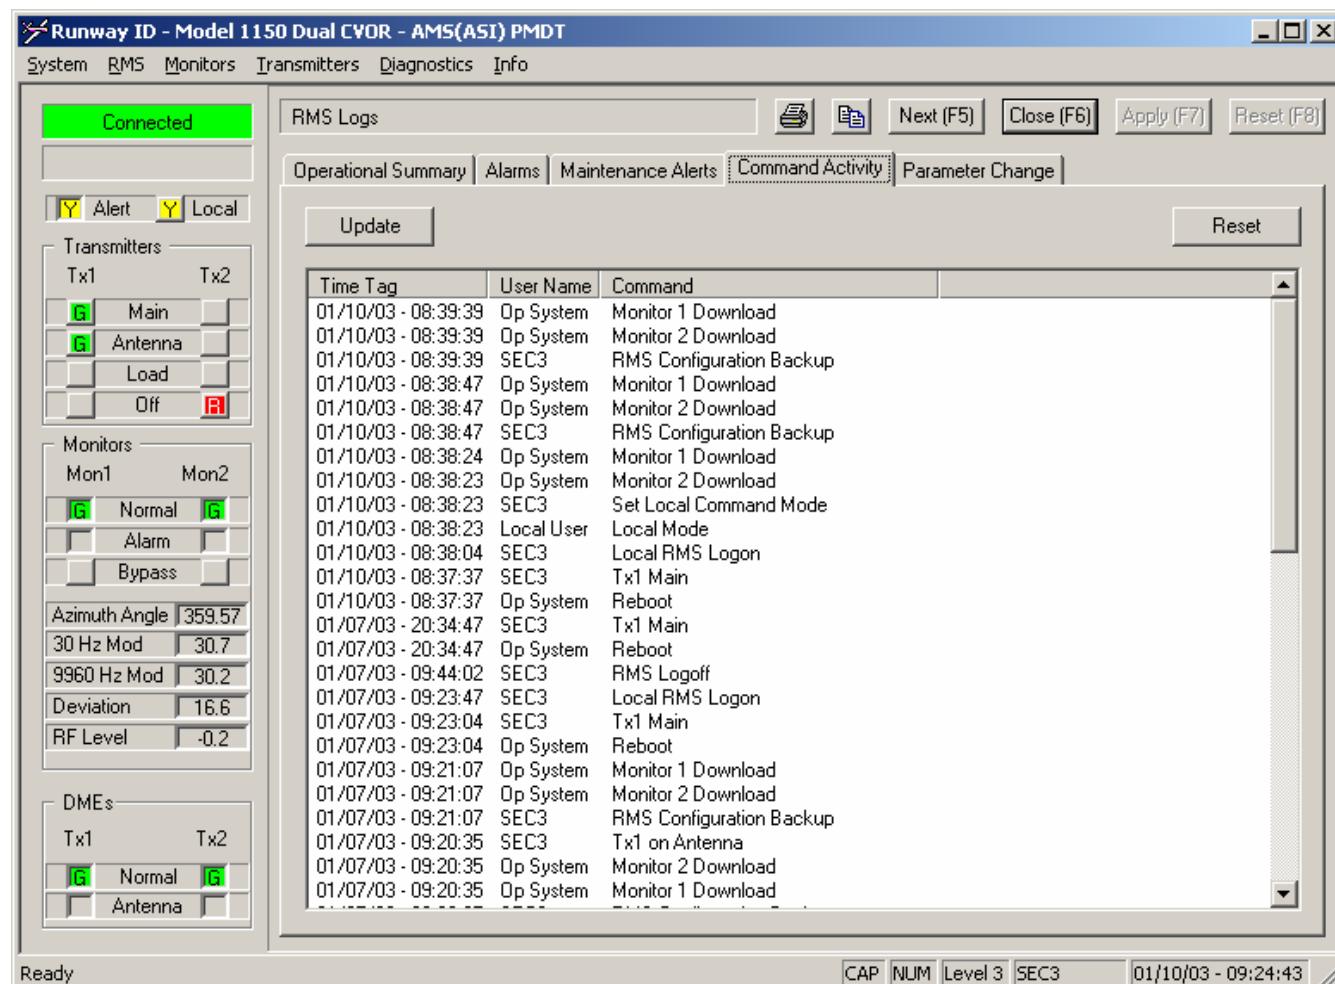

**Figure 3-11. Command Activity Log Screen**

### 3.4.2.6.5 Parameter Change Log Screen

Refer to Figure 3-12. This screen provides the latest 100 changes made in the operator parameters. When 100 or more changes have been made, subsequent changes will replace the oldest changes in the log. The Parameter Change screen specifies the date and time, identifies the operator logged on to the system when the change was made, and the file in which the data was changed. The Update button reloads the log file from the RMS and updates the display with any new entries. The Reset button clears the log file in the RMS.

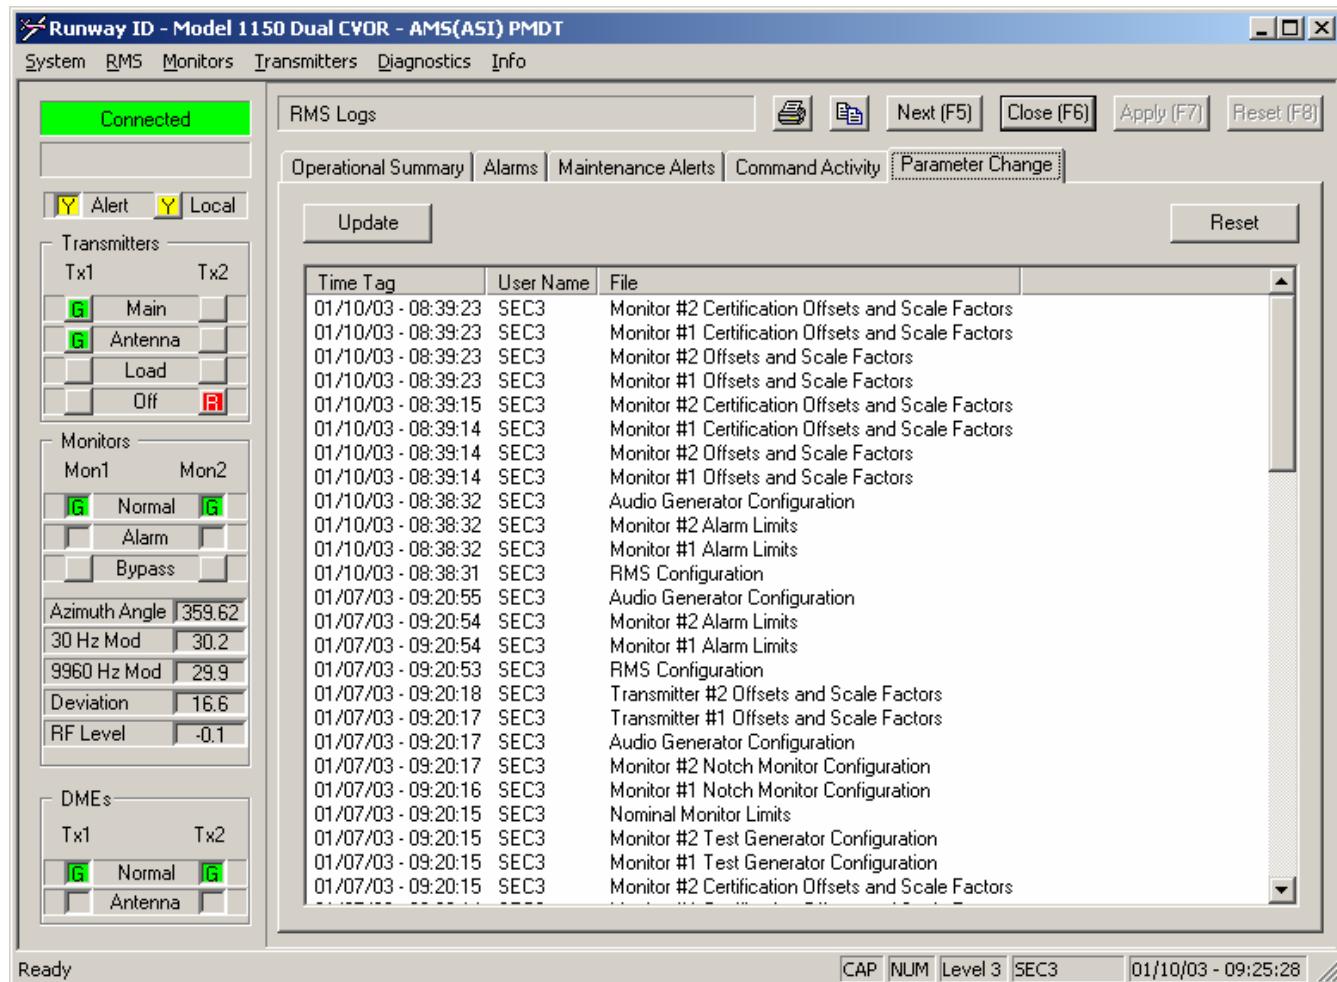


Figure 3-12 Parameter Change Log Screen

### **3.4.2.7 RMS Configuration Screen**

The PMDT contains four RMS Configuration Screens that are used to define the operating parameters for the RMS - General, Station, A/D Limits, and Security Codes. These screens and their contents are described below.

Any changes made to a configuration that should remain after a power cycle or Reset, should be backed up. To backup the current configuration in RAM to EEPROM, first login to Security Level 3 or higher, then select RMS >> Configuration Backup. Press OK at the prompt.


To save the current configuration to hard drive or diskette select System >> Configuration Save. Select the destination and file name and press Save.

To restore a configuration from disk select System >> Configuration Load, enter the file name and press Open. When completed, backup the configuration to EEPROM by selecting RMS >> Configuration Backup. Press OK at the prompt.

Note that the station's configuration can be printed in text form using the System >> Configuration Print menu option.

### 3.4.2.7.1 General RMS Configuration Screen - Refer to Figure 3-13

This screen allows the operator to configure the general parameters of the VOR system.

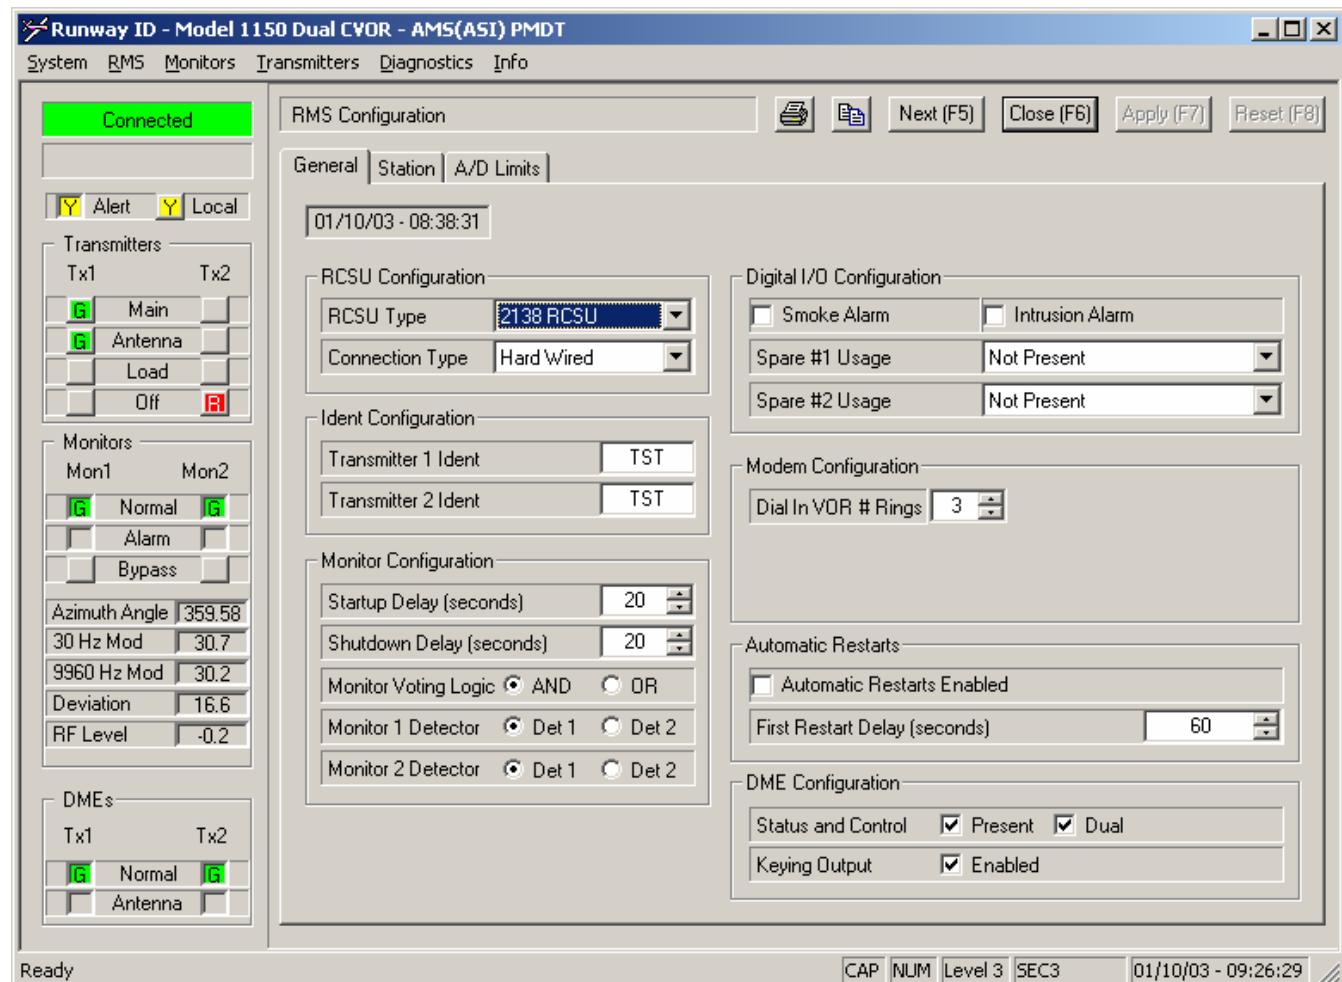

**Figure 3-13. General Configuration Screen**

### 3.4.2.7.1.1 General Configuration the VOR

The parameters in the General Configuration Screen must be set to correctly correspond to the equipment installation at each site. Refer to Table 3-4 for details pertaining to each of the configurable parameters in the General Configuration Screen. Note that some parameters are only applicable to Dual Equipment. In Single Equipment systems, these parameters will not be displayed.

**Table 3-4. General Configuration Parameters**

Parameter	Description
<b>RCSU Configuration</b>	
RCSU Present	<p>When the 1138/None is selected the Modem connection to a 2138 is not selected. A parallel connection to an 1138 interface CCA may be active.</p> <p>When 2138 is selected the connection between the RCSU and RMS is enabled.</p>
Connection Type (only when 2138 selected)	<p>Set to <b>AHard Wired</b> when connecting to the RCSU via the VOR=s RCSU Modem</p> <p>Set to <b>ARadio Modem</b> when connecting to the RCSU via a Radio Modem CCA.</p>
<b>Monitor Configuration</b>	
Monitor Startup Delay	Sets the delay from startup until the shutdown timer starts. This gives additional time for transmitter stabilization.
Monitor Shutdown Delay	Sets the delay from alarm occurrence until the transmitter shutdown (transfer if dual equipment)
Monitor Voting Logic (Dual Equipment)	Selects either AND or OR voting logic for multiple monitor systems.
Monitor 1 Detector	Sets which Monitor detector the Monitor 1 will use for monitoring. This is useful if one of the two detectors fails. Reassignment will allow dual monitoring to continue. Also if two different locations are required for Field Monitoring then Monitor 1 and Monitor 2 must be set to different detectors.
Monitor 2 Detector	Sets which Monitor detector Monitor 2 will use for monitoring.
<b>Ident Configuration</b>	
Transmitter 1 Ident	This setting sets the Ident code transmitted by Transmitter 1. This code may be 2,3 or 4 characters. Numbers are not allowed. If less


**Table 3-4. General Configuration Parameters**

<b>Parameter</b>	<b>Description</b>
	than 4 characters use “spaces” to fill the unused characters.
Transmitter 2 Ident	This setting sets the Ident code transmitted by Transmitter 1. This code may be 2,3 or 4 characters. Numbers are not allowed. If less than 4 characters use “spaces” to fill the unused characters.
<b>Digital I/O Configuration</b>	
Smoke Alarm	Smoke Alarm detection is enabled when checked.
Intrusion Alarm	Intrusion Alarm detection is enabled when checked.
Spare #1 Usage	Configures the Spare #1 I/O channel
Spare #2 Usage	Configures the Spare #2 I/O channel
<b>Modem Configuration</b>	
Dial In # Rings	Sets the ring number that the modem answers incoming calls
<b>Automatic Restarts</b>	
Automatic Restarts Enabled	Both Automatic Restarts (adjustable and fixed) are enabled when the checkbox is checked, and disabled when it is not checked.
First Restart Delay (seconds)	Sets the delay following a shutdown until the system will automatically restart. The system also has an additional 5 minute (fixed) restart delay.
<b>DME Configuration</b>	
Present	DME connection, status, and control enabled when checked.
Dual	Dual DME operation enabled when checked. Single DME operation enabled when not checked.
Keying Output	Enables the DME Keyer.

### 3.4.2.7.2 Station Configuration Screen


Refer to Figure 3-14. This screen is used to configure the various system-level parameters for the VOR station: CVOR/CVOR, Dual/Single, Hot Standby, and the station's Transmitter Frequency. The value for each of these settings currently stored in the RMS and is also displayed for reference. Note that any changes under User Configuration do not take affect until the "Apply" button is pressed.

Any discrepancies between the User Configuration, and RMS will be indicated with a red background, and should be corrected by the user. This can be done by backing up the configuration (RMS >> Config Backup).

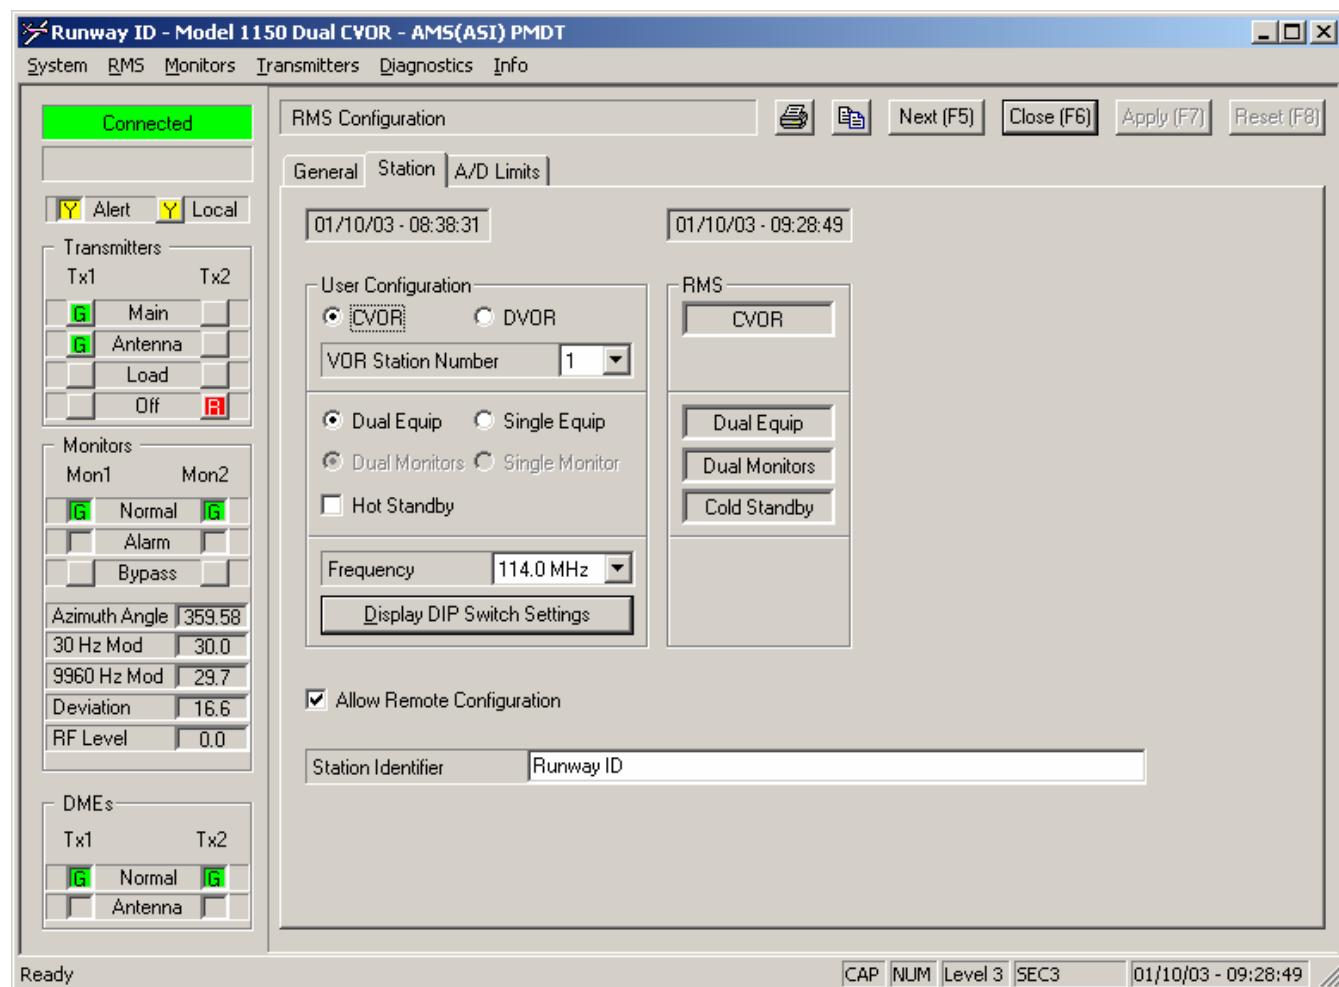

**Figure 3-14. Station Configuration Screen**


Once the user has set the User Configuration parameters as desired and pressed “Apply”, pressing the “Display DIP Switch Settings” button will display the corresponding DIP switch settings for the Synthesizer S1 as shown in Figure 3-15. These DIP switches should be set according to the displayed information.

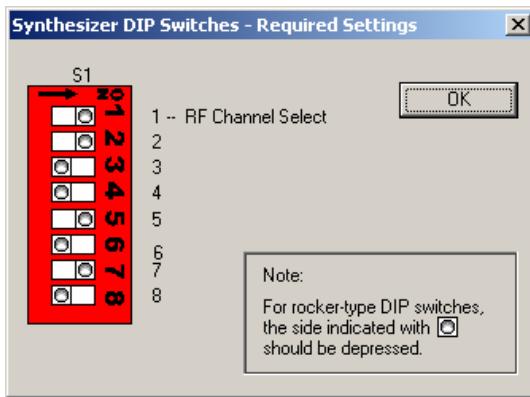

**Figure 3-15. Synthesizer Switch Setting Screen**

### 3.4.2.7.3 A/D Limits Configuration Screen


Refer to Figure 3-16. This screen is used to configure the upper and lower alarm limits. A checkbox is provided to enable the Exterior Temperature sensor parameter's Maintenance Alert. If the checkbox is checked, a Maintenance Alert will be generated when the Exterior Temperature Sensor parameter is out of the specified limits.

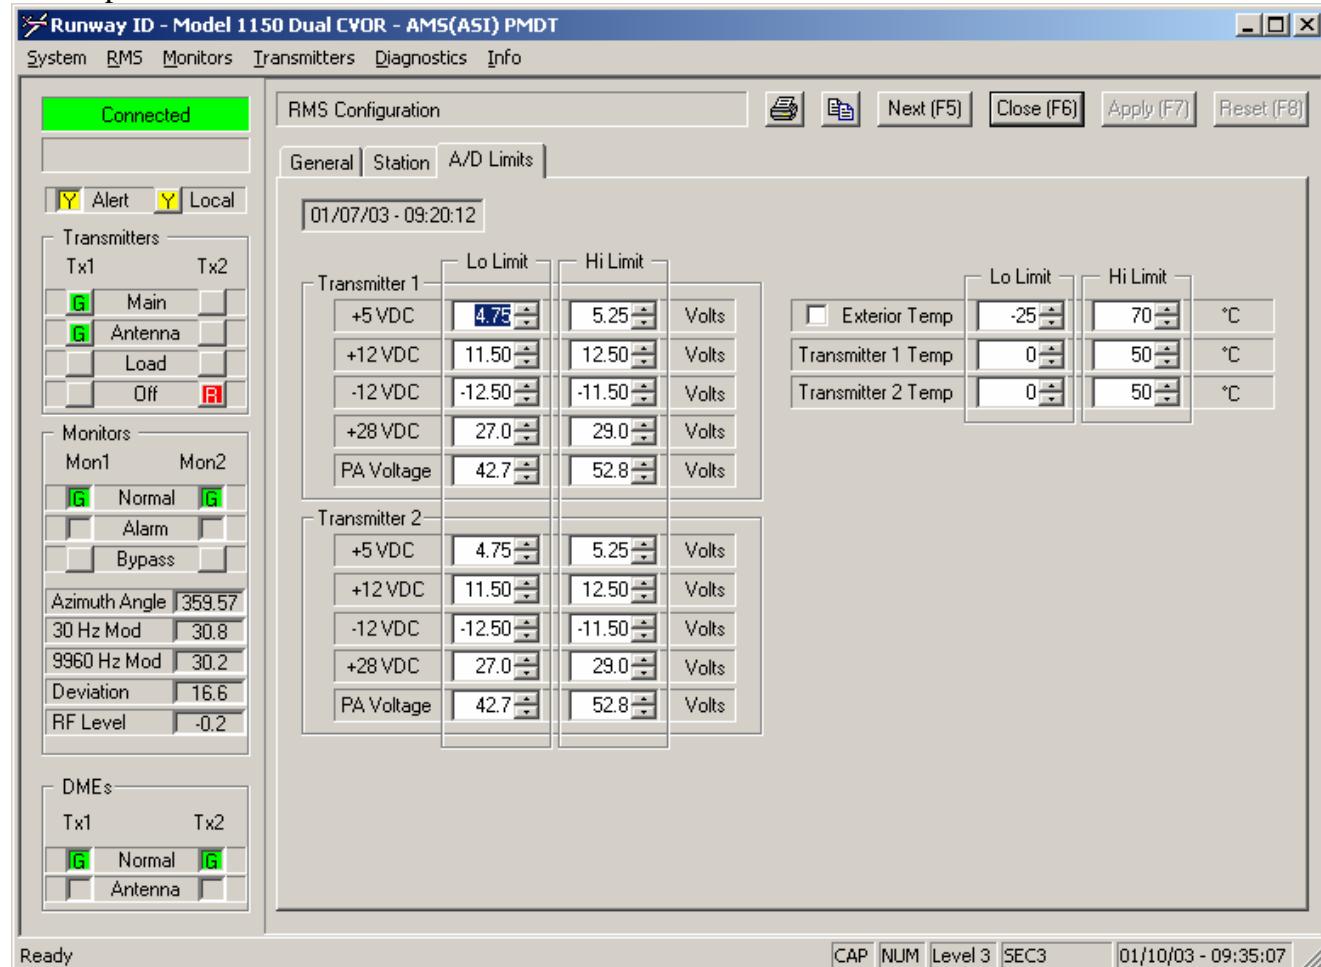

**Figure 3-16. A/D Limits Configuration**

### 3.4.2.7.4 Security Codes Configuration Screen

Refer to Figure 3-17. This screen is used to configure the security access passwords for each user, including User ID, Password, and Security Level. This User ID/Password information is encrypted and stored in the non-volatile RAM (NVRAM) on the RMS CCA. This screen is only available to the Level 4 user.

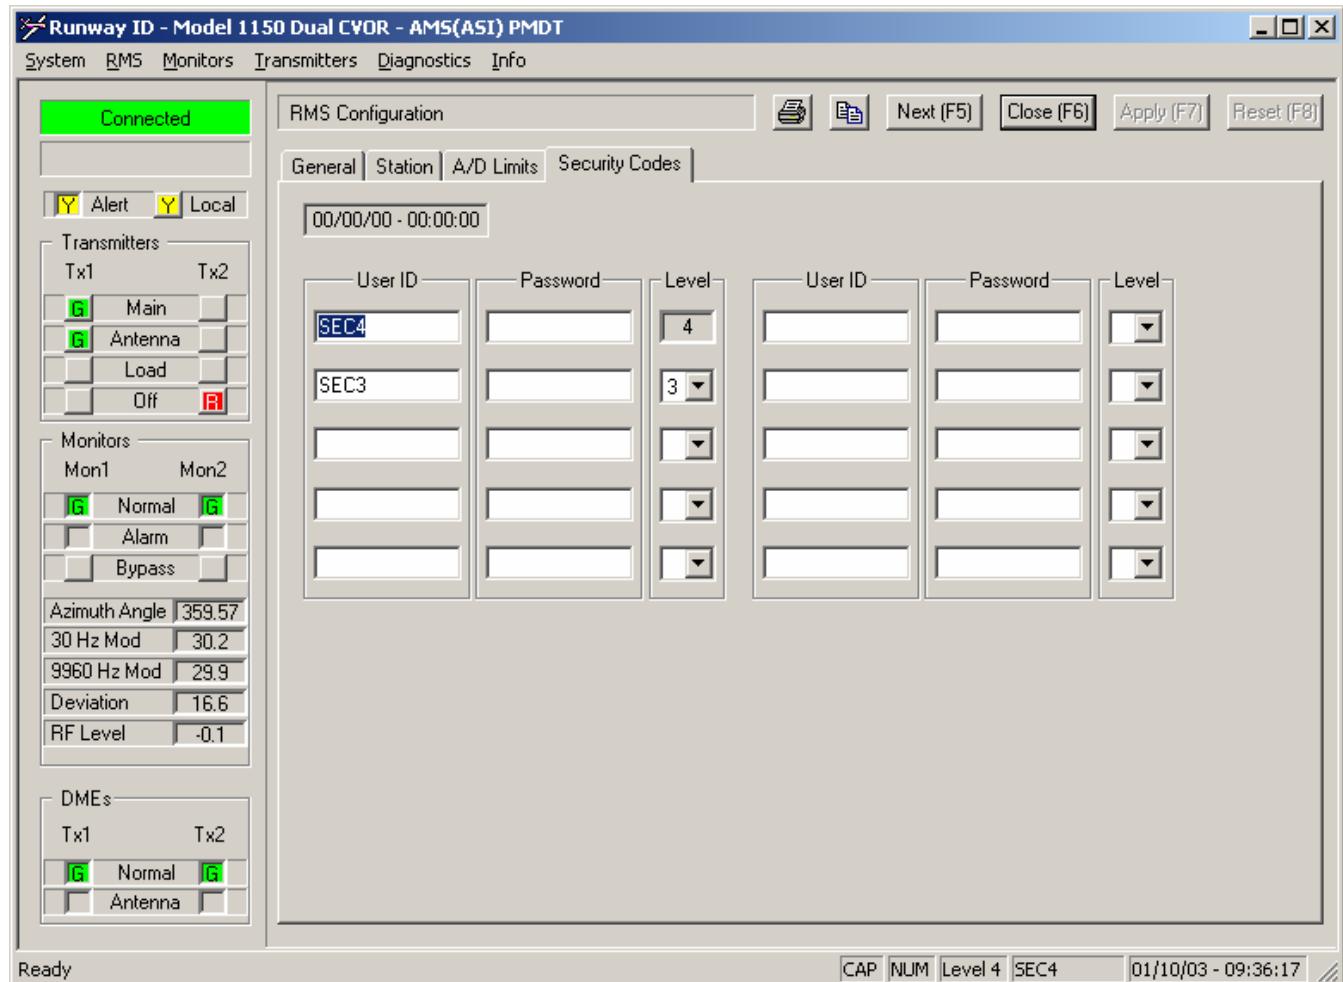

**Figure 3-17. Security Codes Screen**

#### **3.4.2.7.4.1 User Account Maintenance**

As part of initial configuration, several user accounts should be setup, corresponding to the access levels required. User account maintenance can only be done through a direct connection (i.e. not via a remote modem) in the LOCAL mode, from within Security Level 4, with the exception of changing the current user's password. All users can change their own passwords, when connected directly and the system is in Local Mode, through the RMS >> Commands >> Change Password menu option. Refer to Figure 3-17 for the Security Codes Configuration Screen.

#### **3.4.2.7.4.2 Add a User Account.**

1. Log on to Security Level 3 and select the RMS >> Configuration >> Security Codes screen.
2. Click on any empty User ID field.
3. Enter the desired User ID. Note that the User ID must be 4 to 8 characters in length, is case-sensitive, and can contain any alphanumeric characters.
4. Press TAB to move to the associated Password field.
5. Enter the desired Password. Asterisks will hide the password on the display. Note that the password must be 4 to 8 characters in length, is case-sensitive, and can contain any alphanumeric characters.
6. Select the desired Security Level for this user.
7. Repeat these steps for any additional users.
8. When all users have been configured, press the Apply button to save the new User Account data. This will clear the asterisks in the password field to hide the length of the password.
9. To store the new account information in the RMS's NVRAM, select RMS >> Config Backup. If this is not done, the user data will revert to the values stored in the NVRAM following the next system reset or power-cycle.

#### **3.4.2.7.4.3 Change a User's Password.**

All User account information, including passwords, is accessible from Security Level 4 as follows:

1. Log on to Security Level 4 and select the RMS >> Configuration >> Security Codes screen.
2. Select the Password field associated with the desired User ID.
3. Enter the desired Password, which is case-sensitive. Asterisks will hide the password on the display. Note that the password must be 4 to 8 characters in length, and can contain any alphanumeric characters.
4. Press the Apply button to save the new User Account data. This will clear the asterisks in the password field.

5. To store the new account information in the RMS's NVRAM, select RMS >> Config Backup. If this is not done, the user data will revert to the values stored in the NVRAM following the next system reset or power-cycle.

From other Security Levels, only the current user's password can be changed. This is done as detailed below:


1. Log on directly (not via a Modem connection).
2. Select the RMS >> Commands >> Change Password menu item.
3. Enter the Current Password and press TAB to move to the next field.
4. Enter the New Password, which is case-sensitive. Asterisks will hide the password on the display. Note that the password must be 4 to 8 characters in length, and can contain any alphanumeric characters. Press TAB to move to the next field.
5. Re-enter the New Password and press OK to save the new password.
6. A message box will be displayed, indicating that the password has been changed. Press OK to clear this message.

#### 3.4.2.7.4.4 Delete a User's Account.

1. Log on to Security Level 4 and select the RMS >> Configuration >> Security Codes screen.
2. Select the desired User ID field.
3. Delete the User ID in this field, leaving it blank.
4. Press the Apply button to save the new User Account data.
5. To store the new account information in the RMS's NVRAM, select RMS >> Config Backup. If this is not done, the user data will revert to the values stored in the NVRAM following the next system reset or power-cycle.


### 3.4.2.8 RMS Commands

The RMS Commands menu, shown in Figure 3-18, provides system level controls for setting the time and date of the VOR station to the PMDT PC's current settings, changing the current user's password, resetting the Intrusion and Smoke Detectors, resetting the RMS hardware, and basic control of a co-located Distance Measuring Equipment (DME) if so equipped.

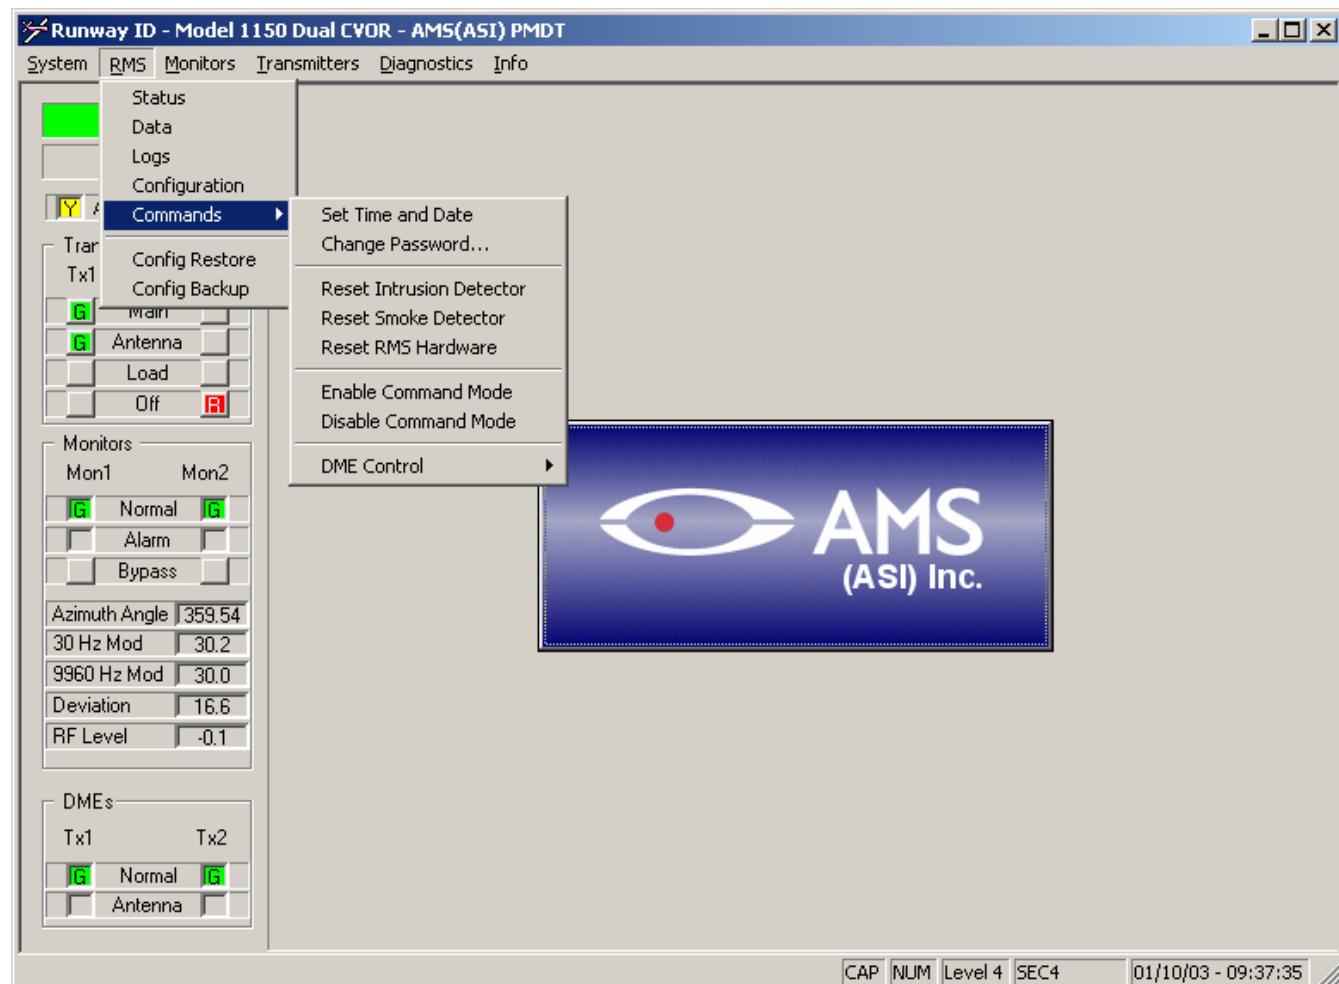

**Figure 3-18. RMS Commands**

The DME Commands sub-menu of the RMS Commands menu shown in Figure 3-19 is used for basic control of a co-located DME. It is only available if the DME is configured present in the RMS >> Configuration >> General screen. The DME Control >> Transfer command is used to transfer between the Main and Standby transmitters in a dual DME system.

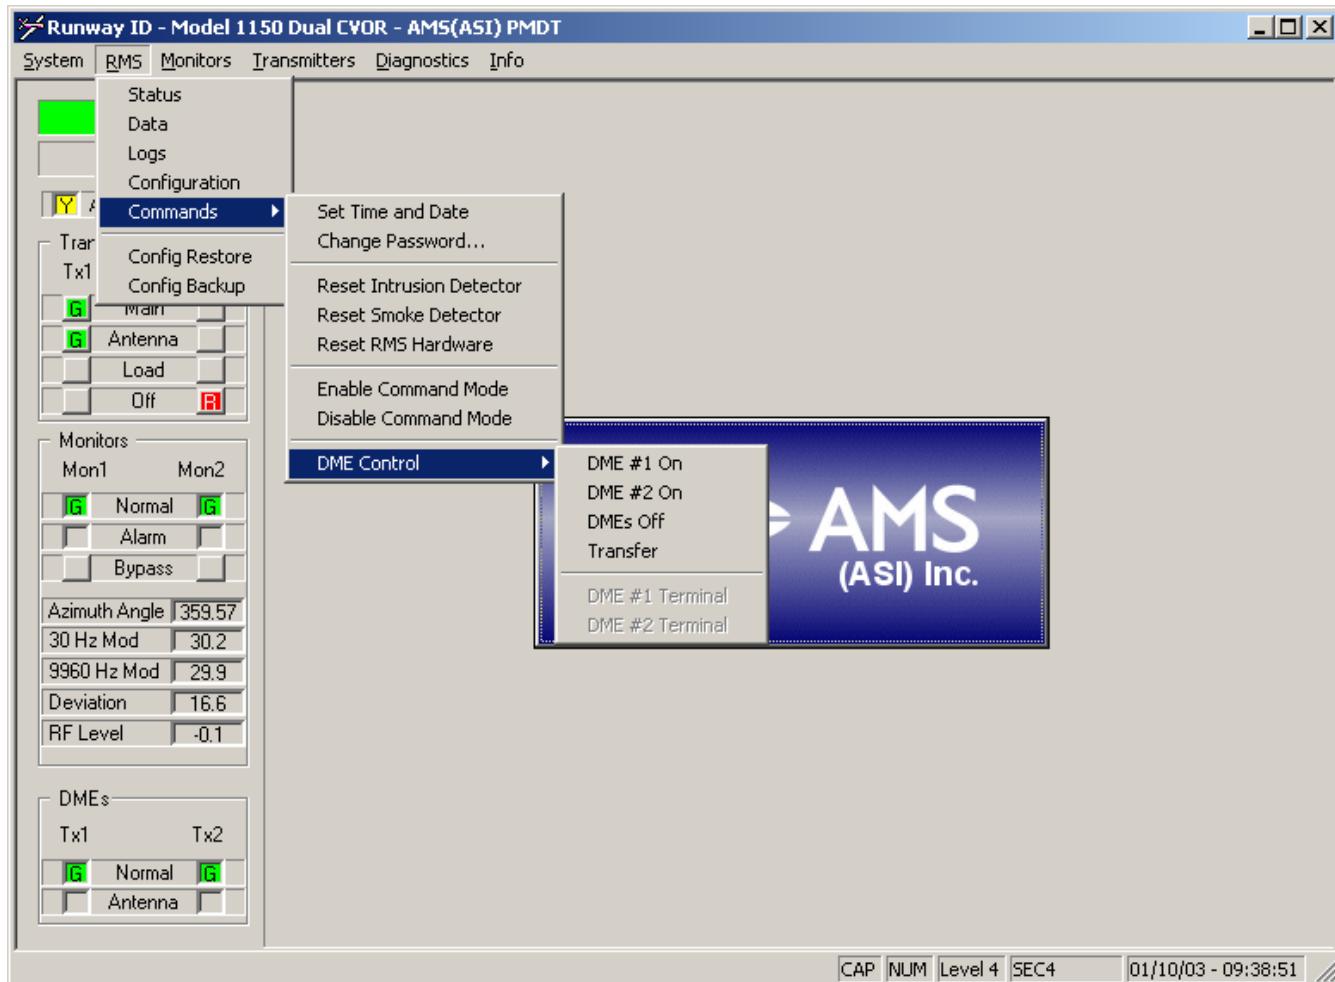


**Figure 3-19. DME Commands**

### **3.4.2.9 Monitor Configuration Screens**

The PMDT contains two Monitor Configuration Screens that are used to configure the VOR's Monitors. The screens and their contents are described below.

#### **3.4.2.9.1 Monitor Alarm Limit Configuration Screen**


Refer to Figure 3-20. This screen is used to configure the alarm limits for the VOR's Monitors. It also contains a check box control to enable the Ident Monitoring. The Azimuth Angle setting is separate for Monitor 1 and Monitor 2 to allow for two different field monitor positions. All other alarm parameters have common limits. The ability to set the nominal reading is also provided. The nominal angle must be set for the ground check to operate properly. If for instance the field monitor position is 118.5 degrees then enter 118.50 degrees into the Monitor 1 Azimuth Angle Nominal value. Repeat this for Monitor 2.

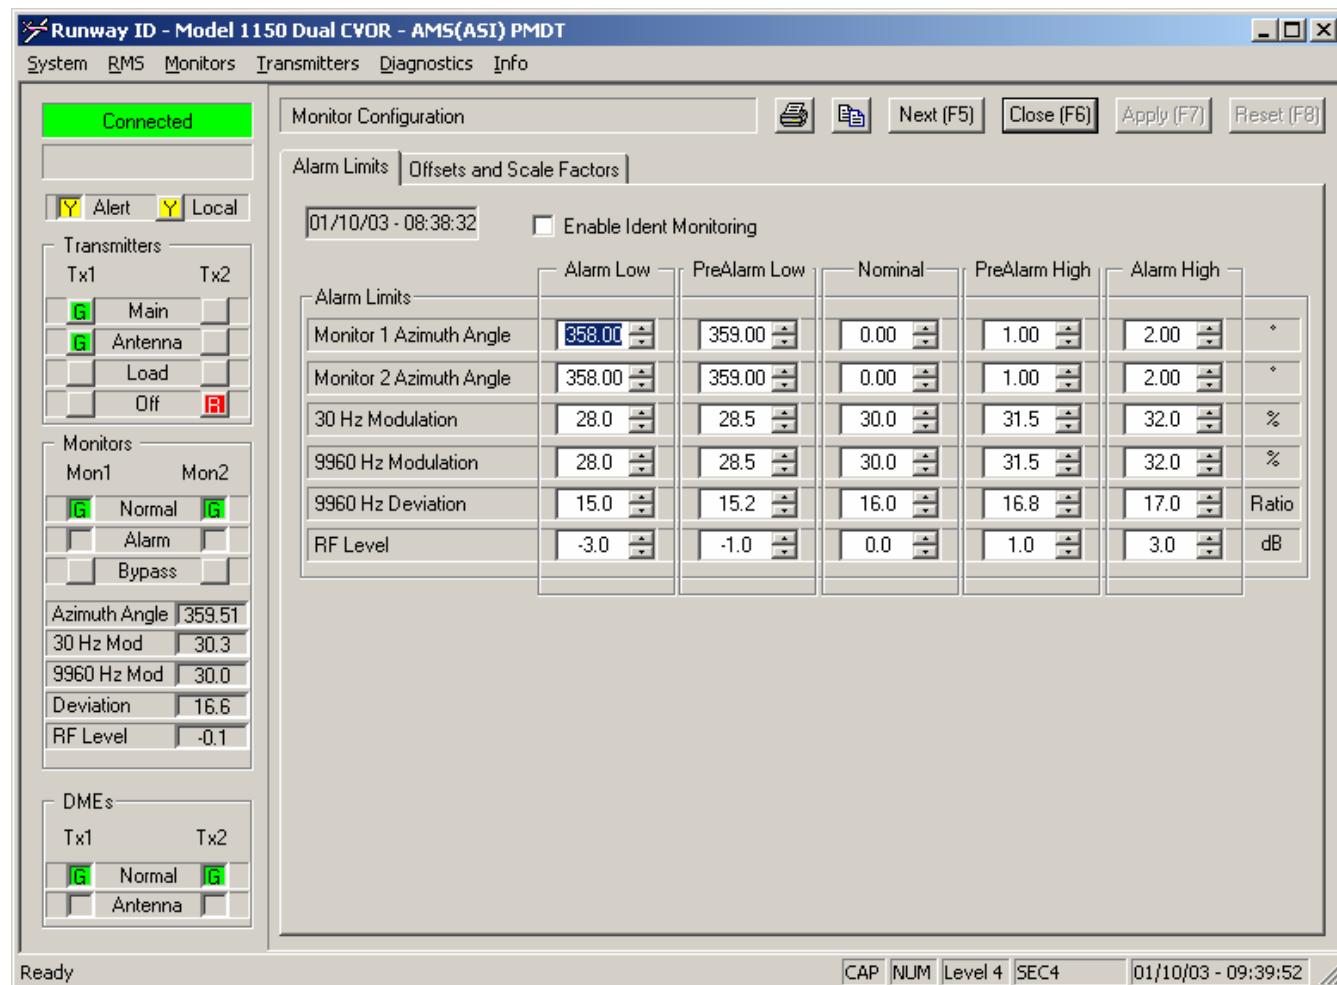

**Figure 3-20. Monitor Alarm Limits Screen**

### 3.4.2.9.2 Monitor Offsets and Scale Factor Configuration Screen


Refer to Figure 3-21. This screen is used to configure the operation of the Monitors. Each parameter measured by the monitor may be scaled to display a corrected value. The Test Generator should be used as the initial reference for the offsets and scale factors. After a successful completion of the Generator Test each parameter in this screen should be adjusted. Run the Generator Test until the final outcome of the Generator test is the same as the setting for the test. When the Integrity Monitor offset and scale factors are correct then press the copy button and then the F7. This will duplicate the Integrity Offsets and scale factors for the Certification Tests.

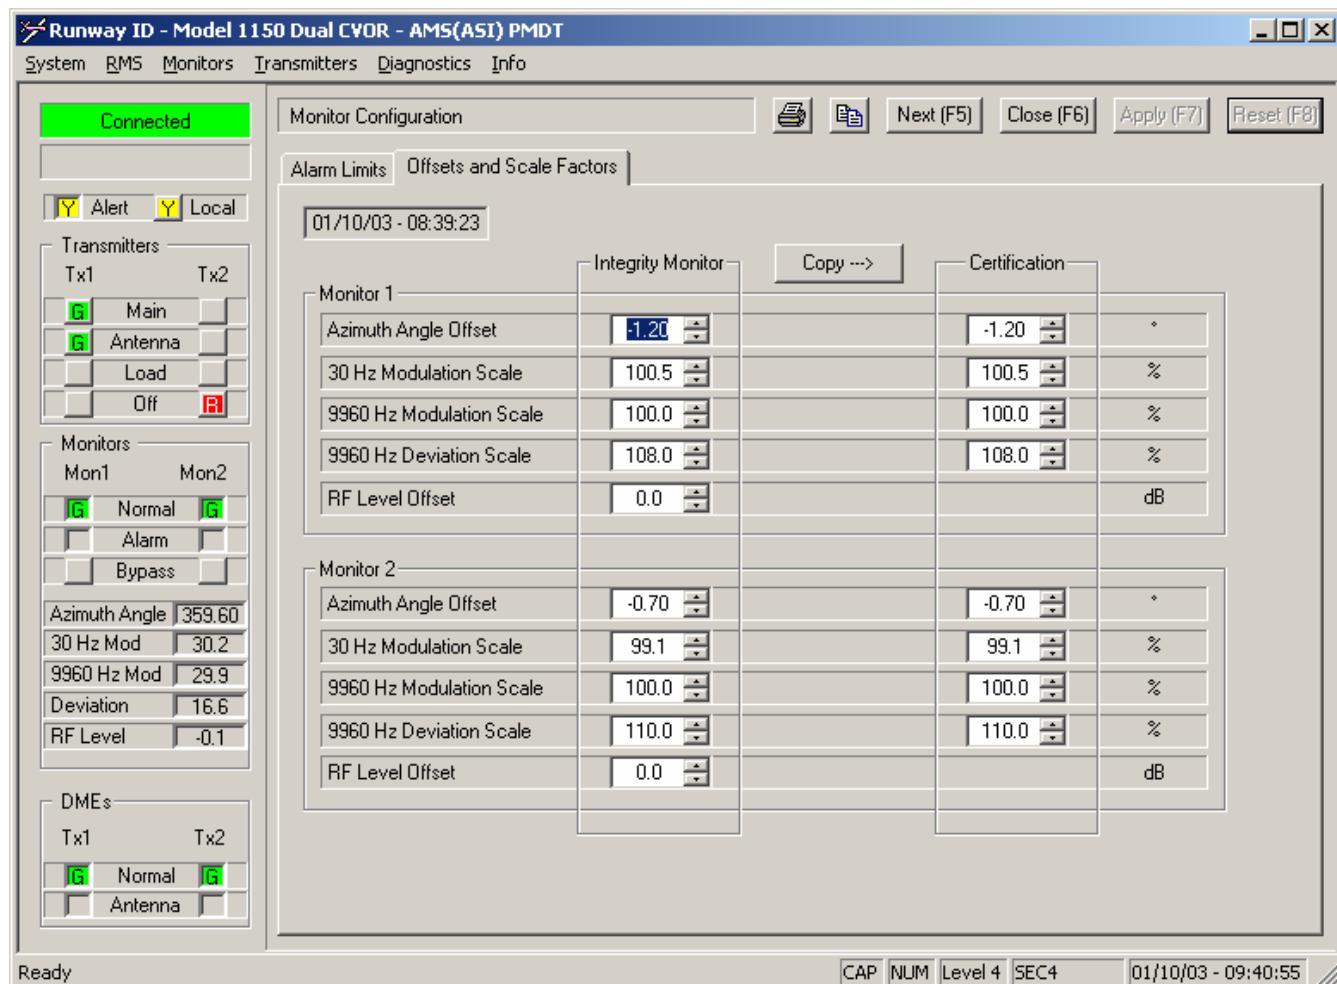

**Figure 3-21. Monitor Offsets and Scale Factors**

### 3.4.2.10 Monitor Commands

Refer to Figure 3-22. The Bypass state of the Integral Monitor can be changed using the corresponding command under the Monitors >> Commands menu.

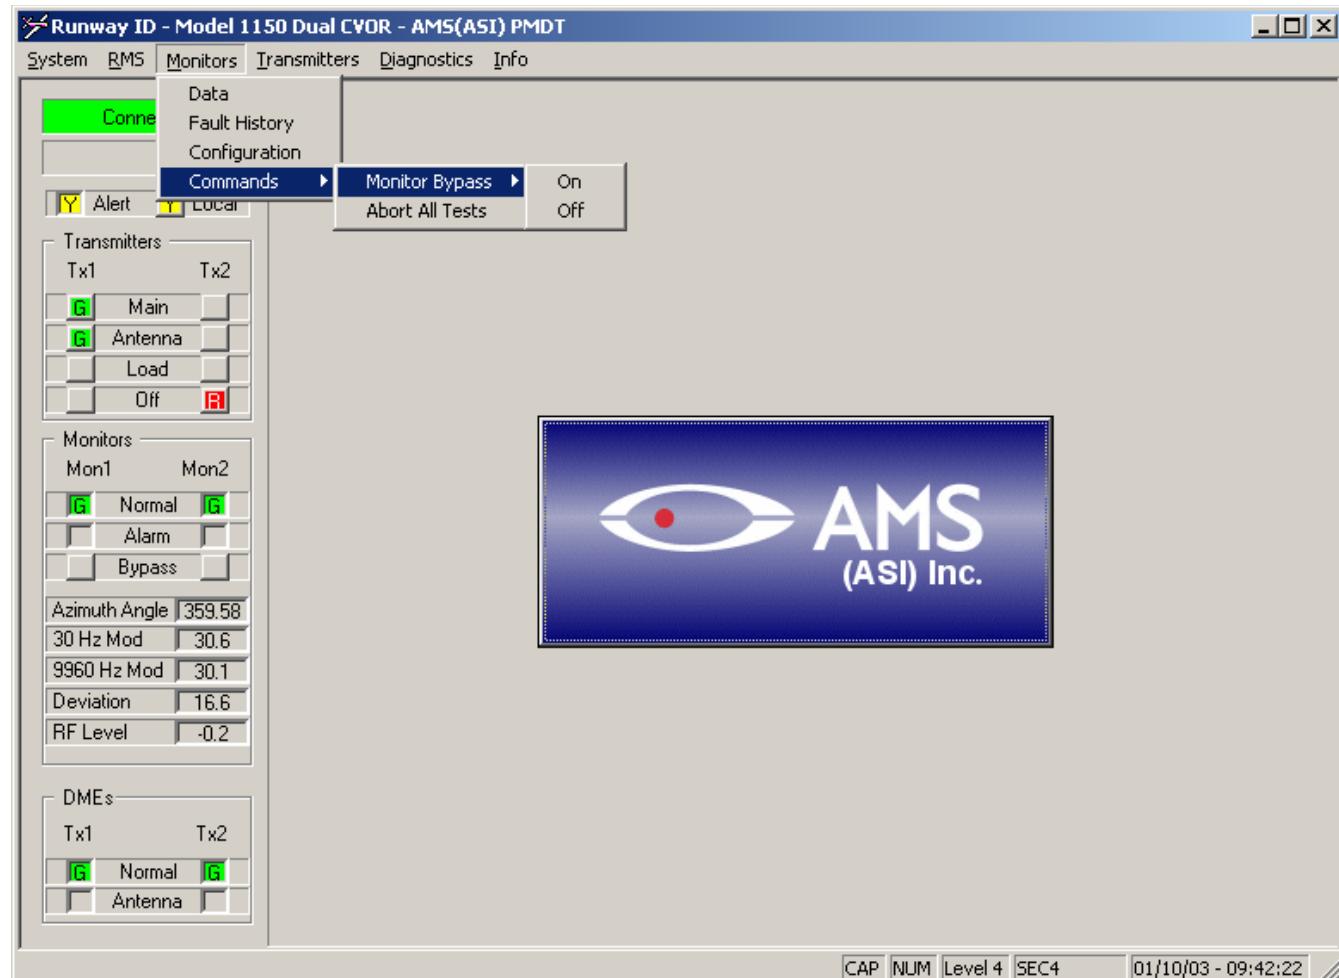

**Figure 3-22. Monitor Commands**

### 3.4.2.11 Monitor Data Screens

The PMDT contains seven Monitor Data Screens that are used to view the current status of the monitored parameters. The screens and their contents are described below.

#### 3.4.2.11.1 Integrity Data Screen

Refer to Figure 3-26. This screen displays the low and high alarm limits and pre-alarm limits with current operating values for Monitor 1 and Monitor 2. A green background for a parameter indicates that the parameter falls within the Prealarm and Alarm limits. A yellow background indicates that the parameter falls outside of the prealarm limits but is still within the integrity alarm limits. The Comm status if green indicates that normal serial communications exist with the Monitors. A box indicates which of the two monitors is the controlling monitor. The controlling monitor has control of the ground check switch capability and the audio output to the headset jack and telephone line interface. The LED on the monitor edge will also light when the monitor is the controlling monitor. The RMS will assign the controlling monitor function to Monitor 1 if Transmitter 1 is on the antenna and to Monitor 2 if Transmitter 2 is on the antenna.


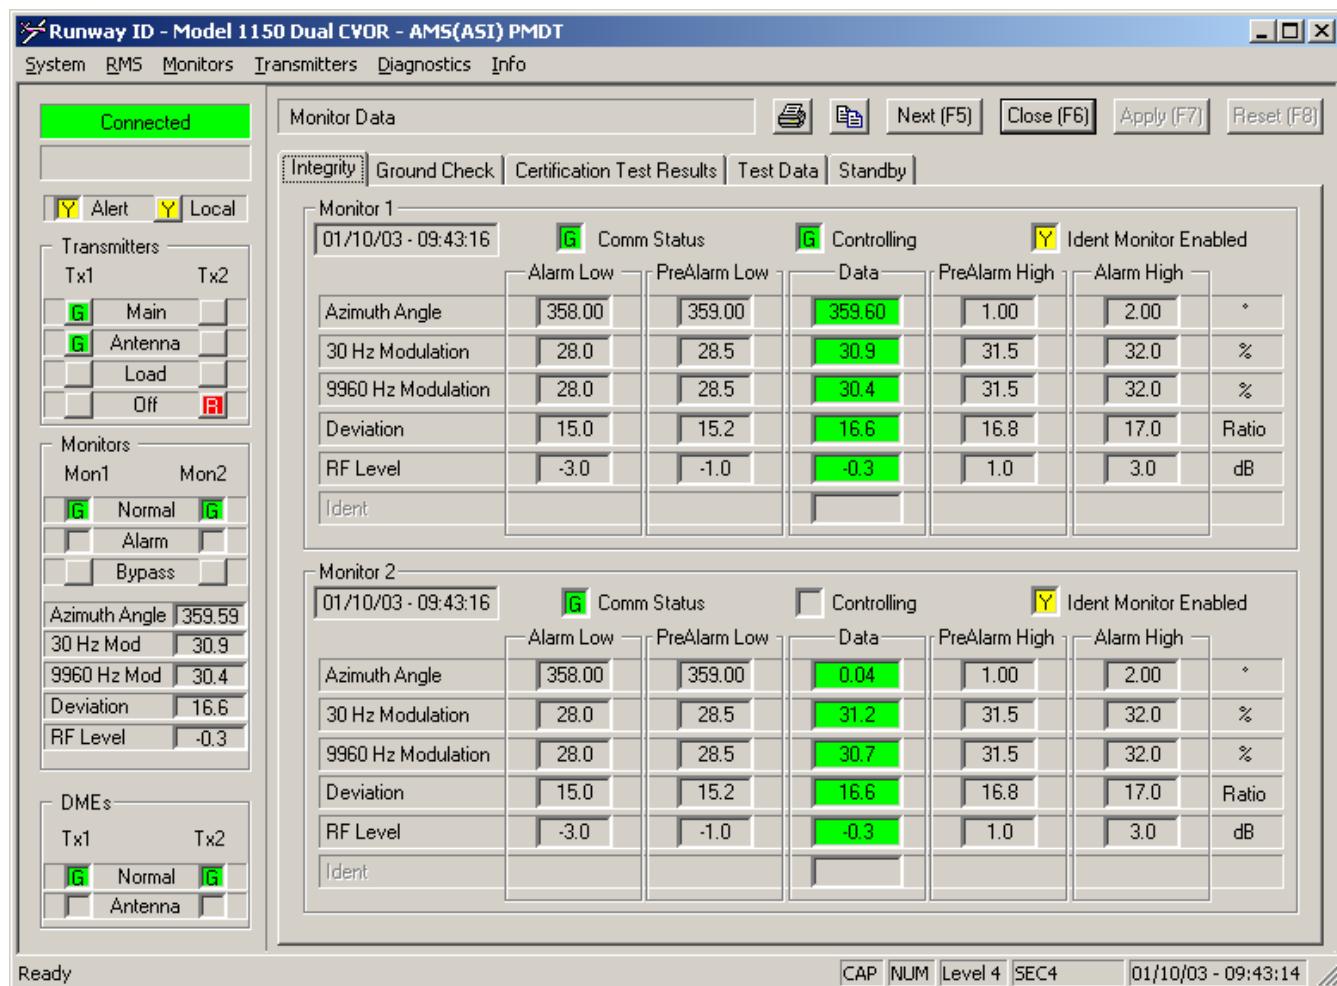


Figure 3-23. Integrity Data Screen

### 3.4.2.11.1.1 Test DATA Screen

Refer to Figure 3-24. This screen displays the results of the last Test Generator Test performed by the associated Monitor. It shows the measurement data for Monitor 1. Pressing the RUN button under the Monitor 1 results will cause the Test of Monitor 1 to start. This test takes about 2 minutes to complete. To abort the test select Monitors>> Commands>> Abort All Tests. To start the Monitor 2 Test press the RUN button under the Monitor 2 data. The Test Generator settings may be changed by pointing to the parameter and entering the desired value. The identification signal may be set to either NORMAL or CONTINUOUS. The audio frequency may be set to a value from 300 to 3000 Hertz in 30 Hertz increments.

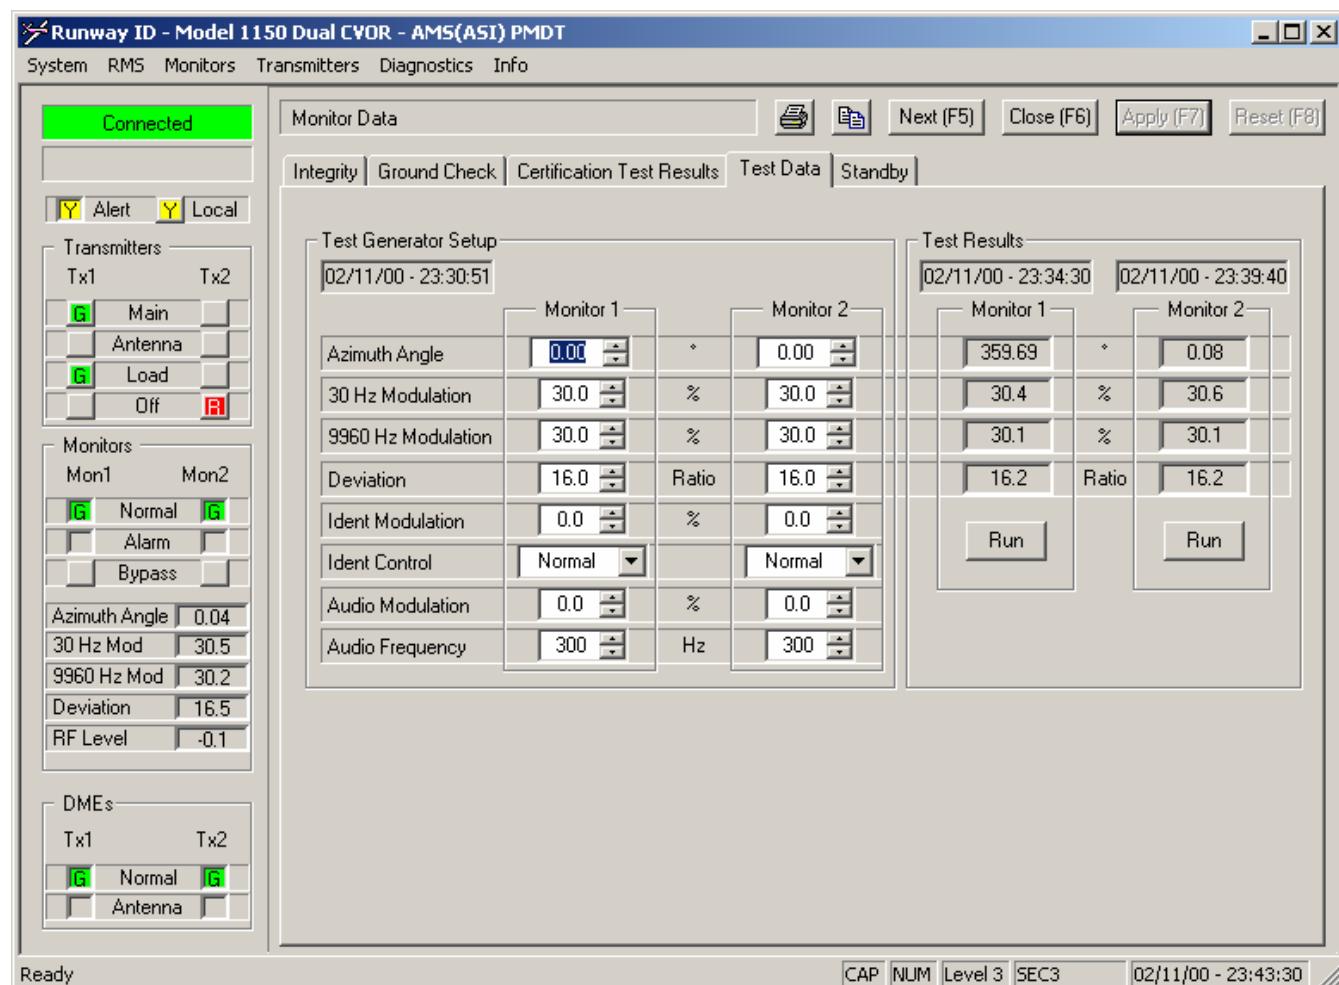

**Figure 3-24. Monitor Test Data Screen**

### 3.4.2.11.1.2 Monitor Certification Test Results Screen

Refer to Figure 3-25. This screen displays the results of the last Certification Test performed by the associated Monitor. It shows the measurements for Monitor 1 Low Limit test and Monitor 1 High limit test. Pressing the RUN button to the right of Monitor 1 results will cause the Certification Test of Monitor 1 to start. This test takes about 3 minutes to complete. To abort the test select Monitors>> Commands>> Abort All Tests. To start the Monitor 2 Certification Test press the RUN button to the right of Monitor 2 data. The certification limits may be entered by pointing to the parameter and entering the desired value. The preferred method is to point and click on the “Set to Monitor Limits” button. This will automatically set the Certification Limits to the same value as the Monitor Integral Limits in the Monitors>>Configuration>>Alarm Limits screen. If the Monitor finds that the parameter exceeds the tolerance then the parameter is declared in alarm and the Monitors >> Data >> Certification Test Results shows the background in red on the parameter that is out of tolerance. Refer to Table 3-5 for Certification Test Criteria.

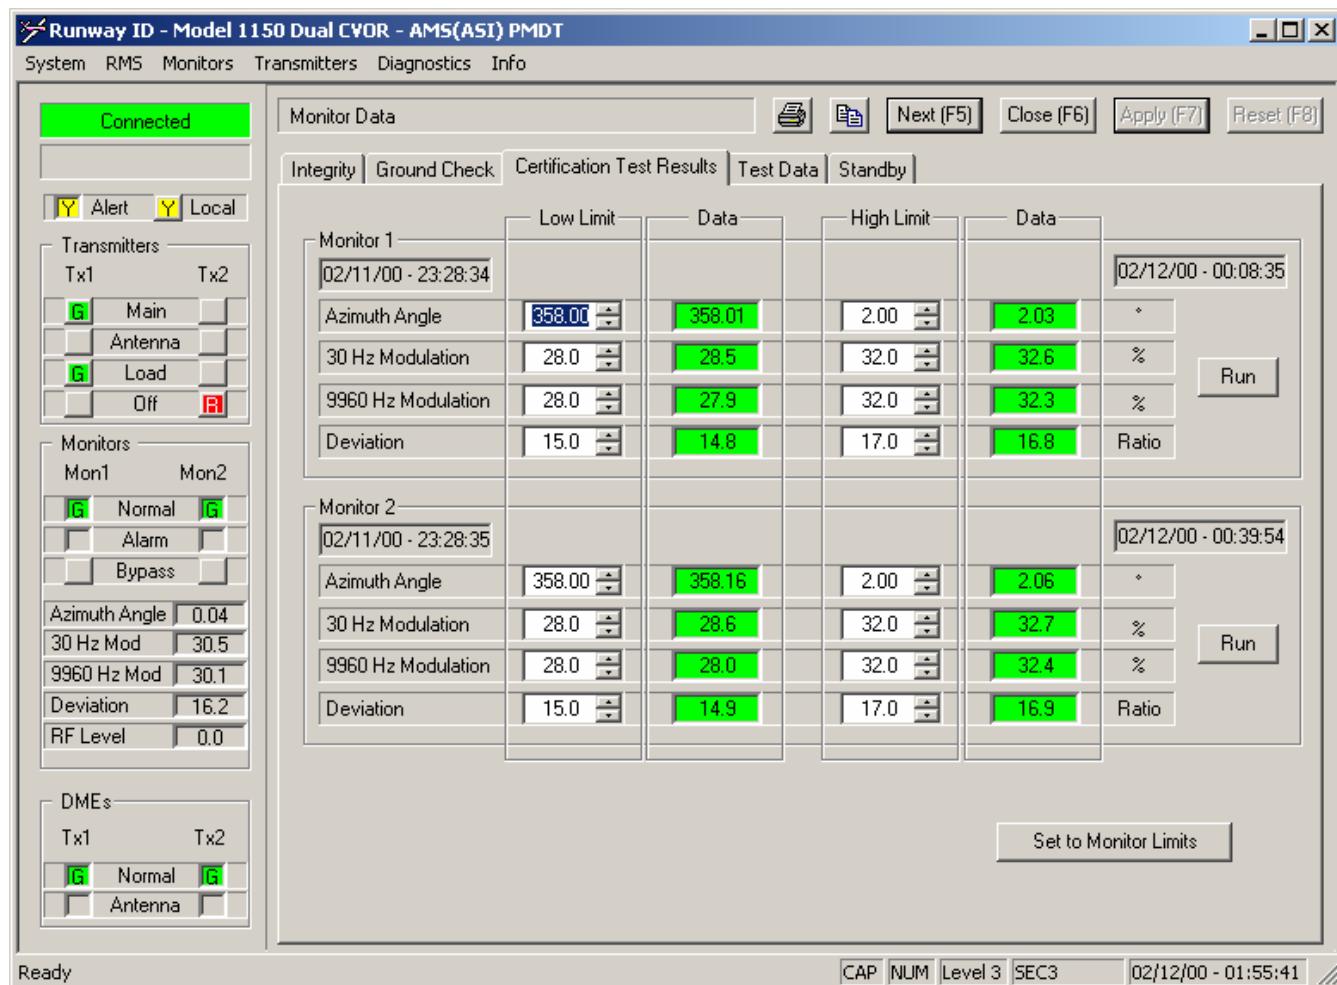


Figure 3-25. Certification Test Results Screen

<b>Table 3-5. Monitor Certification Test Criteria</b>		
<b>TEST CASE/ PARAMETER</b>	<b>TEST GENERATOR SETTING</b>	<b>PASS CRITERIA CERTIFICATION</b>
Alarm High Test:  Azimuth Angle 30 Hz Modulation 9960 Hz Modulation FM Deviation	High Alarm Limit High Alarm Limit High Alarm Limit High Alarm Limit	High Alarm Limit " 0.2 degrees High Alarm Limit "1% High Alarm Limit "1% High Alarm Limit " 0.2 Ratio
Alarm Low Test:  Azimuth Angle 30 Hz Modulation 9960 Hz Modulation FM Deviation	Low Alarm Limit Low Alarm Limit Low Alarm Limit Low Alarm Limit	Low Alarm Limit "0.2 degrees Low Alarm Limit "1% Low Alarm Limit "1% Low Alarm Limit " 0.2 Ratio

### 3.4.2.11.1.3 VOR Ground Check Data Screen


Refer to Figure 3-28. This screen provides a control to start a VOR Ground Check and display of the data from the ground check. The 1150 CVOR provides the ability to perform a ground check. The ground check requires the use of the 012616-1003, Audio Generator CCA.

The monitor controls the RS422 data to the Ground Check Switch Assy to rotate the position of the CVOR from the normal position in 22.5 degree increments. At each of these positions the Monitor measures the signal and computes the error for that position. When all 16 positions have been measured then a Fourier Analysis is computed and the resulting errors submitted for display. The outcome of the Fourier analysis are Duantal, Quadrantal, Octantal and Bias errors. Duantal error has one maximum and one minimum in 360 degrees around the CVOR. Similarly Quadrantal error has two peaks and two minimums around the 360 degrees. The Octantal Error has four peaks and four minimums around the CVOR. The Bias error is the average azimuth shift of the CVOR station.

The Station error is a plot of the errors from the data in the Station Error column of data. The FFTs errors are the individual Duantal, Quadrantal, Octantal and Bias errors. The FFT sum is the summation of the FFT errors. When performed correctly the FFT sum plot should look like the Station error plot.

By selecting one of the graph options the data appears on the graph along with the legend (If checked) for that data. Pressing the advanced button will display the Advanced Ground Check screen which allows viewing a larger graph, printing and copying the graph to a file.


Note: The Nominal Monitor Angle must be set in the Monitors>>Configuration>>Alarm Limits screens. Jumper E3 on the 012616-1003 must be removed.

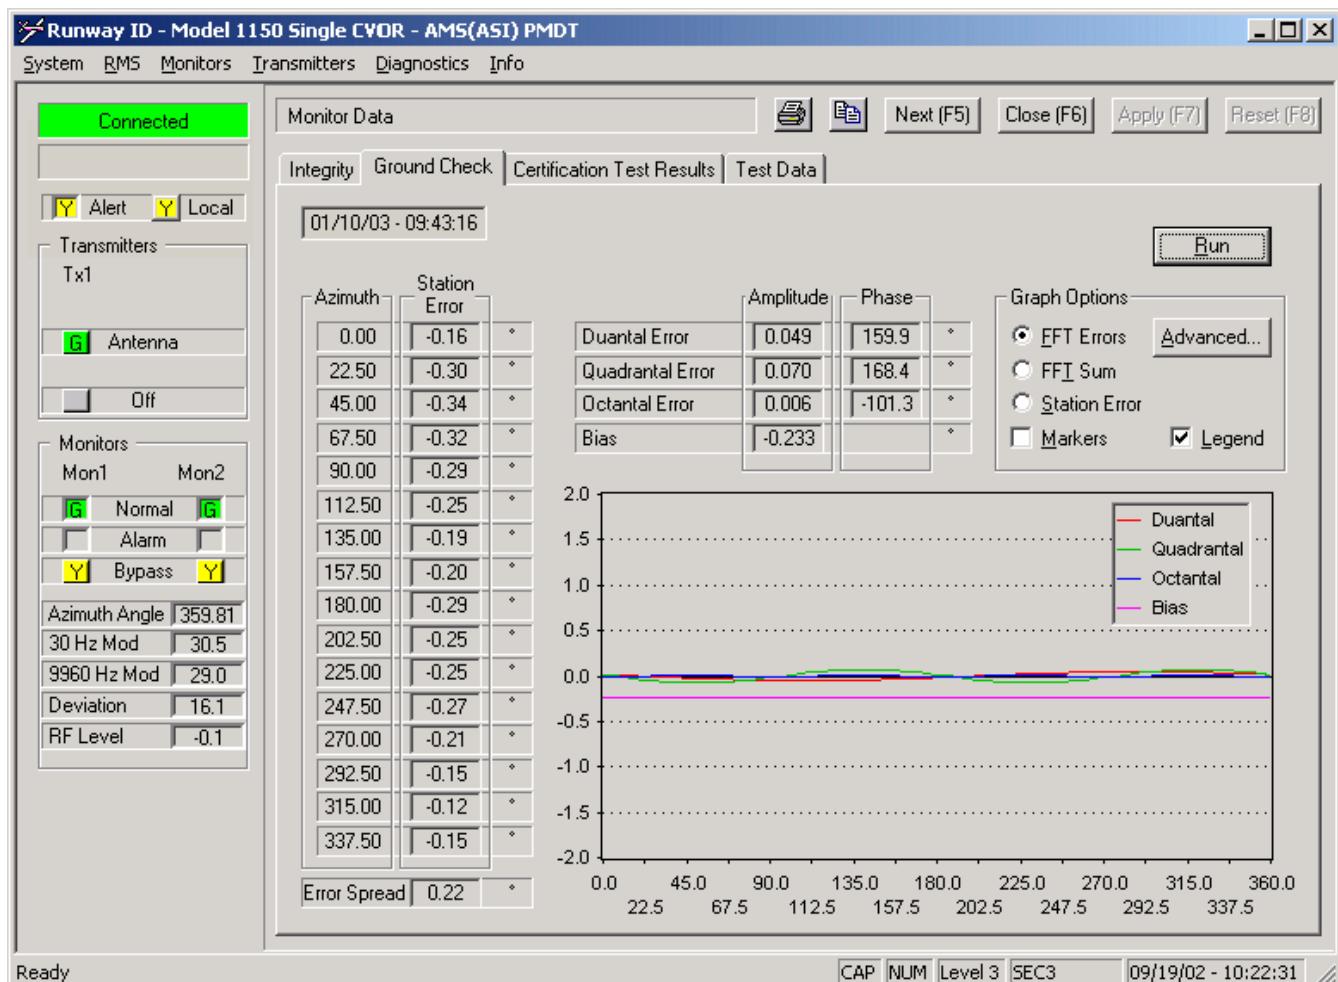

**Figure 3-26. Ground Check Screen**

### 3.4.2.11.1.4 VOR Ground Check Data Advanced Screen

Refer to Figure 3-27. This screen shows VOR Ground Check Data in more detail than the previous Ground Check screen. By selecting one of the graph options the data appears on the graph along with the legend (If checked) for that data. By pointing and clicking the print button the graph will be printed on the current Windows printer. Selecting the Copy button will direct the technician to store the data to a file.

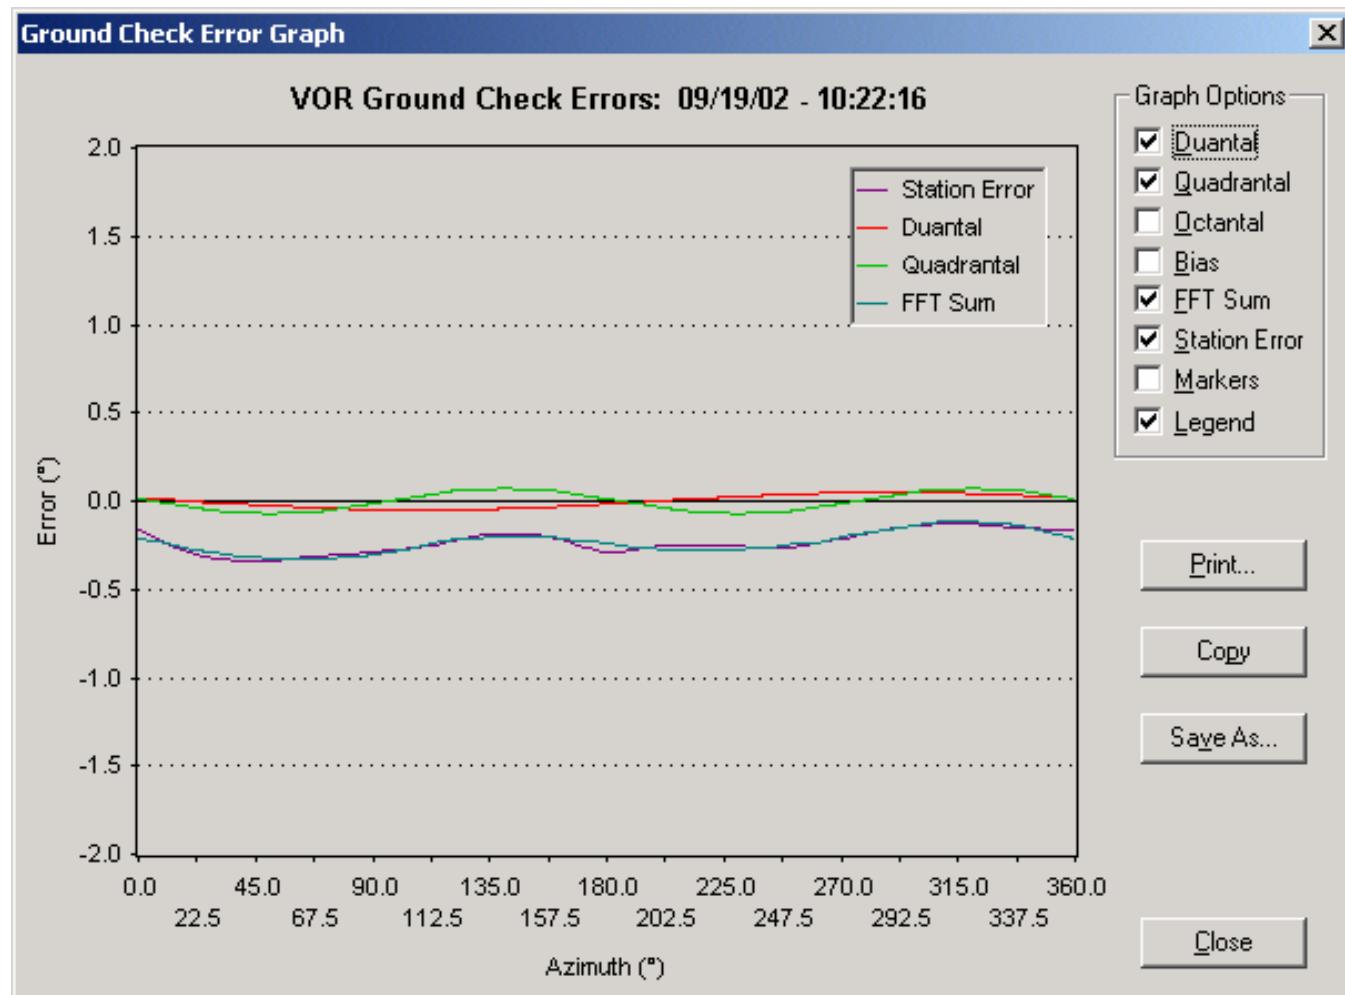


**Figure 3-27. Advanced Ground Check Screen**

### 3.4.2.11.1.5 VOR Fault History Screens

Refer to Figure 3-30 and 3-31. There are two screens that provide the fault history for the last three faults. These faults caused a shutdown and transfer from the Main to the Standby Transmitter.

### 3.4.2.11.1.6 Fault History Monitor Data Screen


This screen shows the latest monitor data along with the last pre-alarm data. This pre-alarm was the last data available with no integrity alarms. The time and date is also shown for each occurrence.

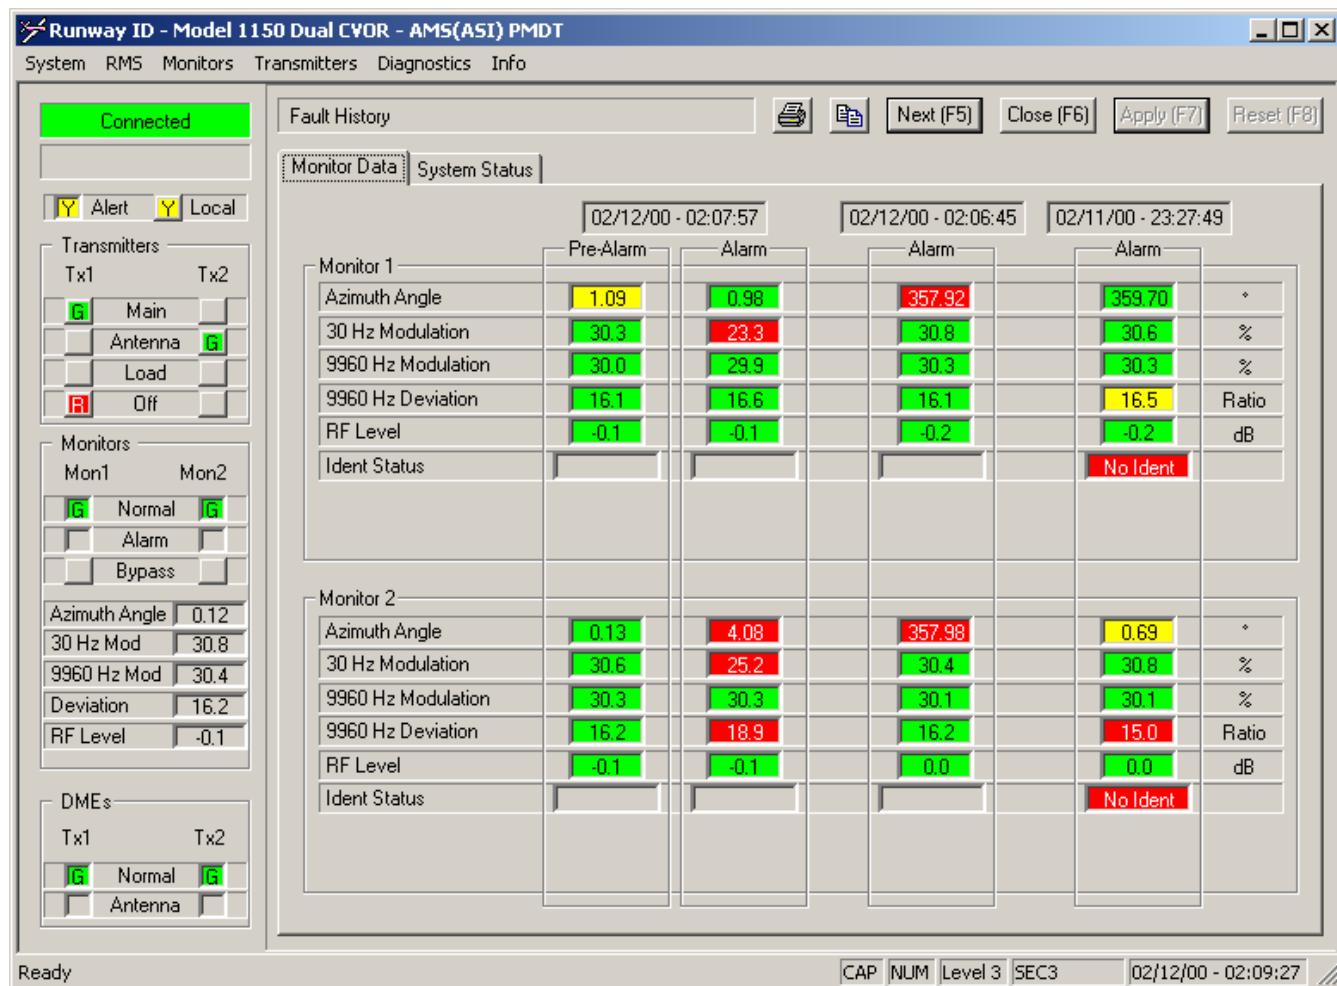

**Figure 3-28. Fault History, Monitor Data**

### 3.4.2.11.1.7 Fault History System Status Screen

This screen shows the state of the system during the last three faults. The time and date is also shown for each occurrence to allow correlation with the Fault History Monitor Data screen..

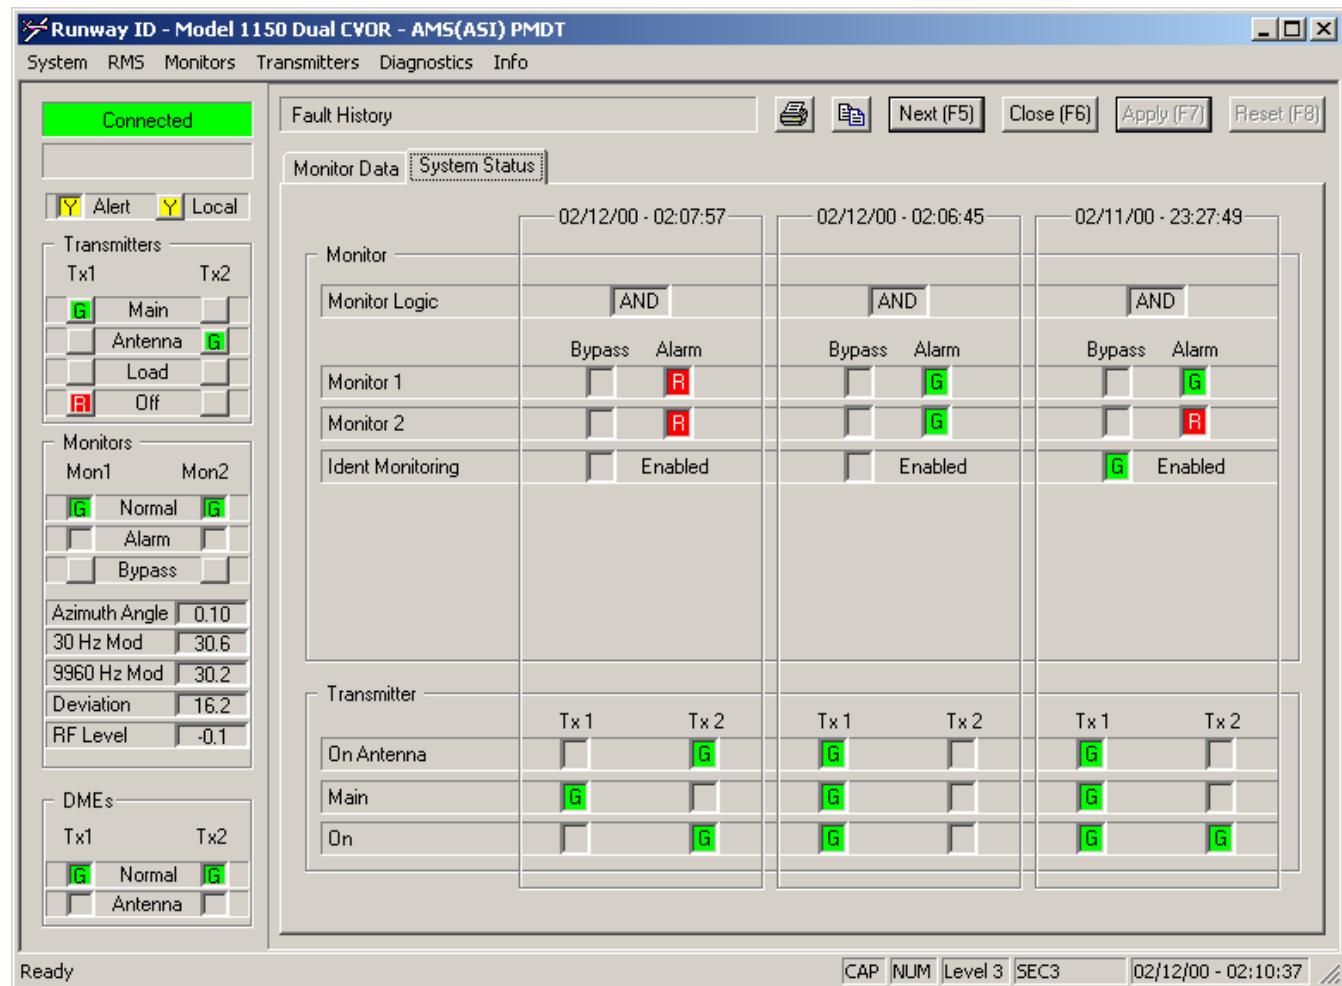


**Figure 3-29. Fault History, System Status**

### 3.4.2.12 Transmitters Data Screens

There are two screens for the transmitter data as described below. One screen is for Transmitter 1 and the other for Transmitter 2. They are identical and only Transmitter 1 Data screen is shown.

#### 3.4.2.12.1 Transmitter Data Screen

Refer to Figure 3-30. This screen displays the current transmitter data as measured by the Audio Generator and Monitor CCAs. The power level and VSWR data are measured by the Audio Generator CCA. The 1A7 CCA measures Transmitter 1 and the 1A23 measures Transmitter 2. The 1A8 Monitor CCA measures the frequency data. The 1A24 Monitor CCA measures the Transmitter 2 Frequency data.

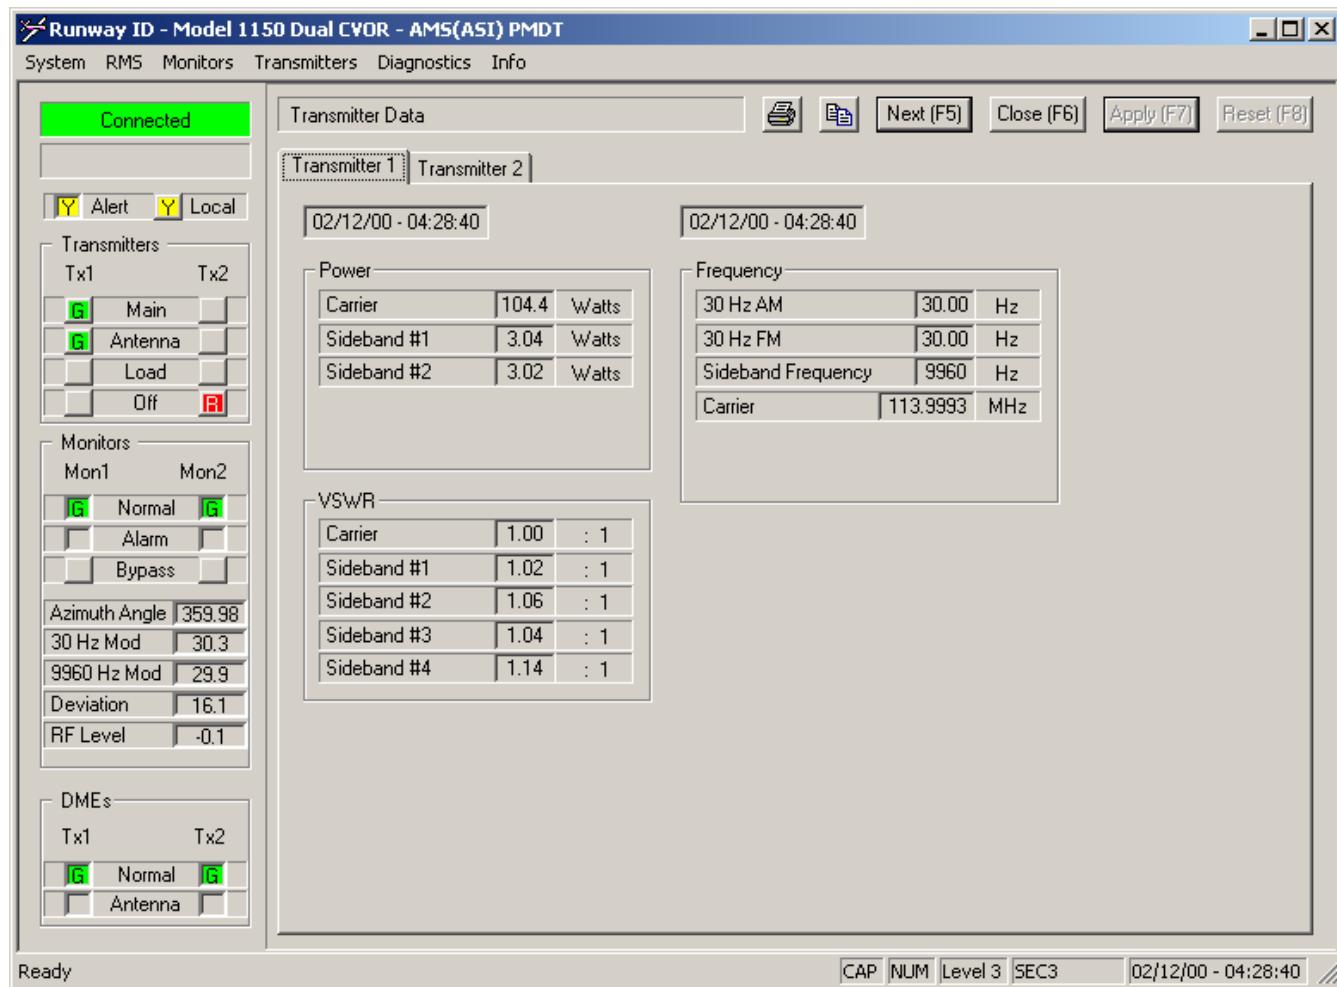

**Figure 3-30. Transmitter Data Screen**

### **3.4.2.13 Transmitters Configuration Screen**


There is one screen used for configuring the offsets and scale factors for the parameters of each of the two transmitters. Any changes made to a configuration that should remain after a power cycle or Reset, should be backed up. To backup the current configuration in RAM to EEPROM, select RMS >> Configuration Backup. Press OK at the prompt.

To save the current configuration to hard drive or diskette select System >> Configuration Save. Select the destination and file name and press Save.

To restore a configuration from disk select System >> Configuration Load, enter the file name and press Open. The status of the restore will be displayed in the bottom left corner. When completed, backup the configuration to EEPROM by selecting RMS >> Configuration Backup. Press OK at the prompt.

### 3.4.2.13.1 TX 1 & 2 Offsets & Scale Factors


Refer to Figure 3-31. This screen is used to configure the parameters of each of the two transmitters. Refer to [paragraph 3.4.2.16](#) for use of this screen.

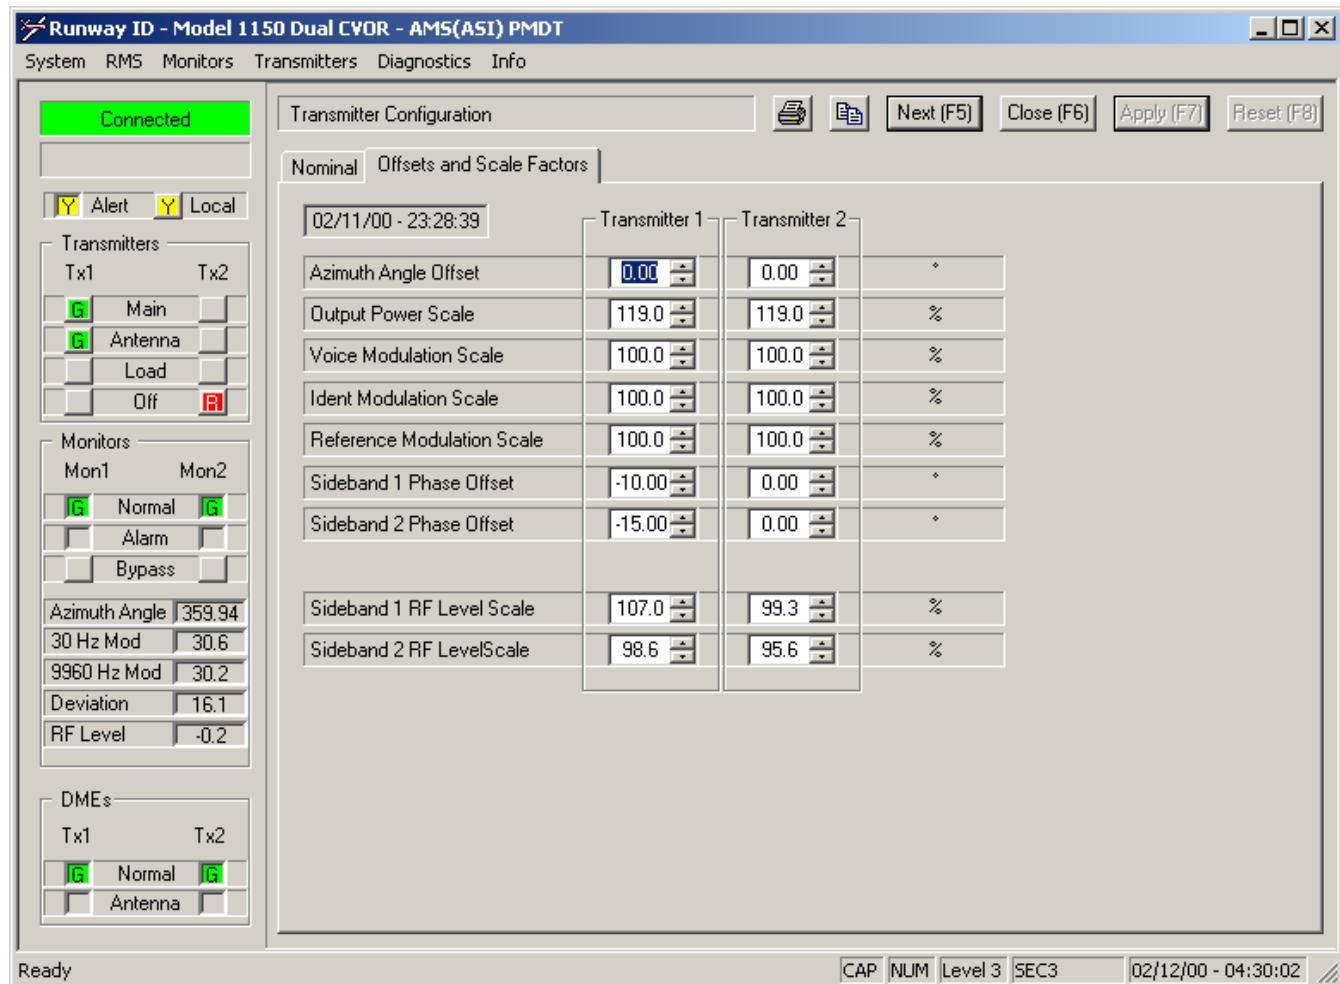

**Figure 3-31. Transmitter Offsets and Scale Factors**

### 3.4.2.14 Transmitters Nominal Screens


This screen is used to specify the transmitter waveform. The screen holds data used by the Audio Generator associated with a Transmitter to calculate the appropriate values to be placed in the D/A converters on the Audio Generator CCA. The values represent a composite waveform at TP6 on the Audio Generator CCA. **When a change is made, the change takes place once the Apply button is pressed.**

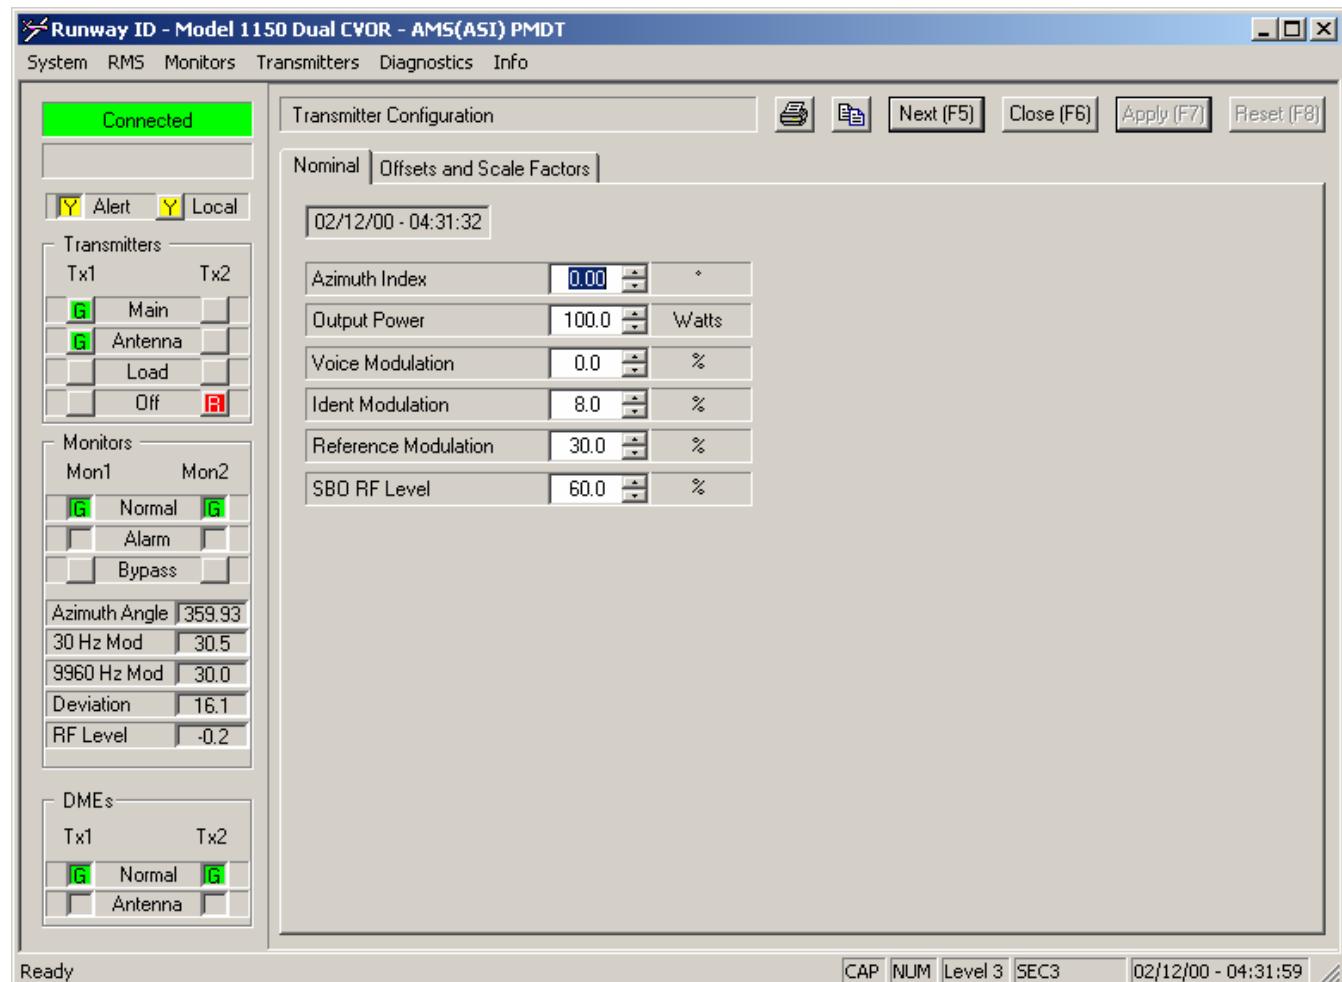

**Figure 3-32. Transmitter Nominal Screen**

### 3.4.2.15 Transmitter Commands

The Transmitter Commands menu, shown in Figure 3-33, provides direct control of transferring between the Main and Standby transmitters, as well as selecting either Tx 1 or Tx 2 specific commands, or VOR Ident commands.

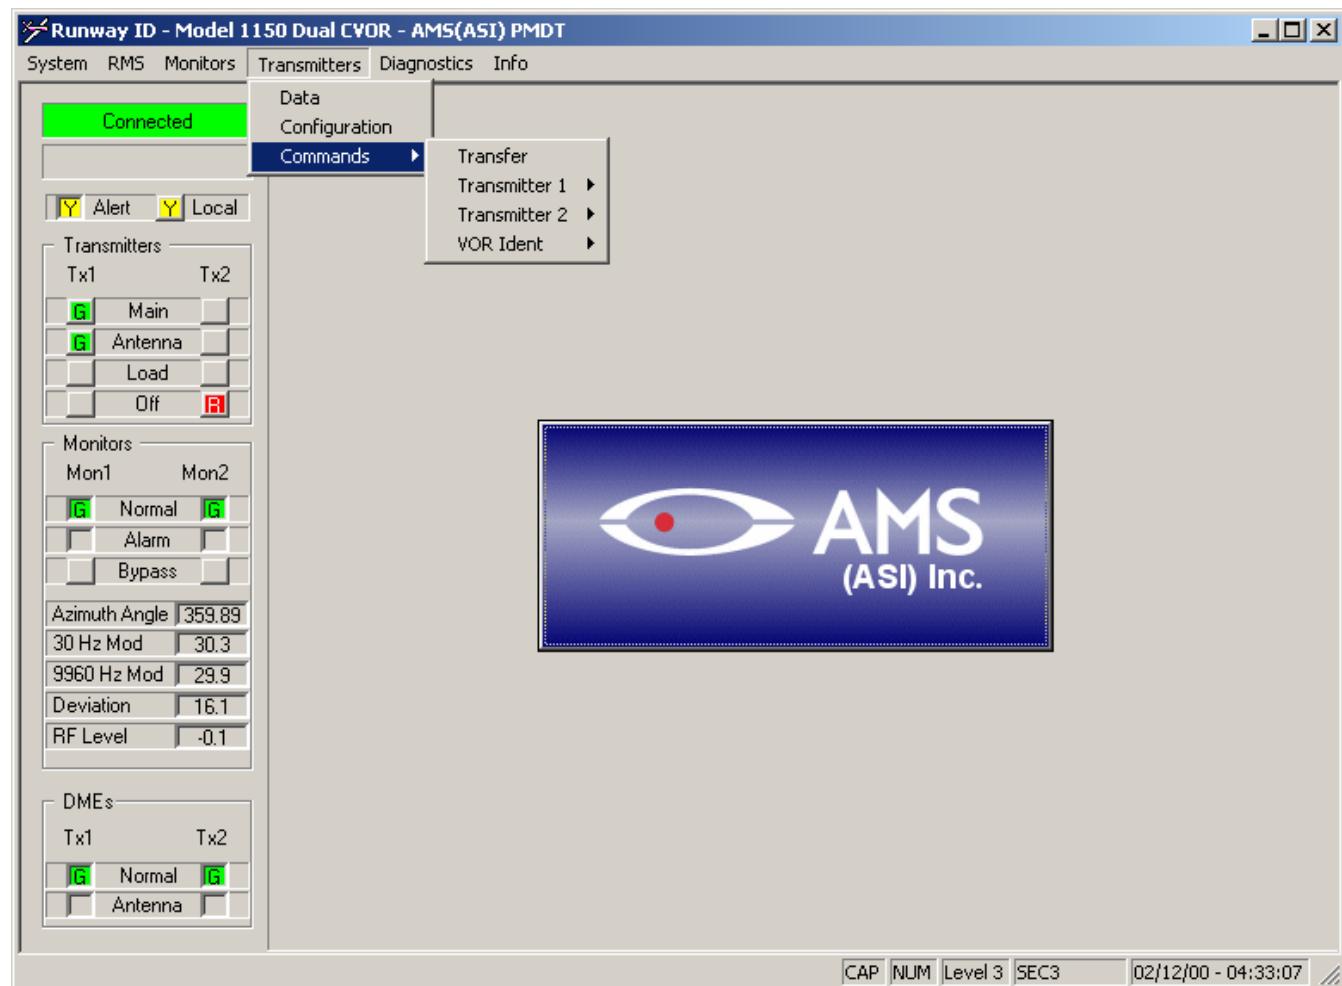

**Figure 3-33. Transmitter Commands**

## Model 1150 CVOR

The Tx 1 and Tx 2 command menus, shown in Figure 3-36, provide the following commands to the corresponding transmitter:

- Switch to Antenna
- Switch to Load
- Turn Off


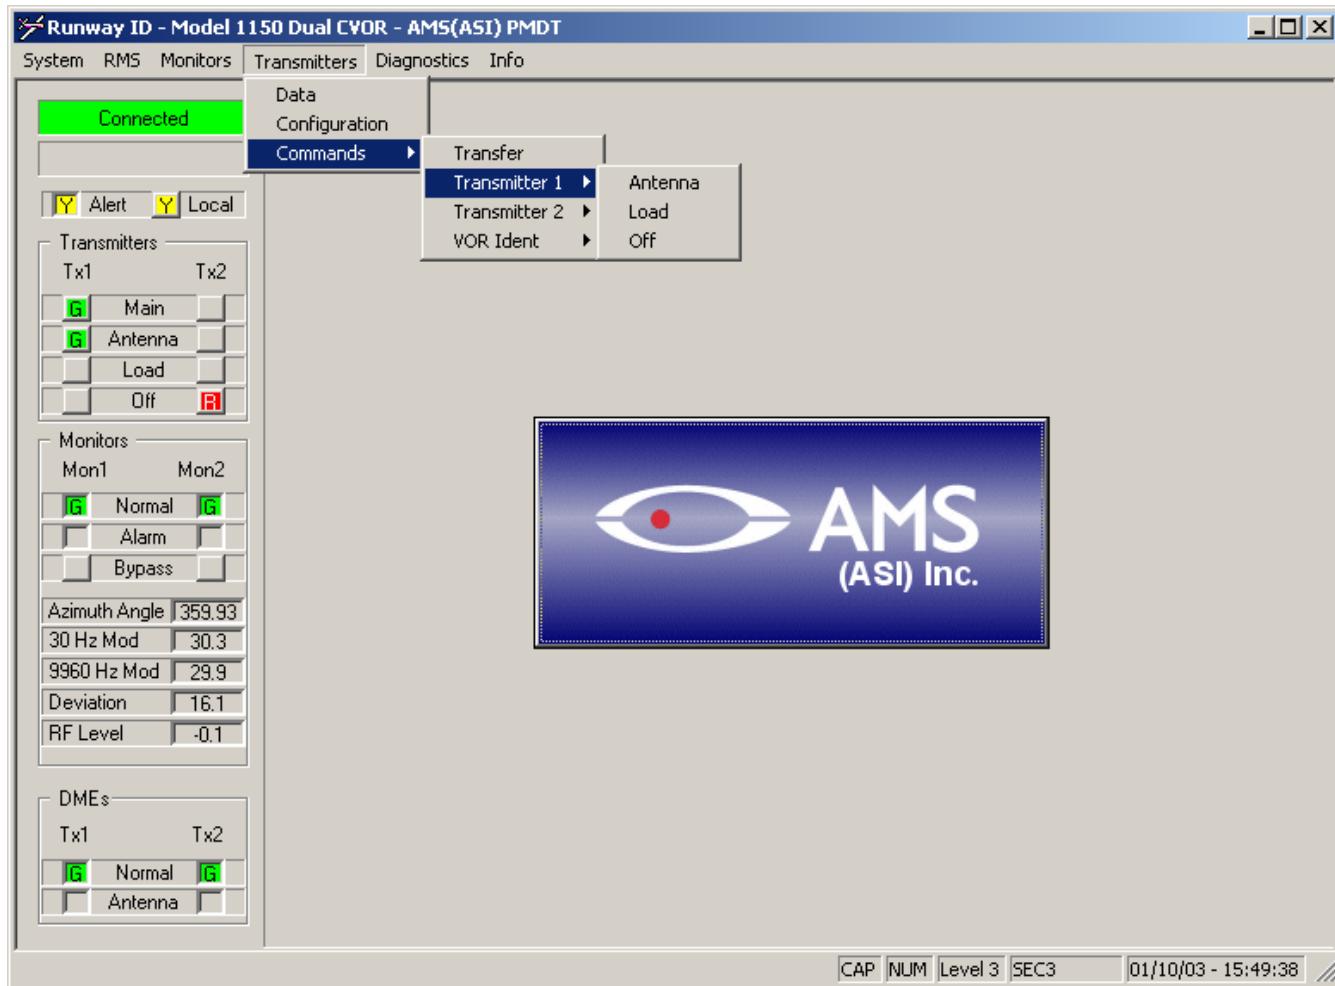


Figure 3-34. Transmitter Commands, Antenna Control

The VOR Ident command menu, shown in Figure 3-37, is used to select the Ident, either Normal, Off, or Continuous.

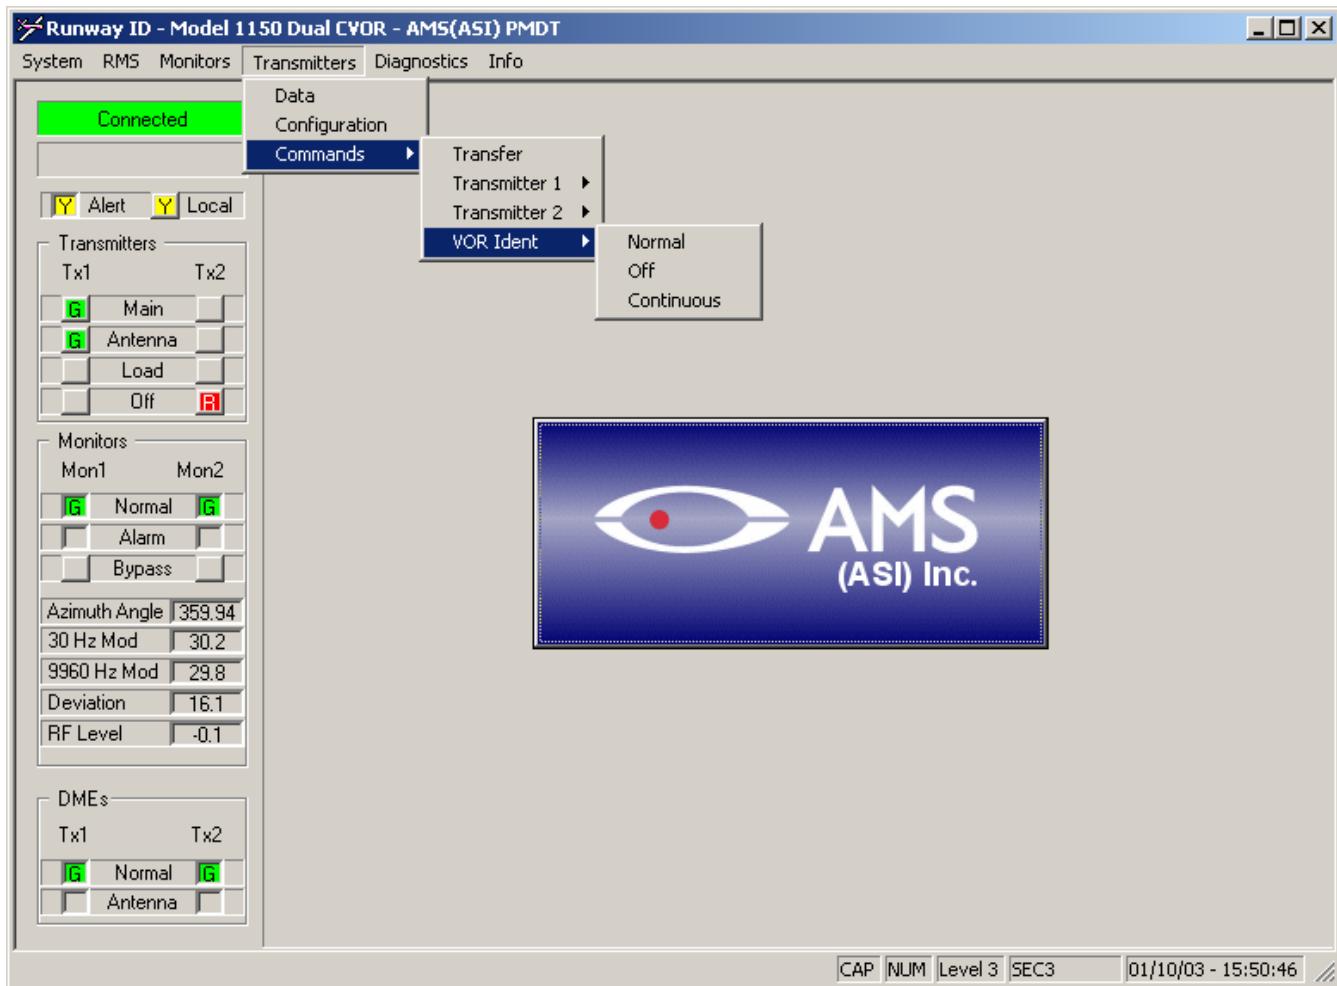

**Figure 3-35. Transmitter Ident Control**

### 3.4.2.16 Controlling the Transmitter via the PMDT

Transmitter parameters are adjusted using the Nominal Screen ([Figure 3-32](#)) and the Transmitter Offsets and Scale factors Screen ([Figure 3-31](#)). Refer to these screens for the following paragraphs.

#### 3.4.2.16.1 General Transmitter Control

With Transmitter #1 on the antenna, configure the Nominal settings for the desired signal in space. Adjust the Tx #1 offsets and scale factors to obtain this signal in space for Transmitter #1. Transfer to Transmitter #2 and adjust the Tx #2 offset and scale factors to obtain the same desired signal in space.

**NOTE:**

The Waveform is used to provide the desired setting, for example a Reference Modulation of 30%. The Transmitter offsets and scale factors allow an adjustment to obtain this actual setting.

#### **3.4.2.16.2      Change the Azimuth Index**

To affect both Transmitter #1 and Transmitter #2, select Transmitters >> Configuration >> Nominal. Adjust the Azimuth Index by selecting the parameter with the mouse then either enter the value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

To affect only one transmitter, select Transmitters >> Configuration >> Offsets and Scale Factors screen. Adjust the Transmitter 1 (or 2, as desired) Az Angle Offset by selecting the parameter with the mouse, then either enter the offset value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

#### **3.4.2.16.3      Change the CSB Output Power**

To affect both Transmitter #1 and Transmitter #2, select Transmitters >> Configuration >> Nominal. Adjust the CSB power output level by selecting the CSB Output Power parameter with the mouse then either enter the value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change. The value entered is a percentage of the maximum available for the CSB amplifier. A value of 100% represents approximately 125 Watts. Note that the power change in the Nominal Screen also affects the Sideband RF Level.

To affect only one transmitter (so that both transmitters provide the same level), select Transmitters >> Configuration >> Offsets and Scale Factors screen. Adjust the Transmitter 1 (or 2, as desired) Power Output level by selecting the Output Power Scale parameter with the mouse then either enter the percentage value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

#### **3.4.2.16.4      Change the Voice Depth of Modulation**

To affect both Transmitter #1 and Transmitter #2, select Transmitters >> Configuration >> Nominal. Adjust the Voice Modulation Level by selecting the Voice Modulation parameter with the mouse then either enter the value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

To affect only one transmitter, select Transmitters >> Configuration >> Offsets and Scale Factors screen. Adjust the Transmitter 1 (or 2, as desired) Voice Modulation Scale Percent by selecting the parameter with the mouse, then either enter the percentage value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

### 3.4.2.16.5 Change the Identification Depth of Modulation

To affect both Transmitter #1 and Transmitter #2, select Transmitters >> Configuration>>Nominal. Adjust the ident modulation level by selecting the Ident Mod Level parameter with the mouse then either enter the value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

To affect only one transmitter, select Transmitters >> Configuration >> Transmitter 1 (or 2, as desired) Offsets and Scale Factors screen. Adjust the ident modulation level by selecting the Ident Level Scale parameter with the mouse then either enter the percentage value or use the spin controls. Press the Apply button (or the (F7" key) to apply the change.

### 3.4.2.16.6 Change the Reference Depth of Modulation

To affect both Transmitter #1 and Transmitter #2, select Transmitters >> Configuration >> Nominal. Adjust the Reference Modulation Level by selecting the Reference Modulation parameter with the mouse then either enter the value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

To affect only one transmitter, select Transmitters >> Configuration >> Offsets and Scale Factors screen Adjust the Transmitter 1 (or 2, as desired) Reference Modulation Scale Percent by selecting the parameter with the mouse, then either enter the percentage value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change.

### 3.4.2.16.7 Change the Sideband Power Level


To affect both Transmitter #1 and Transmitter #2, select Transmitters >> Configuration >> Nominal. Adjust the SBO power output level by selecting the SBO RF Level parameter with the mouse then either enter the value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change. The value entered is a percentage of the maximum available for the SBO amplifier. Note that the power change of the Output Power level in the Transmitters >> Configuration >> Nominal Screen also affects the SBO RF Level.

To affect only one transmitter, select Transmitters >> Configuration >> Offsets and Scale Factors screen. Adjust the Transmitter 1 or 2 (as required) Sideband 1 RF level by selecting the Sideband 1 RF Level Scale parameter with the mouse then either enter the percentage value or use the spin controls. Press the Apply button (or the "F7" key) to apply the change. Note that a value of 100% scales the Sideband 1 power output by 1.0, and a value of 70.7% scales the Sideband 1 power output by 0.5 (since this is a Voltage Scale Factor). Sidebands 2,3 and 4 can also be adjusted individually in this screen.

### 3.4.2.17 Diagnostics Screen.

#### 3.4.2.17.1 Power-Up Diagnostics Results


Refer to Figure 3-36. This screen shows the results of the most recent power-up diagnostics test. Each time an embedded software processor is reset or powered up, it performs a series of internal diagnostic tests to verify its integrity. The results of those tests are displayed on this screen for the RMS, Monitors and Audio Generators. CPU Functional tests are instruction and data fetches, bit operations, and math operations. RAM checks are extensive tests on individual bit positions of all RAM. PROM checks are checksum calculations and comparison against checksums established at the factory. EEPROM checks are checksum validations of data held in EEPROM. Green indications are normal. If a module indicates a power-up diagnostic failure, it should be replaced.

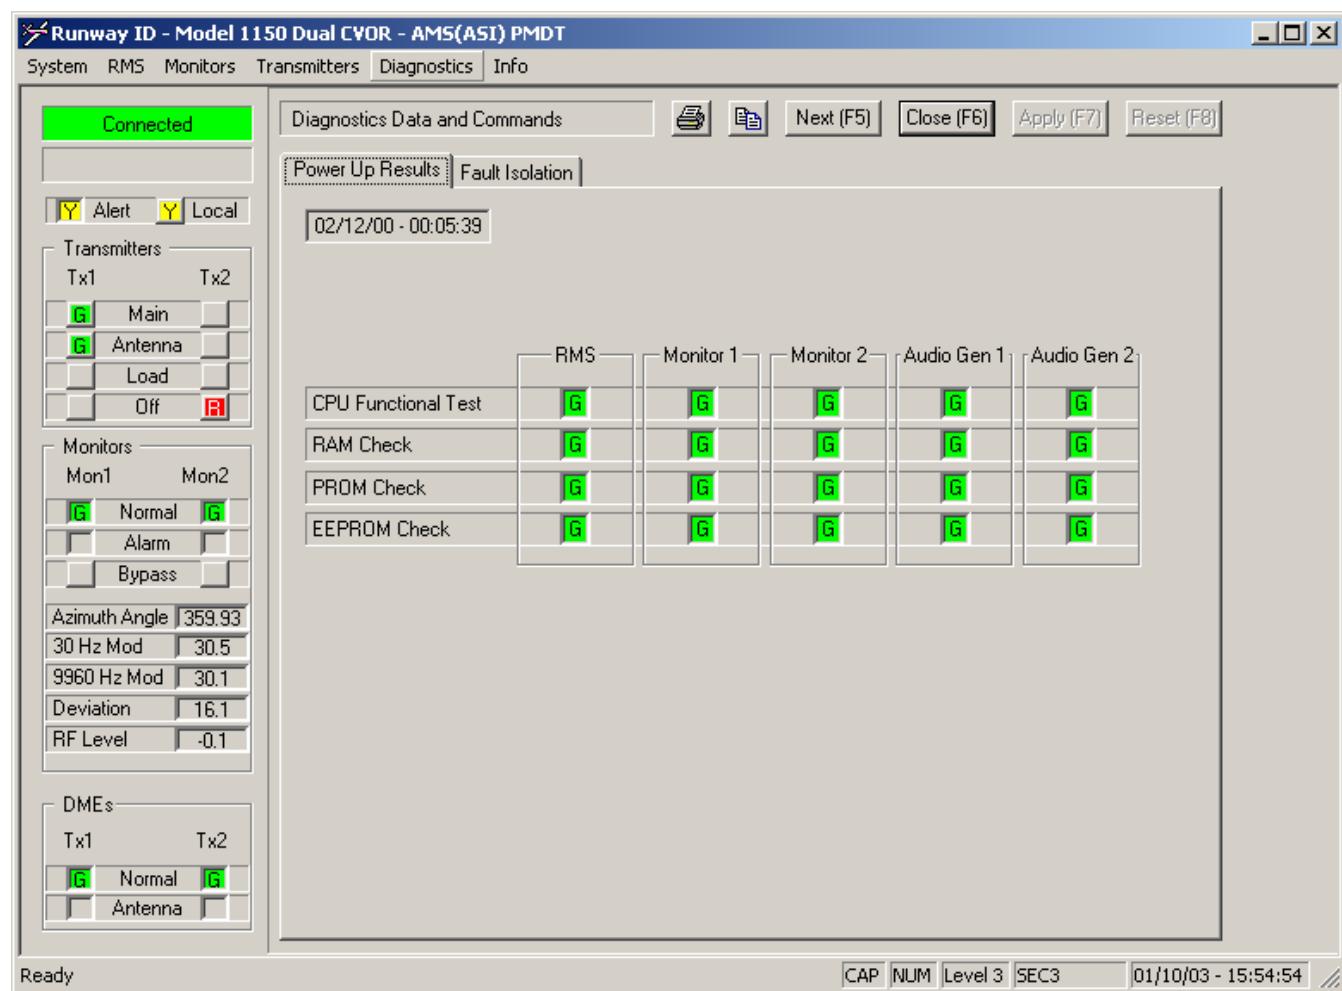

**Figure 3-36. Power Up Diagnostics Results**

### 3.4.2.17.2 Fault Isolation Test Results

Refer to Figure 3-37. This screen shows the results of the most recent Fault Isolation Test. Pressing the “Run Full Diagnostic”, which is only available in Local Mode from Security Level 3 or higher, causes the system to execute the complete built-in diagnostics. This requires the system to be NOTAM’d off. Pressing the “Run On Air Diagnostics”, which is available either locally or remotely from Security Level 2 or higher, causes the system to execute a subset of the full diagnostics that does not require the system to be NOTAM’d off. Once started, the diagnostics can be canceled by the user with the “Cancel” button. The results are shown in the Fault Results window at the bottom of the screen.

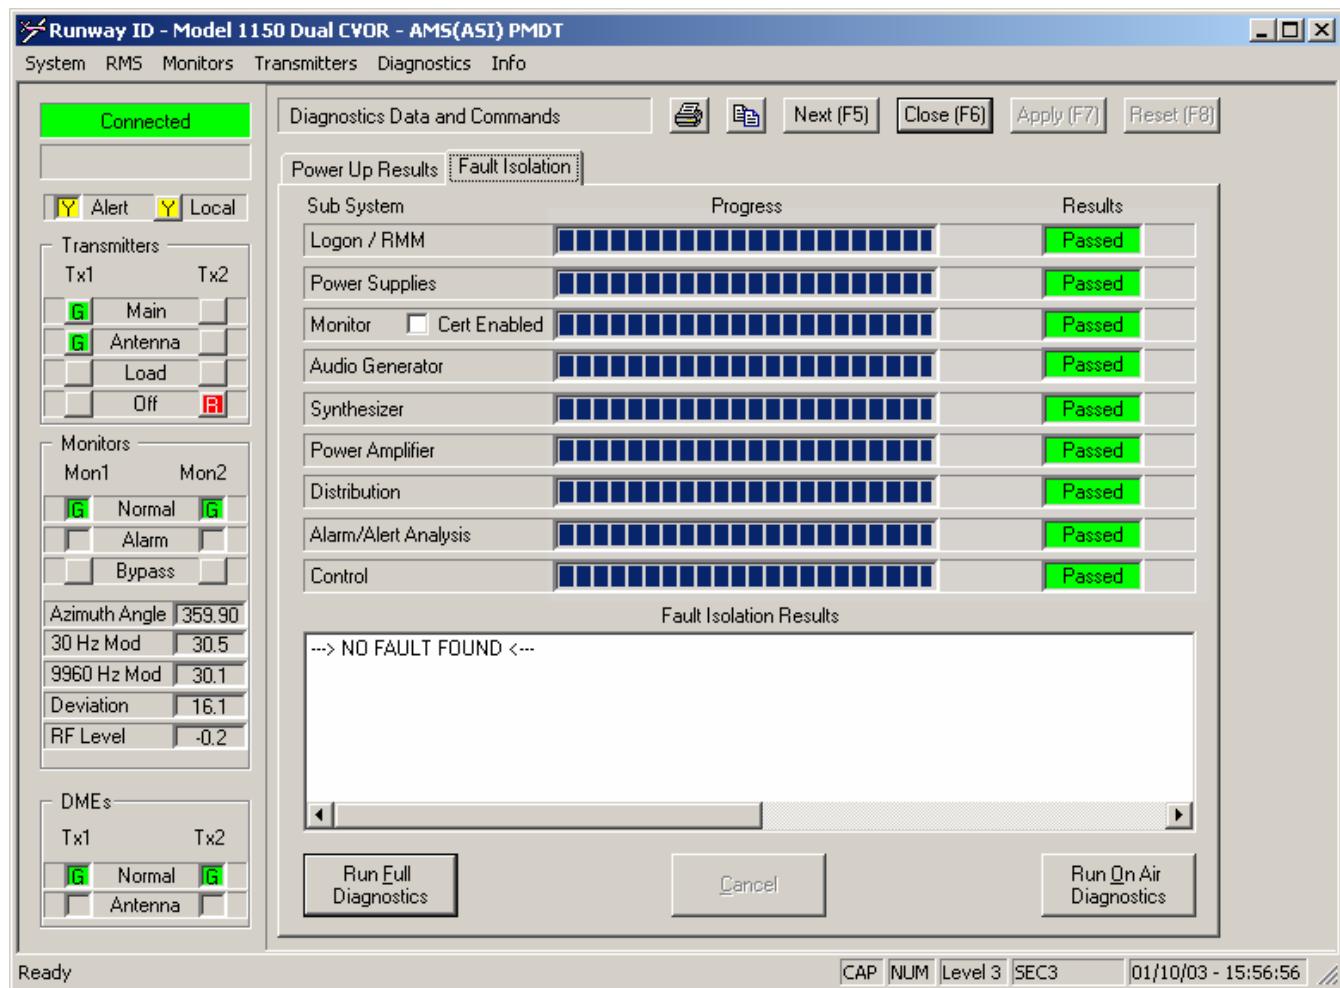

**Figure 3-37. Fault Isolation Test Results**

## 3.5 RMM

The RMM uses the same hardware and software as the PMDT but interconnects to the equipment via a modem and a telephone circuit. The software screens and operator selection of this usage of the PMDT are described above in the PMDT paragraphs

### **3.6 STATUS PANEL/ POWER CONTROL**

The STATUS PANEL mounts on the face of the VOR at the top equipment cabinet. The POWER CONTROL is on the face of the VOR at the lower part of the cabinet. The functions of each switch and indicator are described in Table 3-6.

**Table 3-6. Dual Equipment Control Panel Functions**

<b>POWER CONTROL</b>	
TX1 AC	AC Circuit Breaker - In the A1" position powers AC and also charges the Battery Set.
TX1 DC	DC Circuit Breaker - In the A1" position connects the BCPS to the battery.
TX2 AC	AC Circuit Breaker - In the A1" position powers AC and also charges the Battery Set
TX2 DC	DC Circuit Breaker - In the A1" position connects the BCPS to the battery.
<b>STATUS PANEL</b>	
Integral Normal1 Indicators	Illuminates to indicate the normal condition of monitor 1. During an AC Failure this LED will cycle on and off.
Integral Alarm 1 Indicators	Illuminates to indicate the alarm condition of monitor 1.
Integral Normal 2 Indicators	Illuminates to indicate the normal condition of monitor 2. During an AC Failure this LED will cycle on and off.
Integral Alarm 2 Indicators	Illuminates to indicate the alarm condition of monitor 2.
Integral Bypass Switch and Indicator	The indicator illuminates when bypass is active.

### **3.7      REMOTE MAINTENANCE SUB-SYSTEM (RMS) CCA (1A13)**

Refer to Table 3-7 for the indicators and controls on the RMS CCA.

<b>Table 3-7. RMS CCA (1A13) Controls and Indicators</b>	
CPU Fault	This LED when lit (RED) indicates that the RMS processor has reset due to power failure or memory problems within the RMS CCA.

### **3.8      MONITOR CCA (1A8, 1A24)**

Refer to Table 3-8 for the indicators and controls on the Monitor CCA.


<b>Table 3-8. Monitor CCA (1A8, 1A24) Controls and Indicators</b>	
Integral Fault LED	Illuminated when the Monitor CCA detects an Integral Fault.
TP1	Detected Voice+ Signal from differential transformer driver
TP2	Detected Voice- Signal from differential transformer driver
TP3	Detected Audio Signal Level
TP4	Detected Notch Data. This signal includes the 720, and 1440 Hertz signals and will have a “notch” when an antenna is inoperative.
TP5	Composite Audio. This includes DC, 30 Hz, 9960 Hertz and Ident signals.
TP6	30 hertz AM Signal. This is a half rectified 30 Hz signal used for measurement of the 30 AM level
TP7	This is 30 Hertz AM square wave. This signal enters the uP for angle measurement.
TP8	Ident Signal Level. This is the 1020 Hz signal after the bandpass filter. When keying is detected the 1020 Hz sine wave is present.
TP9	This signal is the 1020 signal square wave signal.
TP10	Ident Modulation level Voltage. This voltage peak when keying is present and decays when keying stops.
TP11	9960 Signal after the bandpass filter

**Table 3-8. Monitor CCA (1A8, 1A24) Controls and Indicators**

TP12	9960 Signal after the One-Shot multivibrator..
TP13	30 hertz FM Signal. This is a half rectified 30 Hz signal used for measurement of the Deviation ratio.
TP14	9960 Hertz signal level. This is a DC voltage representing the level of the 9960 Hertz Signal.
TP15	This is 30 Hertz FM square wave. This signal enters the uP for angle measurement.
TP0 (GND)	This test point is available for scope or voltmeter ground.


### **3.9      SYNTHESIZER CCA (1A4, 1A20)**

Refer to Figure 3-38 and Table 3-9 for the indicators and controls on the Synthesizer CCA.

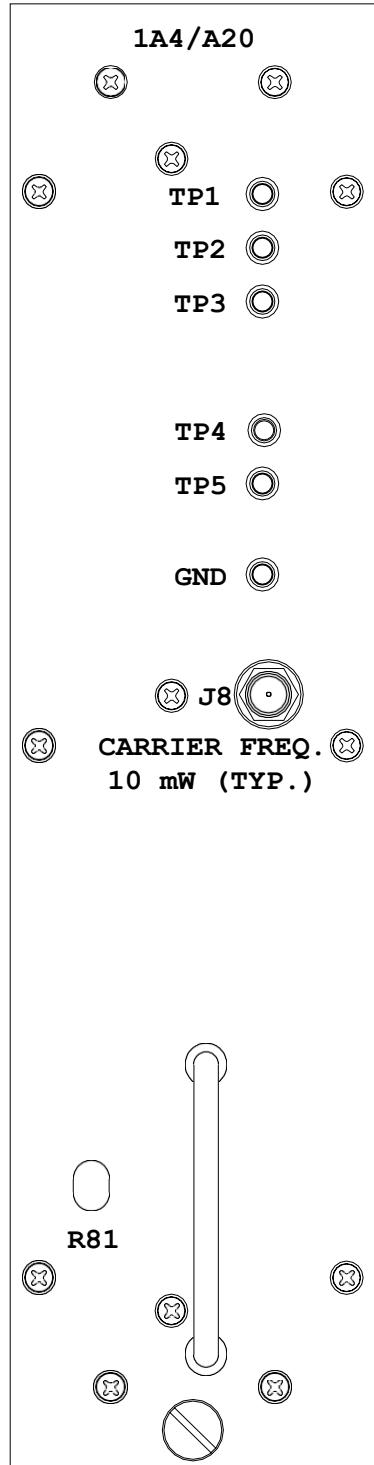

1150-610  
**Figure 3-38. Synthesizer Front Panel**

## **Model 1150 CVOR**

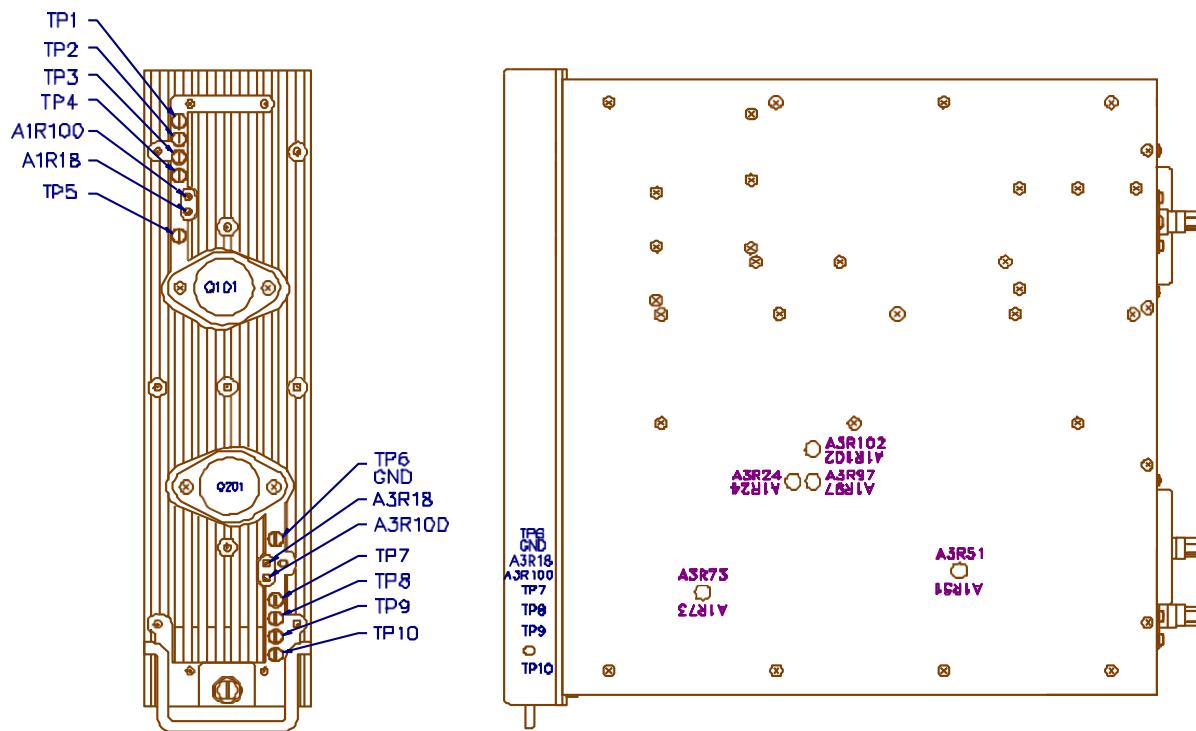

**Figure 3-39. Sideband Generator Controls**

**Table 3-9. Synthesizer CCA (1A4, 1A20) Controls and Indicators**

TP1	Lower Sideband Quadrature Signal. When Sidebands 1 and 2 (1A4, 1A21) are in phase and equal amplitude this signal is a triangular waveform.
TP2	Upper Sideband Quadrature Signal. When Sidebands 3 and 4 (1A5, 1A22) are in phase and equal amplitude this signal is a triangular waveform.
TP3	Carrier Phase Error Voltage
TP4	Carrier Phase Control Voltage
TP5	CVOR Sideband Manual Phase Control Voltage
TP6	This test point is available for scope or voltmeter ground

**Table 3-10. Sideband Generator (1A5, 1A6, 1A21, 1A22) Controls and Indicators**

TP1	This test point is the Sideband 1 (1A5, 1A21) or Sideband 3 (1A6, 1A22) Dynamic Phase Control Voltage.
TP2	This test point is the Sideband 1 (1A5, 1A21) or Sideband 3 (1A6, 1A22) Sideband Manual Phase Control Voltage. This is a DC voltage representing the phaser control voltage.
TP3	This test point is the Sideband 1 (1A5, 1A21) or Sideband 3 (1A6, 1A22) Mean Phase Control Voltage. This is a DC voltage representing the mean (slow) phaser control voltage.
TP4	This test point is the Sideband 1 (1A5, 1A21) or Sideband 3 (1A6, 1A22) Mean Phase Error Voltage. This is a DC voltage representing the mean (slow) error control voltage. If the control loop is locked this voltage should be nearly 0 volts.
TP5	This test point is the detected output of the Sideband 1 (1A5, 1A21) or Sideband 3 (1A6, 1A22) output. This signal is a rectified 360 Hz waveform in CVOR mode.
TP6	This test point is the detected output of the Sideband 2 (1A5, 1A21) or Sideband 4 (1A6, 1A22) output. This signal is a rectified 360 Hz waveform in CVOR mode.
TP7	This test point is the Sideband 2 (1A5, 1A21) or Sideband 4 (1A6, 1A22) Mean Phase Error Voltage. This is a DC voltage representing the mean (slow) error

**Table 3-10. Sideband Generator (1A5, 1A6, 1A21, 1A22) Controls and Indicators**

	control voltage. If the control loop is locked this voltage should be nearly 0 volts.
TP8	This test point is the Sideband 2 (1A5, 1A21) or Sideband 4 (1A6,1A22) Mean Phase Control Voltage. This is a DC voltage representing the mean (slow) phaser control voltage.
TP9	This test point is the Sideband 2 (1A5, 1A21) or Sideband 4 (1A6,1A22) Sideband Manual Phase Control Voltage. This is a DC voltage representing the phaser control voltage.
TP10	This test point is the Sideband 2 (1A5, 1A21) or Sideband 4 (1A6,1A22) Dynamic Phase Control Voltage.
A1/A3 R18	This adjustment point is the Sideband Carrier Balance Adjustment. It adjusts the balance of every other peak in CVOR.
A1/A3 R24	This adjustment point is the Sideband Carrier Balance Adjustment. It adjusts the balance of every other peak in CVOR.
A1/A3 R51	This adjustment point is the Phase Detector DC offset Adjustment.
A1/A3 R73	This adjustment point is the Sideband Mean Phase Control Voltage Set Adjustment.
A1/A3 R97	This adjustment point is the Sideband Phase zero control.
A1/A3 R100	This adjustment point is the Sideband Detector Calibration Adjustment. It adjusts the power level displayed on the PMDT.
A1/A3 R102	This adjustment point is the Sideband Dynamic Phase Control Voltage Set Adjustment.
GND	This test point is available for scope or voltmeter ground.

## 4 STANDARDS AND TOLERANCES

### 4.1 INTRODUCTION

Table 4-1 is a list of equipment parameters, their standards, and their limits. In the Parameter column, each parameter measured or adjusted is listed. The paragraphs of [Section 9](#) that describe the procedures used to establish the values of the parameters are listed in the Reference Paragraph column. In the Standard column are listed the optimum values of the parameters. The Tolerance column is the maximum possible deviation, above or below the standard value, when the CVOR equipment is commissioned initially or subsequent to any modification.

**Table 4-1. Standards and Tolerances**

<u>Parameter</u>	<u>Standard</u>	<u>Tolerance</u>	<u>Reference Paragraph</u>
a. Max Antenna VSWR	1.0:1	~1.2:1	<a href="#">6.2.7</a>
b. Power Output (1) Carrier	Value established by flight inspection	50% of standard (-3dB)	<a href="#">6.2.3</a>
			<a href="#">9.7.16.2</a>
(2) Sideband	For 30% AM	Nominal, ±2%	<a href="#">9.7.16.2</a>
c. Frequencies (1) Carrier (2) 9960 Hz (3) 30 Hz Variable (4) 30 Hz Reference (5) Ident (6) Ident (Dot Length)	Assigned Freq.	Nominal, ±0.0005%	<a href="#">6.2.4</a>
	9960 Hz	±1%	<a href="#">6.2.6</a>
	30 Hz	±1%	<a href="#">6.2.6</a>
	30 Hz	±1%	<a href="#">6.2.6</a>
	1020 Hz	±20 Hz	<a href="#">6.2.13</a>
	100 ms	±5 ms	
d. Modulation (1) 30 Hz (2) 9960 Hz (3) 9960 Hz Deviation (4) Ident (5) Voice	30%	±2%	<a href="#">6.2.5</a>
	30%	±2%	<a href="#">6.2.5</a>
	16:1	±1	<a href="#">6.2.5</a>
	5%	±1%	<a href="#">6.2.13</a>
	30%	+0,-2%	
e. Reflected Powers (1) Reference VSWR	1.0:1	~1.2:1	<a href="#">6.2.7,</a> <a href="#">6.3.1.8</a>

**Table 4-1. Standards and Tolerances**

<b><u>Parameter</u></b>	<b><u>Standard</u></b>	<b><u>Tolerance</u></b>	<b><u>Reference Paragraph</u></b>
(2) Sideband VSWR	1.0:1	~1.2:1	6.2.7, 6.3.1.8
f. Monitor Alarms			
(1) 30 Hz	30% $\pm$ 2%	$\pm$ 1%	6.2.10
(2) 9960 Hz	30% $\pm$ 2%	$\pm$ 1%	6.2.10
(3) 9960 Hz Deviation	16:1 $\pm$ 1	$\pm$ 0.2	6.2.10
(4) Azimuth Shift	1 degree	$\pm$ 0.2 degree	6.2.10
g. Power Supply Limits			
(1) AC Voltage	115/230 Vac	$\pm$ 15%	
(2) DC Voltage	48 Vdc	$\pm$ 10%	
h. Monitor 1 Test Generator			6.2.9
(1) Azimuth Angle	Established Monitor Radial	$\pm$ 0.2°	9.7.20.1
(2) 30 Hz AM Modulation	30%	29 to 31%	9.7.20.2
(3) 9960 Hz Modulation	30%	29 to 31%	9.7.20.3
(4) 9960 Hz Deviation	16.0	15.6 to 16.4	9.7.20.4
i. Monitor 2 Test Generator			6.2.9
(1) Azimuth Angle	Established Monitor Radial	$\pm$ .2°	9.7.20.1
(2) 30 Hz AM Modulation	30%	29 to 31%	9.7.20.2
(3) 9960 Hz Modulation	30%	29 to 31%	9.7.20.3
(4) 9960 Hz Deviation	16.0	15.6 to 16.4	9.7.20.4
j. Monitor Limits			

**Table 4-1. Standards and Tolerances**

<b><u>Parameter</u></b>	<b><u>Standard</u></b>	<b><u>Tolerance</u></b>	<b><u>Reference Paragraph</u></b>
(1) Azimuth Angle Low	Executive Monitor Radial	-1°	9.7.18.1
(2) Azimuth Angle High	Executive Monitor Radial	+1°	9.7.18.2
(3) 30 Hz AM Modulation Low	Established by flight check or 30%	-2% of Standard	9.7.18.3
(4) 30 Hz AM Modulation High	Established by flight check or 30%	+2% of Standard	9.7.18.4
(5) 9960 Hz Modulation Low	Established by flight check or 30%	-2% of Standard	9.7.18.5
(6) 9960 Hz Modulation High	Established by flight check or 30%	+2% of Standard	9.7.18.6
(7) 9960 Hz Deviation Low	16.0	15.0	9.7.18.7
(8) 9960 Hz Deviation High	16.0	17.0	9.7.18.8
(9) Field Intensity Low	Established Value	-3 dB	9.7.18.9
(10) Field Intensity High	Established Value	+2 dB	9.7.18.10
k. Monitor Certification			6.2.10
(1) Azimuth Angle Low	Executive Monitor Radial -1.0°	±0.2° of Standard	9.7.19

**Table 4-1. Standards and Tolerances**

<b>Parameter</b>	<b>Standard</b>	<b>Tolerance</b>	<b>Reference Paragraph</b>
(2) Azimuth Angle High	Executive Monitor Radial +1.0°	±0.2° of Standard	9.7.19
(3) 30 Hz AM Modulation Low	Established Modulation -2%	±1% of Standard	9.7.19
(4) 30 Hz AM Modulation High	Established Modulation +2%	±1% of Standard	9.7.19
(5) 9960 Hz Modulation Low	Established Modulation -2%	±1% of Standard	9.7.19
(6) 9960 Hz Modulation High	Established Modulation +2%	±1% of Standard	9.7.19
(7) 9960 Hz Deviation Low	Established Deviation Low	±0.2	9.7.19
(8) 9960 Hz Deviation High Limit	Limit Established Deviation High Limit	±0.2	9.7.19
1. Ground Check			
(1) Maximum error (4.0° ICAO) (2° USA) spread of any ground check			6.3.1.5, 3.4.2.11.1.3

## 5 PERIODIC MAINTENANCE

### **5.1 INTRODUCTION**

This section contains instructions for system level performance testing and maintenance of the Model 1150 CVOR.

The CVOR is capable of continuous, unattended operation. Maintainability is based on a schedule consisting of a monthly, quarterly, semi-annual and annual performance checks. The performance checks are described in the following paragraphs. If maintenance action has potentially degraded system performance to such a degree that its published aircraft approach procedures may not be achieved, system performance is to be verified by a flight inspection aircraft prior to returning the facility to normal service.

### **5.2 PERFORMANCE CHECK SCHEDULE**

Table 5-1 is a summary of the various performance checks and their recommended intervals. Supervising personnel are responsible for scheduling these checks based on the recommended intervals. Information contained in table 5-1 is limited to equipment specifically covered in this manual.

**Table 5-1. Performance Check Schedule**

	<b>Performance Check</b>	<b>Reference Paragraph Standards &amp; Tolerances</b>	<b>Maintenance Procedures</b>
<b>MONTHLY</b>			
a.	Generator Test VOR Monitor	Table 4-1.h/I	6.2.9 (RMM)
b.	Certification Test VOR Monitor	Table 4-1.k	6.2.10 (RMM)
c.	Check RSCU Status/Control	N/A	6.2.11
d.	Check 30 Hz and 9960 Hz Modulation	Table 4-1.d	6.2.5 (RMM)
e.	Check Deviation Ratio	Table 4-1.d	6.2.5 (RMM)
f.	Station Ground Check	Table 4-1.l	3.4.2.11.2.1 (RMM)
<b>QUARTERLY</b>			

**Table 5-1. Performance Check Schedule**

	<b>Performance Check</b>		<b>Reference Paragraph</b>
		<b>Standards &amp; Tolerances</b>	<b>Maintenance Procedures</b>
a.	Site Inspection	N/A	<a href="#">6.3.1.1, 6.3.1.4</a>
b.	Clean Air Filters	N/A	<a href="#">6.3.1.6, 6.3.1.4</a>
c.	Check Carrier Output Power	<a href="#">Table 4-1.b</a>	<a href="#">6.2.3</a>
d.	Check Station Ident	<a href="#">Table 4-1.c</a>	<a href="#">6.2.13</a>
e.	Check Antenna VSWR	<a href="#">Table 4-1.a</a>	<a href="#">6.2.7</a>
f.	Check Battery Backup Transfer	N/A	<a href="#">6.2.2</a>
g.	Check Auto-Transfer	N/A	<a href="#">6.2.8</a>
h.	Reassign Main/Standby Transmitters	N/A	<a href="#">6.3.1.7</a>
<b>SEMI-ANNUAL</b>			
a.	Inspect Battery Backup	N/A	<a href="#">6.3.1.5</a>
b.	Check Carrier Frequency	<a href="#">Table 4-1.c</a>	<a href="#">6.2.4</a>
c.	Check Operating Frequency	<a href="#">Table 4-1.c</a>	<a href="#">6.2.6</a>
<b>ANNUAL</b>			
a.	Verify BITE Wattmeter Calibration	N/A	<a href="#">6.3.1.10</a>
b.	Verify BITE Frequency Counter Calibration	N/A	<a href="#">6.3.1.9</a>
c.	Verify BITE VSWR Calibration	N/A	<a href="#">6.3.1.8</a>
d.	Check Battery on CPU (1A13) CCA	N/A	<a href="#">6.2.12</a>
e.	Antenna System and Radome Inspection	N/A	<a href="#">6.3.1.2</a>
f.	Inspect Field Monitor Antenna	N/A	<a href="#">6.3.1.3</a>

## 6 MAINTENANCE PROCEDURES

### **6.1 INTRODUCTION**

This section provides the procedures required for accomplishing incidental maintenance activities. This section is divided into three parts: performance check procedures, other maintenance procedures, and special maintenance procedures.

### **6.2 PERFORMANCE CHECK PROCEDURES**

When abnormal performance conditions are indicated during the performance check procedures, refer to [Section 7](#).

#### **6.2.1 Test Equipment**

The performance checks are designed to make optimum use of the Built-in Equipment (BITE) by personnel responsible for the maintenance of the CVOR facility. The test equipment (or equivalent) listed in table 6-1 are required to perform CVOR maintenance procedures.

**Table 6-1. Test Equipment**

Oscilloscope, Type TAS250 (Tektronics)	Detecting Elements Models 250B or 250C
Multimeter, Digital, Model 77 (Fluke)	Dummy Load, 5-T-N (Bird)
Frequency Counter, Model 1856A (B&K)	Type "N" Barrel (Qty. 2)
Power Meter, Model 4130A (Bird)	Type "N" Tee

#### **6.2.2 Battery Backup Transfer Performance Check**

- a. Select Screen [RMS, DATA],
- b. Starting with all cabinet circuit breakers in the ON position (AC and DC), remove AC power from Transmitter 1. Verify that the CVOR system continues to function and that "On Batteries" changes from No to Yes.
- c. If the VOR is a dual system, remove AC power from Transmitter 2. Verify that the CVOR system continues to function and that "On Batteries" changes from No to Yes.
- d. Restore AC power for Transmitters 1 and 2 (if dual equipment). Verify that the system continues to function and that "On Batteries" changes from Yes to No for both systems.

#### **6.2.3 Carrier Output Power Performance Check**

- a. Verify that transmitter 1 is operating.

## **Model 1150 CVOR**

- b. Select screen Transmitters, Configuration. Typically Carrier Power is set for 100 watts (en route) or 50 watts (terminal).
- c. Select screen, VOR Transmitters, Data, Transmitter 1, and observe that Carrier Power is within  $\pm 10\%$  of the setting in step b.
- d. Change operating transmitter to 2 by pointing and clicking on the Tx2 Antenna.
- e. Select screen Transmitters, Data, Transmitter 2. and observe that Carrier power is within  $\pm 10\%$  of the setting.

### **6.2.4 Carrier Frequency Performance Check**

- a. Verify that transmitter is powered.
- b. Connect frequency counter to "CARRIER FREQUENCY" jack of Synthesizer Generator Assembly (1A4).
- c. Observe the station operating frequency while transmitter 1 is operating. Verify that the frequency is within the tolerance in Table 4-1.
- d. Connect frequency counter to "CARRIER FREQUENCY" jack of Frequency Synthesizer assembly (1A20).
- e. Observe the station operating frequency while transmitter 2 is operating. Verify that the frequency is within the tolerance of Table 4-1.

### **6.2.5 30 Hz and 9960 Hz Modulation and Deviation Ratio Performance Check**

- a. Select Monitors, Data Screen. Observe the Monitor 1, 30 Hz modulation and verify it is within the low-high limits.
- b. Observe Monitor 1, 9960 Hz modulation and verify it is within low-high limits.
- c. Observe Monitor 1, Deviation Ratio and verify it is within low-high limits.
- d. Observe Monitor 2, Integrity Data. Observe the 30 Hz modulation and verify it is within the low-high limits.
- e. Observe Monitor 2, 9960 Hz modulation and verify it is within low-high limits.
- f. Observe Monitor 2, Deviation Ratio and verify it is within low-high limits.
- g. Change operating transmitter by pointing and clicking Tx2 Antenna. Repeat steps a. through f. after Monitors have stabilized.

### **6.2.6 Operating Frequency Performance Check**

- a. Verify that transmitter 1 is operating.
- b. Select Transmitters, Data, Transmitter 1.
- c. Observe the 30 Hz frequency and assure it is within  $\pm 1\%$ .

- d. Observe the 9960 Hz frequency and assure it is within  $\pm 1\%$ .

**NOTE:**

The frequencies displayed are not to be used.

- e. Observe the Carrier frequency and assure that it is within  $\pm 0.02\%$ .
- f. Observe Lower Sideband frequency and assure it is 10 KHz below Carrier  $\pm 0.02\%$ .
- g. Observe Upper Sideband frequency and assure it is 10 KHz above Carrier  $\pm 0.02\%$ .
- h. Change operating transmitter to 2 by pointing and clicking Tx 2 antenna.
- i. Select Transmitters, Data, Transmitter 2
- j. Observe the 30 Hz frequency and assure it is within  $\pm 1\%$ .
- k. Observe the 9960 Hz frequency and assure it is within  $\pm 1\%$ .
- l. Observe the Carrier frequency and assure that it is within  $\pm 0.02\%$ .
- m. Observe Lower Sideband frequency and assure it is 10 KHz below Carrier  $\pm 0.02\%$ .
- n. Observe Upper Sideband frequency and assure it is 10 KHz above Carrier  $\pm 0.02\%$ .

### **6.2.7 Antenna VSWR Performance Check**

- a. On the video terminal, select screen Transmitters, Data, Transmitter 1. Observe Carrier VSWR. Verify that this value is less than 1.2:1.
- b. On the same screen, observe Sideband 1 and Sideband 2 VSWR. Verify that these values are less than 1.2:1.
- c. On screen Monitors, Data, Sideband Antenna VSWR observe the sideband antenna VSWR. Verify that no antennas are out of tolerance as indicated by an alert condition.

### **6.2.8 Automatic Transfer Performance Checks**

- a. Log on to system. Select transmitter 1 as main by pointing and clicking the Tx1 main button.
- b. Enter the Monitors, Configuration, Offsets and Scale Factors screen and change the Azimuth Angle Offset for Monitor 1 so that an out-of-tolerance condition exists for Monitor 1.
- c. Change the Azimuth Angle offset for Monitor 2 of the limits so that an out-of-tolerance condition exists for Monitor 2.
- d. Verify that transmitter 2 turns on, relays change, and transmitter 1 turns off.
- e. Enter Monitors, Configuration, Offsets and Scale Factors screen and restore the angle offsets to the original settings.
- f. Select transmitter 2 as main by pointing and clicking on Tx 2 main button..

- g. Enter the Monitors, Configuration, Offsets and Scale Factors screen and change the Azimuth Angle Offset for Monitor 1 so that an out-of-tolerance condition exists for Monitor 1.
- h. Change the Azimuth Angle offset for Monitor 2 of the limits so that an out-of-tolerance condition exists for Monitor 2.
- i. Verify that transmitter 2 turns on, relays change, and transmitter 1 turns off.
- j. Enter Monitors, Configuration, Offsets and Scale Factors screen and restore the limits to the original settings.

### **6.2.9 VOR Monitor Performance Check**

- a. Select Monitors, Data, Test Data Screen. Point and click on the RUN button for Monitor 1.
- b. When complete the data from the monitor will be displayed under Test Results for azimuth angle, 30 Hz modulation, and 9960 Hz modulation/deviation.
- c. Verify the displayed data is within tolerances as stated in Table 4-1, section h (Monitor 1).
- d. Point and click on the Run button under Monitor 2.
- e. The data from the monitor will be displayed under Data, for azimuth angle, 30 Hz modulation, and 9960 Hz modulation/deviation.
- f. Verify the displayed data is within tolerances as stated in [Table 4-1](#), section i (Monitor 2).

### **6.2.10 Certification Test VOR Monitor**

- a. Select Monitors, Configuration, Offsets and Scale Factors. Point and Click the Copy Button. Press F7.
- b. Select screen Monitors, Data, Certification Test Results. Click and press set to monitor limits. Press F7. Click and press the RUN button in the Monitor 1 Section. The internal test generator will automatically perform a test of the number 1 monitor, using the upper and lower test limits displayed. The entire test takes several minutes.
- c. When complete the results of the upper and lower limit test of the monitor will be displayed under data, for azimuth angle, 30 Hz modulation, and 9960 Hz modulation/deviation.
- d. Point and click the RUN button for Monitor 2. The internal test generator will automatically perform a test of the number 2 monitor, using the upper and lower test limits displayed. The entire test takes several minutes.
- e. When complete the results of the upper and lower limit test of the monitor will be displayed under Data, for azimuth angle, 30 Hz modulation, and 9960 Hz modulation/deviation.

## **6.2.11 RSCU Operation Performance Check**

This check may be performed only by authorized tower control or local control personnel on a routine schedule.

### **6.2.11.1 Single Equipment Performance Check**

- a. At the remote site perform a lamp test. Verify all lights illuminate.
- b. At the remote site, assure that the indicator for CVOR transmitter 1 Normal light is on and the "DATA FAULT" is off.
- c. From the RSCU, turn off transmitter. Verify that the NORMAL light is off.
- d. At the remote site turn on the transmitter. Verify that the NORMAL light is on and the ALARM light is off.

### **6.2.11.2 Dual Equipment Performance Check**

- a. Put the CVOR in normal configuration, with transmitter 1 selected as main.
- b. At the remote site, perform a lamp test. Verify all lights illuminate.
- c. At the remote site, assure that the indicator for CVOR transmitter 1 NORMAL and antenna indicator "#1" lights are on and the "DATA FAULT" lamp is off.
- d. From the RSCU, turn on the number 2 transmitter. Verify that the CVOR changes transmitters and the number 2 transmitter comes up normally. Verify the antenna indicator "#2" light is on. A visual and audible alarm will also occur with transfer. Clear the alarm by holding #2 switch to on.
- e. From the RSCU, turn off transmitter 2. Turn on transmitter 1. Assure that the indicators for CVOR transmitter 1 NORMAL and antenna indicator #1 lights are on.

## **6.2.12 Checking Battery on CPU (1A13) CCA**

- a. Connect digital voltmeter negative lead to chassis ground.
- b. Place the positive probe tip against the exposed battery case on the CPU CCA (1A13). This may be accomplished while the system is operational. Verify that the voltage is greater than 2.0 Vdc.

## **6.2.13 Station Identification Checks**

- a. Connect oscilloscope probe to 1A8-TP5. Select Transmitters, Commands, VOR IDENT, Continuous.
- b. Adjust the oscilloscope controls to obtain a pattern showing 2 or 3 cycles of the 1020 identification modulation.

- c. Adjust Transmitters, Configuration, Ident modulation to the desired modulation level. Set Reference and Voice Modulation to 0%.
- d. Adjust the Transmitters, configuration, offsets and scale factors, Ident Modulation Scale for Transmitter 1 until the oscilloscope pattern indicates the same modulation as determined by the following relation:

$$\% \text{ Ident Modulation} = \frac{\text{Emax} - \text{Emin}}{\text{Emax} + \text{Emin}}$$

- d. Connect frequency counter input to test point 1A8 - TP8
- e. Observe the Ident frequency and verify it is within  $\pm 20$  Hz.
- f. Turn on transmitter 2 by pointing and clicking the Tx 2 antenna button.
- g. Repeat Step D for Transmitter 2.
- h. Connect frequency counter input to test point 1A24-TP8.
- i. Observe the Ident frequency and verify it is within  $\pm 20$  Hz.
- j. Select Transmitters, Commands, VOR Ident, Normal.
- k. On the Monitors, Data, Integrity screen, verify that the Ident is NORMAL.

## **6.3 OTHER MAINTENANCE PROCEDURES**

### **6.3.1 Equipment Inspection**

The equipment inspection is a visual inspection that is done prior to performing any maintenance procedure. This will assure the technician that the system is properly connected and all electrical bonds are in good condition.

#### **6.3.1.1 Site Inspection**

- a. Check that the site is clear of any new obstructions or materials which could affect the normal operation of the CVOR system.
- b. Check the shelter, inside and out, for any sign of water filtration, damage, or other deterioration.
- c. Check the condition of the air conditioner, shelter lighting, obstruction lights, baseboard heaters, electrical outlets, lightening arrestors, etc.
- d. Check for and remove any accumulation of snow, ice, or debris on the field monitor antennas.
- e. Check for and remove any accumulation of snow, ice or debris on the counterpoise surface.

### 6.3.1.2 Inspection of Antenna System

- a. Insure that both CVOR transmitters are turned off.
- b. The CVOR antennas are contained within 9 fiberglass radome.
- c. Inspect the mating areas of the radome where the radome interfaces with counterpoise. Check for any signs of water leakage or deterioration. Repair or replace as necessary.
- d. Inspect the antenna for any signs of deterioration of water damage. Check the input cables and connectors for breaks, cracks or corrosion. Check that the connectors are securely fastened, and inspect the remaining parts of the antenna for damage or signs of vermin infestation.
- e. Inspect the counterpoise for any signs of deterioration, paying special attention to the welded joints, bolted connections, mesh, etc. Check for proper electrical connection between the counterpoise segments and grounding connections.
- f. Remove any articles carried into the radome area and replace the antenna radome covers.

### 6.3.1.3 Inspection of the Field Monitor Antenna

- a. Inspect the condition of the field monitor antenna. Make sure it is solidly mounted, and that all nuts and bolts are tightened.
- b. Inspect the condition of the field monitor antenna coaxial cables for signs of cracks or breakage. Replace if necessary.

### 6.3.1.4 Equipment Inspection

- a. Visually inspect interconnecting wire harnesses, coaxial cables and connectors for corrosion, cracks, breaks, and burns. Insure all RF connectors are tightened.
- b. Inspect all peripheral equipment connected to the CVOR, including the PMDT, printer, etc.
- c. Inspect the front panel indicators on the CVOR and assure that indicators are normal.
- d. Inspect the CVOR air filters. Clean the air filters by removing them from the cabinet and shaking out any loose dirt and debris. Wash the filter with mild detergent and water. Dry the filters completely prior to replacing in the cabinet.

### 6.3.1.5 Inspection of Battery Backup Unit

Refer to [Figure 9-5](#).

- a. Place the circuit breakers on the battery boxes in the OFF position.
- b. Remove the covers from the battery boxes. Visually inspect the condition of each battery, and inspect the connectors and cables for any cracks, breaks, burns, or corrosion. Make sure that all connectors are fastened tightly to their terminals. Clean battery area as necessary.

- c. Replace the battery box covers and place the circuit breakers in the ON position.

#### **6.3.1.6 Maintenance of Blowers and Air Filters**

The CVOR blowers use lifetime lubricated bearings and do not require maintenance.

- a. Inspect the CVOR air filters. Clean the air filters by removing them from their housing and shaking any out loose dirt and debris. Wash the filter with mild detergent and water. Dry the filters completely prior to replacing in the cabinet.

#### **6.3.1.7 Reassign Main/Standy Transmitters (Dual Systems Only)**

- a. Log on to the PMDT.
- b. Point and click on the Tx 1 Main or the Tx 2 Main Button as desired on Sidebar.

#### **6.3.1.8 Verification of BITE VSWR Calibration. -**

- a. Make sure that both transmitters are off.
- b. Disconnect the Carrier feed cable from the top of the CVOR cabinet. Replace with type "N" barrel, type "N" TEE and 250W load. Attach type "N" barrel to the open port of the TEE.
- c. Turn on transmitter 1 by pointing and clicking the Tx 1 Antenna button. Place transmitter in BYPASS by pointing and clicking the Bypass button.
- d. Select screen Transmitters, Data, Transmitter 1 observe Carrier VSWR. The display VSWR should be between 1.20 to 1.23.
- e. If the levels are not within this range, carefully adjust (on the RF Monitor Assembly) the transmitter 1 reflected power detector potentiometer (TX1 RFD) located behind the CVOR status panel. Turning the pot clockwise will increase VSWR reading and counterclockwise will decrease. Make a small adjustment and wait for display to stabilize.
- f. Point and click the Tx 2 Antenna Button.
- g. Select screen [Transmitters, Data, Transmitter 2, observe Carrier VSWR. The display VSWR should be between 1.20 to 1.23.
- h. If the levels are not within this range, carefully adjust (on the RF Monitor Assembly) the transmitter 2 reflected power detector potentiometer (TX2 RFD) located behind the CVOR status panel. Turning the pot clockwise will increase VSWR reading and counterclockwise will decrease. Make a small adjustment and wait for display to stabilize.
- i. Point and click the OFF button for Transmitter 1 and Transmitter 2.
- j. Move the barrels, bullets, and TEE to the Sideband 1 output (J2). Replace the carrier cable. Place a 5W termination on the TEE output. Place the Carrier Transmitter cable back to its original position.

- k. Turn on transmitter 1 by pointing and clicking the Tx 1 Antenna button. Place transmitter in BYPASS by pointing and clicking the Bypass button.
- l. Select screen Transmitters, Transmitter 1 Data, Sideband Antenna VSWR, observe Sideband 1 VSWR. The displayed VSWR should be between 1.20 to 1.23.
- m. If the levels are not within this range, carefully adjust (on the RF Monitor Assembly) the transmitter 1, SB1 reflected power detector potentiometer (SB1 RFD) located behind the CVOR status panel. Turning the pot clockwise will increase VSWR reading and counterclockwise will decrease.
- n. Turn both transmitters are off. Move the load barrels, bullets, and TEE to the Sideband 2 output.
- o. Select screen Monitors, Data, Sideband Antenna VSWR, observe Sideband 1 VSWR. The displayed VSWR should be between 1.20 to 1.23.
- p. If the levels are not within this range, carefully adjust (on the RF Monitor Assembly) the transmitter 1, SB2 reflected power detector potentiometer (SB2 RFD) located behind the CVOR status panel. Turning the pot clockwise will increase VSWR reading and counterclockwise will decrease.
- q. Turn both transmitters off.
- r. Remove termination, TEE and bullets. Place cables in their original positions.
- s. Turn the system on and clear the bypass condition by clicking by clicking on the bypass button.

#### 6.3.1.9 Verification of BITE Frequency Counter Calibration

- a. Turn off all power. Remove VOR Monitor (1A8) CCA, replace with a CCA extender and attach the VOR Monitor CCA to the extender.
- b. Turn on power.
- c. Connect scope to TP16 of the VOR Monitor (1A8) CCA and verify that 2.00 MHz pulse signal is present. Select Transmitters, data, Transmitter 1 screen. Adjust C4 on the Monitor CCA as necessary to cause displayed Carrier frequency to match the actual Carrier frequency (as measured in 6.2.4)  $\pm .002\%$ . The reading will update approximately once every 90 seconds. Make small adjustments and wait for update.
- d. Turn on Transmitter 1 by clicking the Tx 1 Antenna Button.
- e. Connect the external frequency counter to 1A8-TP7.
- f. On the PMDT select Transmitters, Data.
- g. Observe the 30 Hz frequency and assure it is within  $\pm 1.0\%$  of the reading from the frequency counter.
- h. Connect the external frequency counter to 1A8-TP11.
- i. Observe the 9960 Hz frequency and assure it is within  $\pm 1.0\%$  of the reading from the frequency counter.

## **Model 1150 CVOR**

- j. Turn off power. Remove VOR Monitor (1A8) CCA from extender. Put the VOR Monitor (1A24) CCA on extender. Turn on power.
- k. Turn on power. Change operating transmitter to 2 by pointing to Tx 2 antenna.
- l. Connect scope to TP16 of the VOR Monitor (1A24) CCA and verify that 2.00 MHz pulse signal is present. Select Transmitters, Data, Transmitter 2 screen. Adjust C4 on the Monitor CCA as necessary to cause displayed Carrier frequency to match the actual Carrier frequency (as measured in 6.2.4)  $\pm 0.002\%$ . The reading will update approximately once every 90 seconds. Make small adjustments and wait for update.
- m. Connect the external frequency counter to 1A24-TP7.
- n. On the PMDT select Transmitters, data, Transmitter 2.
- o. Observe the 30 Hz frequency and assure it is within  $\pm 1.0\%$  of the reading from the frequency counter.
- p. Connect the external frequency counter to 1A24-TP11.
- q. Observe the 9960 Hz frequency and assure it is within  $\pm 1.0\%$  of the reading from the frequency counter. This reading will be close to 10 KHz.
- r. Remove VOR Monitor (1A24) CCA from extender and place the VOR Monitor (1A24) CCA back into its original position.

### **6.3.1.10 Verification of BITE Wattmeter Calibration**

- a. Insert a 250 Watt plug-in element into the thru-line wattmeter body in the carrier feed cable.
- b. Point and click the Tx 1 antenna button to turn on Transmitter. Point and click the Bypass button to place the transmitter in BYPASS.
- c. Select screen Transmitters, data, Transmitter 1, observe Carrier power output. The displayed output is to coincide with the external wattmeter indication.
- d. If the levels are not the same, carefully adjust (on the RF Monitor Assembly) the transmitter 1 forward power detector potentiometer (TX1 FWD) located behind the CVOR status panel. Turning the pot clockwise will decrease power reading and counterclockwise will increase. Make a small adjustment and wait for display to stabilize.
- e. Point and click on the Tx 2 antenna button.
- f. Select screen Transmitters, data, Transmitter 2, observe Carrier power output. The displayed output is to coincide with the external wattmeter indication.
- g. If the levels are not the same, carefully adjust (on the RF Monitor Assembly) the transmitter 2 forward power detector potentiometer (TX2 FWD) located behind the CVOR status panel. Turning the pot clockwise will decrease power reading and counterclockwise will increase. Make a small adjustment and wait for display to stabilize.
- h. Turn on Transmitter 1 by pointing and clicking Tx 1 Antenna button.
- i. Insert a 5 Watt plug-in element into the thru-line wattmeter body in the Sideband 1 feed cable.

- j. Select screen Transmitters, data, Transmitter 1, observe Sideband 1 power output. The displayed output is to coincide with the external wattmeter indication.
- k. If the levels are not the same, carefully adjust the Sideband 1 forward power detector potentiometer A5A1R100 located on the Sideband Generator (1A5) Assembly. Turning the pot clockwise will increase power reading and counterclockwise will increase. Make a small Adjustment and wait for display to stabilize.
- l. Point and click on Tx 2 Antenna button to change Transmitters.
- m. Select screen Transmitters, data, Transmitter 2, observe Sideband 1 power output. The displayed power is to coincide with the external wattmeter indication.
- n. If the levels are not the same, carefully adjust Sideband 1 forward power detector potentiometer A21A1R100 located on the Sideband Generator (1A21) Assembly. Turning the pot clockwise will increase power reading and counterclockwise will increase. Make a small adjustment and wait for display to stabilize.
- o. Move the 5 Watt plug-in element from the thru-line wattmeter body at the Sideband 1 output to the thru-line wattmeter body at the Sideband 2 output.
- p. Repeat steps i. through n. for Sideband forward power output.
- q. Take the system out of BYPASS by pointing and clicking on the bypass button.

## **6.4 SPECIAL MAINTENANCE PROCEDURES**

### **6.4.1 Replacement of Assemblies with 1/4 Turn Fasteners**

This procedure is used when a module is removed and replaced.

- a. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breaker to the OFF position.
- b. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the OFF position.
- c. Observe ESD precautions.
- d. Loosen the 1/4 turn fasteners securing faulty assembly in place.
- e. Pull faulty assembly forward until it is clear of the transmitter cabinet.
- f. Slide new assembly into transmitter cabinet until it is mounted flush against mating connectors. If difficulty occurs during installation, refer to [paragraph 6.4.3](#).
- g. Tighten the 1/4 turn fasteners to hold the assembly securely in the transmitter cabinet assembly.
- h. Perform the appropriate tune up procedures as detailed in [paragraph 9.7](#).

#### **6.4.2 Replacement of CCA without 1/4 Turn Fasteners**

- a. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breaker to the OFF position.
- b. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the OFF position.
- c. Using ESD procedures, pull faulty CCA forward until it is clear of the transmitter cabinet.
- d. Slide new CCA in to transmitter cabinet until it is mounted flush against mating surface.
- e. Perform the appropriate tune up procedures as detailed in [paragraph 9.7](#).

#### **6.4.3 Cabinet Backplane Connector Adjustment**

Due to the physical characteristics of the CVOR cabinet, difficulty may be encountered during the installation of new RF Modules. If difficulty is encountered, refer to the following backplane adjustment procedure.

- a. Swing the hinged transmitter cabinet assembly away from the shelter wall.
- b. Remove the eight (8) screws securing the transmitter cabinet back panel and remove it. This allows access to the cabinet backplane connector.
- c. Determine which RF Module will not properly mate with the cabinet backplane connector.

##### **NOTE:**

In order to adjust backplane for Sideband Amplifiers, it will be necessary to loosen screws for regulators attached to the chassis insert.

- d. From the rear of the transmitter cabinet, loosen (do not remove) the six (6) screws securing the cabinet backplane connector mounting plate of the RF Module that will not fit properly into transmitter cabinet. This allows for slight adjustment of the cabinet backplane connector mounting plate.
- e. Carefully slide the RF Module into place to position the cabinet backplane connector mounting plate. Carefully tighten the cabinet backplane connector mounting plate screws. Check the installation by installing and removing the RF Module. Repeat the process until RF Module mates smoothly with cabinet backplane connector. If Sideband Amplifier was replaced, carefully tighten the screws for regulators.

- f. The cabinet backplane connector mounting plate contains D-shell connectors that may cause binding to occur. If this occurs, adjust the position of the D-shell connector by loosening (do not remove) the two (2) screws securing the D-shell connector. This allows for slight adjustment of the D-shell connector. Note that screws are to be loosened slightly so the D-shell connector will retain its position when the RF Module is removed from the cabinet.
- g. Carefully slide the RF Module into place to position the D-shell connector. Carefully tighten the D shell connector screws. Check the installation by installing and removing the RF Module. Repeat the process until RF Module mates smoothly with cabinet backplane connector.
- h. Replace cabinet back panel and secure using appropriate hardware.
- i. Swing the cabinet assembly until it is flush with shelter wall and secure to the unistrut with appropriate hardware.

#### **6.4.4 Replacing CPU (1A13) CCA**

- a. Select System, Configuration, Save, [enter]. Select a distinctive filename and save.
- b. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breaker to the OFF position.
- c. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the OFF position.
- d. Using proper ESD handling procedures, disconnect the front card edge connector and pull faulty CPU CCA (1A13) forward until it is clear of the transmitter cabinet.
- e. Insert the new CPU CCA into the cabinet and seat securely into backplane connector. Reconnect the front card edge connector.
- f. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the ON position.
- g. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breakers to the ON position.
- h. Select System, Configuration Load, and choose the Filename from Step a.
- i. Select RMS, Config Backup.
- j. Set the current date and time by selecting RMS, Commands, Set Time and Date, [enter].

#### **6.4.5 Update of CVOR Software**

- a. Select System, Configuration Save, [enter]. Select a distinctive filename and save.
- b. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breaker to the OFF position.

## **Model 1150 CVOR**

- c. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the OFF position.
- d. Using proper ESD handling procedures, disconnect the front card edge connector and pull the CPU CCA (1A13) forward until it is clear of the transmitter cabinet.
- e. Replace the U11 and U12 integrated circuits, observing proper orientation of parts in sockets. Insert the CPU CCA (1A13) into the cabinet and reconnect the front connector.
- f. Pull the Audio Generator CCA (1A7) forward. Locate and remove the U4 integrated circuit.
- g. Replace the U4 integrated circuit and install the Audio Generator CCA (1A7) into its original location.
- h. Pull the VOR Monitor CCA (1A8) forward. Locate and remove the U1 integrated circuit.
- i. Replace the U1 integrated circuit and install the VOR Monitor CCA (1A8) into its original location.
- j. Repeat steps f. through i. for the Audio Generator (1A23) and VOR Monitor (1A24) CCAs.
- k. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the ON position.
- l. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breakers to the ON position.
- m. Pull the VOR Monitor CCA (1A8) forward. Locate and remove the U1 integrated circuit.
- n. Replace the U1 integrated circuit and install the VOR Monitor CCA (1A8) into its original location.
- o. Repeat steps f. through i. for the Audio Generator (1A23) and VOR Monitor (1A24) CCAs.

### **6.4.6      Changing the Station Rotation (Azimuth)**

This step may be requested during a flight inspection of the VOR station.

- a. If the operating transmitter is Transmitter 1, Select Transmitters, Configuration, Offsets and Configuration, Transmitter 1, Azimuth angle offset or Transmitter 2, Azimuth angle offset.
- b. Change the desired amount of rotation. Enter a positive number for clockwise rotation or a negative number for counterclockwise rotation. The allowable entry is  $\pm 40$  degrees in 0.01 degree increments.

### **6.4.7      Changing the Monitoring Offsets**

This procedure is required after commissioning flight check to make the monitors agree with flight inspection results.

- a. Turn on Transmitter 1.
- b. Select Monitors, Data, Integrity Data.

- c. The Azimuth index offset is the difference of the desired angle less the current value is azimuth for Monitor 1 and Monitor 2.
- d. Select Monitors, Configuration, Offsets and Scale Factors. Enter the new azimuth offset for Monitor 1 and Monitor 2.
- e. Select Monitors, data, Integrity data. Verify that the Azimuth value displayed is correct.
- f. Compute the 30 Hz Modulation correct factors by the formula

$$\frac{30.0}{\text{Current Reading}} \times \text{Current Offset.}$$

- g. Select Monitors, Configuration, Offsets and Side factors and read the current 30 Hz modulation offset and apply the formula if step f.
- h. Enter the new offset value for Monitor 1 and Monitor 2, 30 Hz modulation
- i. Repeat steps f, g and h for 9960 Hz Modulator and 9960 Hz deviation ratio.
- j. Compute the field intensity offset by reading the field intensity value in Monitors, Data, Integrity data and subtracting the reading from 0.0. Place this offset value in Monitors, Configuration, Offsets and Scale Factors for Monitor 1 and for Monitor 2.

#### **6.4.8      Changing the CPU (1A13) CCA Lithium Battery**

- a. Select RMS, Config Backup to save the parameters into EEPROM.
- b. Select System Configuration Save, [enter]. Select a filename and save.
- c. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breaker to the OFF position.
- d. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the OFF position.
- e. Using proper ESD handling procedures, disconnect the front card edge connector and pull the CPU CCA (1A13) forward until it is clear of the transmitter cabinet.
- f. Disconnect the jumper between E1 and E2. Remove the lithium battery from its holder.
- g. Insert the new lithium battery in the holder. Insert the CPU CCA (1A13) into the original position.
- h. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breaker to the ON position.
- i. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the ON position.
- j. Place the jumper back between the CPU (1A13) CCA E1 to E2 terminals.

#### **6.4.9 Test Generator Check with a VOR Phasemeter**

- a. Select Monitors, Data, Test Data.
- b. Enter the desired angle to test. Insure that the modulation levels for 30 Hz AM and 9960 Hz modulation are set to 30% and the 9960 deviation is set to a ratio of 16.0. Ident and voice modulation should be set to 0.
- c. Connect the VOR phasemeter (ZIFOR III or equivalent) between VOR Test Generator (1A12) TP1 (pos.) and TP0 (gnd).

##### **NOTE**

The ZIFOR III is intolerant to abrupt angle changes and may require cycling of ZIFOR III AC power to obtain the proper reading.

- d. Click on the monitor 1 Run button to generate the desired angle. Wait approximately two minutes for completion of the waveform.

#### **6.4.10 Modulation Reading Change**

Refer to 6.4.7.

#### **6.4.11 DME Keying Check**

This procedure is used on systems where the CVOR is collocated with a DME.

- a. Set the CVOR SYSTEM A DC INPUT (batteries) and SYSTEM B DC INPUT (batteries, dual system) circuit breaker to the ON position.
- b. Set the CVOR SYSTEM A AC INPUT (line) and SYSTEM B AC INPUT (line) circuit breakers to the ON position.
- c. Place DME equipment circuit breakers to the ON position.
- d. Listen for the DME keying. If keying is not detected or is not in synchronization with the CVOR check terminal board wiring and connections.

#### **6.4.12 Monitor Detector Alignment**

This alignment should be performed at installation and after a detector has been replaced.

- a. Place CVOR systems AC and DC circuit breakers to the ON position.
- b. Log on to system.
- c. Verify the monitor to detector settings in the RMS, Configuration, Station. Verify that Monitor 1 detector is 1 and Monitor 2 detector is 2. Press F7 if changed.
- d. Turn on the Transmitter.
- e. Connect oscilloscope probe to test point TP5 on the Monitor 1 CCA (1A8).

- f. Observe the waveform on the oscilloscope. Adjust Detector 1 potentiometer R14 for minimum signal output at 1A8-TP5.
- g. Adjust Detector 1 AT1 for 1 Vdc at 1A8-TP5.
- h. Adjust audio potentiometer R14 for 2.5 VDC 1A8-TP5.
- i. Connect oscilloscope probe to test point TP5 on the Monitor 2 CCA (1A24).
- j. Observe the waveform on the oscilloscope. Adjust Detector 2 potentiometer R14 for minimum signal output at 1A24-TP5.
- k. Adjust Detector 1 AT1 for 1 Vdc at 1A24-TP5.
- l. Adjust audio potentiometer R14 for 2.5 VDC as indicated on 1A24-TP5.

#### **6.4.13 CVOR Frequency Synthesizer Alignment**

The following procedure must be used to properly align the Frequency Synthesizer Assembly for operation at a new frequency. Instructions are provided for adjusting the 1A4 Frequency Synthesizer Assembly, substitute 1A20 for 1A4 when performing the procedure on CVOR Transmitter No. 2 Frequency Synthesizer Assembly.

- a. Remove power from the CVOR.
- b. Remove the Frequency Synthesizer 1A4 from the VOR cabinet. Remove the left side cover (the one with the greater number of screws).
- c. Refer to [Table 9-3](#), set the frequency select dip switch S1 for the desired frequency of operation.
- d. Connect the 1A4 Frequency Synthesizer Assembly to the CVOR with extender cables.
- e. Apply power to the CVOR.

#### **NOTE**

Placing the Frequency Synthesizer Assembly on extender cables may cause the carrier phase control loop to unlock. This phase control loop effects only the RF output to the carrier power amplifier, and will have no effect on the frequency counter readings taken at the test port output, J8 on the front panel of the Frequency Synthesizer Assembly. However, it may be desirable to check system operation while on extender cables. If the carrier phase control loop is unlocked, temporarily adjust 1A4R81 through the hole on the front panel of the 1A4 Frequency Synthesizer Assembly for 0.0 +/- 0.1 VDC at 1A4TP3 (carrier phase control loop error voltage). When the loop is properly locked, a small CCW adjustment of 1A4R81 will cause the error voltage to decrease, a small CW adjustment of 1A4R81 will cause the error voltage to increase. Due to the long time constants involved in the mean phase control loop, there is some time lag between adjustments of 1A4R81 and the error voltage reading (1A4TP3). Allow the reading to settle between small adjustments.

**NOTE**

The RF power level at 1A4J8 on the front panel of the Frequency Synthesizer Assembly can be as high as +15 dBm. In the following step, use attenuators as appropriate for the frequency counter used to properly protect any counter input ports.

- f. Connect a frequency counter to 1A4J8, the SMA connector on the front panel of the Frequency Synthesizer Assembly.
- g. Measure the output frequency of the 1A4 Frequency Synthesizer Assembly. It should be the desired station frequency, within +/- 250 Hz of nominal. If the frequency is more than 2000 Hz away from station frequency, double check the positions of the frequency select switch, S1. An oscilloscope probe can be used to connect a frequency counter to test point TP1, near U1, the 10.000 MHz TCXO in the Frequency Synthesizer Assembly. This frequency should be 10.000 MHz, +/- 20 Hz. Small adjustments can be made to the capacitor within U1 to achieve this. Once the TCXO is set to 10.000 MHz, the station frequency should be within +/- 250 Hz.
- h. Remove power from the CVOR.
- i. Replace the Frequency Synthesizer Assembly side cover, and replace in the system cabinet.
- j. Apply power to the CVOR.
- k. With a DMM, monitor the carrier phase loop error voltage at TP3 on the Frequency Synthesizer Assembly front panel. Slowly adjust 1A4R81 to obtain 0.0 +/- 0.05 volts on TP3.
- l. Measure the voltage at 1A4TP4, carrier phase loop control voltage. This voltage should be between 2 volts and 8 volts. If it is below 2 volts, or above 8 volts, re-adjust 1A4R81 to obtain a locked condition (0.0 +/- 0.05 volts at TP3) with TP4 between 2 and 8 volts. Because the phase shift control range is approximately 450 degrees in the carrier phaser circuitry within the Frequency Synthesizer Assembly, it should be possible to obtain a control voltage in the 2 to 8 volt range. While the active range of this control voltage is roughly 1 volt to 11 volts, it is desired to find a lock point that allows operation at a point not close to the 1 to 11 volt extremes in control voltage.

#### **6.4.14 CVOR Sideband Amplifier Alignment for New Frequency**

The following procedure is to be used to optimize the sideband generator amplifiers for operation at a new frequency. This procedure may also be used to verify optimum performance of sideband generator amplifiers. Substitute 1A21 when performing the procedures on CVOR transmitter No. 2 Sideband Generator Assembly.

- a. Remove power from the CVOR.
- b. Remove Sideband Generator Assembly 1A5 from the CVOR cabinet.
- c. Place Sideband Generator Assembly 1A5 on extender cables.

- d. Apply power to the CVOR.
- e. Adjust 1A5A1R73 to lock signal at TP5/6 and a locked ac voltage at TP3/8.
- f. Refer to [Figure 9-18](#). Connect oscilloscope to 1A5TP1. If steady waveform exists, adjust 1A5A1R102 so that the DC offset at the bottom of the waveform is 4 volts.
- g. If waveform is not steady, adjust 1A5A1R73 to obtain a steady waveform then adjust 1A5A1R102 so that the DC offset at the bottom of the waveform is 4 volts. If waveform will not stabilize it may be necessary to adjust DC offset to 5 or 6 volts.
- h. Adjust potentiometers 1A5A1R97 and 1A5A1R51 for best waveform. The waveform must remain between 3 and 6 Vp-p.
- i. Connect DVM to 1A5TP4. Adjust potentiometer 1A5A1R73 for approximately 0.00 Vdc  $\pm 50$  mV. Verify that the DC offset at the bottom of the waveform is still 4 volts. Readjust if necessary.
- j. Refer to [Figure 9-15](#). Verify waveform on 1A5TP5. Adjust potentiometer 1A5A1R24 so waveform peaks are equal in amplitude.
- k. Refer to [Figure 9-14](#). Connect oscilloscope to 1A5TP10. If steady waveform exists, adjust 1A5A3R102 so that the DC offset at the bottom of the waveform is 4 volts.
- l. If waveform is not steady, adjust 1A5A3R73 to obtain a steady waveform then adjust 1A5A3R102 so that the DC offset at the bottom of the waveform is 4 volts.
- m. Adjust potentiometers 1A5A3R97 and 1A5A3R51 for best waveform. The waveform must remain between 3 and 6 Vp-p.
- n. Connect DC Voltmeter to 1A5TP7. Adjust potentiometer 1A5A3R73 for approximately 0.00 Vdc  $\pm 50$  mV.
- o. Refer to [Figure 9-15](#). Verify proper waveform on 1A5TP6. Adjust potentiometer 1A5A3R24 so waveform peaks are equal in amplitude.
- p. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- q. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- r. Remove power from the CVOR. Disconnect all test equipment. Disconnect all extender cables.
- s. Replace the Sideband Generator Assembly in the CVOR cabinet. Repeat procedures in steps a. through ee., above, for CVOR transmitter No. 2.
- t. Restore power to the CVOR.
- u. Observe CVOR operation. Select RMS, Data Screen. There should be no unlocks sideband observed for a minimum of 30 minutes.

### **6.4.15 Semi-Automatic Ground Check**

The Semi-Automatic Ground Check method used with the Model 1150 CVOR is performed uniquely from other systems. Semi-Automatic Ground Check operation is provided, permitting single operator capability. Semi-Automatic Ground Checks are always begun on the North (0 degree) azimuth, and progress in a clockwise direction. The Semi-Automatic Ground Check Indicator is used to indicate to the technician when the VOR is ready to take a measurement, and when it is ready for the next azimuth. These indications are both visual (LED) and audio (Buzzer), and originate from the Semi-Automatic Ground Check Indicator. The Semi-Automatic Ground Check Indicator is moved from one azimuth position to the next, and indicates it is taking a measurement with a steady tone and light. Intervals between measurements are indicated by an intermittent tone and flashing light. The measurement is actuated by the technician, when the detector is solidly mounted by pressing the switch on the Semi-Automatic Ground Check Indicator. This procedure progresses until all 16 detector positions have been measured.

- a. Install the field detector on the North (0 degree) azimuth.
- b. Attach the extension tube to the field monitor and ground check antenna. Attach the Semi-Automatic Ground Check Indicator Assembly to the extension tube with the spring clamp on the rear of the Semi-Automatic Ground Check Indicator Assembly.
- c. Disconnect the antenna cable from the type-N heliax connector. Attach cable (Part No. 070445-0001) between the antenna and the heliax connector.
- d. Connect the Semi-Automatic Ground Check Indicator Assembly to the Monitor CCA (1A8) or (1A24). Verify the green LED on the Monitor CCA chosen is illuminated. If not, enter the "J" screen and enter "7" to set Monitor 1 (1A8) to control, or enter "8" to set Monitor 2 to control. Verify that the green LED is now illuminated on the selected Monitor CCA.
- e. Log-on to the system.
- f. On the PMDT, select screen Monitors>>DATA>Ground Check. Select "V" Run Button to, Ground Check VOR.
- g. When an intermittent tone and light is indicated by the Semi-Automatic Ground Check Indicator Assembly and the field monitor and ground check antenna is in position press the SWITCH (S1) on the Semi-Automatic Ground Check Indicator Assembly. The tone and light will become steady, indicating that the measurement is taking place. During this period be careful not to disturb the field monitor and ground check antenna.
- h. After the CVOR has completed its measurement, the Semi-Automatic Ground Check Indicator Assembly will indicate this with another intermittent tone and light. At this time, the field monitor ground check antenna may be moved and installed in the next azimuth position (22.5 degree radial). Proceed to complete all 16 measurements.

#### **NOTE**

Be careful not to miss any azimuth position. If an error has been committed select Monitors>>Commands>>Abort all Tests and restart with Step f above.

- i. On the video terminal, select screen "F;5", Mon Ground Check Data. A list of each azimuth measured, with corresponding errors (in degrees) will be displayed. In addition, the compilation results from the automatic Fourier analysis will be displayed, including the Bias, Duantal, Quadrantal, and Octantal error with corresponding amplitudes and azimuth of occurrence.
- j. This data may be printed out, if desired, along with the graphic record. To print the data, put the printer on-line and enter "P". To display graphic data on the video terminal enter "D".
- k. Repeat steps "a" through "j" for the second transmitter.

**THIS SHEET INTENTIONALLY BLANK**

## 7 CORRECTIVE MAINTENANCE

### **7.1 INTRODUCTION**

This section contains instructions required for on-site corrective maintenance and offsite repair of the CVOR system. Required test equipment is defined and packing instructions are included in this section.

### **7.2 TEST EQUIPMENT REQUIRED**

Refer to [Section 1](#) for test equipment requirements.

### **7.3 ON-SITE CORRECTIVE MAINTENANCE**

The following paragraph provides general troubleshooting information and [table 7-1](#) is the troubleshooting chart. The troubleshooting chart is intended only as a guide and does not give all possible symptoms or all possible causes of trouble.

#### **7.3.1 General Troubleshooting Information**

- a. Identify the symptom.
- b. List the symptoms that you find or a field technician describes. If someone else describes the symptoms to you, check the symptoms yourself or have that person demonstrate the symptoms to make sure the problem is not an operator error.
- c. Do a careful visual inspection of the suspected assembly, including the following suggestions.
  - 1. Check for signs of excessive heat.
  - 2. Check that all integrated circuits (ICs) are firmly seated in their sockets and that the ICs have no bent pins.
  - 3. Check that printed circuit board edge connectors are clean and seated fully.
  - 4. Check the ribbon-cable connectors.
- d. Check the power supplies. Power supplies are a very common source of problems. Low output voltage or excessive ripple may be an indication that an IC is defective.
  - 1. Measure the power supply output voltages and check that they are within specifications.
  - 2. Check with an oscilloscope to insure that the power supply does not have excessive noise on the outputs.
- e. Using an oscilloscope, check waveforms of the suspected faulty assembly against those in this section.

## **Model 1150 CVOR**

- f. Verify the clock signals. Using an oscilloscope, check that the clock signals are present and correct.
- g. Verify the microprocessor input control signals.
  1. Check input signals, such as CLOCK, RESET, READY, HOLD, INT, etc., are at the proper level for normal operations. A common problem is that the processor will get stuck in a wait, hold, reset, or interrupt condition because of some other hardware problem.
  2. If one of these signals is at the wrong level. Refer to the proper schematic and see what is connected to the input and track down the problem.
- h. Verify the microprocessor output control signals.
  1. Check active output signals. The absence of these signals indicates a bad processor IC.
  2. Check whether pulses are present on lower address lines and data lines. On a normal oscilloscope these pulses will appear as random, 0 to +5Vdc pulses. This is a quick way to find out whether the CPU is sending out addresses and whether the data bus is active.
  3. Check with an oscilloscope whether the memory decoders are producing chip-select signals. If a decoder is not producing these signals, the decoder may be defective or may not be getting enabled.

**Table 7-1. Onsite Corrective Maintenance**

<b>Symptom</b>		<b>Possible Cause</b>		<b>Troubleshooting Procedure</b>
a.	System Alarm Condition Exists	Module Fault		(1) Perform fault isolation test. (2) Check for field monitor signal input to the monitor.
b.	RMS Fault	One of the modules in RMS has failed.		Perform Fault Isolation test. Replace faulty module.
c.	Transmitter No. 1 Fault	One of the modules in transmitter No. 1 has failed.		Perforem Fault Isolation test. Replace faulty module.
d.	Monitor No. 1 Fault	Fault in monitor No. 1.		Perform Fault Isolation test. Replace faulty module.
e.	Transmitter No. 2 Fault	One of the modules in transmitter No. 2 has failed.		Perform Fault Isolation test.. Replace faulty module
f.	Monitor No. 2 Fault	Fault in monitor No. 2		Perform Fault Isolation test. Replace faulty module.
g.	BCPS Power Failure	Faulty BCPS Module 1A/33/1A34		(1) Perform input voltage check as per <a href="#">paragraph 9.7.2</a> . If voltage is not present check AC input. If voltage is present go to step 2.  (2) Perform +28 Vdc output check as per <a href="#">paragraph 9.7.3</a> . If voltage is not +28 Vdc $\pm 0.5$ Vdc, adjust voltage potentiometer (located on 28 Vdc module) for +28 Vdc. If voltage is not present or if voltage will not adjust to +28 Vdc $\pm 0.5$ Vdc, replace BCPS 1A33/1A34. If proper voltage is present proceed to step 3.  (3) Perform +43 Vdc output check as per <a href="#">paragraph 9.7.4</a> . If voltage is not +43 Vdc $\pm 0.5$ Vdc adjust voltage adjust potentiometer (located on 48 Vdc module) for +43 Vdc. If voltage is not present or if voltage will not adjust to +43 Vdc $\pm 0.5$ Vdc. Replace BCPS 1A33/1A34.

**Table 7-1. Onsite Corrective Maintenance**

<b>Symptom</b>	<b>Possible Cause</b>	<b>Troubleshooting Procedure</b>
h. No Carrier Power Output	(1) +48 Vdc is not being supplied by BCPS 1A33/1A34.  (2) Faulty CSB Power Amplifier 1A3/A19.  (3) Frequency Synthesizer 1A4/1A20 is not producing carrier frequency.  (4) Faulty Frequency Synthesizer 1A4	Check BCPS 1A33 for +43 Vdc as detailed in <a href="#">paragraph 9.7.4</a> . If voltage is present go to possible cause step 2.  Replace suspected faulty PA with the power amplifier from standby system. If carrier power has been restored, replace faulty power amplifier. If carrier power has not been restored proceed to step 3.  Place Frequency Synthesizer 1A4 on extender cables. Connect frequency counter to carrier output 1A4J1/A20J1. If carrier frequency is not present replace frequency generator 1A4 or 1A20.
i. No Sideband Output	(1) +28 Vdc is not being supplied by BCPS 1A33/1A34.  (2) Frequency Synthesizer is not producing Sideband frequency.  (3) Faulty Sideband Generator 1A6/A22	Replace suspected fault with frequency synthesizer from standby system. If carrier power has been restored, troubleshoot wiring harness.  Perform +28 Vdc output check as per <a href="#">paragraph 9.7.3</a> . If voltage is not +28 Vdc $\pm 0.5$ Vdc adjust voltage adjust potentiometer (located on 28 Vdc module) for + 28 Vdc. If voltage is not present or if voltage will not adjust to $\pm 28$ Vdc $\pm 0.5$ . Replace BCPS 1A33/1A34. If proper voltage is present proceed to possible cause step 2.  Place Frequency Synthesizer 1A4 or 1A20 on extender cables. Connect frequency counter to sideband output 1A4J2 or 1A20J2. If sideband is not present replace frequency synthesizer 1A4 or 1A20. If sideband is present proceed to possible step 3.  Replace suspected faulty sideband generator with a sideband generator 1 from the standby system. If sideband has been restored, repair faulty sideband generator. If sideband power has not been restored, troubleshoot wiring harness.

## **7.4      OFFSITE REPAIR**

There are no assemblies that require offsite overhaul or calibration.

## **7.5      PACKING INSTRUCTIONS**


Equipment requiring shipment from the site for repair shall be individual packaged and marked. All items sensitive to electrostatic discharge (ESD) shall be packed in ESD bags or containers.

**Table 7-2. Test Point Data**

**NOTE:**


Unless otherwise indicated, Carrier output power is 100 watts and Sideband output power is 2.5 watts. Scope probe is 10:1, trigger source is Channel 1, input is DC coupled (zero ground reference point is indicated by the arrow(s) on the left side of each figure). The "A" arrow is the zero reference point for channel 1. The "B" arrow is the zero reference point for channel 2. 20 MHz bandwidth limiting turned on.

All oscilloscope presentations are typical; however, variations are possible due to site-specific operating requirements.

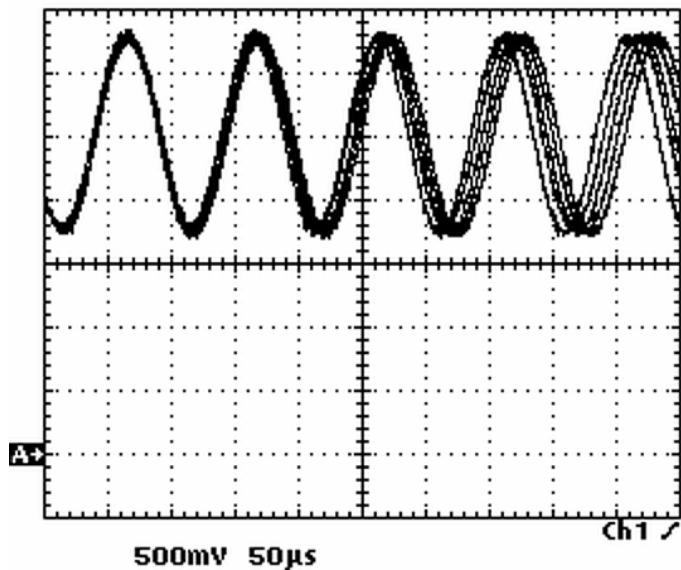

**Figure 7-1. RF Monitor Assembly (A2)**

Test Point TP6/TP7  
TX1, TX2 Forward Power  
Carrier Power 100 Watts, 9960 Modulated 30%

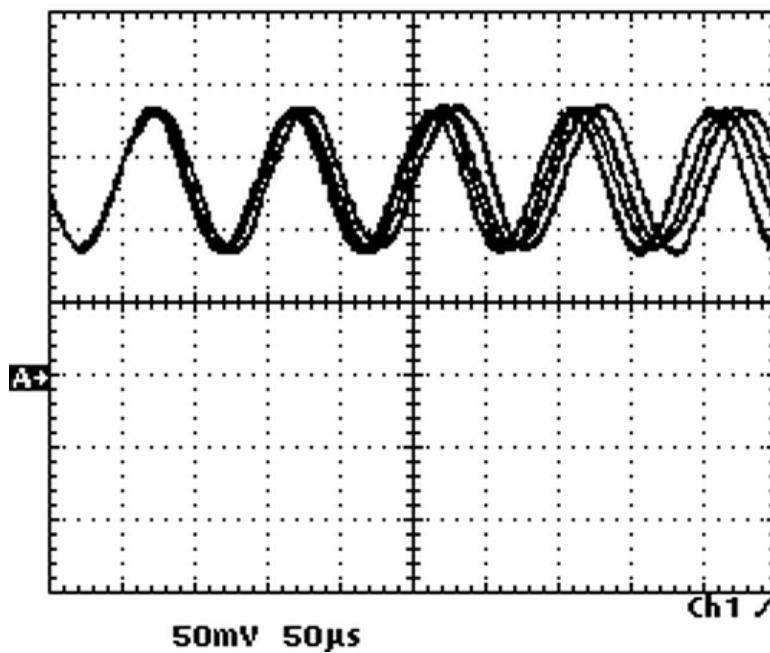


**Figure 7-2. RF Monitor Assembly (A2)**

Test Point TP8/TP9

TX1, TX2 Reflected Power

VSWR 1.02, Carrier Power 100 watts, 9960 Modulated 30%

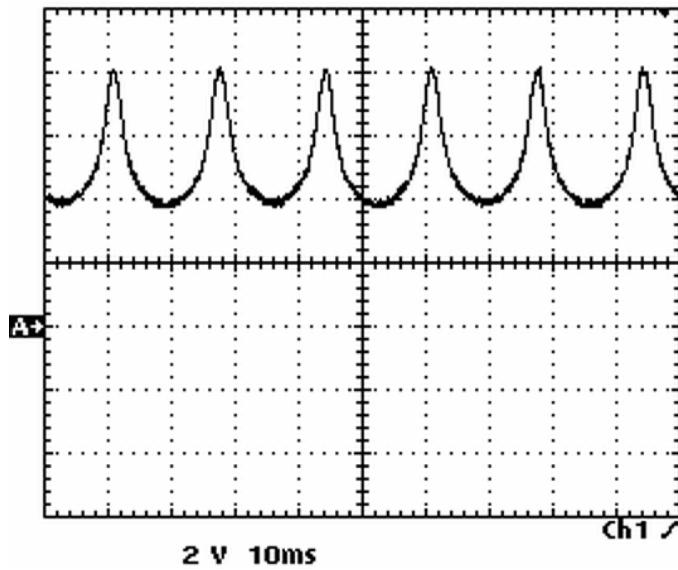


**Figure 7-3. Waveform - Sideband Generator Assembly (A5/A21)**

Test Point TP1/TP10


Dynamic Phase Control Voltage

**Model 1150 CVOR**

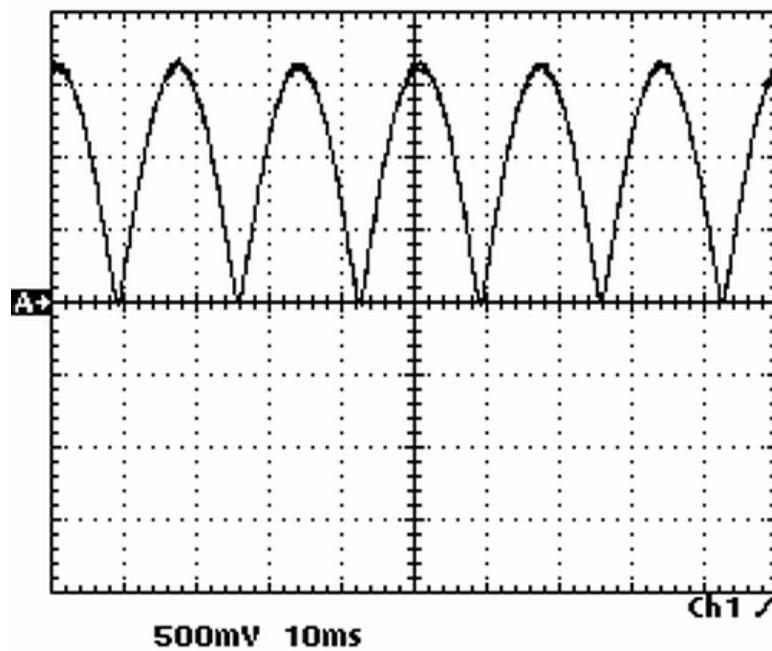


**Figure 7-4. Waveform - Sideband Generator Assembly (A5/A21)**

Test Point TP5/TP6  
Detected Output

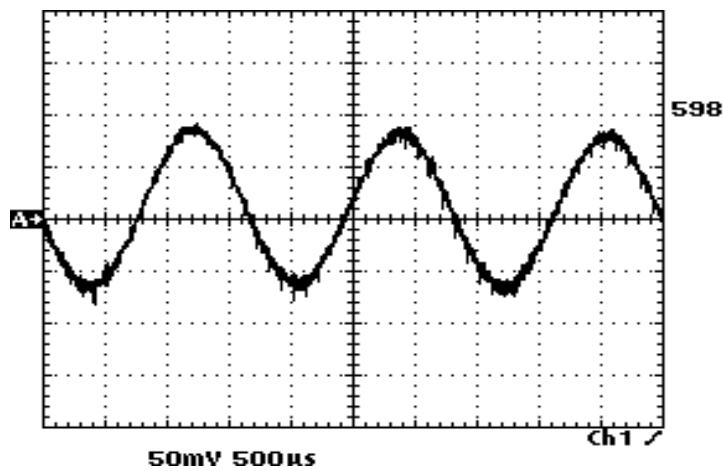

**Figure 7-5. Waveform - A7/A23 TP1 Signal Generator Output Connected to A38 MIC input**

A7/A23 Audio Generator Assy  
TP1  
600 Hz tone, 30% voice modulation  
Signal generator set to 600 Hz, 850 mV peak.  
Signal Generator output connected to A38 MIC input.

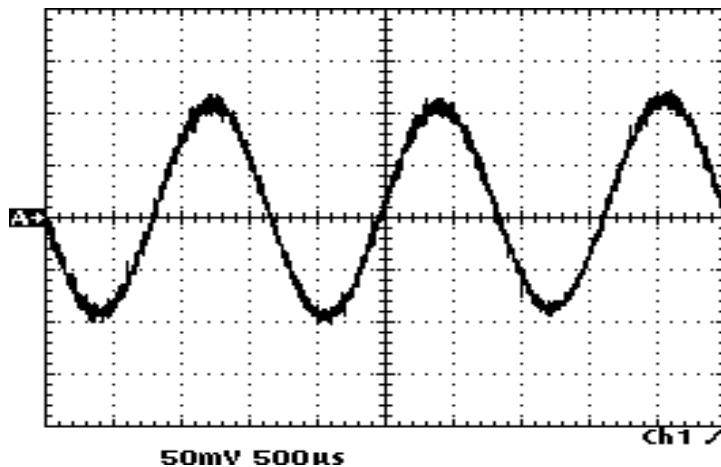

**Figure 7-6. Waveform - A7/A23 TP2 Signal Generator Output Connected to A38 MIC input**


A7/A23 Audio Generator Assy

TP2

600 Hz tone, 30% voice modulation

Signal generator set to 600 Hz, 850 mV peak

Signal generator output connected to A38 MIC input.

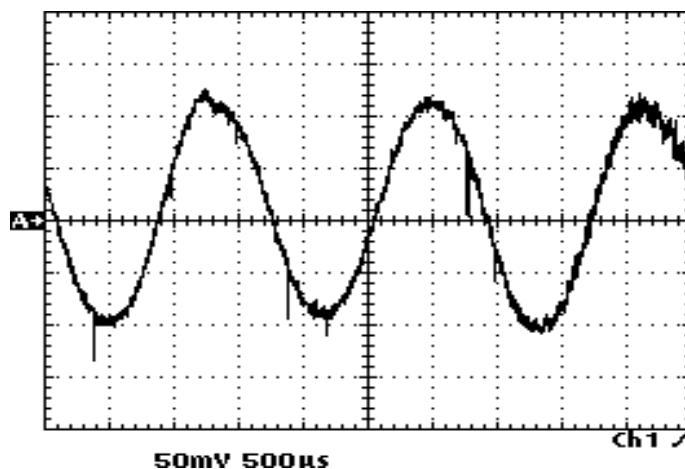

**Figure 7-7. Waveform - A7/A23 Signal Generator Output Connected to A38 MIC input**

A7/A23 Audio Generator Assy


TP3

600 Hz tone, 30% voice modulation.

Signal generator set to 600 Hz, 850 mV peak.

Signal generator output connected to A38 MIC input.

## Model 1150 CVOR

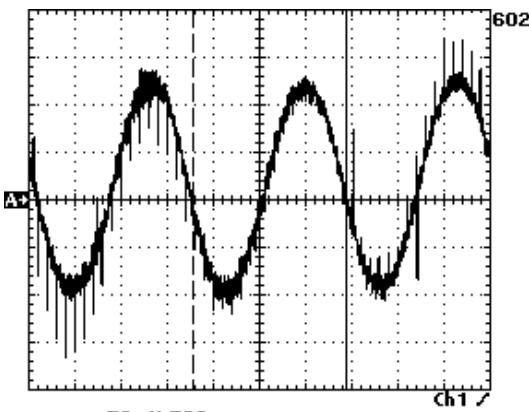

**Figure 7-8. Waveform - A7/A23 TP11 Signal Generator Output Connected to A38 MIC Input**

A7/A23 Audio Generator Assy

TP11


600 Hz tone, 30% voice modulation

Signal generator set to 600 Hz, 850 mV peak.

Signal generator output connected to A38 MIC input.

**NOTE:**

Waveform distortion caused by amplifier noise and notch filter.

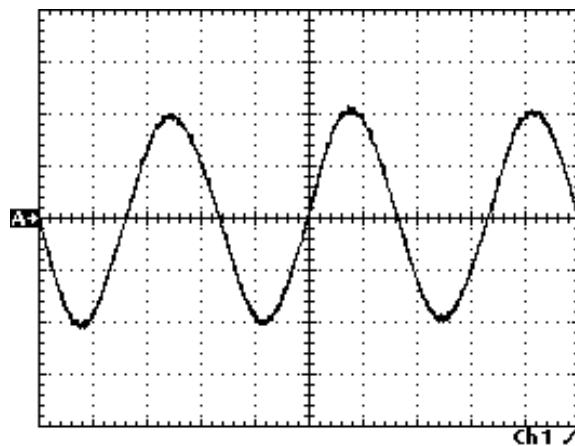

**Figure 7-9. Waveform - A7/A23 Signal Generator Output Connected to A38 MIC input**


A7/A23 Audio Generator Assy

TP4

600 Hz Tone, 30% voice modulation

Signal generator set to 600 Hz, 850 mV peak.

Signal generator output connected to A38 MIC input.

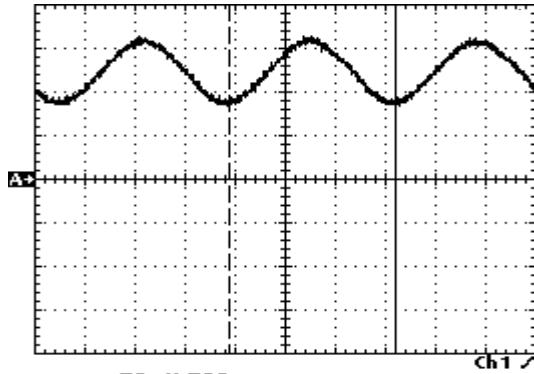

**Figure 7-10. Waveform - A7/A23 TP6 Signal Generator Output Connected to A38 MIC input**

A7/A23 Audio Generator Assy

TP6

Power 100 watts


600 Hz tone 30% voice modulation

Signal generator set to 600 Hz, 850 mV peak.

Signal generator output connected to A38 MIC input.

**NOTE:**

Voice audio signal only. Navigation and ID signals excluded.

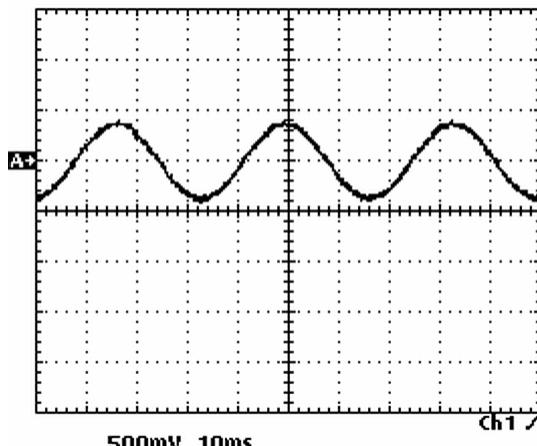


**Figure 7-11. Waveform - Audio Generator CCA (A7/A23)**

Test Point TP7

Waveform 30 Hz sin

Sideband Power 0.90 watts

**Model 1150 CVOR**

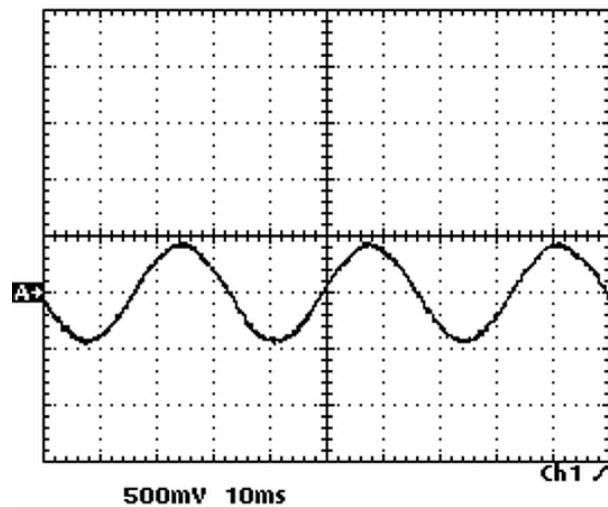


**Figure 7-12. Waveform - Audio Generator CCA (A7/A23)**

Test Point TP8

Waveform 30 Hz cos

Sideband Power 0.90 watts

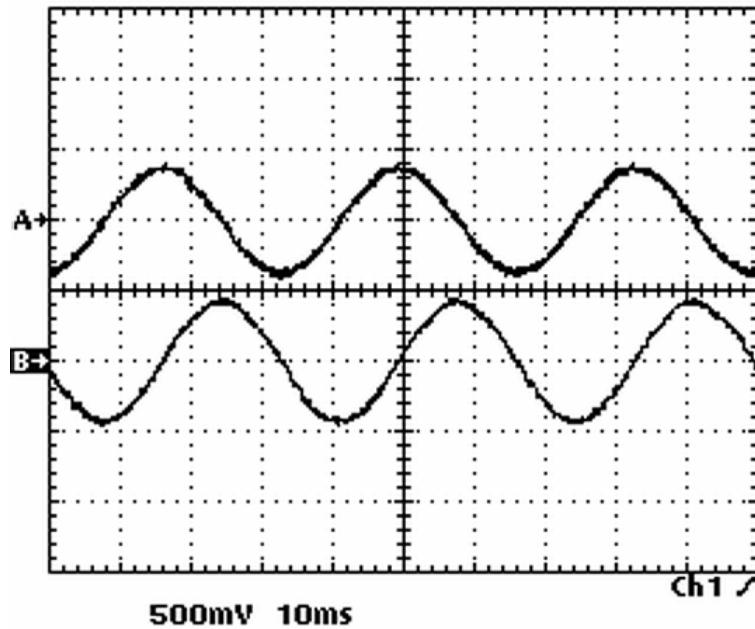

**Figure 7-13. Waveform - Audio Generator CCA (A7/A23)**

Test Point TP7/TP8

Upper Waveform 30 Hz sin

Lower Waveform 30 Hz cos

Sideband Power 0.90 watts

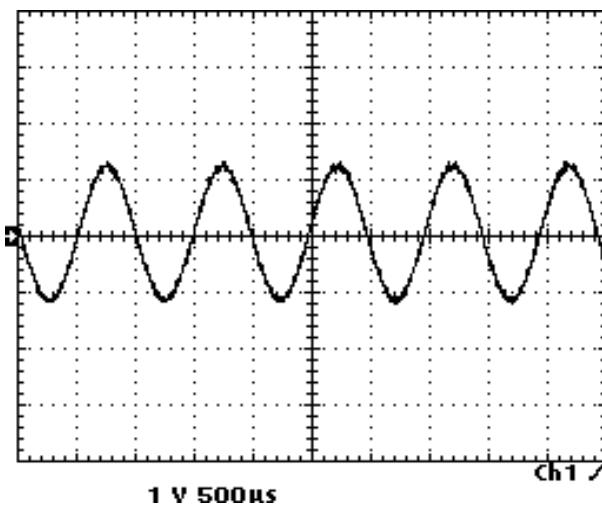


Figure 7-14. Waveform - A7/A23 TP9 1020 Hz Identity Tone

A7/A23 Audio Generator Assy

TP9

1020 Hz Identity Tone


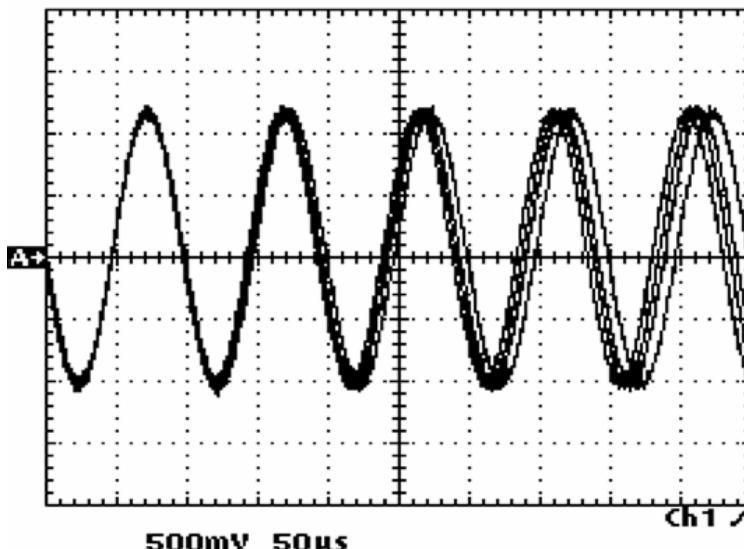


Figure 7-15. Wveform - Audio Generator CCA (A7/A23)

Test Point TP10


9960 Hz Reference Signal

**Model 1150 CVOR**

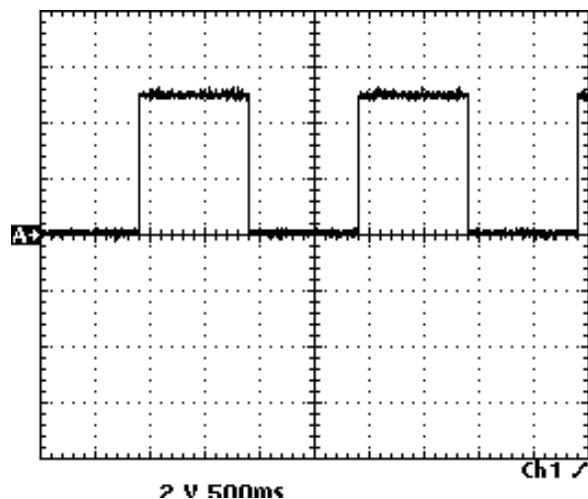


**Figure 7-16. Waveform - A11 TP1 Two Second Period**

A11 Facilities CCA  
TP1  
Two second period

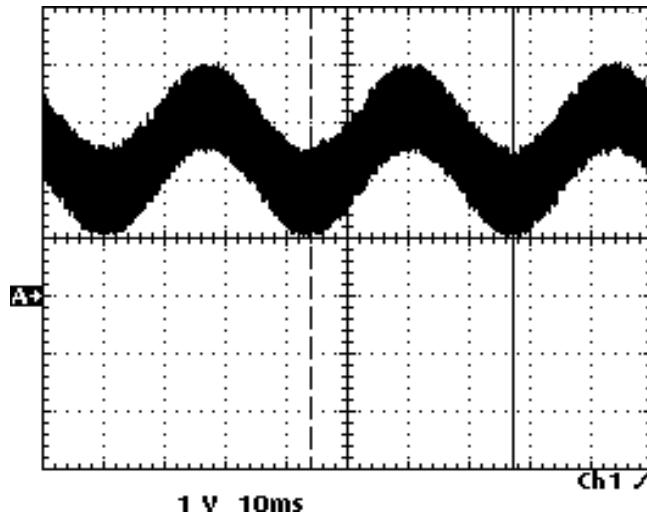

**Figure 7-17. Waveform - A12 TP1 Normal Appearance for Monitor Calibration**

A12 Test Generator CCA  
TP1  
Normal appearance for Monitor Calibration  
305 30 Hz, 9960 Hz, 16 Dev, 2.5 Vdc

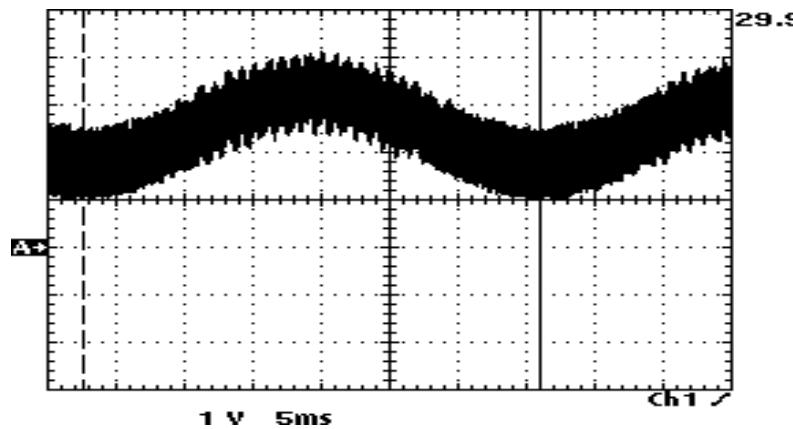


**Figure 7-18. Waveform - A12 TP1 Re-configuring for Generator Test of Monitor**

A12 Test Generator CCA

TP1

Re-configuring for generator test of monitor

ID set to "P" mode

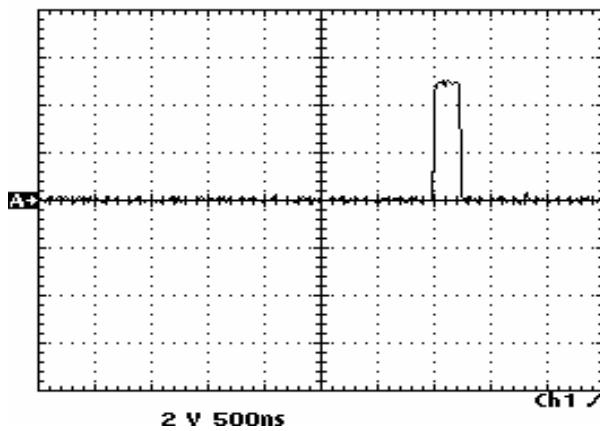

**Figure 7-19. Waveform - A12 TP2 Sync Signal**

A12 Test Generator CCA

TP2

Sync Signal

## Model 1150 CVOR

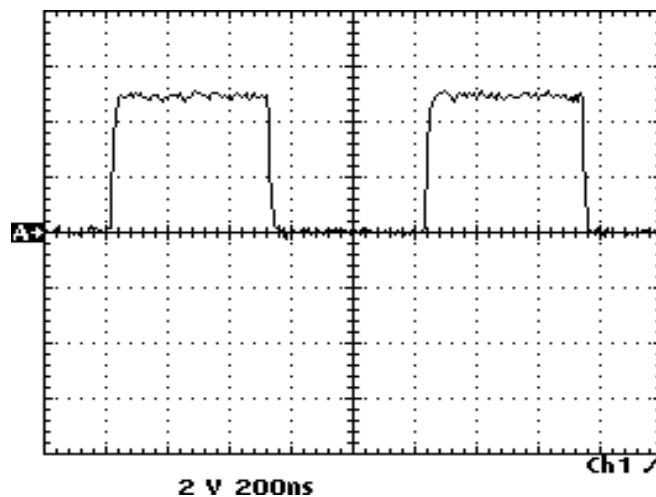


Figure 7-20. Waveform - A12 TP3 983.04 kHz Clock

A12 Test Generator CCA  
TP3  
983.04 kHz Clock

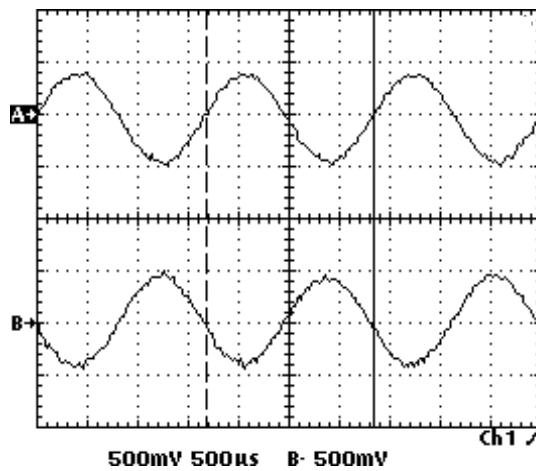
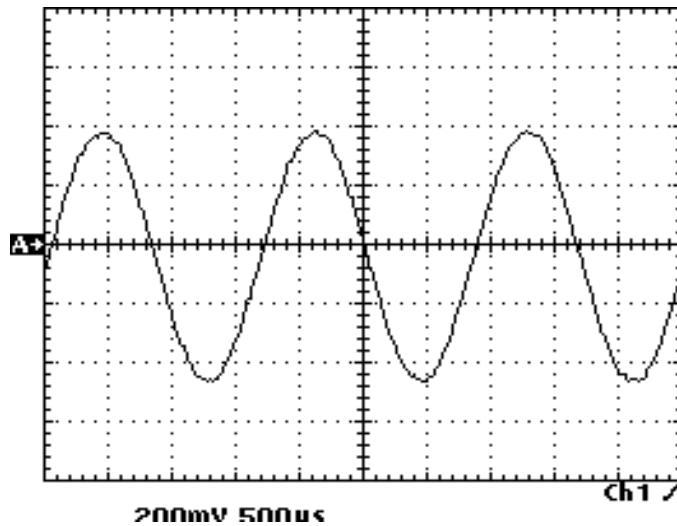


Figure 7-21. Waveform - A8/A24 TP1 and TP2 Voice Output

A8/A24 Monitor CCA  
TP1 and TP2  
Top Trace TP1 Voice Output of U25 600 Hz  
Bottom Trace TP2 Voice Output of U25 600 Hz  
10% modulation level 600 Hz test tone  
R21 adjusted for level

**Figure 7-22. Waveform - A8/A24 TP3 600 Hz Voice**


A8/A24 Monitor CCA

TP3

600 Hz Voice

10% modulation level 600 Hz test tone

R21 adjusted for level

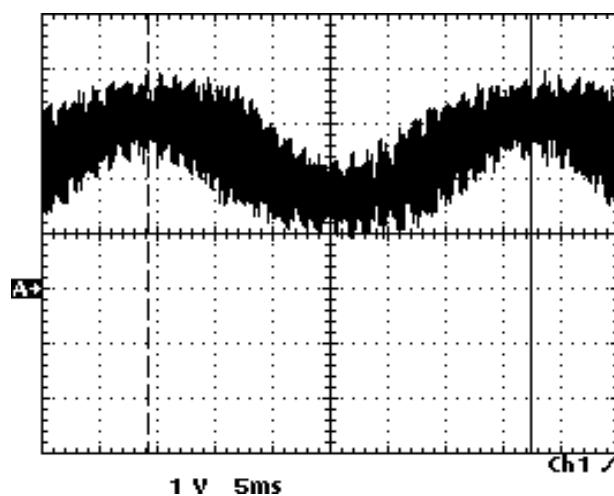**Figure 7-23. Waveform - A8/A24 TP5 Composite Signal**

A8/A24 Monitor CCA

TP5


Composite Signal (test generator provided)

30% 30 Hz, 30% 9960 Hz 16 dev

5% 1020 Hz Ident

## **Model 1150 CVOR**

Zero dB field intensity (avg DC is 2.5 Vdc)

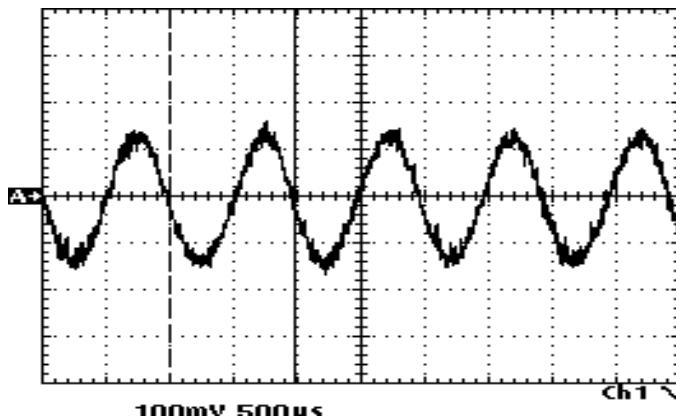


**Figure 7-24. Waveform - A8/A24 TP3 Audio Signal Level (ID Only)**

A8/A24 Monitor CCA 012617-0001

TP3

Audio Signal Level (ID Only)

Monitor has 5% 1020 Hz at TP5

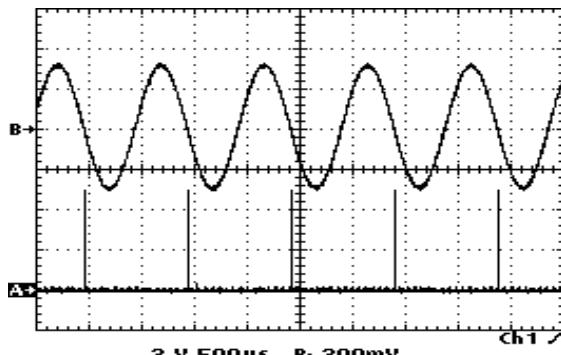


**Figure 7-25. Waveform - A8/A24 TP8 Ident Signal Level**

A8/A24 Monitor CCA

TP8

Ident Signal Level

Monitor has 5% 1020 Hz at TP5

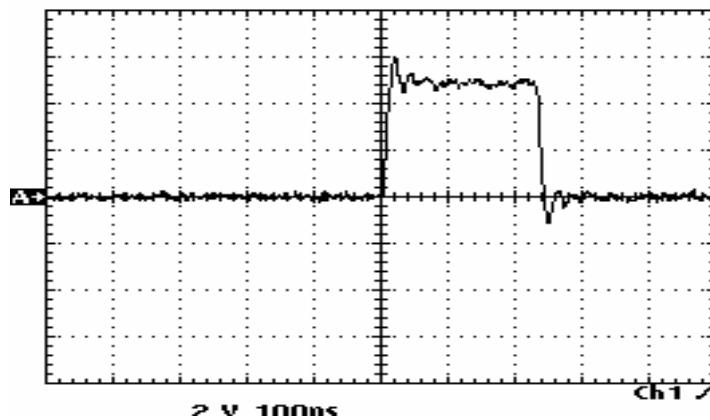

**Figure 7-26. Waveform - A8/A24 TP9 ID Square Pulse**


A8/A24 Monitor CCA

TP9

ID Square Pulse (occurs at zero crossover point of 1020 Hz signal). Typically  $\sim 0.25 \mu\text{s}$ .

Trigger from Anode of CR31

Ideal test generator composite w/continuous 1020 Hz

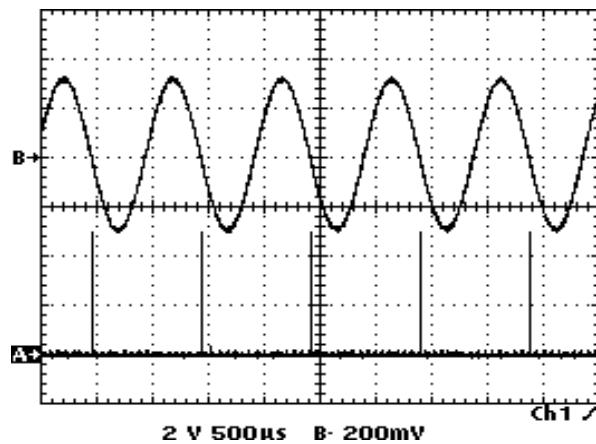


**Figure 7-27. Waveform - A8/A24 Monitor CCA TP9 and TP8**

A8/A24 Monitor CCA

TP9 and TP8

Trigger at TP9

Bottom trace TP9 0.25  $\mu$ s

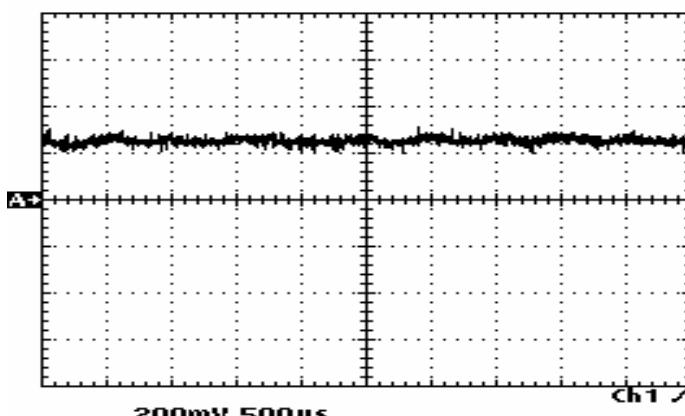

**Figure 7-28. Waveform - A8/A24 TP10 Continuous ID Tone**

A8/A24 Monitor CCA


TP10

Continuous ID tone from test generator

5% modulation level

**NOTE:**

This DC voltage will vary in amplitude as the ID morse code is detected.

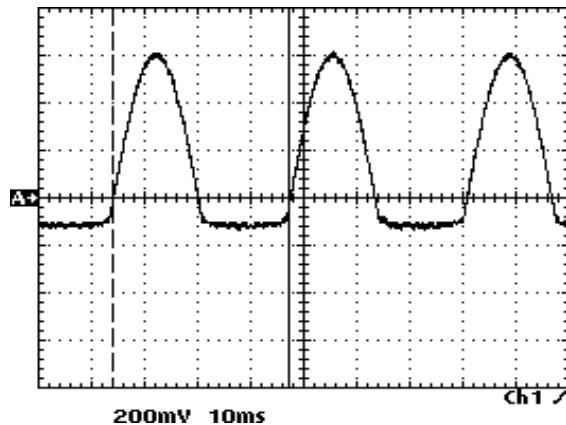


**Figure 7-29. Waveform - A8/A24 TP6 Half Wave Rectified**

A8/A24 Monitor CCA

TP6

Half Wave Rectified

30 Hz AM Signal

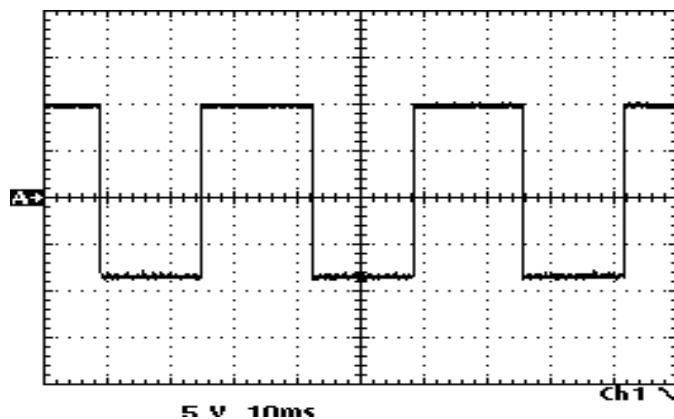


**Figure 7-30. Waveform - A8/A24 TP7 30 Hz AM Squared Signal**

A8/A24 Monitor CCA

TP7


30 Hz AM Squared Signal

## Model 1150 CVOR

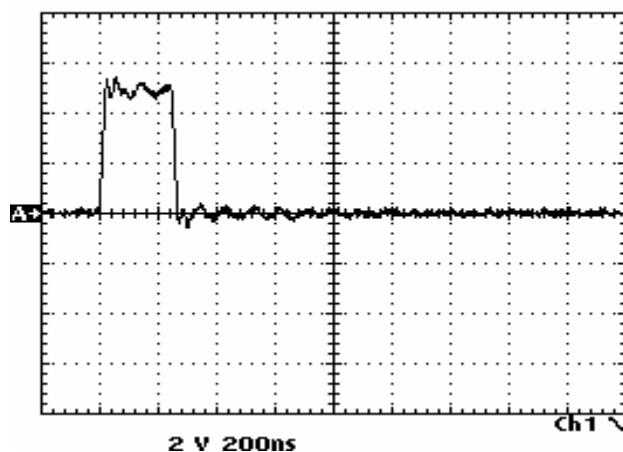


**Figure 7-31. Waveform - A8/A24 Monitor CCA TP12**

A8/A24 Monitor CCA  
TP12  
.25  $\mu$ s 9960 Hz Pulse  
Ideal test generator composite

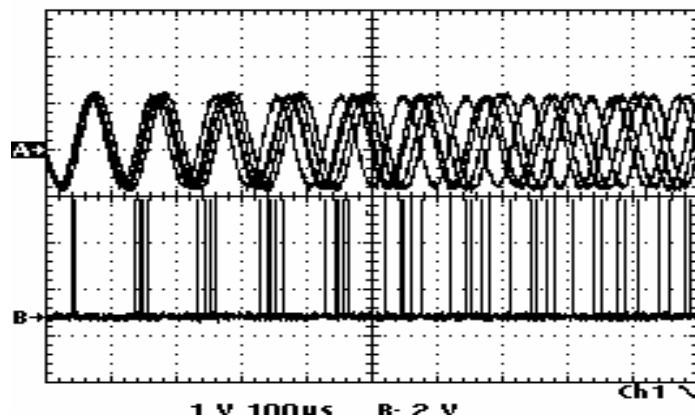

**Figure 7-32. Waveform - A8/A24 TP11 and TP12**

A8/A24 Monitor CCA  
TP11 and TP12  
Trigger from anode of CR30  
Top trace TP11, 9960 Hz  
Bottom trace TP12 .25  $\mu$ s pulse at zero crossover point.

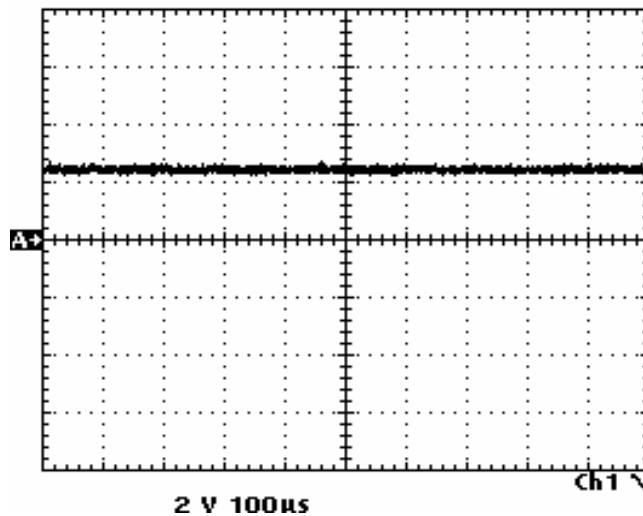


**Figure 7-33. Waveform - A8/A24 TP14 DC Voltage**

A8/A24 Monitor CCA

TP14 DC Voltage

Ideal test generator composite input signal

30% 9960 Hz modulation level

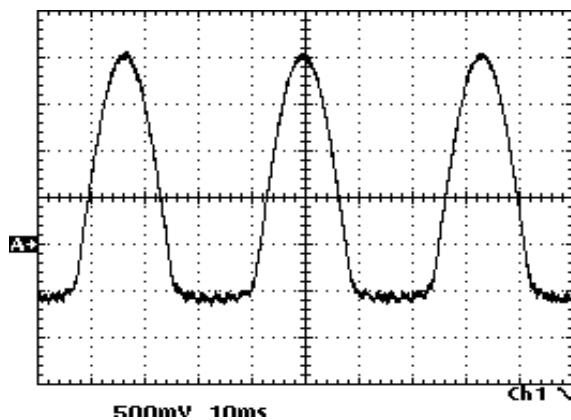

**Figure 7-34. Waveform - A8/A24 TP13 Half Wave Rectified 30 Hz FM**

A8/A24 Monitor CCA


TP13

Half Wave Rectified 30 Hz FM

Ideal test generator composite input signal

16 Dev (30 Hz FM)

## Model 1150 CVOR

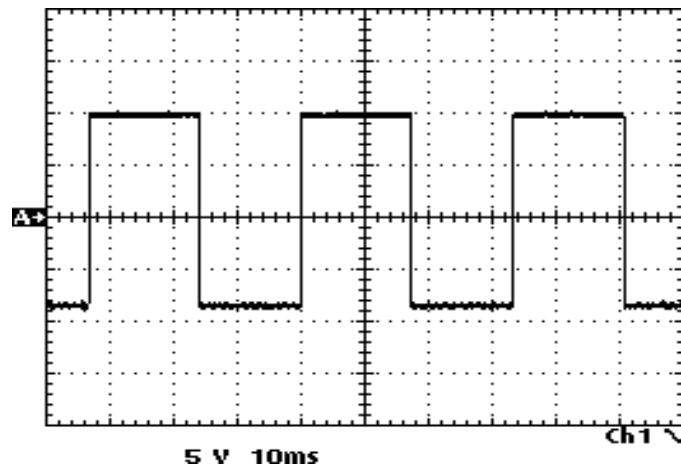

**Figure 7-35. Waveform - A8/A24 TP15 30 Hz FM Squared Signal**


A8/A24 Monitor CCA

TP15

30 Hz FM squared signal

Ideal test generator composite input signal

16 Dev (30 Hz FM)

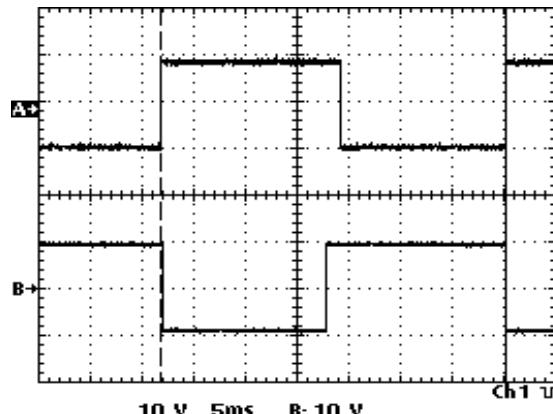

**Figure 7-36. Waveform - A8/A24 TP15 and TP7 (0 Degrees)**


A8/A24 Monitor CCA

TP15 and TP7

Top trace TP15 30 Hz FM

Bottom trace TP7 30 Hz AM

Test generator 9 degrees azimuth

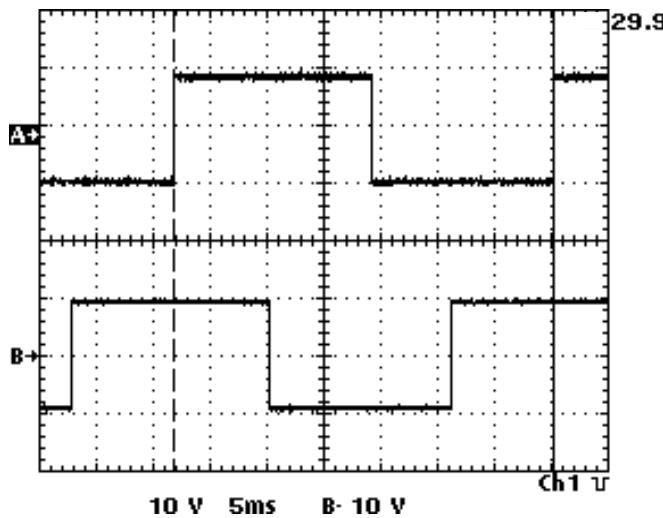

**Figure 7-37. Waveform - A8/A24 TP15 and TP7 (90 Degrees)**


A8/A24 Monitor CCA

TP15 and TP7

Top trace TP15 30 Hz FM

Bottom trace TP7 30 Hz AM

Test generator 90 degrees azimuth

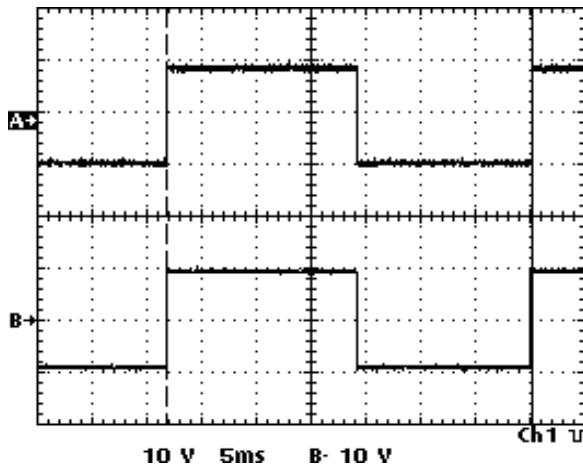

**Figure 7-38. Waveform - A8/A24 TP15 and TP7 (180 Degrees)**


A8/A24 Monitor CCA

TP15 and TP7

Top trace TP15 30 Hz FM


Bottom trace TP7 30 Hz AM

Test generator 180 degrees azimuth

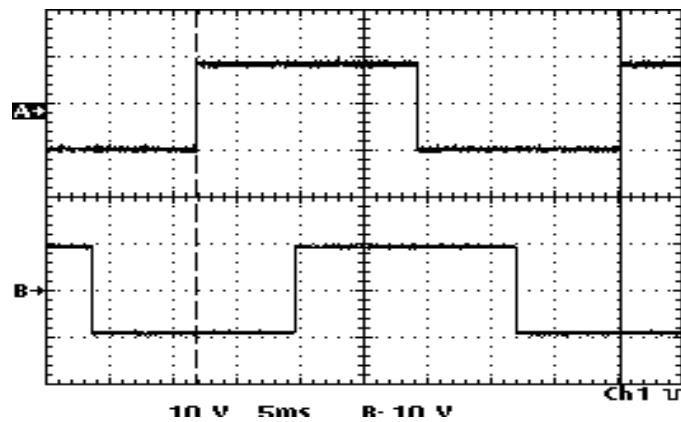

**Figure 7-39. Waveform - A8/A24 TP15 and TP7 (270 Degrees)**

A8/A24 Monitor CCA  
TP15 and TP7  
Top trace TP15 30 Hz FM  
Bottom trace TP7 30 Hz AM  
Test generator 270 degrees

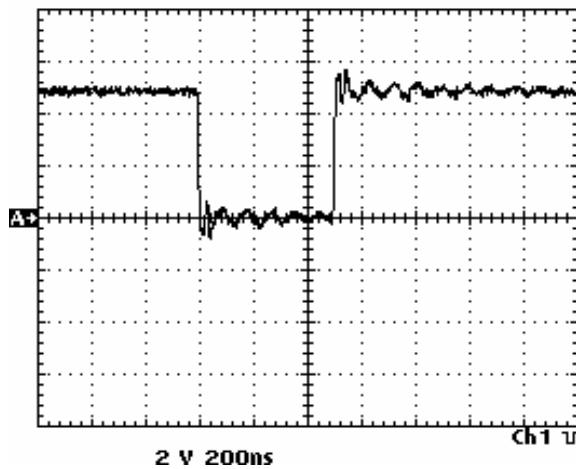

**Figure 7-40. Waveform - A8/A24 TP16 300 Hz Clock Pulse**

## 8 PARTS LIST

### 8.1 INTRODUCTION

Table 8-1 contains a list of the different variations of the Model 1150 CVOR. Table 8-2 contains a list of the assemblies and printed circuit cards used in the Dual Model 1150 CVOR. [Table 8-3](#) contains a list of the kits and optional equipment used in the Dual Model 1150 CVOR. Detailed Parts Lists are available through the electronic version of this manual.

**Table 8-1. Model 1150 Dual/Single CVOR**

<u>Part Number</u>	<u>Description</u>
001150-0102	VOR Transmitter Assembly Dual,Conventional 240V
001150-1102	VOR Transmitter Assembly Dual,Conventional 120V
001150-0101	VOR Transmitter Assembly Single, Conventional 240V
001150-1101	VOR Transmitter Assembly Single, Conventional 120V

**Table 8-2. Dual/Single 1150 CVOR Parts List**

<u>Part Number</u>	<u>Description</u>	<u>Ref Des</u>
030600-0002/0006	Cabinet Assembly, Dual	A1
030600-0001/0005	Cabinet Assembly, Single	A1
012610-0001	Display CCA	A1/A2
030364-0001	RF Monitor Assembly	1A2
012687-0001	RF Monitor CCA	A1
030363-0003	CSB Power Amplifier Assembly	1A3/1A19
012624-0001	Power Amplifier Modulator CCA	A1
012625-0002	Power Amplifier CCA	A2
012627-0002	Exciter CCA	A3
012626-0001	Bias Regulator/Exciter Modulator CCA	A4
030757-0002	Synthesizer Assembly	1A4/1A20
012100-1002	Synthesizer CCA	A1
012102-0001	Interconnect CCA	A2
030398-0002	Sideband Generator Assembly	1A5/1A21
012636-0001	Sideband Control CCA	A1/A3
012793-0002	Sideband Amplifier CCA	A2/A4
012616-1003	Audio Generator CCA w/Software	1A7/1A23
012617-1003	Monitor CCA w/Software	1A8/1A24
012101-1001	Modem CCA w/Software	1A9

**Table 8-2. Dual/Single 1150 CVOR Parts List**

<u>Part Number</u>	<u>Description</u>	<u>Ref Des</u>
012619-0002	Serial Interface CCA	1A10
012620-0001	SCIP Facilities CCA	1A11
012689-1001	Test Generator CCA w/Software	1A12
012618-1003	Microprocessor CCA w/Software	1A13
012743-0001	Low Voltage Power Supply CCA	1A14/1A15/1A16
012600-0004	Backplane CPU CCA	1A17
030358-0001/0003	Chassis Insert Assembly	A18
950350-0002	Power Supply Switching	1A33/1A34
030448-0001	Low Pass Filter Assembly	1A35/1A36
030749-0001	Jack Assembly	1A38
012090-0001	Jack CCA Microphone & Headphones	
070683-0001	Wiring Harness Chassis Insert	W1
030359-0001	Blower Assembly	1A39
030446-0001	Blower Valve Assy	
030551-0001/0002	Ext. Interface Enclosure	Unit 2
030470-0001	Field Detector Assy	
012708-0001	Field Detector CCA	
030366-0001	Auto Gnd. Ck. Assy	
012658-0001	Preselect/Ampl/Det. CCA	
012785-0001	Diode Switch CCA	
012786-0001	Switch Driver CCA	
030568-0001	Enclosure Assy	
030574-0001	Transient Suppressor Assy	
030610-0001	Wattmeter Assy	

**Table 8-3. Model 1150 CVOR Kits and Optional Equipment**

<u>Part Number</u>	<u>Description</u>	
001159-0101	VOR-DME Monitor	120V
001159-0102	VOR-DME Monitor	240V
470108-0001	Battery Backup Kit	w/Batteries Wall Mount
470108-0003	Battery Backup Kit	w/o Batteries Wall Mount
470115-0002	Test Equipment Kit	CVOR
470116-0001	Accessory Kit	CVOR/CVOR
470426-0001	Remote Maintenance System Kit	w/Computer (120V)
470426-0002	Remote Maintenance System Kit	w/Computer (240V)
470202-0002	Antenna Kit, 4 Loop Array	

**Table 8-3. Model 1150 CVOR Kits and Optional Equipment**

<u>Part Number</u>	<u>Description</u>	
470177-0001	Radome Kit	
470190-0001	Equipment Cabinet Mounting Kit	
470196-0001	Interface Kit	1138 RSCU
470344-0001	Transmitter Mounting Kit	Reiff Shelter
470360-0001	Portable Maintenance	Computer Kit
470487-0002	Interface Kit, 2138 DTMF	2138 RSCU
480002-0001	Spares Kit	Full,Board & Modules
480002-0001	Spares Kit	Components
480039-0001	Spares Kit	Recommended,RSCU Interface
480055-0001	Spares Kit	Recommended
480057-0001	Spares Kit	Minimum
480081-0001	Spares Kit	Components,RSCU Interface

**THIS SHEET INTENTIONALLY BLANK**

## 9 INSTALLATION, INTEGRATION, AND CHECKOUT

### 9.1 INTRODUCTION

This section contains installation data and initial tune-up procedures for the Model 1150 Doppler VHF Omnidirectional Range (CVOR) electronic subsystem. Refer to the appropriate equipment manuals for specific antenna installation and siting requirements. Before the equipment is installed, shelter construction must be completed. After equipment is unpacked and inspected, the installation work is divided into two major sections.

- a. First, site construction work consisting of the concrete, antenna counterpoise, shelter, primary AC power installation, and CVOR system hardware is to be installed. At sites where Alenia Marconi Systems (ASI) Inc., does not supply the antenna counterpoise, shelter, or primary AC power, the customer or end user is responsible for these items and their installation.
- b. Second, the transmitter is powered up and aligned.

### 9.2 SITE INFORMATION

All obstructions within 1000 feet of the station shall be removed. No groups of trees shall be within 1000 feet or subtend a vertical angle of more than 2 degrees. Farm type wire fences about 4 feet high are not permitted within 200 feet and chain link type fences (6 feet high) are not allowed within 500 feet. Overhead power and control lines may be installed beyond 600 feet but should be essentially radial to the station for a minimum of 1200 feet. Power and control lines to the station should be buried underground within 600 feet of the station. There should be no lines or supporting structures that subtend a vertical angle of 1.5 degrees as measured from the station ground elevation. At mountain top sites no trees within 1000 feet should be visible from the antenna array.

All other conditions and considerations applicable to specific sites should follow specifications of FAA Order 6820.10, VOR/VORTAC Siting Criteria, and ICAO Annex 10, Part 1 Volume 1, Attachment C, Paragraph 3.2, VOR Siting Guidance.

#### 9.2.1 Shelter Requirements

The CVOR requires a shelter which is centrally located under the counterpoise. The wall on which the interface enclosure is mounted should face the center of the counterpoise.

## **9.3 UNPACKING AND REPACKING**

The CVOR electronic subsystem and interface enclosure are shipped unassembled. Only general precautions can be given because the crating and unpacking depends upon destination and which optional equipment is included. Most items are packed separately in individual containers; these are then grouped for crating. Each crate contains a packing list which details what equipment is enclosed in the crate. Unpack the equipment and visually inspect each item for accuracy and damage, but DO NOT REMOVE any ESD protective wrapping. Report damage immediately. After inspection, repack each item to prevent damage. During installation, unpack items as they are needed.

### **9.3.1 Environmental Considerations**

The environmental conditions must not exceed those listed in the Specifications of [Table 1-1](#).

## **9.4 INPUT REQUIREMENT SUMMARY**

The requirements for input power must not exceed those listed in the Specification of [Table 1-1](#).

## **9.5 INSTALLATION PROCEDURES**

### **9.5.1 Tools and Test Equipment Required**

Refer to table 9-1 for a list of special tools and test equipment that is not listed in [Table 1-7](#). Refer to [table 9-2](#) for a list of tools needed for installation but not for normal operation of the system.

**Table 9-1. Tools and Test Equipment**

<b>Part Number</b>	<b>Description</b>
950270-0000	Dummy Load, 50 ohm, 100 Watt, Load, 1kW max.
399006-0000	Dummy Loads, 50 ohm, 5 Watt (5 required)
339003-0000	ESD Wrist Strap (part of 470116-0001 accessory kit)
950267-0000	SMA Wrench
950268-0000	1 Watt Element
950474-0001	5 Watt Element
	250 Watt Element, Bird, 250B or 250C


**Table 9-2. Tools Needed for Installation**

<b><u>Part No.</u></b>	<b><u>Description</u></b>
950505-0000	Theodolite
950505-0001	Vector Voltmeter, HP, Model 8508A
234617-0000	Or Agilent Model 8712 Network Analyzer Accessory Kit, Vector Voltmeter, Model HP11570A NARDA Bi-directional Coupler, PN 3020A
900065-0000	Soldering Iron, 30 watt Soldering Gun, 120 Watt Heat Gun, Ungar, Professional Model 6970
Obtain locally	Silicon Sealant
Obtain locally	3/16" Drill Bit 2-1/2" Hole Saw

### **9.5.2 Counterpoise and Shelter Foundation Installation**

Refer to [Figures 9-1](#) and [9-2](#). The counterpoise and shelter foundation drawing is a typical installation drawing and will change per local building codes. Refer to AMS VOR Counterpoise Manual, Part Number [571150-0006](#) for complete details about an AMS supplied VOR Counterpoise. For counterpoise and shelters not supplied by Alenia Marconi Systems (ASI) Inc., the manufacturer of the counterpoise or shelter should supply drawings for the siting engineer.

**Figure 9-1. Typical Shelter Foundation Drawing**

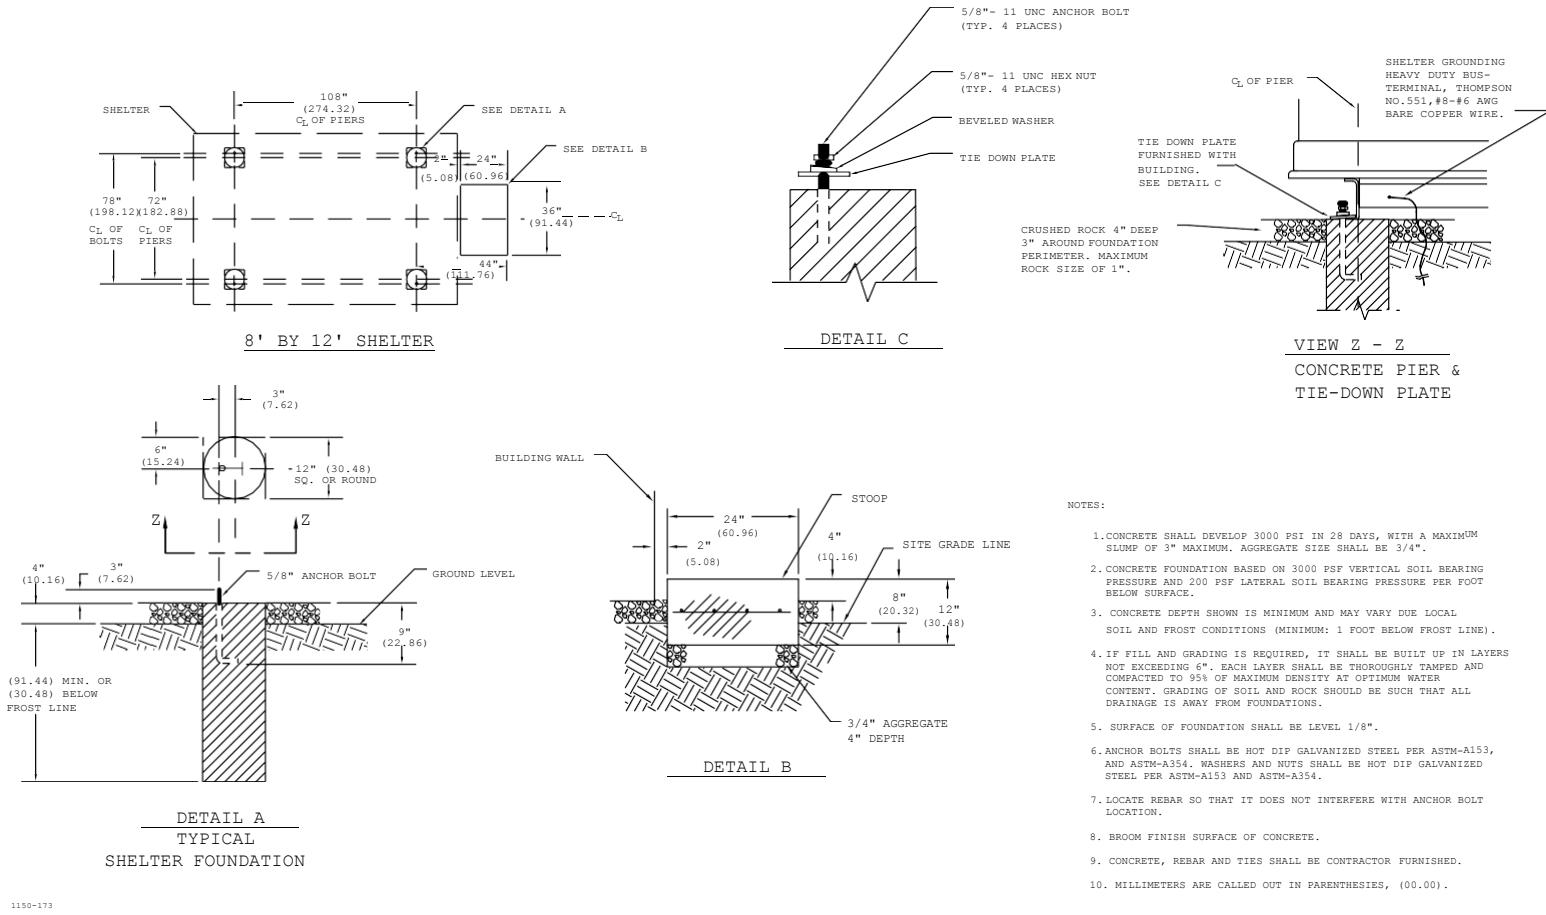


This document contains proprietary information and such information may not be disclosed to others for any purposes without written permission from Alenia Marconi Systems (ASD) Inc.

Rev. F January, 2003

### 9.5.3 Shelter Installation

Shelter installation procedures are for a 8' x 12' shelter supplied by Alenia Marconi Systems (ASI) Inc..

- Refer to Figure 9-1. Using a crane and four (4) nylon slings (20' long), position the equipment shelter on the concrete foundations. Attach shelter to the foundation anchor bolts using the 5/8" hardware and mounting plates.
- Install shelter ground rods, refer to Figure 9-2.

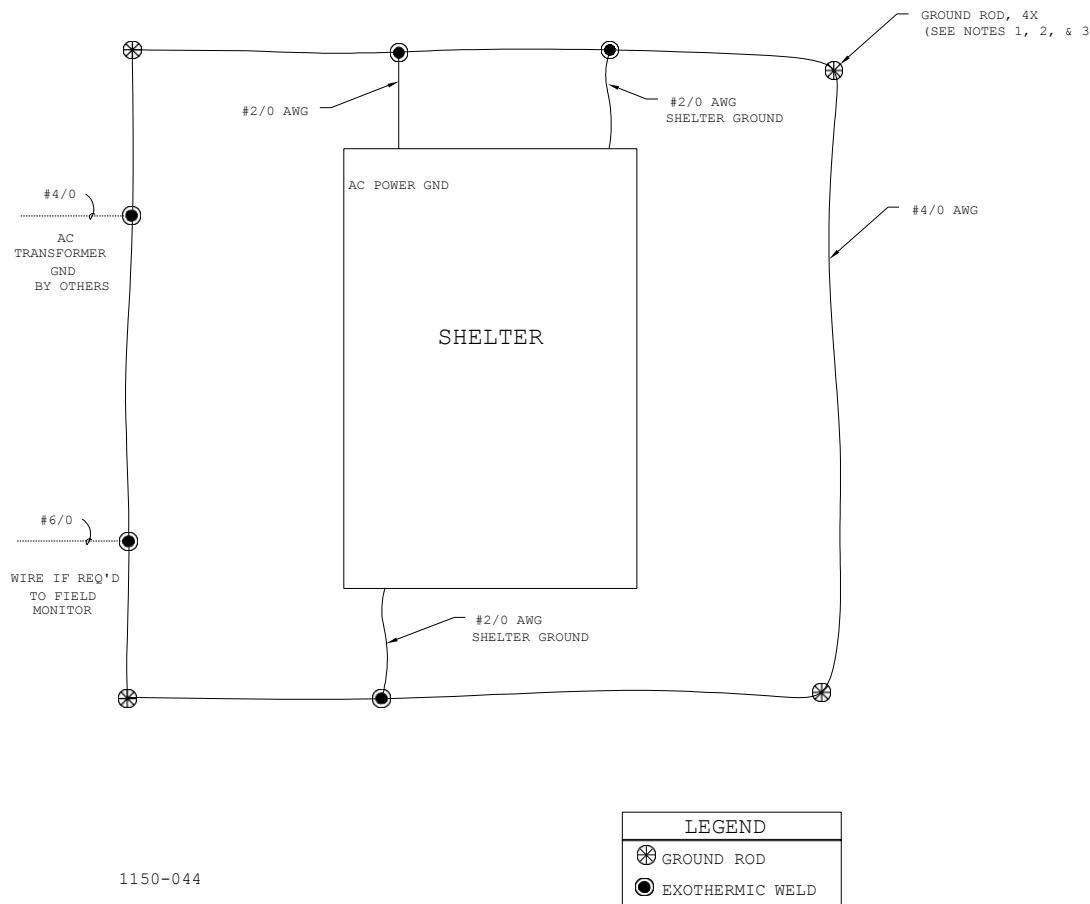

- Notes:
- All ground rods shall be 3/4" x 10' copper clad steel, driven to 12' below grade.
  - Unless otherwise indicated, all bonds below grade shall be exothermically welded.
  - All ground rods shall be at least 24" from any foundation (6' max.).
  - Strip all bonding locations to bare, clean metal and apply anti-oxidation compound.
  - Resistance to earth of the complete earth electrode system will be 5 ohms or less.


**Figure 9-2. Shelter Grounding Diagram**

#### **9.5.4 Counterpoise Installation**

Refer to Alenia Marconi Systems Manual, Part Number [571150-0006](#) for counterpoise installations instructions. For a counterpoise not supplied by Alenia Marconi Systems (ASI) Inc. refer to the manufacturer's installation drawings.

#### **9.5.5 Radome and Obstruction Light Installation**

Install radome and obstruction light as detailed in Figure 9-3 (Use Kit Part Number 470177-0002).

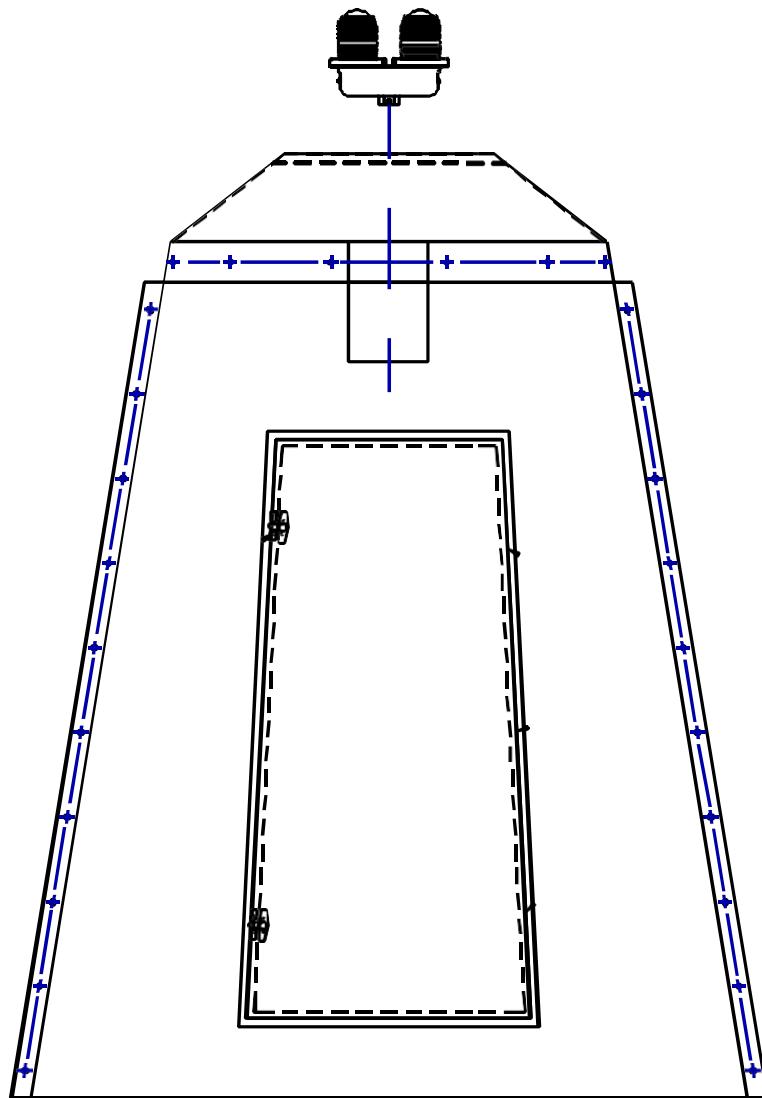

**1150-594**


**Figure 9-3. Radome Installation Kit Diagram**

## 9.5.6 Initial Conditions

Turn off CVOR AC and DC Circuit Breakers. Do not turn on until instructions indicate to do so.

## 9.5.7 Four-Loop Antenna Array Installation


The install four-loop antenna array as shown in Figure 9-4. Refer to antenna manual part no. [570001-0001 Section 9, paragraph 9.4.3 through 9.4.6](#) for installation details (Kit Part Number 470202-0001).

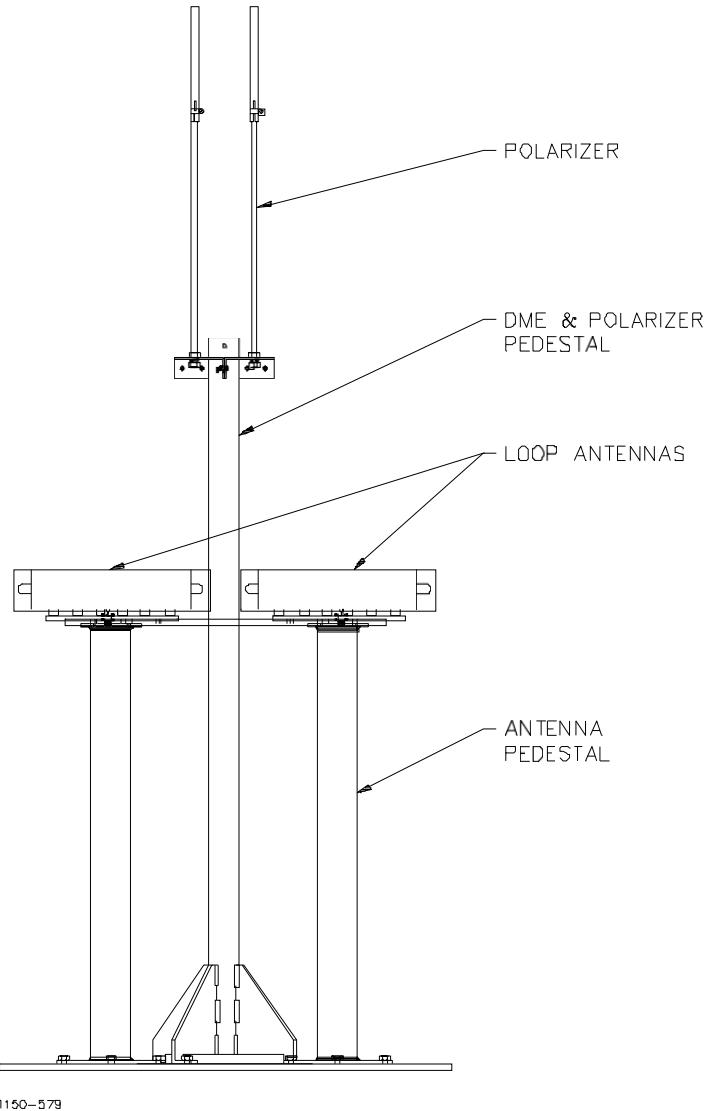

**Figure 9-4. Four-Loop Antenna Array Installation Kit Diagram**

### **9.5.8 Interface Enclosure Assembly Installation**


Install interface enclosure assembly as detailed in Figure 9-5. Refer to Figure 9-11 for location and dimensional information. Using the Enclosure Assembly mounting holes as a guide, drill six 3/16" holes in the inside shelter wall. Attach the enclosure assembly using 1/4" x 1- 1/4" lag screws and flat washers.

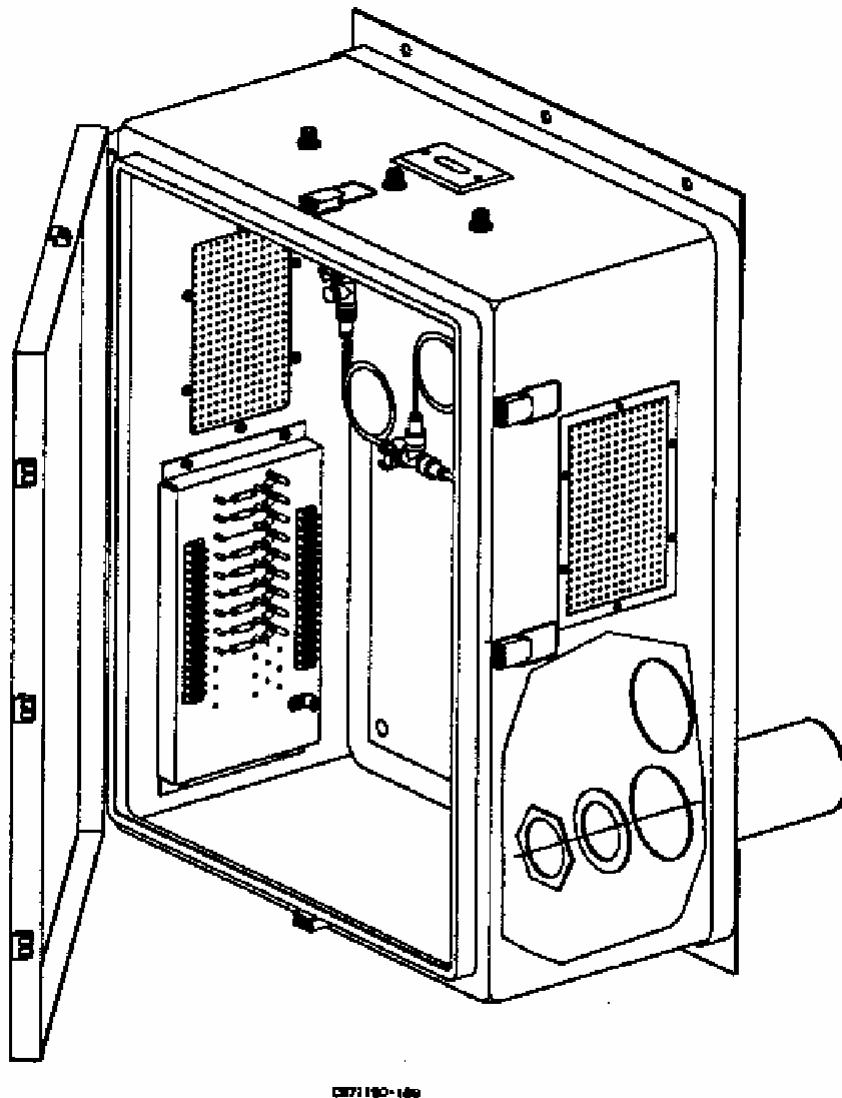

**Figure 9-5. Interface Enclosure Assembly Installation Diagram**

### 9.5.8.1 Coaxial Bridge Assembly Installation

Install coaxial bridge assembly within the interface enclosure as shown in Figure 9-6. Details of installation are in manual [570001-0001 Section 9.4.8](#).

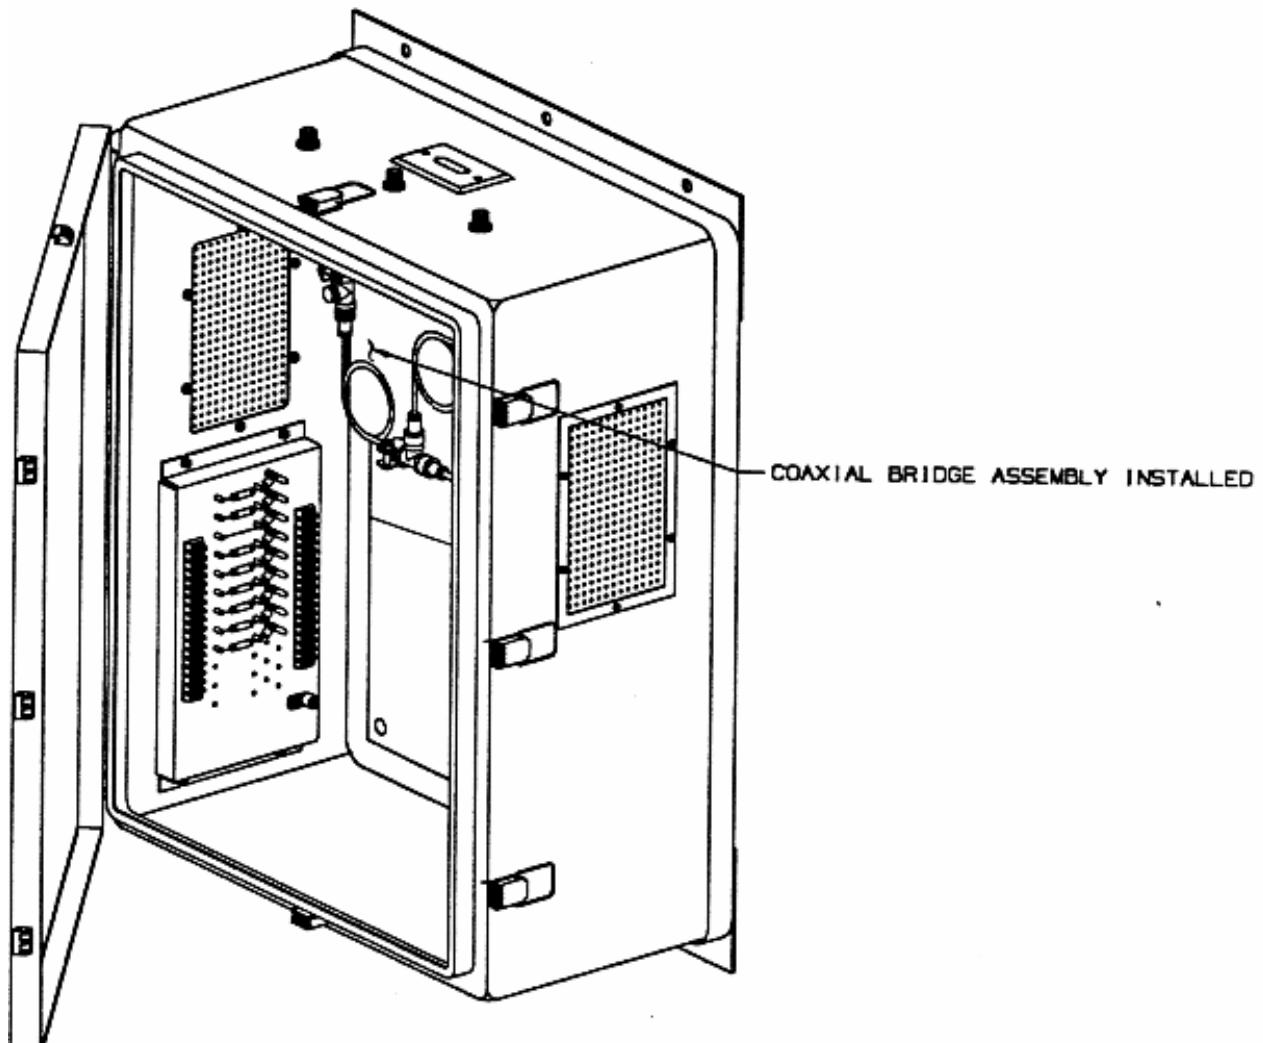

0571150-180


**Figure 9-6. Coaxial Bridge Assembly Installation Diagram**

### **9.5.8.2 Semi-Automatic Ground Check Installation Kit (Optional)**

Install the semi automatic ground check assemblies according to antenna manual part number [570001-0001](#).

### **9.5.8.3 Automatic Ground Check Installation Kit (Optional)**


Install the automatic ground check switch assembly within the interface enclosure as detailed in Figure 9-7 and refer to Antenna Manual Part Number [570001-0001](#).

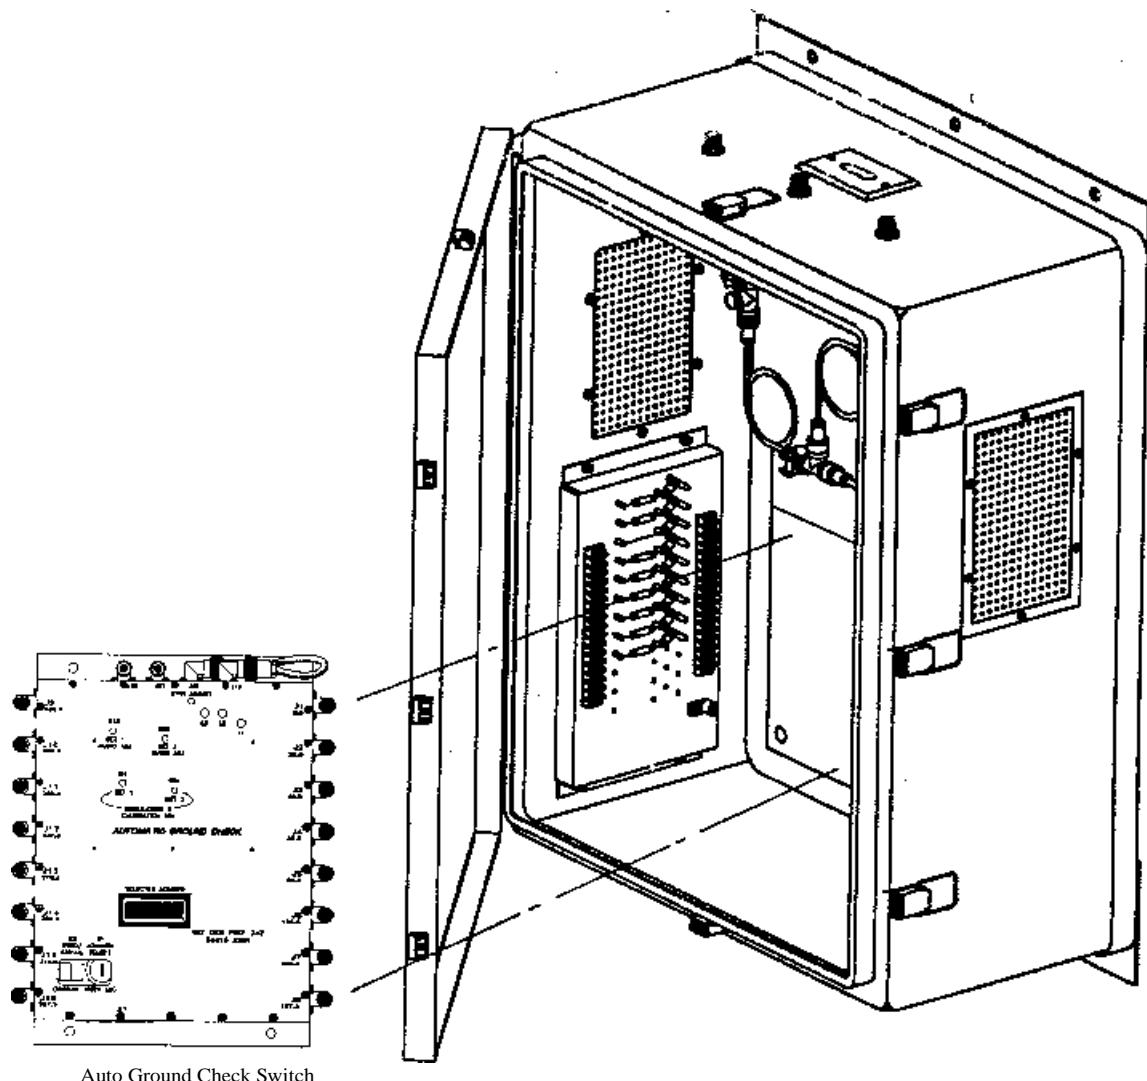

**Figure 9-7. Automatic ground Check Switch Installation Diagram**

### 9.5.9 DME Antenna Installation (Optional)

Install DME antenna assembly as detailed in Figure 9-8. Using the DME antenna base as template, mark and drill the six holes required to secure the DME antenna to the radome and the hole for the antenna coaxial cables. Mount the DME Antenna using silicon sealant between the radome and the DME antenna. All DME antenna attaching hardware is supplied in the radome kit 470177-0001.

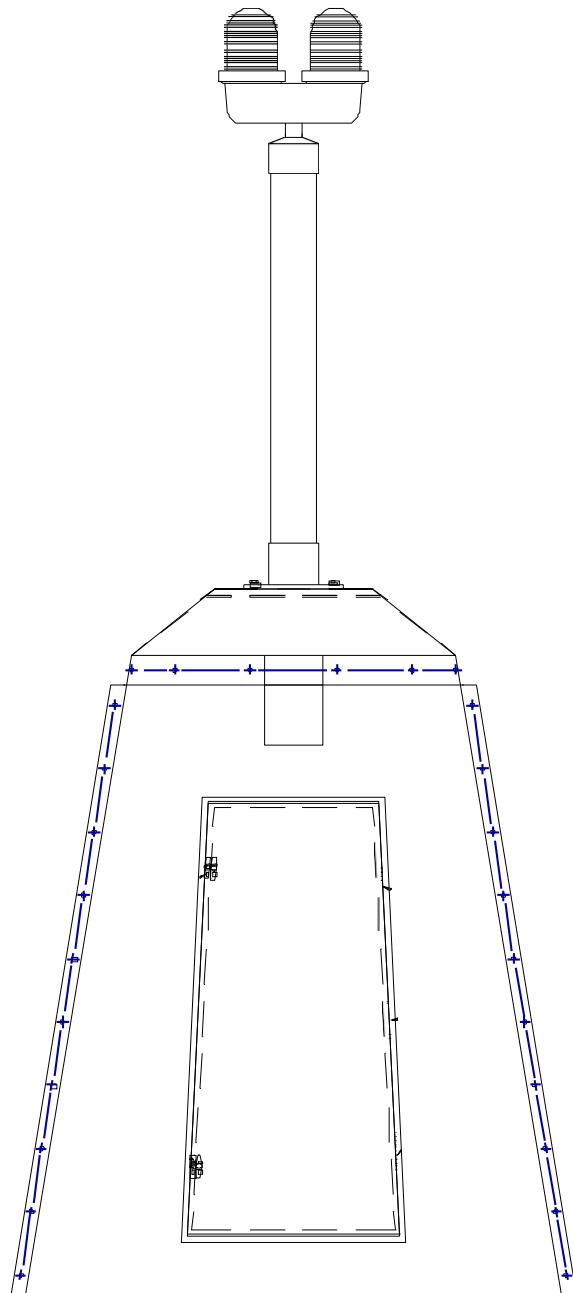

1150-603

**Figure 9-8. VOR Collocated with DME Antenna Installation Diagram**

**Rev. F January, 2003**


This document contains proprietary information and such information may not be disclosed to others for any purposes without written permission from Alenia Marconi Systems (ASI) Inc.

9-


## Model 1150 CVOR

### 9.5.9.1 CVOR/DME Obstruction Light Interconnect

Refer to Figures 9-9 or 9-10 (as appropriate) for CVOR/DME obstruction light wiring.

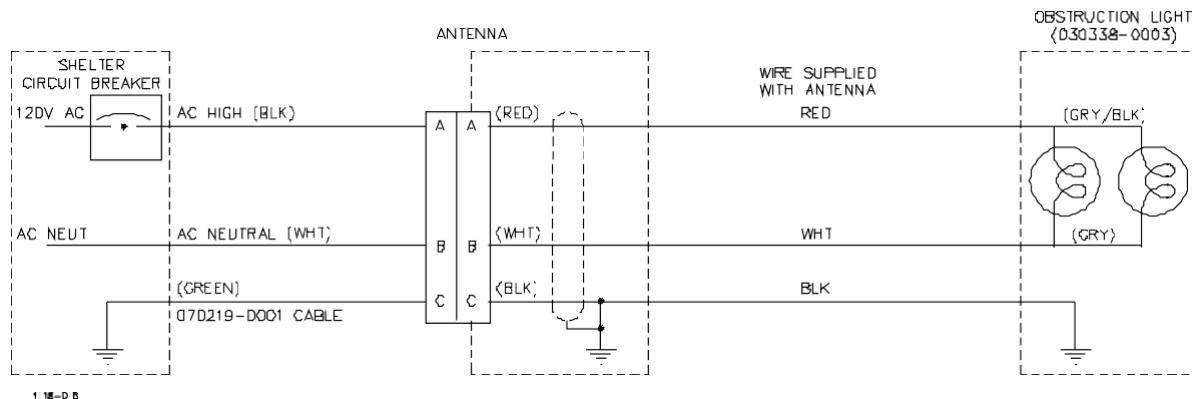

**Figure 9-9. CVOR/DME Obstruction Light 120 Vac Interconnect Diagram**

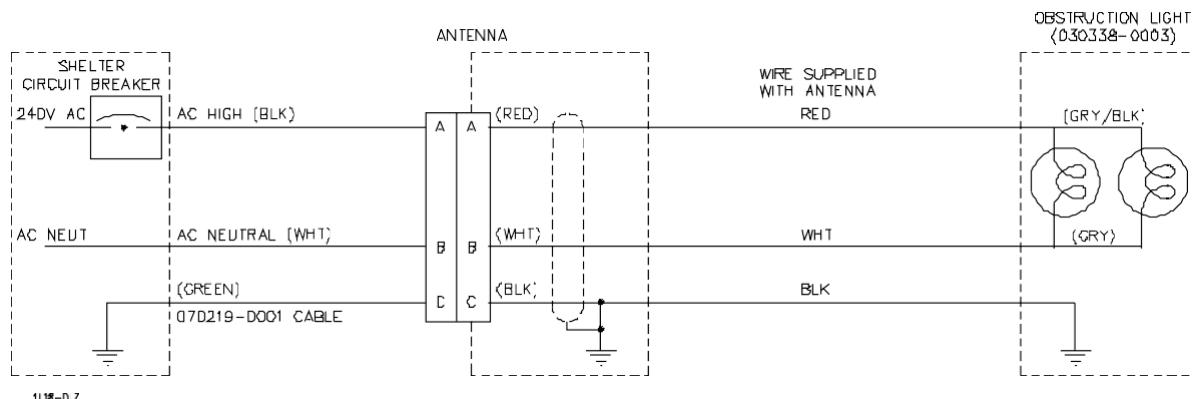

**Figure 9-10. CVOR/DME Obstruction Light 240 Vac Interconnect Diagram (International Use Only)**

### 9.5.10 Unistrut Rail Mounting Procedures

Refer [Figure 9-11 and 9-12](#).

- Using Unistrut rail (MP3), as a guide, drill four 3/16" holes (maximum depth of 1") per vertical Unistrut rail into the inside shelter wall. Make sure Unistrut mounting rails are perpendicular to the shelter floor and attach each Unistrut rail (MP3) to shelter wall using 1/4" x 1-1/4" lag screws and a flat washer.

- 
- b. Attach and secure the horizontal Unistrut mounting rails (MP1) to vertical Unistrut mounting rails (MP3) using appropriate hardware.

### **9.5.11 Air Conditioner Installation**

If a wall mounted air conditioner is supplied install the air conditioner in the wall opening and secure it in place using brackets supplied.

### **9.5.12 Transmitter Cabinet Installation**

Refer to [Figures 9-11](#) and [9-12](#). Remove rear cover until installation and checkout is complete.

- a. Secure the two 28" mounting rails (MP2) to the open end of the strap hinges (MP6).
- b. Attach and secure strap hinges (MP6) to Unistrut mounting rails (MP1) using appropriate mounting hardware.
- c. Secure the two 28" mounting rails (MP2) to the open end of the strap hinges.
- d. Secure the CVOR transmitter cabinet to the hinged Unistrut mounting rails using appropriate hardware.


#### **NOTE:**

Equipment mounting for Vertex shelters (straight wall) is shown in [Figure 9-11](#). For equipment mounting in Rieff shelters (slanting wall) please refer to details in drawing 470344 found in the 470190 shelter mounting kit.

### **9.5.13 Interior Interface Enclosure**

Refer to [Figure 9-11](#). Secure the CVOR interface enclosure between the horizontal Unistrut rails using appropriate hardware.


## **Model 1150 CVOR**

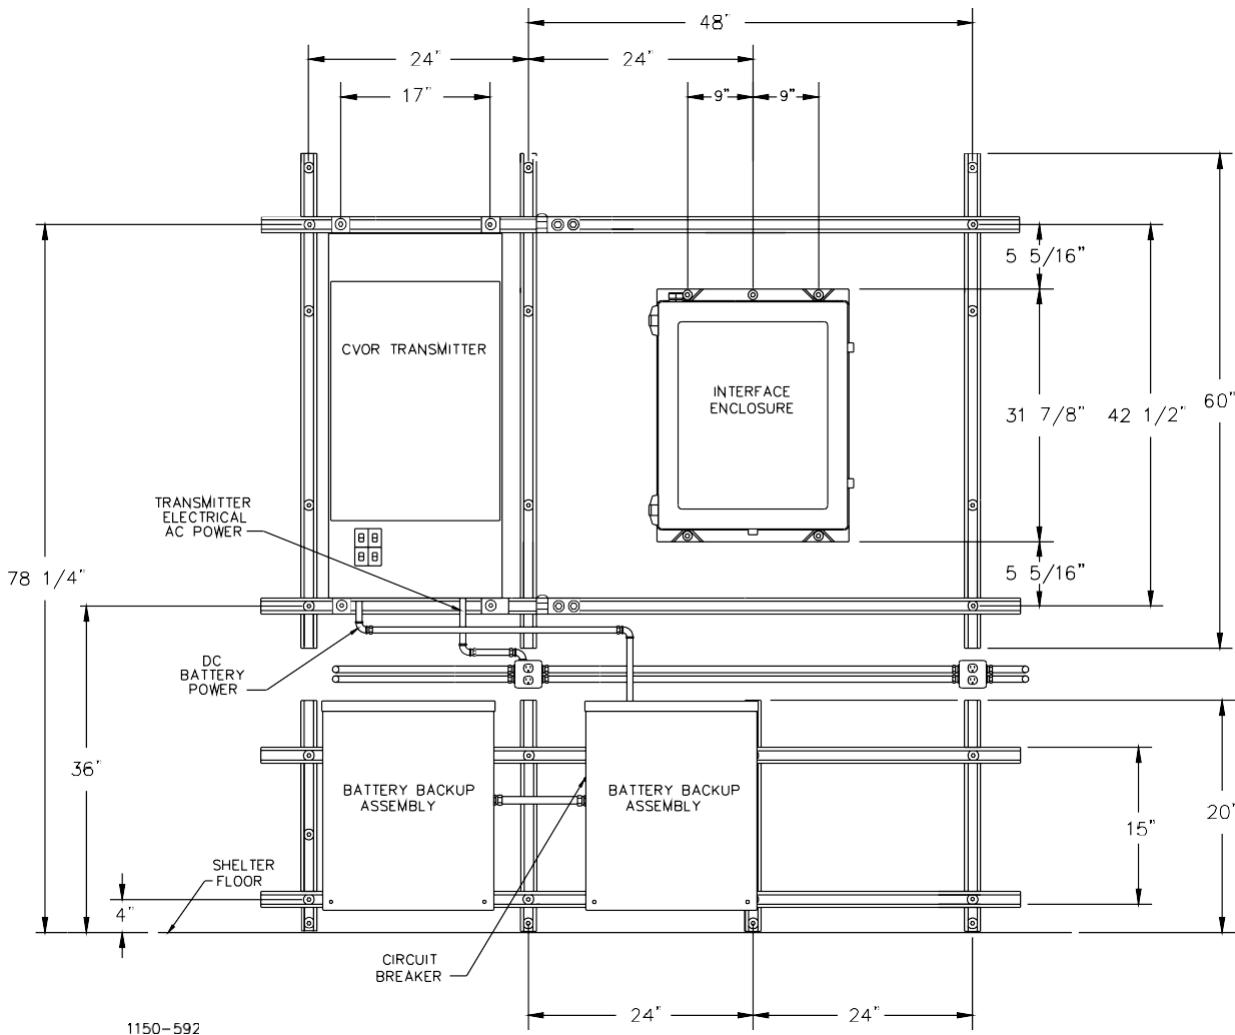

### INTERIOR WALL VIEW

## UNISTRUT EQUIPMENT LAYOUT FOR INTERIOR SHELTER WALL

**Figure 9-11. Unistrut Layout for Interior Shelter Wall**

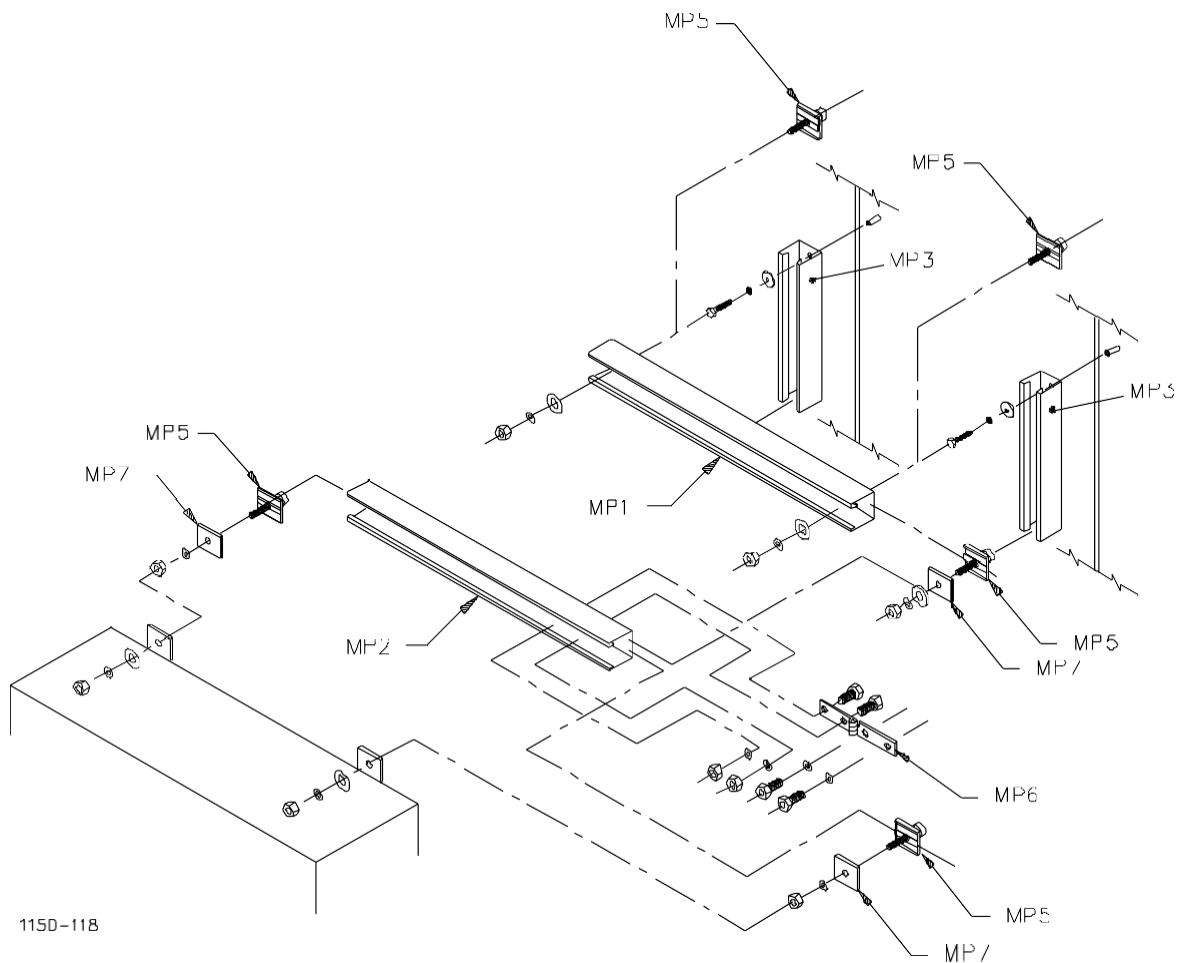


**Figure 9-12. Transmitter Cabinet to Shelter Wall Installation Diagram**

### **9.5.14 Battery Back Up Installation**

Refer to [Figure 9-13](#). The installation procedures given are those required for installing optional battery back unit (part number 470108-0001) in supplied shelter.

- a. Using 20" Unistrut rail (MP4), as a guide, drill 2 - 3/16" holes (maximum depth of 1") per vertical Unistrut rail into the inside shelter wall. Make sure Unistrut mounting rails are perpendicular to the shelter floor. Attach each Unistrut rail (MP4) to shelter wall using 1/4" x 1-1/4" lag screws, a flat washer, and a lock washer.
- b. Attach and secure the horizontal Unistrut mounting rails (MP3) to vertical Unistrut mounting rails (MP4) using appropriate hardware and attach battery housings to mounting rails.
- c. Cut sealite conduit and attach fittings as required to attach sealite to the battery housings and the CVOR transmitter. Insure there is sufficient sealite conduit to allow the transmitter to swing out properly. Holes may be drilled or punched in the cabinets as required.

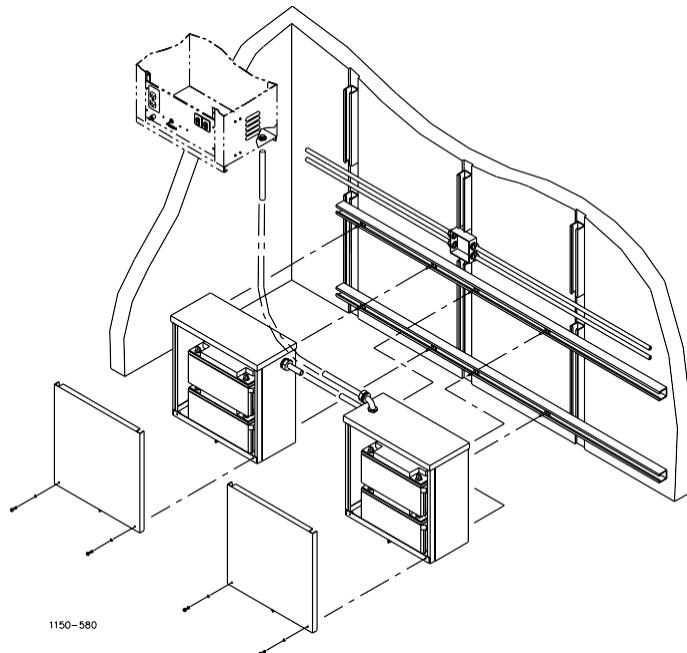

**Figure 9-13. Battery Installation Diagram**

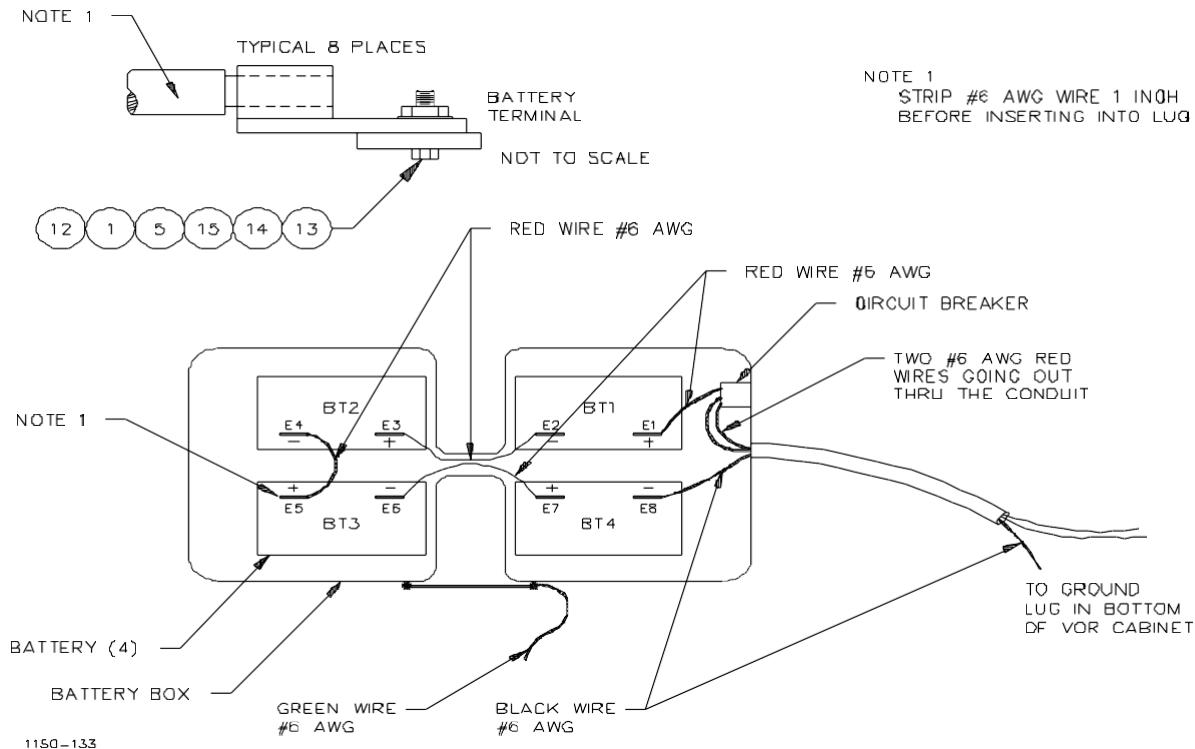


Figure 9-14. Battery Backup Wiring Diagram

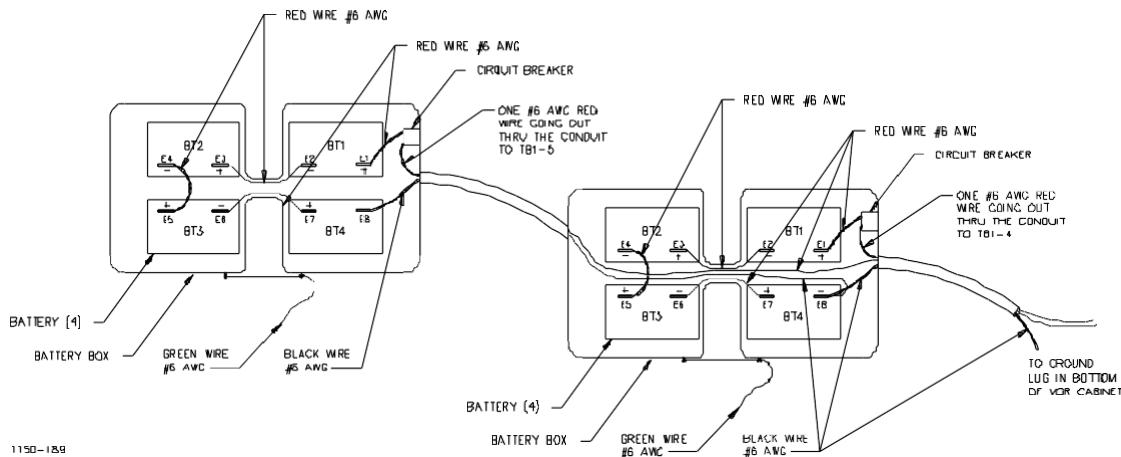


Figure 9-15. Dual Battery Backup Wiring Diagram

### **9.5.15 DC Voltage and Battery Installation**

Install the four (4) 12 Vdc batteries in the battery boxes and connect wiring between the batteries as shown in [Figures 9-14](#) or [9-15](#) if a dual battery configuration.

- a. Set CVOR equipment circuit breakers AC INPUT POWER and DC INPUT BATTERY to the OFF position.
- b. Remove 8 screws securing the back cover of the CVOR transmitter cabinet. Carefully remove the back panel from the cabinet. Locate the AC power and battery terminal block. TB1 is located to the left of BCPS supplies.
- c. Attach the wiring from the batteries to TB1. TB1 is located to the right of BCPS 1A33.
  1. Connect battery plus (+) wire to TB1-4 and TB1-5.
  2. Connect battery minus (-) wire to the ground lug.

### **9.5.16 AC Voltage Installation**

- a. Set the primary AC power circuit breakers (located in the shelter main circuit breaker box) to the OFF position.
- b. Refer to [Figure 9-16](#). Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- c. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- d. Cut sealite conduit and attach fittings as required to attach sealite to the bottom of the transmitter cabinet and the AC power junction box located beneath the transmitter cabinet. Insure there is enough sealite to allow the transmitter cabinet to swing out. Insure it does not interfere or bind with the battery cable conduit.
- e. Using No. 10 AWG stranded copper wire, fabricate system power line. Route system power line through hole in bottom of CVOR transmitter cabinet to TB1.


**NOTE:**

AC and DC power cables must be routed through separate conduits.

- f. Connect AC input ground (green wire) to TB1-3.
- g. Connect AC low input (white wire) to TB1-2.
- h. Connect AC high input (black wire) to TB1-1.

**CAUTION:**

**Black, white and green wiring will also be used in International installations. For those locations, technicians must note that the black wire is the AC HIGH and the white wire is the AC LOW. This condition may not be the same as local wiring standards, and caution must be observed when working on the AC supply wiring.**

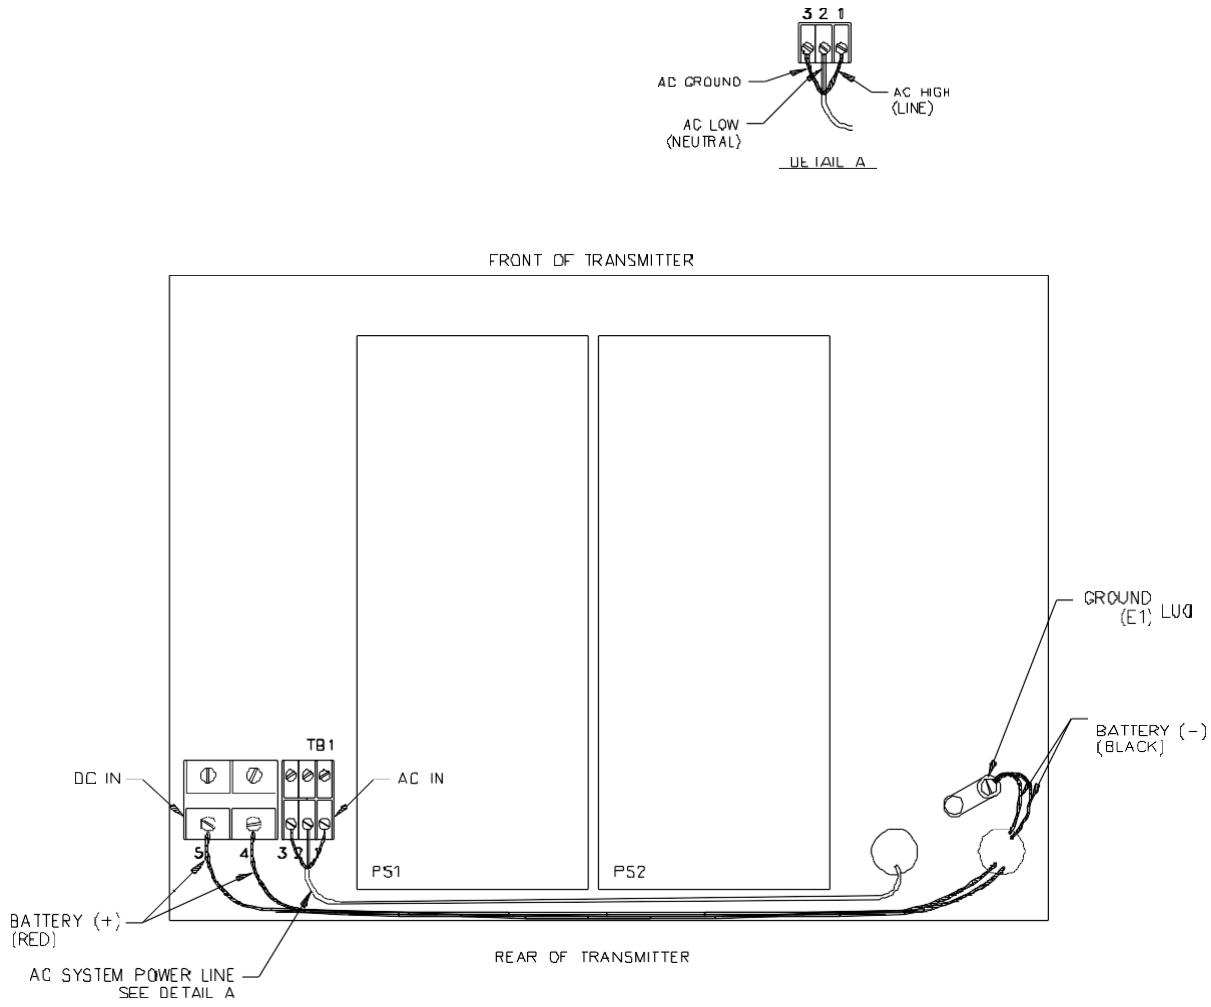**Figure 9-16. AC & DC Interconnect Wiring Diagram**


### **9.5.17 Collocated CVOR/DME Wiring Interconnect**

Refer to [Figure 11-32](#). This procedure is used for CVORs that are collocated with a DME.

- a. Set the primary AC power circuit breakers (located in the shelter main circuit breaker box) to the OFF position.
- b. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- c. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) to the OFF position.
- d. Place DME equipment circuit breakers to the OFF position.
- e. Wire the CVOR and DME as shown in [Figure 11-32](#) using the cable harness provided in the 470420-0001 or -0002 interconnect kit.

### **9.5.18 Transmitter to Interface Enclosure Cable Connections**

- a. Locate RF connectors J1 to J5 on the top of CVOR transmitter cabinet.
- b. Locate RF connectors J1 to J5 on the top of the CVOR interface enclosure.
- c. Securely fasten RF feed cable (part number 070400-0001) to connector J5 on the transmitter cabinet and to connector J5 on interface enclosure.
- d. Securely fasten sideband 1 RF cable (part number 070400-0001) to connector J1 on the transmitter cabinet and to connector J1 on the interface enclosure.
- e. Securely fasten sideband 2 RF cable (part number 070400-0001) to connector J2 on the transmitter cabinet and to connector J2 on the interface enclosure.
- f. Securely fasten ribbon cable (950483-0003) to connector J8 on the transmitter cabinet and to connector P1 on the interface enclosure.
- g. Refer to Figure 9-17. The white multiconductor cable from the detectors located on the Interface Assembly must be routed to TB15 and TB16 in the transmitter cabinet. Use standard installation techniques to properly dress the cable between the units. Terminate the red wire on TB15-4. Terminate the white wire on TB16-4. Terminate the black wire on TB16-2.

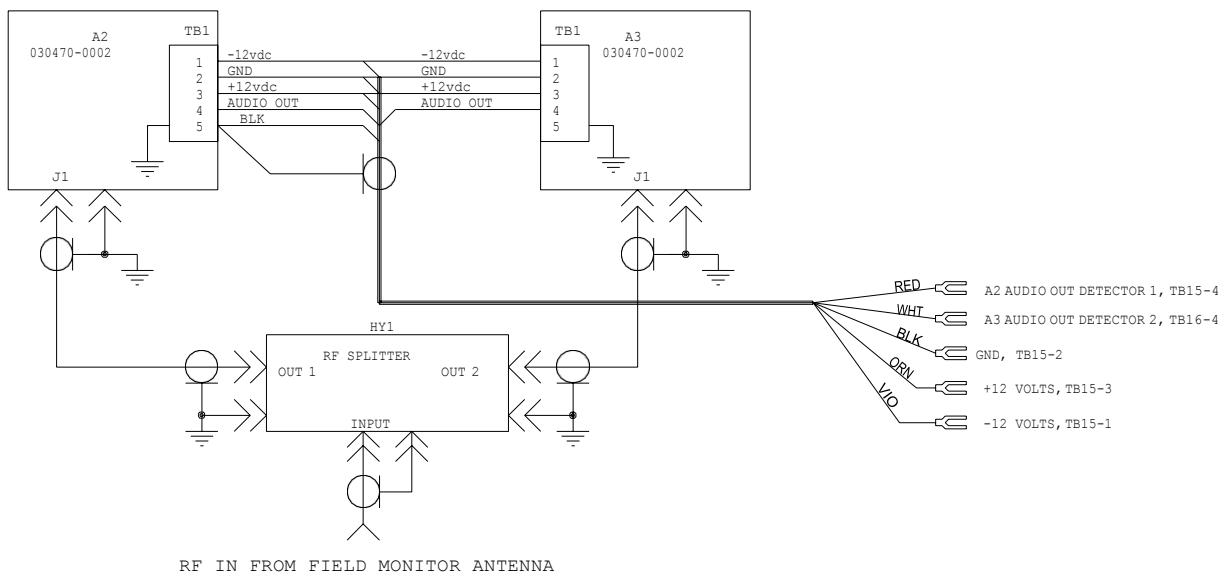

1150-617

**Figure 9-17. Detector Wiring**

## **9.6      INSPECTION**

### **9.6.1    Visual Inspection**

The visual inspection is made prior to operating or energizing the equipment.

- a. Visually inspect wire, coaxial cables, and connectors for corrosion, loose connectors, and improperly assembled connectors.
- b. Unscrew 2 captive screws holding front power panel closed and open panel. Insure all terminal boards are free of foreign objects such as, pieces of wire, or other objects that could cause electrical shorts within the equipment. Remove foreign objects as necessary and re-secure power panel.
- c. Inspect rear of CVOR Transmitter cabinet for foreign objects, remove as necessary.
- d. Inspect all peripheral equipment connected to the CVOR, including the PMDT, printer, etc. for proper connections.
- e. Inspect the battery backup units to ensure that all terminals and connectors are tight and that no metal shavings or other objects that could cause damage to the equipment.

## **9.7 INITIAL STARTUP AND PRELIMINARY TESTING.-**

### **NOTE:**

Step 9.7.1 is necessary for the 950350-0000 Power Supply. The 950350-0002 Power Supply has an automatic 120/240 volt selection input. Refer to [Figure 9-18](#). Disregard step 9.7.1 for the 950350-0002 and determined if terminal strip TB2 has only 3 positions.

### **9.7.1 Strapping Battery Charger Power Subsystem (BCPS) for 240 Vac Operation**

Refer to [Figure 9-18](#). [Figure 9-18](#) shows the BCPS unit strapped for operation at 120 Vac. For 240 Vac operation, the strapping must be changed. Refer to the following procedure for 240 Vac operation.

- a. Set the primary AC power circuit breakers to the OFF position.
- b. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- c. Place CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- d. Unscrew 2 captive screws holding front power panel closed and open panel.
- e. Remove the snap-on protective cover from terminal board 1A33TB2.
- f. Remove the jumper that is installed between terminals 1 and 2 of TB2. System is now set for 240 Vac operation.
- g. Replace the snap-on protective cover on terminal board 1A33TB2.
- h. For a dual system, repeat steps e, f, and g for the second BCPS (1A34).

### **9.7.2 Input Voltage Checks**

After the AC and DC power has been connected to the CVOR transmitter it is necessary to check the input power to ensure the proper voltage is applied to the system.


- a. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- b. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- c. Ensure that the primary (shelter) AC power circuit breakers are in the OFF position.
- d. Locate the AC power terminal block TB1. TB1 is located to the left of the BCPS 1A33/1A34 assemblies.

- e. Set the primary AC power circuit breakers to the ON position.
- f. Using an AC voltmeter check voltage across terminals 1 and 2 of TB1. Ensure proper voltage for the site is present here and that the polarity is observed. Insure that the voltage present is correct for BCPS operation
- g. Set the primary AC power circuit breakers to the OFF position.

### **9.7.3 Checking Battery Charger Power Subsystem for 28 Vdc Output**

This procedure is to determine that the battery charger power subsystem(s) are supplying the correct voltages to be applied to the system's low voltage power supply circuits.

- a. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- b. Place CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- c. Unscrew 2 captive screws holding front power panel closed and open panel.
- d. Refer to [Figure 9-18](#). Locate TB1 on battery power subsystem 1A33.
- e. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the ON position.
- f. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the ON position.
- g. Using a DC voltmeter check for + 28 Vdc  $\pm 0.5$  volts across terminals 1 and 4 of TB1. If voltage is not within tolerance adjust 28 Vdc voltage adjust potentiometer located on +28 Vdc module to bring the voltage to the desired level.
- h. Locate TB1 on battery power subsystem 1A34.
- i. Using a DC voltmeter check for +28 Vdc  $\pm 0.5$  volts across terminals 1 and 4 of TB1. If voltage is not within tolerance adjust 28 Vdc voltage adjust potentiometer located on 28 Vdc module to bring the voltage to the desired level.
- j. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- k. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.

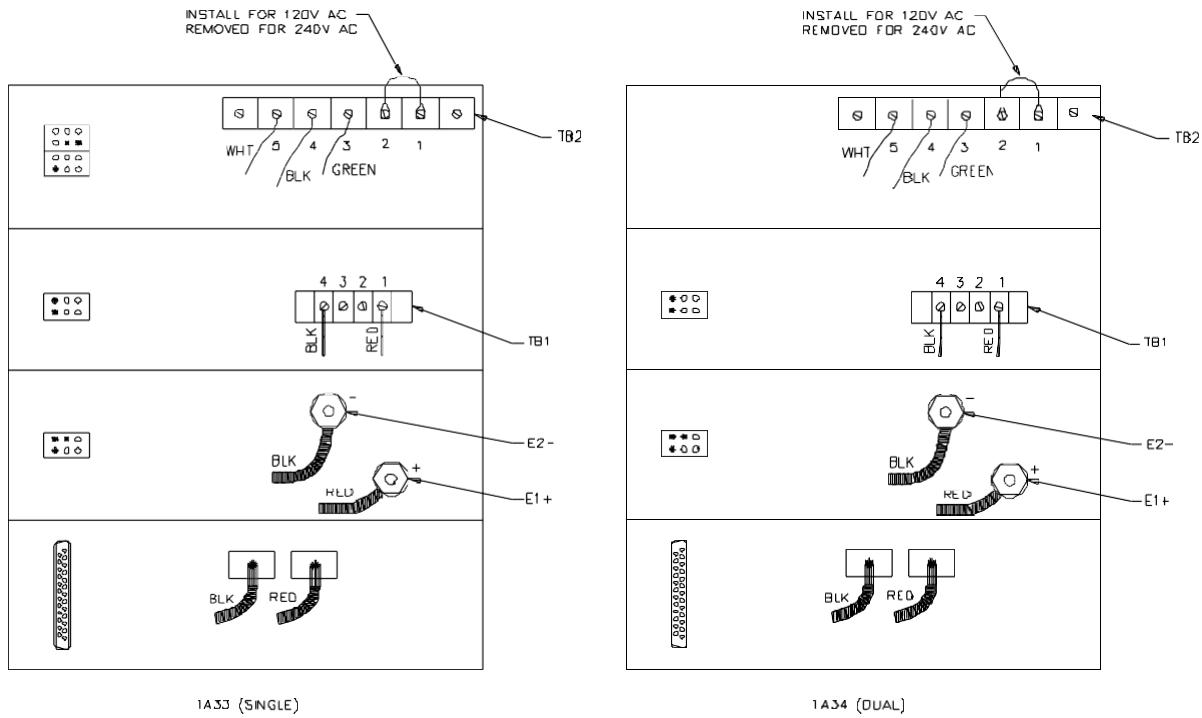

1150-621

**Figure 9-18. Terminal Layout for BCPS 1A33/1A34**

#### **9.7.4     Checking Battery Charger Power Subsystem for 43 or 48 Vdc Output**

This procedure is to determine that the battery charger power subsystem(s) are supplying the correct voltages to be applied to the system's CSB power amplifiers.

**NOTE:**

Total modulation of voice, reference and ident must be less than 42% as programmed in the transmitter configuration screen. If the total modulation is 42% or more, then the required output voltage must be 48 Vdc  $\pm 0.5$  volts.

- Refer to [Figure 9-18](#). Locate terminals E1 and E2 on battery power subsystem 1A33.
- Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the ON position.
- Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the ON position.

- d. Using a DC voltmeter check for +43 Vdc  $\pm 0.5$  volts across terminals E1 and E2 of battery charger power subsystem 1A33. If voltage is not within tolerance adjust the voltage adjust potentiometer on the 48 Vdc module to bring the voltage within tolerance.
- e. Locate terminals E1 and E2 on battery power subsystem 1A34 for a dual transmitter VOR.
- f. Using a DC voltmeter check for +43 Vdc  $+0.5$  volts across terminals E1 and E2 on battery charger power subsystem 1A34. If voltage is not within tolerance adjust the voltage adjust potentiometer on the 48 Vdc module to bring the voltage within tolerance.
- g. Close front power panel and tighten 2 captive screws securing the panel.

### **9.7.5 Low Voltage Power Supply Output Voltage Checks.**

- a. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- b. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- c. Refer to [Figure 1-4](#). Install low voltage power supply modules 1A14, 1A15, and 1A16.
- d. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the ON position.
- e. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the ON position.

**CAUTION:**

**Power supply jack numbers are numbered from 1 to 10, bottom to top. Therefore, +28 Vdc (red wire) is at J1-10, which is at the top of the connector.**

- f. Check connectors 1A14J1-2, 1A15J1-2, 1A16J1-2, and 2A1A1J1-2 for +12 Vdc  $+0.5$  volts.
- g. Check connectors 1A14J1-1, 1A15J1-1, 1A16J1-1, and 2A1A1J1-1 for -12 Vdc  $+0.5$  volts.
- h. Check connectors 1A14J1-3, 1A14J1-4, 1A15J1-3, 1A15J1-4, 1A16J1-3 and 1A16J1-4, for +5 Vdc  $+0.25$  volts.
- i. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- j. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.

### **9.7.6      Installing Modules in Transmitter Cabinet**

Since the CVOR transmitter cabinet is shipped separately from its electronic modules, it will be necessary to install them into the transmitter equipment cabinet. Refer to [Figure 1-4](#) for proper module and CCA locations.

#### **CAUTION**

**Many of the modules used in the CVOR transmitter contain Electrostatic Discharge (ESD) sensitive components. ALWAYS wear the protective grounding wrist strap when installing modules or CCAs.**

**Before modules are installed into transmitter cabinet, check modules or CCAs for cracked or broken connectors, bent pins, and loose hardware. Report damage immediately.**

#### **NOTE**

Ensure that the CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers are in the OFF position. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.

### **9.7.7      Setting Transmitter Frequency**

- a. Remove the 1A4 Synthesizer Assy from the cabinet.
- b. Remove the cover on the left side of the assembly.
- c. Locate the S1 DIP switch circuit card
- d. Program S1 per Table 9-3. A “1” in the Table is a closed (on) position on the switch.
- e. Replace the cover on the synthesizer.
- f. Put the 1A4 module into the VOR.
- g. Repeat steps a through f for 1A20.

**Table 9-3. Frequency Selection Chart**

S1 Switch Setting 12345678	VOR Frequency MHz	S1 Switch Setting 12345678	VOR Frequency MHz	S1 Switch Setting 12345678	VOR Frequency MHz
10000000	108.000	10001010	112.000	10000101	116.000
01000000	108.050	01001010	112.050	01000101	116.050
11000000	108.100	11001010	112.100	11000101	116.100
00100000	108.150	00101010	112.150	00100101	116.150
10100000	108.200	10101010	112.200	10100101	116.200
01100000	108.250	01101010	112.250	01100101	116.250
11100000	108.300	11101010	112.300	11100101	116.300
00010000	108.350	00011010	112.350	00010101	116.350
10010000	108.400	10011010	112.400	10010101	116.400
01010000	108.450	01011010	112.450	01010101	116.450
11010000	108.500	11011010	112.500	11010101	116.500
00110000	108.550	00111010	112.550	00110101	116.550
10110000	108.600	10111010	112.600	10110101	116.600
01110000	108.650	01111010	112.650	01110101	116.650
11110000	108.700	11111010	112.700	11110101	116.700
00001000	108.750	00000110	112.750	00001101	116.750
10001000	108.800	10000110	112.800	10001101	116.800
01001000	108.850	01000110	112.850	01001101	116.850
11001000	108.900	11000110	112.900	11001101	116.900
00101000	108.950	00100110	112.950	00101101	116.950
10101000	109.000	10100110	113.000	10101101	117.000
01101000	109.050	01100110	113.050	01101101	117.050
11101000	109.100	11100110	113.100	11101101	117.100
00011000	109.150	00010110	113.150	00011101	117.150
10011000	109.200	10010110	113.200	10011101	117.200
01011000	109.250	01010110	113.250	01011101	117.250
11011000	109.300	11010110	113.300	11011101	117.300
00111000	109.350	00110110	113.350	00111101	117.350
10111000	109.400	10110110	113.400	10111101	117.400
01111000	109.450	01110110	113.450	01111101	117.450
11111000	109.500	11110110	113.500	11111101	117.500
00000100	109.550	00000110	113.550	00000011	117.550
10000100	109.600	10001110	113.600	10000011	117.600
01000100	109.650	01001110	113.650	01000011	117.650
11000100	109.700	11001110	113.700	11000011	117.700
00100100	109.750	00101110	113.750	00100011	117.750
10100100	109.800	10101110	113.800	10100011	117.800
01100100	109.850	01101110	113.850	01100011	117.850
11100100	109.900	11101110	113.900	11100011	117.900

**Table 9-3. Frequency Selection Chart**

S1 Switch Setting 12345678	VOR Frequency MHz	S1 Switch Setting 12345678	VOR Frequency MHz	S1 Switch Setting 12345678	VOR Frequency MHz
00010100	109.950	00011110	113.950	00010011	117.950
10010100	110.000	10011110	114.000		
01010100	110.050	01011110	114.050		
11010100	110.100	11011110	114.100		
00110100	110.150	00111110	114.150		
10110100	110.200	10111110	114.200		
01110100	110.250	01111110	114.250		
11110100	110.300	11111110	114.300		
00001100	110.350	00000001	114.350		
10001100	110.400	10000001	114.400		
01001100	110.450	01000001	114.450		
11001100	110.500	11000001	114.500		
00101100	110.550	00100001	114.550		
10101100	110.600	10100001	114.600		
01101100	110.650	01100001	114.650		
11101100	110.700	11100001	114.700		
00011100	110.750	00010001	114.750		
10011100	110.800	10010001	114.800		
01011100	110.850	01010001	114.850		
11011100	110.900	11010001	114.900		
00111100	110.950	00110001	114.950		
10111100	111.000	10110001	115.000		
01111100	111.050	01110001	115.050		
11111100	111.100	11110001	115.100		
00000010	111.150	00001001	115.150		
10000010	111.200	10001001	115.200		
01000010	111.250	01001001	115.250		
11000010	111.300	11001001	115.300		
00100010	111.350	00101001	115.350		
10100010	111.400	10101001	115.400		
01100010	111.450	01101001	115.450		
11100010	111.500	11101001	115.500		
00010010	111.550	00011001	115.550		
10010010	111.600	10011001	115.600		
01010010	111.650	01011001	115.650		
11010010	111.700	11011001	115.700		
00110010	111.750	00111001	115.750		
10110010	111.800	10111001	115.800		
01110010	111.850	01111001	115.850		
11110010	111.900	11111001	115.900		

<b>Table 9-3. Frequency Selection Chart</b>					
S1 Switch Setting 12345678	VOR Frequency MHz	S1 Switch Setting 12345678	VOR Frequency MHz	S1 Switch Setting 12345678	VOR Frequency MHz
00001010	111.950	00000101	115.950		

**NOTE:**

Shaded areas in the above table are set aside as ILS frequencies, therefore are non-valid VOR frequencies. Setting the switches to any of the shaded combinations in the table will result in the synthesizer being programmed to 108.000 MHz. Switch settings that would result in frequencies higher than 119.750 MHz will result in the synthesizer being programmed to 117.950 MHz. This will prevent the VOR transmitter system from operating on a non-valid VOR frequency.

### **9.7.8      Lithium Battery Jumper Removal**

The central processing unit (CPU) CCA 1A13 is shipped with a lithium battery installed on the circuit board. It is responsible for providing power to various circuits on the CPU CCA when a power failure occurs. When shipped, the lithium battery is disabled with the position of a jumper placed across terminals E2, and E3. Only while power is applied to the system, should the position of the Jumper should be changed so that it is across terminals E1 and E2 of the CPU CCA.

**CAUTION:**

**Installation of the jumper across terminal E1 and E2 without power being properly applied to the CPU CCA may result in high current use by the static RAM devices on the CPU CCA. This will cause rapid discharge of the lithium battery and loss of data in the VOR system.**

### **9.7.9      PMDT Setup and Hookup**

Install the 978178 software onto the computer. Connect the 25 pin D serial cable to the PMDT computer.

### **9.7.10     CVOR Station Power-Up**

Refer to [Section 3](#) of this manual for detailed instruction on CVOR operation. The CVOR is microprocessor controlled, transmitter one will come up in the on-line mode as the normal mode of operation.

- a. Turn on the PMDT. Refer to [Section 3](#) for operating instructions.
- b. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC [INPUT (LINE) circuit breakers to the ON position.

- c. Set CVOR SYSTEM A DC INPUT and SYSTEM B DC INPUT circuit breakers to the ON position.

### **9.7.11 Log-On Procedure**

Refer to [paragraph 3.4.2.3](#) for CVOR system log on procedures.

- a. Place system in bypass using the PMDT mouse to point and click the BYPASS button on the left side of the display command and shutdown transmitter by pointing and clicking the OFF button on the screen.

### **9.7.12 Setting Date and Time**

- a. Point and click the RMS TAB pull down menu.
- b. Select set time and date and push the enter key.
- c. The RMS time will be updated to the current time on the PMDT laptop.

### **9.7.13 Setting Station's Name**

Refer to [Table 3-4](#) and [paragraph 3.4.2.7.2](#) for this procedure. The station name is an alpha or numeric descriptor that allows you to readily identify a CVOR system. This is very useful when there is more than one system that you are monitoring. This code is not broadcast by the CVOR.

### **9.7.14 Password Change**

Refer to [paragraph 3.4.2.7.4](#) for this procedure.

### **9.7.15 Setting System Configuration**

Refer to [paragraph 3.4.2.7.1.1](#) for this procedure.

### **9.7.16 Transmitter Tune-up Procedures.**

#### **9.7.16.1 Checking Output Frequency of Frequency Synthesizer**

- a. Connect frequency counter to the carrier frequency connector on the front of the Frequency Synthesizer 1A4. Refer to [Figure 9-21](#).
- b. Make sure the carrier frequency is within the proper operating frequency tolerance of Table 4-1c for the station.

- c. If the frequency is not within tolerance refer to [paragraph 6.4.13](#).
- d. Check 1A4TP4 for a locked voltage. The voltage at this point should be between 2 and 8 volts. If voltage is below 2 volts, turn 1A4R81 clockwise to obtain a locked voltage between 2 and 8 volts. If the voltage is above 8 volts, turn 1A4R81 counterclockwise to obtain a locked voltage between 2 and 8 volts.
- e. Using a DDM, check 1A4TP3. Make small adjustments to 1A4R81 for 0.0 VDC +/-0.05 VDC at 1A4TP3.
- f. Re-check 1A4TP4 for a locked voltage between 2 and 8 volts.
- g. Repeat steps a through f for 1A20 frequency synthesizer.

**NOTE:**

The CVOR Transmitter has a feedback control loop that is external to the frequency generator assembly that aids in stabilizing the transmitter RF output with respect to power, phase and frequency. Unstable operation of the frequency synthesizer may be caused by an external condition, rather than an internal fault or misalignment.

#### 9.7.16.2 Amplitude Adjustment

- a. Setting Transmitter Frequency. Select RMS>>Configuration>>Station then the Operating Frequency (in MHz), then press F7. The transmitter's new Operating Frequency will be entered into the station's temporary memory. This parameter is necessary to calculate the phaser setting. This setting does not change the output frequency.
- b. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- c. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- d. Connect in-line wattmeter thru body between connector 1J5 and carrier feed cable. Install a 250 watt element into the wattmeter to measure forward power.
- e. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the ON position.
- f. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the ON position.
- g. Insure that system 1 is on line.
- h. Place transmitter in the BYPASS mode of operation.
- i. Select Transmitters>>Configuration>>Nominal. This will display the Transmitter Nominal Operating Parameters screen.
- j. Set reference modulation to 30.0 and press [F7].


- k. Select Transmitters>>Configuration>>Nominal. Enter the desired Output Power from 0 to 100 Watts then F7. Select Transmitters>>Configuration>>Offsets and Scale Factors. Adjust the Output Power Scale for Transmitter 1 from 0 to 150% so that the Wattmeter displays the desired output power.

**NOTE:**

If the VOR is to be operated as an enroute facility, use the 250 watt element and set the station for 100 watts. If the facility is to be used as a terminal facility, use the 100 watt element and set the station for 50 watts. Other power settings between 50 and 100 watts should be at customer's request. Use the wattmeter element that provides the best display.

- l. Select Transmitters>>Data>>Transmitter 1. This will display the Transmitter No. 1 Data screen.
- m. Adjust potentiometer 1A2A1R114 until Carrier Power displayed on the Transmitters, Data, Transmitter 1 screen indicates the same value as the wattmeter.
- n. Select Transmitters>>Configuration, and adjust the SBO RF Level to 50.0% and F7.
- o. Turn off CVOR by using the mouse to point and click on the Transmitter 1 OFF button. Remove in-line wattmeter thru body on connector 1J5 and install it on sideband 1 (SB1) connector 1J1. Install a 5 watt element into wattmeter body.
- p. Click on the Transmitter 1 ON button. Select Transmitters>>Configuration>>Nominal. Adjust the SBO RF Level to obtain 0.9 watts on the wattmeter.
- q. Select Transmitter>>Data>>Transmitter 1. Adjust potentiometer 1A5A1R100 for a power out of 0.9 watts on the Sideband 1 display. Turn off transmitter by clicking on the Transmitter 1 OFF button.
- r. Remove wattmeter thru body on connector 1J1 and install it on sideband 2 (SB2) connector 1J2. Turn on transmitter by clicking on the Transmitter 1 ON button. Select the Transmitters>>Configuration>>Offsets and Scale Factors. Adjust the Sideband 2 RF Level Scale for Transmitter 1 to obtain 0.9 watts on the Wattmeter.
- s. Select the Transmitters>>Data screen, and adjust potentiometer 1A5A3R100 for a power out display of 2.5 watts for Sideband 2.
- t. Select RMS>>Config Backup and press [enter]. This stores the settings into EEPROM.
- u. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the OFF position.
- v. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the OFF position.
- w. Place Sideband Generator assembly 1A5 on extender cables.

- x. Set CVOR SYSTEM A DC INPUT (BATTERY) and SYSTEM B DC INPUT (BATTERY) circuit breakers to the ON position.
- y. Set CVOR SYSTEM A AC INPUT (LINE) and SYSTEM B AC INPUT (LINE) circuit breakers to the ON position.
- z. Adjust 1A5A1R73 to lock signal at TP5/6 and a locked ac voltage at TP3/8.
- aa. Refer to Figure 9-19 and [9-21](#). Connect oscilloscope to 1A5TP1. If steady waveform exists, adjust 1A5A1R102 so that the DC offset at the bottom of the waveform is 4 volts.

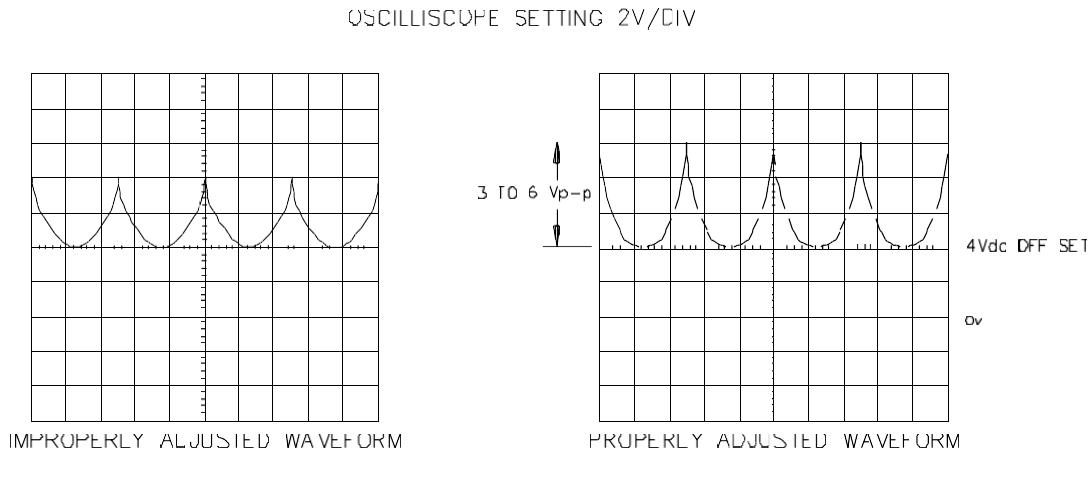

115D-10B


**Figure 9-19. Typical Diagram of Improperly and Properly Adjusted Waveforms**

**At 1A5/1A21/TP1/10**

- bb. If waveform is not steady, adjust 1A5A1R73 to obtain a steady waveform then adjust 1A5A1R102 so that the DC offset at the bottom of the waveform is 4 volts. If waveform will not stabilize it may be necessary to adjust DC offset to 5 or 6 volts.
- cc. Adjust potentiometers 1A5A1R97 and 1A5A1R51 for best waveform. The waveform must remain between 3 and 6 Vp-p.
- dd. Connect DVM to 1A5TP4. Adjust potentiometer 1A5A1R73 for approximately 0.00 Vdc  $\pm 50$  mV. Verify that the DC offset at the bottom of the waveform is still 4 volts. Readjust if necessary.
- ee. Refer to [Figure 9-20](#) and [9-22](#). Verify waveform on 1A5TP5. Adjust potentiometer 1A5A1R24 so waveform peaks are equal in amplitude.

## Model 1150 CVOR

- ff. Refer to [Figure 9-19 and 9-22](#). Connect oscilloscope to 1A5TP10. If steady waveform exists, adjust 1A5A3R102 so that the DC offset at the bottom of the waveform is 4 volts.

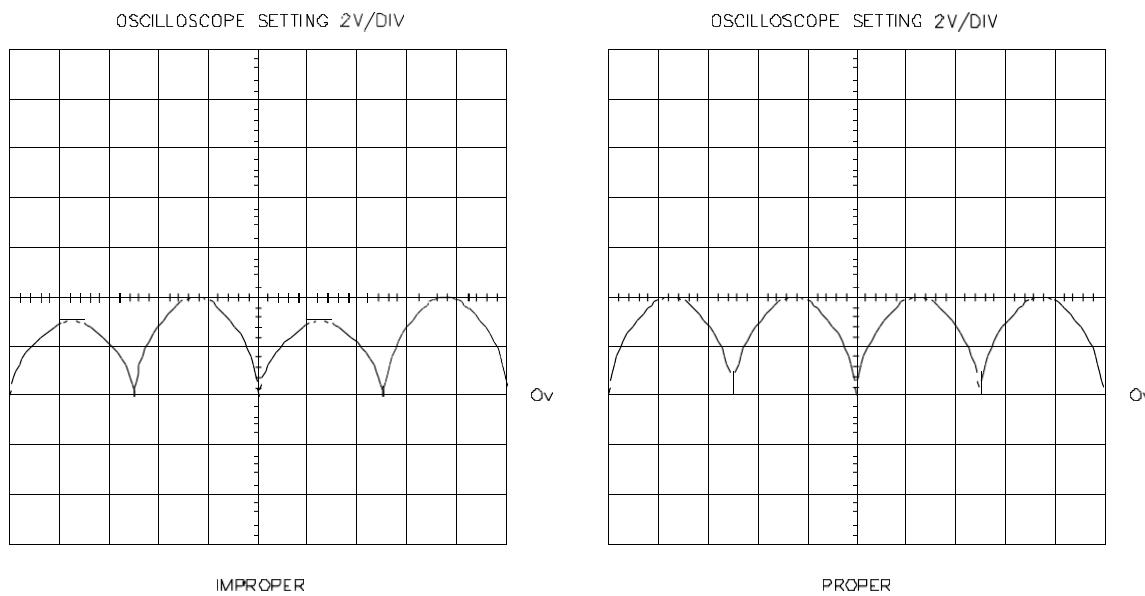


1150-106

**Figure 9-20. Typical Diagram of Improperly and Properly Adjusted Waveforms**

**At 1A5/1A21/TP5/6.**

OSCILLOSCOPE SET TO MEASURE D.C  
TIME BASE 5 ms/DIV  
VOLT/DIV 1V/DIV

- gg. If waveform is not steady, adjust 1A5A3R73 to obtain a steady waveform then adjust 1A5A3R102 so that the DC offset at the bottom of the waveform is 4 volts.
- hh. Adjust potentiometers 1A5A3R97 and 1A5A3R51 for best waveform. The waveform must remain between 3 and 6 Vp-p.
- ii. Connect DC Voltmeter to 1A5TP7. Adjust potentiometer 1A5A3R73 for approximately 0.00 Vdc  $\pm 50$  mV.
- jj. Refer to [Figure 9-20](#). Verify proper waveform on 1A5TP6. Adjust potentiometer 1A5A3R18 so waveform peaks are equal in amplitude.

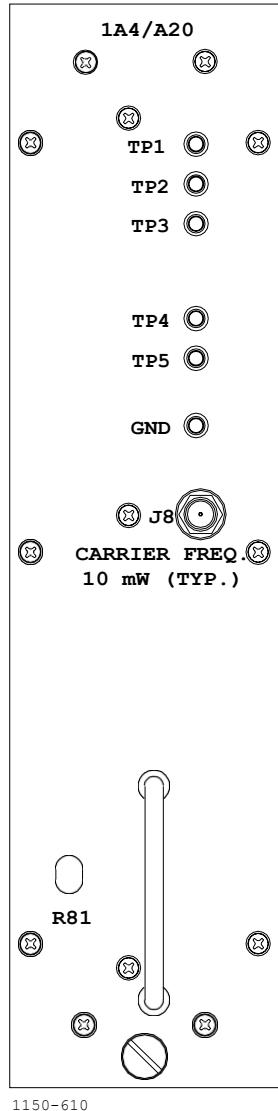

1150-610

**Figure 9-21. Frequency Generator; Front Panel View**

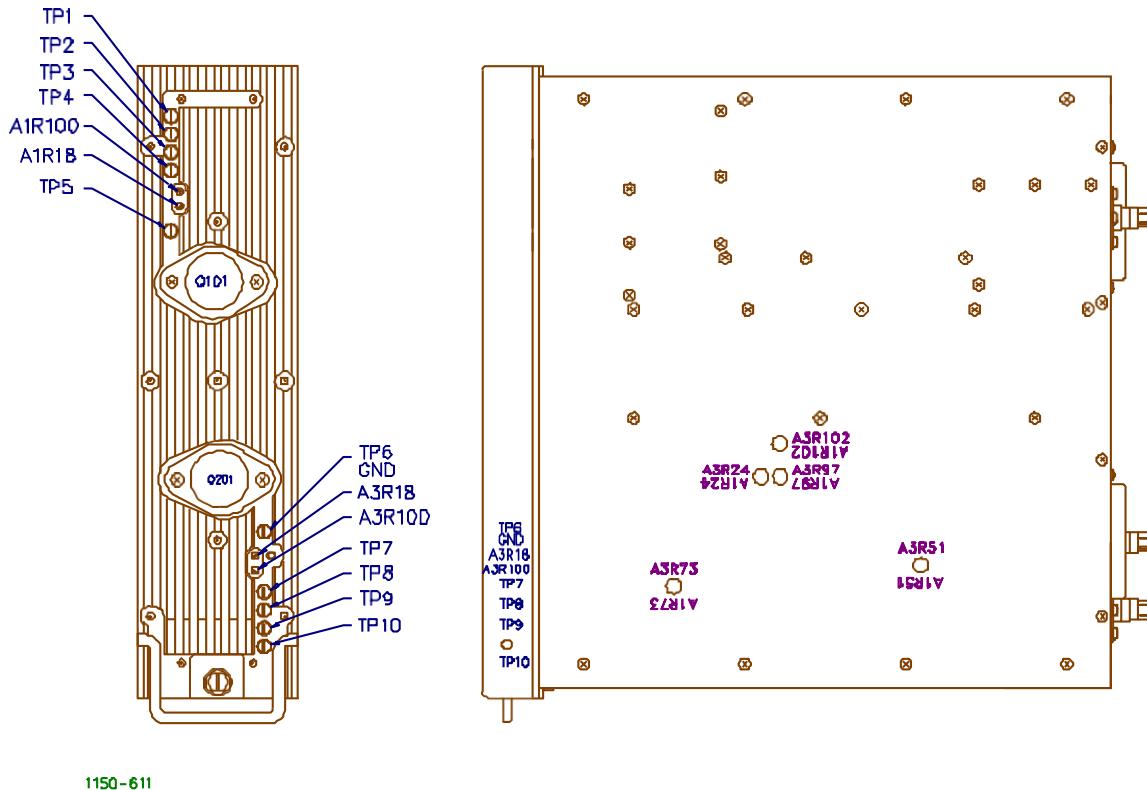


Figure 9-22. Sideband Generator, Front and Side Panel View

### **9.7.17 SETTING NO. 1 TRANSMITTER OPERATING PARAMETERS**

Before the carrier forward power, carrier VSWR, SBO forward powers, and SBO VSWR's can be calibrated it will be necessary to check/set Transmitter No. 1's operating parameters.

#### **9.7.17.1 Setting No. 1 Transmitter Azimuth (Az) Index**

- Select Transmitters>>Configuration>>Nominal. Set the Azimuth Index to 0.00 degrees..
- Select Transmitters>>Configuration>>Offsets and Scale Factors. In the Transmitter 1 Azmuth Angle Offset enter the Az offset from -50.00 to +50.00 as needed then press [F7]. Transmitter No. 1's new Az index will be entered into the station's temporary memory.

**NOTE:**

AZ index is used to rotate the RF signal pattern from the installed 0.0 reference point established at the time the antennas were installed.

#### **9.7.17.2 Setting No. 1 Transmitter Ident Code**

Type RMS>>Configuration>>then enter Transmitter 1's ident, then press [enter]. Transmitter No. 1's new station's code will be entered into the station's temporary memory.

**NOTE**

The system will accept only four alpha characters for the ident code. When the assigned code is only 2 or 3 letters, enter the 2 or 3 letter code and press the spacebar until four characters are entered. Failure to use spaces will result in the lack of Ident Keying.

#### **9.7.17.3 Setting No. 1 Transmitter Voice Modulation**

Select Transmitters>>Configuration>>Nominal. Enter the voice modulation from 0% to 30%, then press [enter]. The new voice modulation will be entered into the station's temporary memory. Select Transmitters>>Configuration. Offsets and Scale Factors. For the Voice Modulation Scale for Voice Modulation, enter a value from 0 to 200% to adjust the value entered into the Nominal setting to the correct value.

#### **9.7.17.4 Setting No. 1 Transmitter Ident Modulation**

Select Transmitters>>Configuration>>Nominal. Enter the identification modulation from 0% to 25%, then press [F7]. The new ident modulation will be entered into the station's temporary memory. Select Transmitters>>Configuration>>Offsets and Scale Factors. For the Ident Modulation Scale for Ident Modulation, enter a value from 0 to 200% to adjust the value entered into the Nominal setting to the correct value.

**NOTE**

Typical setting for ident modulation is 10.0%

#### **9.7.17.5 Setting No. 1 Transmitter Reference Modulation**

Select Transmitters>>Configuration>>Nominal. Enter the Reference modulation from 0% to 30%, then press [F7]. The new Reference modulation will be entered into the station's temporary memory. Select Transmitters>>Configuration>>Offsets and Scale Factors. For the Reference Modulation Scale for Reference Modulation, enter a value from 0 to 200% to adjust the value entered into the Nominal setting to the correct value.

**NOTE**

Normal setting is 30.0%

#### **9.7.17.6 Setting No. 1 Transmitter SBO Modulation**

Refer to 9.7.16.2.

#### **9.7.17.7 Saving No. 1 Transmitter Operating Parameters**

- a. Select RMS>>Config Backup and then press [enter]. This will place Transmitter No. 1's new operating parameters into electrically erasable memory. By means of the lithium battery, Transmitter No. 1's operating parameters are preserved in static ram if system power is lost. The electrically erasable memory is an added precaution against the loss of setup parameters.
- b. A permanent copy should be placed onto the PMDT file system. Select System>>Configuration Save. You will be prompted for a file name. It is suggested that the configuration is saved into different files depicting progress up through the commissioning with different file names for each.

### **9.7.18 SETTING MONITOR ALARM LIMITS**

Once Transmitter No. 1's operating parameters have been set it will be necessary to check/set the Monitor alarm limits. Refer to [Section 4](#) for appropriate limits.

#### **9.7.18.1 Setting Monitor Az Angle Low Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the Az Angle Low Alarm Limit that is needed, then press [F7]. Monitor No. 1's new Az Angle Low Limit will be entered into the station's temporary memory.
- c. Enter the Az Angle Low PreAlarm Limit that is needed, then press [F7]. Monitor No 1 and 2's new Az Angle Low PreAlarm Limit will be entered into the station's temporary memory.

#### **9.7.18.2 Setting Monitor Az Angle High Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the az angle high alarm limit that is needed, then press [F7].
- c. Enter the az angle high prealarm limit that is needed, then press [F7]. Monitor No. 1's new az angle low prelaarm limit will be entered into the station's temporary memory.

#### **9.7.18.3 Setting High Monitor 30 Hz Mod Low Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the 30 Hz Mod low alarm limit that is needed, then press [F7]. Monitor No. 1 and 2's 30 Hz Mod low limit will be entered into the station's temporary memory.
- c. Enter the 30 Hz Mod low prealarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 30 Hz Mod low prealarm limit will be entered into the station's temporary memory.

#### **9.7.18.4 Setting Monitor 30 Hz Mod High Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the 30 Hz Mod high alarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 30 Hz Mod high limit will be entered into the station's temporary memory.
- c. Enter the 30 Hz Mod high prealarm limit that is needed then press [F7].

#### **9.7.18.5 Setting Monitor 9960 Hz Mod Low Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the 9960 Hz Mod low alarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Mod low limit will be entered into the station's temporary memory.
- c. Enter the 9960 Hz Mod low prealarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Mod low prealarm limit will be entered into the station's temporary memory.

#### **9.7.18.6 Setting Monitor 9960 Hz Mod High Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the 9960 Hz Mod high alarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Mod high limit will be entered into the station's temporary memory.

- c. Enter the 9960 Hz Mod high prealarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Mod low prealarm limit will be entered into the station's temporary memory.

#### **9.7.18.7 Setting Monitor 9960 Hz Dev Low Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the 9960 Hz Dev low alarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Dev low limit will be entered into the station's temporary memory.
- c. Enter the 9960 Hz Dev low prealarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Dev high prealarm limit will be entered into the station's temporary memory.

#### **9.7.18.8 Setting Monitor 9960 HZ Dev. High Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the 9960 Hz Dev high alarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Dev high limit will be entered into the station's temporary memory.
- c. Enter the 9960 Hz Dev high prealarm limit that is needed, then press [F7]. Monitor No. 1 and 2's new 9960 Hz Dev high prealarm limit will be entered into the station's temporary memory.

#### **9.7.18.9 Setting Monitor Field Intensity Low Limit**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the Field Intensity Low Alarm Limit that is needed, then press [F7]. Monitor No. 1 and 2's new Field Intensity Low Alarm Limit will be entered into the station's temporary memory.
- c. Enter the Field Intensity Low PreAlarm Limit that is needed, then press [F7]. Monitor No. 1 and 2's new Field Intensity Low PreAlarm limit will be entered into the station's temporary memory.

#### **9.7.18.10 Setting Monitor Field Intensity High Limits**

- a. Select Monitors>>Configuration>>Alarm Limits. The Alarm and Prealarm limits will be displayed for Monitor 1 and Monitor 2.
- b. Enter the Field Intensity High Alarm Limit that is needed, then press [F7]. Monitor No. 1 and 2's new Field Intensity High Alarm Limit will be entered into the station's temporary memory.

- c. Enter the Field Intensity High Alarm Limit that is needed, then press [F7]. Monitor No. 1 and 2's new Field Intensity High PreAlarm Limit will be entered into the station's temporary memory.

#### **9.7.18.11 Saving Monitor Alarm Limits**

- a. Select RMS>>Config Backup and then press [enter]. This will place the Monitor's new operating parameters into electrically erasable memory.
- b. A permanent copy should be placed onto the PMDT file system. Select System, Configuration Save. You will be prompted for a file name. It is suggested that the configuration is saved into different files depicting progress up through the commissioning with different file names for each.

### **9.7.19 SETTING MONITOR CERTIFICATION LIMITS**

Once Monitor alarm limits have been set it will be necessary to check/set Monitor certification limits.

- a. Select Monitors>>Data>>Certification Test Results. Point to the button at the lower right of the screen where the display "SET TO MONITOR LIMITS". Click on the button and then press [return]. This copies the Monitor alarm limit values to the certification limits. This is preferred over setting each parameter individually. Press F7.

### **9.7.20 SETTING MONITOR TEST GENERATOR**

Once the CVOR Monitor certification setups have been completed it will be necessary to check/set the Monitor Test Generator.

#### **9.7.20.1 Setting Monitor Test Gen Az Angle**

- a. Select Monitors>>Data>>Test Data. This will display the Monitors Test Generator Setup and results screen.
- b. Select the Monitor No. 1 and Monitor No. 2 Azimuth Angle that is needed then press F7.

#### **NOTE**

The normal setting is the same as the radial being monitored.

#### **9.7.20.2 Setting Monitor Test Gen 30 Hz Modulation**

Select the Monitor No. 1 and No. 2 30 Hz Modulation that is needed, then press [F7].

#### **9.7.20.3 Setting Monitor Test Gen 9960 Hz Modulation**

Select the Monitor No. 1 and No. 2 9960 Hz Modulation that is needed, then press [F7].

#### **9.7.20.4 Setting Monitor Test Gen 9960 Hz Deviation**

Select the Monitor No. 1 and No. 2 9960 Hz Deviation that is needed, then press [F7].

#### **9.7.20.5 Setting Monitor Test Gen Ident Modulation**

Select the Monitor No. 1 and No. 2 Ident Modulation that is needed, the press [F7].

##### **NOTE**

This value is normally set to 0.0

#### **9.7.20.6 Setting Monitor Test Gen Ident Control**

Point to the “Down Arrow” button on the Ident control parameter. Select the Test Generator Ident Control code that is needed, C = continuous, P = pulse, then press [F].

#### **9.7.20.7 Setting Monitor Test Gen Audio Modulation**

Select the Monitor No. 1 and No. 2 Audio Modulation that is needed, the press [F7].

##### **NOTE**

This level is normally set to 0.0

#### **9.7.20.8 Setting Monitor Test Gen Audio Frequency**

Select the Monitor No. 1 and No. 2 Test Generator Audio Frequency that is needed, then press [F7]. The value entered will be rounded to the nearest 30 Hz increment automatically.

##### **NOTE:**

This level is normally set to 30.0.

#### **9.7.20.9 Saving Monitor's Test Generator Setup Parameters**

- a. Select RMS>>Config Backup and then press [enter]. This will place the Monitor's new operating parameters into electrically erasable memory.
- b. A permanent copy should be placed onto the PMDT file system. Select System, Configuration Save. You will be prompted for a file name. It is suggested that the

configuration is saved into different files depicting progress up through the commissioning with different file names for each.

## **9.7.21 SETTING NO. 2 TRANSMITTER OPERATING PARAMETERS**

### **9.7.21.1 Setting No. 2 Transmitter Azimuth (Az) Index**

- a. Select Transmitters>>Configuration>>Offsets and Scale Factors. In the Transmitter 2 Azimuth Angle Offset, enter the Az offset from -20.00 to +20.00 as needed, then press [F7]. Transmitter No. 2's new Az index will be entered into the station's temporary memory.

#### **NOTE:**

AZ index is used to rotate the signal pattern from the installed reference point established at the time installation occurred normally due to flight check requirements.

### **9.7.21.2 Setting No. 2 Transmitter Power Out**

- a. Turn off CVOR system using the circuit breakers..
- b. Place Bird thruline wattmeter (with a 250 watt plug-in element) in the carrier output line.
- c. Turn on the CVOR system.
- d. The Transmitters>>Configuration>>Nominal desired Output Power was set in 9.7.19.2. Adjust the Output Power Scale for Transmitter 2 from 0 to 150% so that the Wattmeter displays the desired output power.
- e. Select RMS>>Config Backup and then [enter] to save the changes.
- f. Turn off CVOR system using the circuit breakers.
- g. Remove the Bird Thruline wattmeter from the carrier output line.

### **9.7.21.3 Setting No. 2 Transmitter Ident Code**

Type RMS>>Configuration, then enter Transmitter 2's ident, then press [enter]. Transmitter No. 2's new station's code will be entered into the station's temporary memory.

#### **NOTE**

The system will accept only four alpha characters for the ident code. When the assigned code is only 2 or 3 letters, enter the 2 or 3 letter code and press the space bar until four characters are entered. Failure to use spaces will result in the lack of Ident Keying.

#### **9.7.21.4 Setting No. 2 Transmitter Voice Modulation**

The Transmitters>>Configuration>>Nominal voice modulation was previously set in 9.7.17.3. Select Transmitters, Configuration, Offsets and Scale Factors. For the Transmitter 2 Voice Modulation Scale for Voice Modulation, enter a value from 0 to 200% to adjust the value entered into the Nominal setting to the correct value.

#### **9.7.21.5 Setting No. 2 Transmitter Ident Modulation**

Select Transmitters>>Configuration>>Nominal. Enter the identification modulation from 0% to 25%, then press [enter]. The new ident modulation will be entered into the station's temporary memory. Select Transmitters>>Configuration>>Offsets and Scale Factors. For the Ident Modulation Scale for Ident Modulation, enter a value from 0 to 200% to adjust the value entered into the Nominal setting to the correct value.

#### **9.7.21.6 Setting No. 2 Transmitter Reference Modulation**

The Transmitters>>Configuration>>Nominal Reference modulation was previously set in 9.7.17.5. Select Transmitters, Configuration, Offsets and Scale Factors. For the Transmitter 2 Reference Modulation Scale for Reference Modulation, enter a value from 0 to 200% to adjust the value entered into the Nominal setting to the correct value.


#### **9.7.21.7 Setting No. 2 Transmitter SBO Modulation**

Refer to 9.7.16.2.

#### **9.7.21.8 Saving No. 2 Transmitter Operating Parameters**

- a. Select RMS>>Config Backup and then press [enter]. This will place Transmitter No. 2's new operating parameters into electrically erasable memory.
- b. A permanent copy should be placed onto the PMDT file system. Select System>>Configuration Save. You will be prompted for a file name. It is suggested that the configuration is saved into different files depicting progress up through the commissioning with different file names for each.

## 9.8

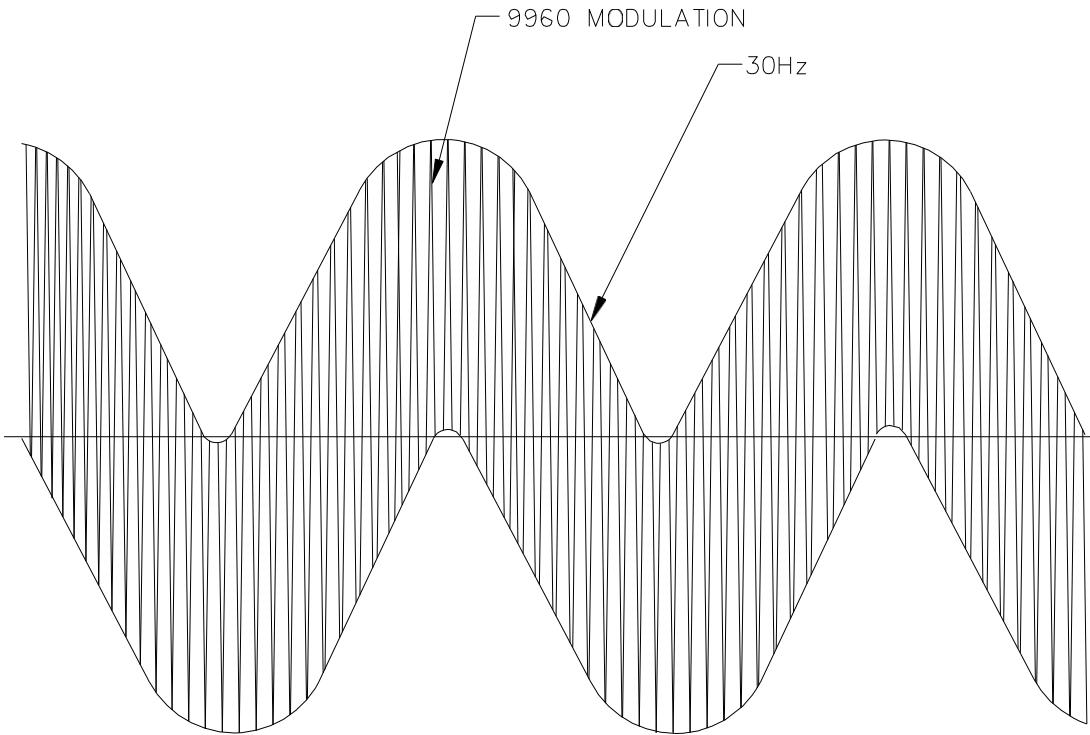REFERENCE TO SIDEBAND PHASING

1150-614

TYPICAL SIGNAL AT 1A8TP5

**Figure 9-23. Monitor CCA, Signal at 1A8TP5**

- Place CVOR system in bypass. Refer to Figure 9-23. Connect oscilloscope probe to monitor CCA 1A8TP5 and check signal. Signal should be a modulated sinewave.
- Turn off transmitter RF power by pointing and clicking the OFF button and place a 90° line section in the sideband SBO 1 (Connector J1) line.
- Set reference modulation parameter Transmitters>Configuration>Nominal to zero, record the original setting.
- Dummy load SBO2 (Connector J2) output and the SBO 2 antenna input.

**Model 1150 CVOR**

- e. Place ground check antenna at (or set the ground check switch to manual and select) the 135° or 315° point on the counterpoise.

- f. Turn on transmitter RF power by pointing and clocking the Transmitter ON button.
- g. Check 1A8TP5 with oscilloscope. Oscilloscope is to be set with volts/centimeter to .1v/div and a time base of 2 ms/div. Connect a digital voltmeter positive lead to 1A8TP5 and negative lead to ground, set DVM to measure AC voltage.
- h. Adjust SBO 1 phase using Transmitters>Configuration>Offsets and Scale Factors for minimum amplitude signals as indicated on oscilloscope display and minimum voltage on the digital voltmeter.
- i. Turn off transmitter RF power.
- j. Remove 90° line section from SB01. Dummy load SBO 1 output and the SBO 1 antenna input.
- k. Remove the dummy loads from SBO 2 output and the SBO 2 antenna input, and connect the antenna to the sideband cable with the 90° line section installed.
- l. Place ground check antenna at (or set the ground check switch to manual and select) the 45° or 225° point on the counterpoise.
- m. Turn on transmitter RF power.
- n. While monitoring 1A8TP5, adjust SBO 2 phase Transmitters> Configuration> Offsets and scale factors using command for minimum amplitude signals as indicated on oscilloscope display and minimum voltage on the digital voltmeter.
- o. Turn off transmitter RF power and remove 90° line section from sideband SBO 2 line and sideband SBO 2 antenna input. Connect antenna to the sideband cable.
- p. Return the reference modulation Transmitters>Configuration>Nominal to its original setting.
- q. Repeat steps a thru q for transmitter No. 2.

## **9.9      INSTALLATION VERIFICATION TEST**

Check to make sure that all RF and power connections have been accomplished. If there are no further adjustments needed to be made to the antenna feed cables, fill the outside of the six conduits with putty to seal against water and vermin.

### **9.9.1     Records**

Select RMS>>Config Backup and then press [enter]. This will place Transmitter No. 2's new operating parameters into electrically erasable memory.

### **9.9.2     Special Tests**

Perform verification procedures of [Section 6](#).

## **10 SOFTWARE**

### **10.1 INTRODUCTION**

Not applicable to this manual

**THIS SHEET INTENTIONALLY BLANK**

# 11 TROUBLESHOOTING SUPPORT

## 11.1 INTRODUCTION

This section contains wiring diagrams, schematic diagrams, system interconnect wiring diagram, and power distribution diagrams. Refer to Table 11-1 for page and figure numbers.

**Table 11-1. Schematic Diagrams**

Description	Schematic No.	Figure	Page
CVOR System Block Diagram	1150-586	<a href="#">11-1</a>	11-3
CVOR Interconnect Diagram (Sheets 1-6)(Single)	001150-9102	<a href="#">11-2</a>	11-5
CVOR Interconnect Diagram (Sheets 1-6) (Dual)	001150-9101	<a href="#">11-3</a>	11-17
RF Monitor Assy	030364-9001	<a href="#">11-4</a>	11-29
RF Monitor CCA (Sheets 1-3)	012687-9001	<a href="#">11-5</a>	11-31
CSB Power Amplifier Assy	030363-9001	<a href="#">11-6</a>	11-37
Power Ampl Mod CCA	012624-9001	<a href="#">11-7</a>	11-39
Power Ampl CCA	012625-9001	<a href="#">11-8</a>	11-41
Exciter CCA	012627-9001	<a href="#">11-9</a>	11-43
Bias Reg/Exciter CCA	012626-9001	<a href="#">11-10</a>	11-45
Freq Gen Cntl CCA (Sheets 1-4)	012100-9001	<a href="#">11-11</a>	11-47
Interconnect CCA	012102-9001	<a href="#">11-12</a>	11-55
Sideband Generator Assy	030398-9001	<a href="#">11-13</a>	11-57
Sideband Control CCA	012636-9001	<a href="#">11-14</a>	11-59
Sideband Amplifier CCA	012793-9001	<a href="#">11-15</a>	11-61
Audio Generator Assy (Sheets 1-4)	012616-9003	<a href="#">11-16</a>	11-63
Monitor CCA (Sheets 1-4)	012617-9001	<a href="#">11-17</a>	11-71
Modem CCA (Sheets 1-2)	012101-9001	<a href="#">11-18</a>	11-79

**Table 11-1. Schematic Diagrams**

<b>Description</b>	<b>Schematic No.</b>	<b>Figure</b>	<b>Page</b>
Serial Interface	012619-9002	<a href="#">11-19</a>	11-83
Facilities CCA (Sheets 1-2)	012620-9001	<a href="#">11-20</a>	11-85
Test Generator CCA	012689-9001	<a href="#">11-21</a>	11-89
CPU CCA (Sheets 1-2)	012618-9001	<a href="#">11-22</a>	11-91
Low Voltage Power Supply CCA	012743-9001	<a href="#">11-23</a>	11-95
Backplane CCA	012600-9001	<a href="#">11-24</a>	11-97
Low Pass Filter Assy	030448-9001	<a href="#">11-25</a>	11-99
VOR Jack CCA	012090-9001	<a href="#">11-26</a>	11-101
Auto Ground Check Schematic	030366-9001	<a href="#">11-27</a>	11-103
Indicator Assy, Manual Ground Check	030554-9001	<a href="#">11-28</a>	11-105
Transient Suppressor	030574-9001	<a href="#">11-29</a>	11-107
Monitor Antenna	012787-9001	<a href="#">11-30</a>	11-109
Field Detector Assy CCA	012708-9001	<a href="#">11-31</a>	11-111
VOR/DME Interface Kit	470420-8001	<a href="#">11-32</a>	11-113
Preselector/Amplifier/Detector	012658-9001	<a href="#">11-33</a>	11-123
Diode Switch	012785-9001	<a href="#">11-34</a>	11-125
Switch Driver	012786-9001	<a href="#">11-35</a>	11-129
Counterpoise Foundation Drawing	470538-0001	<a href="#">11-36</a>	11-131
Display CCA	012610-9001	<a href="#">11-37</a>	11-139