


APPLICATIONS / MARKETS









SPECIFICATIONS

Electrical Rating: 20mA, 20V (AC or DC) Life Expectancy: 1,000,000 Cycles Contact Resistance: 5Ω Max.

Insulation Resistance: 100MΩ Min. at 500VDC Dielectric Strength: 500VAC for 1 Minute Operating Temperature: -25°C to 70°C

Function: SPST

FEATURES & BENEFITS

- •1,000,000 cycle life expectancy
- The switch is triggered when tilted 45 degrees of the horizontal
- · Environmentally friendly, contains no mercury

PART NUMBER CONFIGURATOR


Series **Contact Material** Model 1000 Q - Silver

Specifications subject to change without notice











On - OFF ANGLES



BODY DIMENSIONS

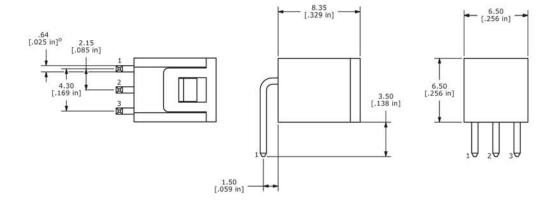

DETECTOR SWITCHES

SWITCHES KEYLOCK

NAVIGATION PUSHBUTTON
SWITCHES SWITCHES