

# PEM Fuel Cell system analysis

SARY Monychot & NIANG Bora

October 3, 2024

## Contents

<b>1</b>	<b><u>Calculation of the power demand inside the vechicle</u></b>	<b>2</b>
1.1	Calculate and plot the instant power provided by the vechicle powertrain for the road cycles ” WLTC ” . . . . .	2
1.1.1	Calculation . . . . .	2
1.2	Calculate the instant power provide (positive) or received (negative) by the electric hybrid power source. . . . .	5
1.3	Calculate and Plot as a function of time : The power of the battery (kW), The power of the fuel cell system (kW), The SOC battery (%) . . . . .	6

# 1 Calculation of the power demand inside the vehicle

- The specification of the vehicle are the following:

- Weight  $M = 2000kg$
- Front area  $A = 2.25m^2$
- Drag coefficient (or air penetration coefficient)  $C = 0.29$
- Rolling Resistance coefficient  $C_r = 0.0115$

- The efforts applied on the vehicle in the rolling direction have to following expression:

- Air penetration :

$$F = \frac{1}{2}\rho_{air}v^2CA \quad (1.1)$$

with  $\rho_{air} = 1.2kg/m^3$

- Rolling resistance :

$$F = MgC_r \cos \alpha \quad (1.2)$$


with  $g = 9.81m/s^2$  and  $\alpha$  the slope angle

- Climbing or descent :


$$F = Mg \sin \alpha \quad (1.3)$$

## 1.1 Calculate and plot the instant power provided by the vehicle powertrain for the road cycles " WLTC "

- ★ Consider a flat road ( $\alpha = 0$ )

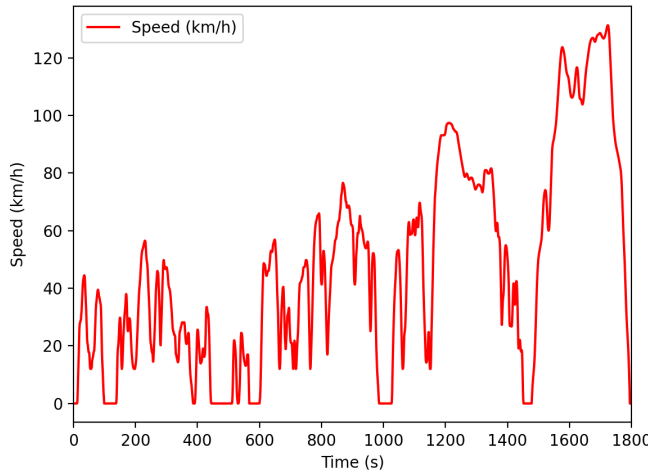

(a) Speed Profile in km/h

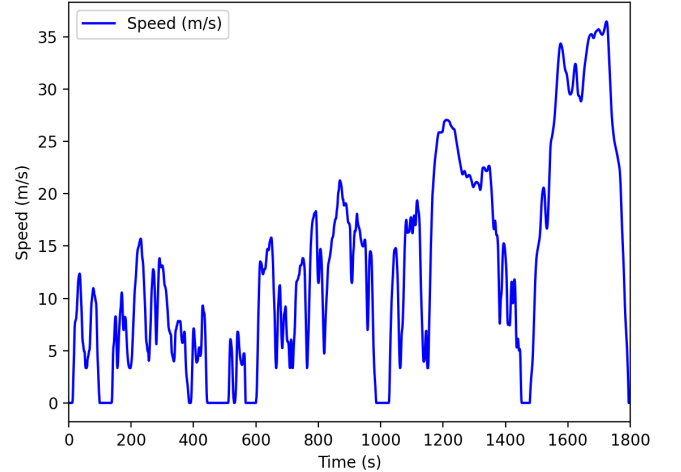


(b) Speed Profile in m/s

Figure 1: Graph of the Speed Profile in km/h and Speed in m/s

### 1.1.1 Calculation

To calculate the **Instant Power**, we need to study of the *force* that have action on the car. By using second Newton's law with the Figure (2) shown below, we can assume that there are 4 forces that have action on thecar while driving.

- The first force is to make the car move in direction. It called the force from motor or machine of the car ( $F_{motor}$ )

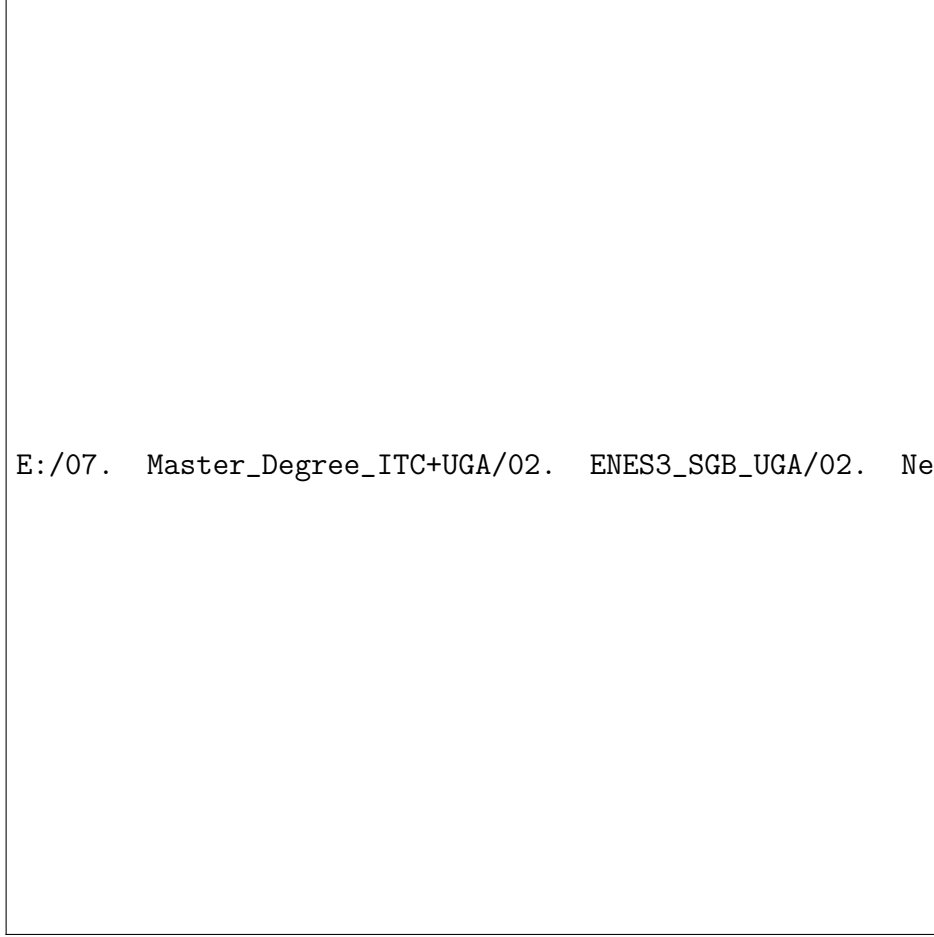

E:/07. Master\_Degree\_ITC+UGA/02. ENES3\_SGB\_UGA/02. New Technology/Report (

Figure 2: Speed (km/h) of the vehicle powertrain by time (s)

- The second force is the rolling force from the car wheels. It called **Rolling Resistance** ( $F_{rolling}$ )
- The third force is the climbing or descent force ( $F_{climb}$ )
- The fourth force is the force from the air friction. we can called it Air penetration ( $F_{air}$ ).

Using second Newton's law, we can written :

$$\vec{F}_{motor} - \vec{F}_{rolling} - \vec{F}_{climb} - \vec{F}_{air} = m \vec{a} \quad (1.4)$$

$$\vec{F}_{motor} = \vec{F}_{rolling} + \vec{F}_{climb} + \vec{F}_{air} + m \vec{a} \quad (1.5)$$

since  $a$  is the acceleration of the vehical in time  $t$ , as we written :

$$\vec{a} = \frac{d\vec{v}}{dt} = \frac{\Delta v}{\Delta t} \quad (1.6)$$

By using Equation (1.6), we can get the result of acceleration on the Figure (3)

According to the graph, it shown that the vehical did not have the stable speed drive on the. At the some time ( $t$ ), the vehical increasing the speed immediately. In contrast, at some time ( $t$ ), the vehical reducing the speed quickly as shown in the Figure (3).

- For calculate  $F_{air}$  by using Equation (1.1) , we got :

$$F_{air} = \frac{1}{2} \rho_{air} v^2 C A = \frac{1}{2} \times 1.2 \times v_{m/s,t}^2 \times 0.29 \times 2.25 \quad (1.7)$$

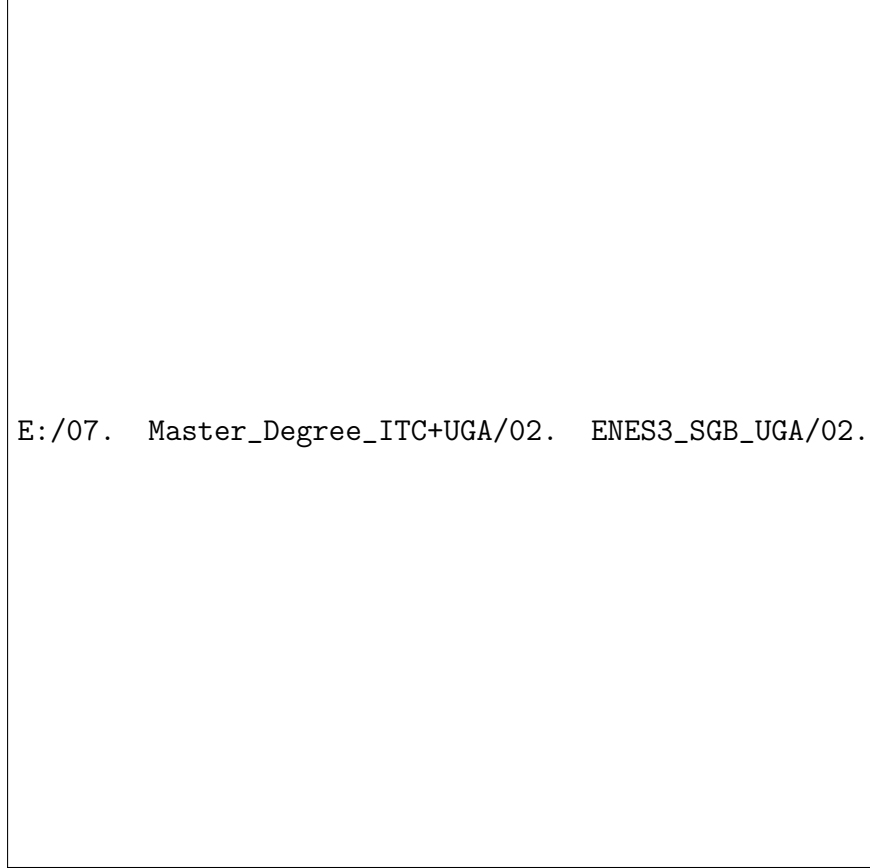


Figure 3: Acceleration ( $m/s^2$ ) of the vehicle powertrain by time (s)

In this section, to calculate  $F_{air}$  we need to get the speed in each time  $t$  in  $m/s^2$  to analyze in the Equation (1.7) By using the Equation (1.1), we got the result of the force air penetration by shown in below graph.

- For calculate  $F_{rolling}$ , we will be using the Equation (1.2), we got :

$$F_{rolling} = MgC_r \cos(\alpha) = 2000kg \times 9.81m/s^2 \times 0.0115 \times \cos(0^\circ) = \mathbf{225.630} \quad (1.8)$$

For this force, it will be constant in time ( $t$ ) because there is not any parameter in the Equation (1.8) will change in which time.

- For calculate  $F_{climb}$ , we will use Equation (1.4) then we got:

$$F = Mg \sin(\alpha) = 2000kg \times 9.81m/s^2 \times \sin(0^\circ) = 0 \quad (1.9)$$

By using Equation (1.6), (1.7), (1.8) and (1.9) substitution into Equation (1.5). The result of total force was shown by the graph in Figure (4).

To calculate Instant power we are using :

$$P = F \times v \quad (1.10)$$

The result of the instant power calculation will be show at Figure (5)b. The instant power of the vehical are depend on two parameter :

- The total force from the vehical action ( $N$ ).
- The speed that make the vehical go forward ( $m/s$ ).

As now, we can write that

$$P_t = F_t \times v_t \quad (1.11)$$

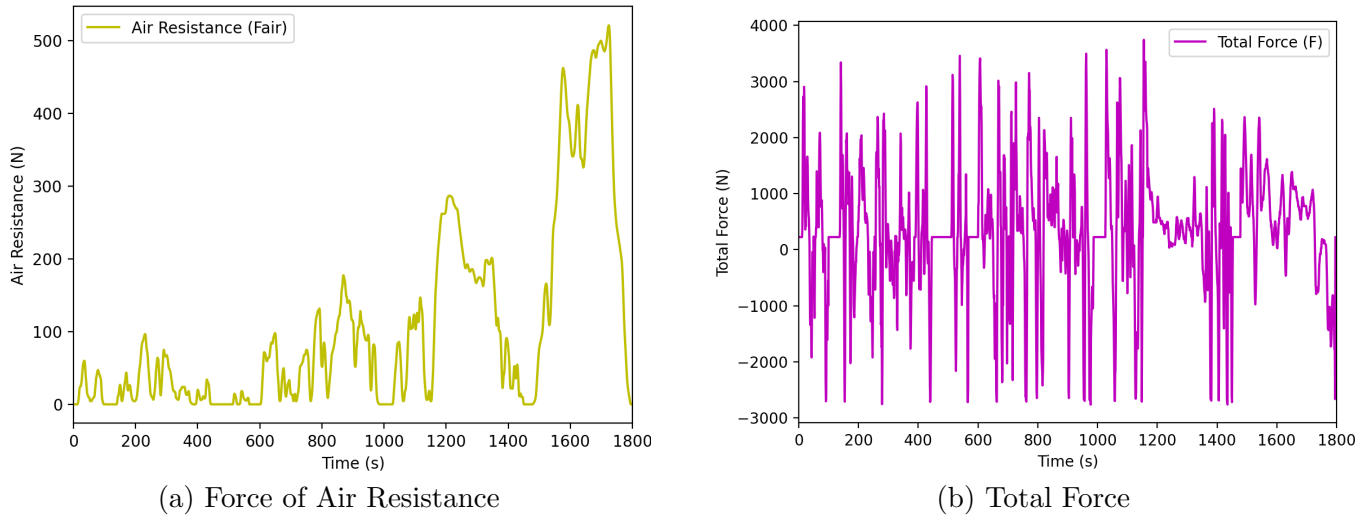


Figure 4: Graph of the Force of Air Resistance and Total Force

The result of the instant power will show in the Figure (5).

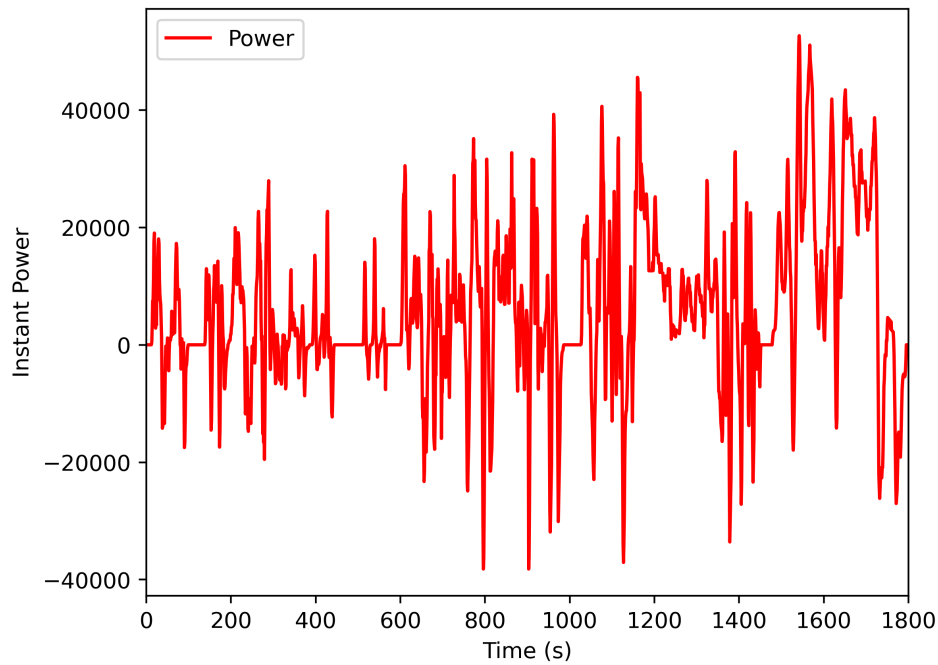


Figure 5: Instant Power of the Vehicle (W)

## 1.2 Calculate the instant power provide (positive) or received (negative) by the electric hybrid power source.

The vehicle auxiliaries consume an electrical power of 300W (no air conditioning, minimum consumption of all the equipment of the vehicle: sensor, supervisor, etc.) The DC/DC converter efficiency is assumed constant at 90% both direction.

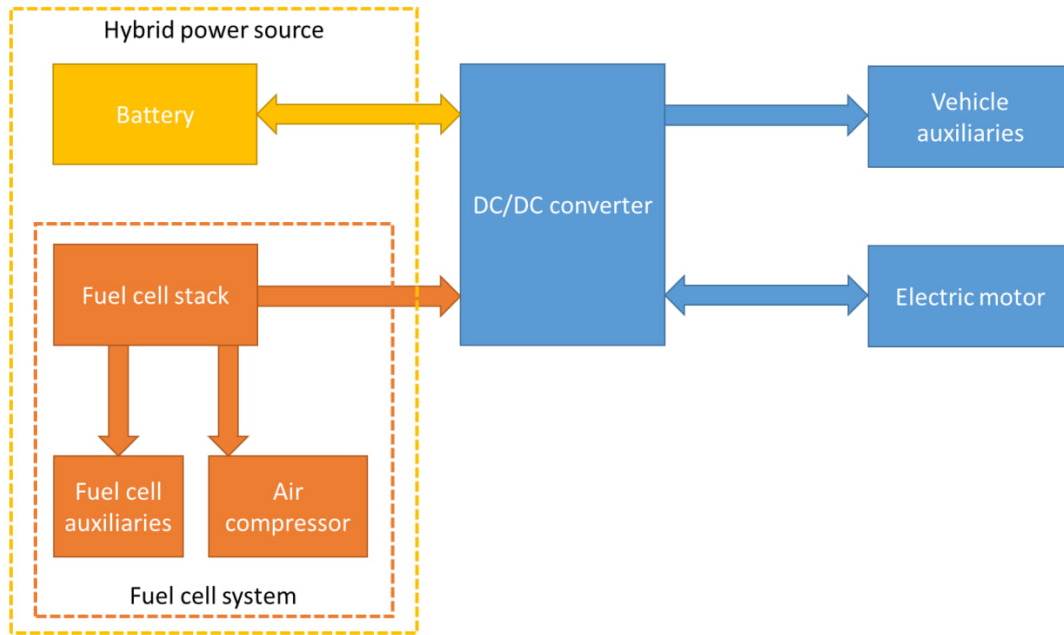


Figure 6: Hybrid system in the vehicle

To find the transfer power in the hybrid system in order to find the provided (positive) or received (negative), we have use instant power from pervious question as data in the Figure (5) with the efficiency of the DC/DC converter. As shown in the Figure (7): At the **first figure** had been show the **RED line graph** represented the received power (negative) to the hybrid power with the maximum received is **34.365 kW**. Moreover, as shown in the **second figure** shown the **Blue line graph** represented the provided power (positive) from the hybrid system to the motor and auxiliaries. The maximum provided power to the motor was around **58.488 kW**. According to data from the calculation, we can assumed that the vehicle mostly consum power from the hybrid and less provided power to hybrid system based on the data of speed that provided.

### 1.3 Calculate and Plot as a function of time : The power of the battery (kW), The power of the fuel cell system (kW), The SOC battery (%)

The energy management strategy of the hybridization between the battery and the fuel cell system is not disclosed by Tooyta.

- The battery technology is Li-ion, with a stored energy of **1.24kWh**.
- The test results of Mirai 1 indicate that the battery State of Charge (SoC) is comprised between **50%** and **65%**
- The power delivered by the battery is often close to **5%** of the total power provided by the hybrid power source when  $SoC < 55\%$  or **30%** when  $SoC > 55\%$
- Discharging power of the battery is approximately **12.4 kW** (or 10C), while the charging power depends on the battery SoC: **10C** if  $SoC < 55\%$  or **6C** if  $SoC > 55\%$
- The battery provides 0%, 5%, 30% of the total power depending on its SoC and in the limit of its maximum discharging power.
- The EMS avoids values of SoC below 50% and above 65%
- The fuel cell system provides the rest of the power reuquired, excpet if the power demand is too low: the power provided by the fuel cell system can't be lower than **2.5kW**

E:/07. Master\_Degree\_ITC+UGA/02. ENES3\_SGB\_UGA/02. New Technology/Report 01 (17-09-24/

Figure 7: Hybrid working system in power transfer

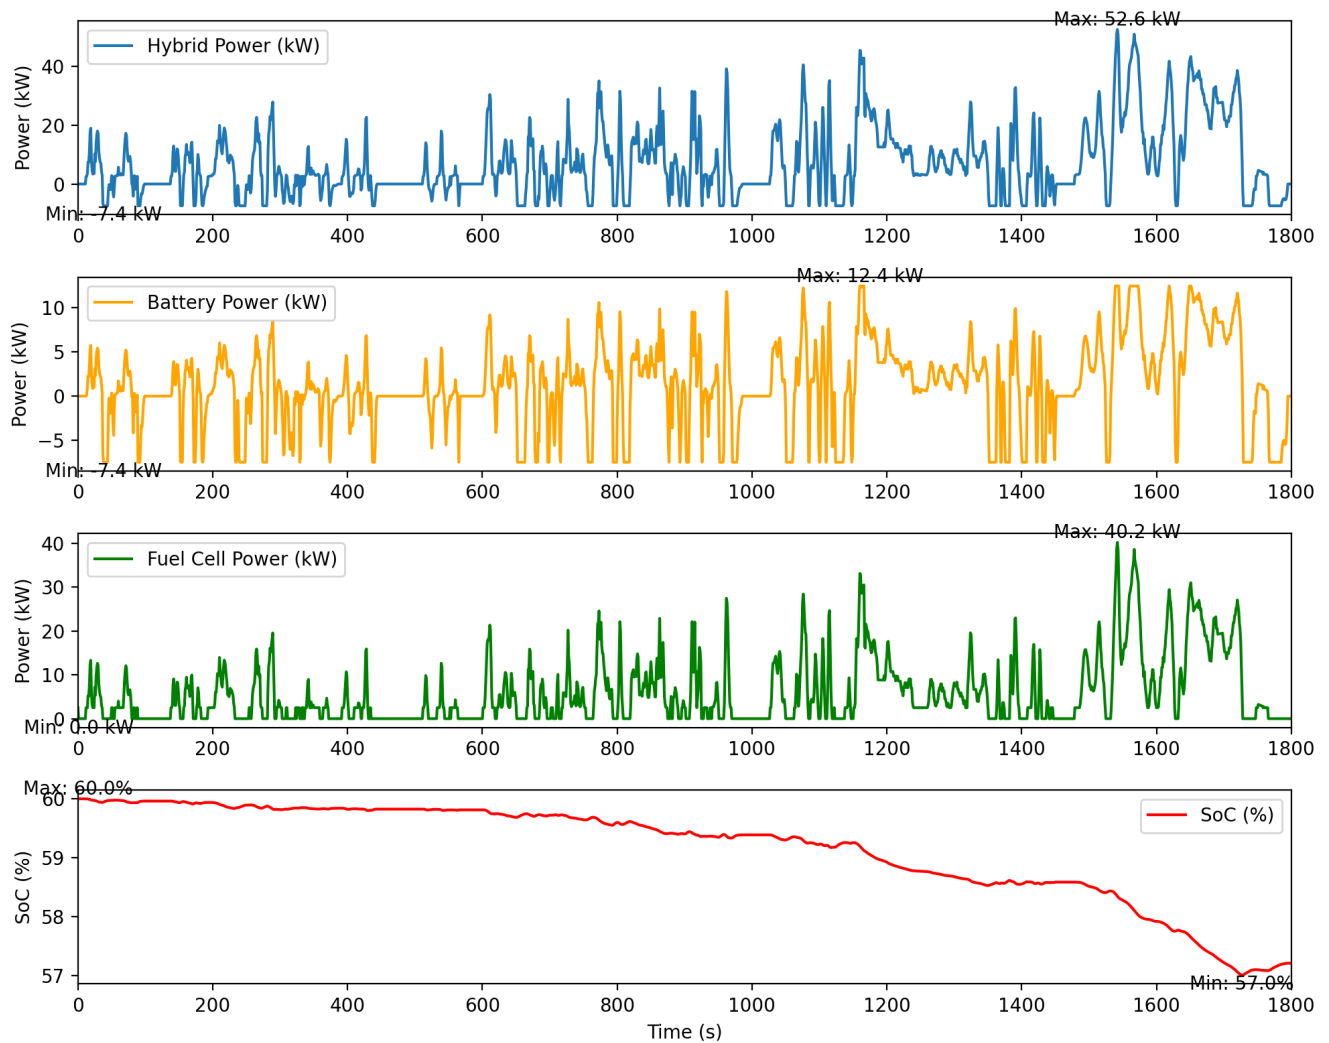


Figure 8: Hybrid working system in power transfer