

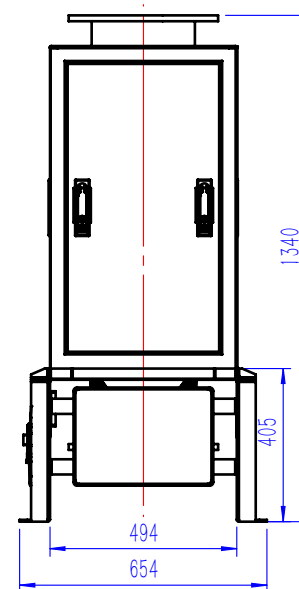
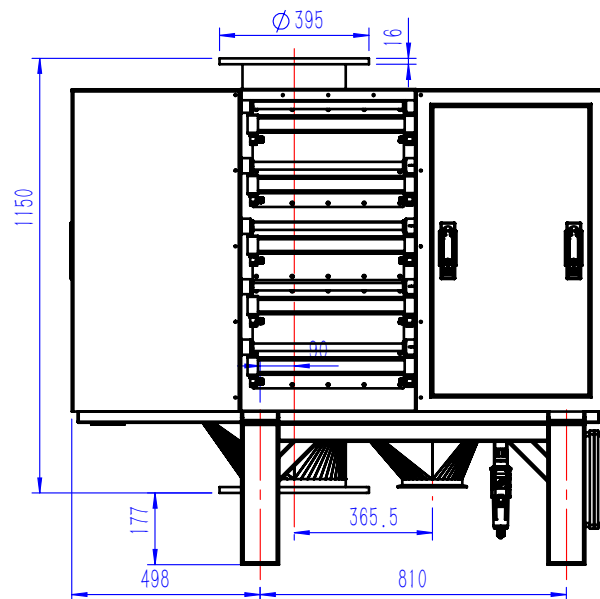


0	~ 5.9:	± 0.1
6	~ 29.9:	± 0.2
30	~ 119.9:	± 0.5
120	~ 314.9:	± 0.8
315	~ 999.9:	± 1.2
1000	~	± 2.0
Angle:		$\pm 0.5^\circ$

NO.	修 改 内 容	更 改 文 件 号	签 字	日 期

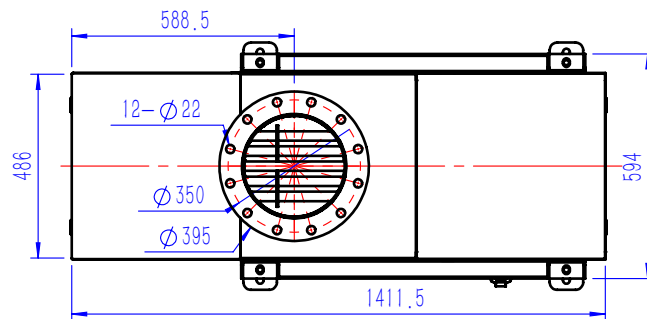

1. 名称:刮环抽屉式除铁器DN200, 进出口法兰DN200PN10-HG/T20592;
材质:壳体304, 磁棒316L, 带控制箱;
2. 磁棒数量:25根按 (2+3) X5排列, 裸磁磁场强度12000GS。
裸棒峰值12000Gs, 长年起年退磁率 $\leq 5\%$ 使用环境 $\leq 80^{\circ}\text{C}$;
3. 表面要求: 内表面喷涂ECTFE/厚度0.3mm, 外表面喷砂Sa2;
4. 其它: 卡扣及旋转部位需防止金属硬碰。

TOLERANCES:		ANGLE:	DRAWINGBY (绘图):	DESIGNEDBY (设计):	湖南腾曦智造 科技有限公司					MACHINE TYPE (机种):				
x. ±0.1 . X±0.05 . xx±0.02		x. ±1° . X±0.5° . xx±0.2°	CHECKEDBY (审核):	APPROVEDBY (核准):						XXX				
ROUGHNESS:			SCALE (比例):	DWGNO (图号):	REV:	THIRD ANGLE PROJE CTION:	图样标记		数量	重量	工艺	MATERIAL (材料):	PART NENA (零件名):	
6.3				A4	UNIT:				1 Set			XXXX		
			mm		A							CUSTOMER (客户):		
							共0000张		第0000张		XX	320240200143-00-01-01 (DN250 10层5组无套管		