

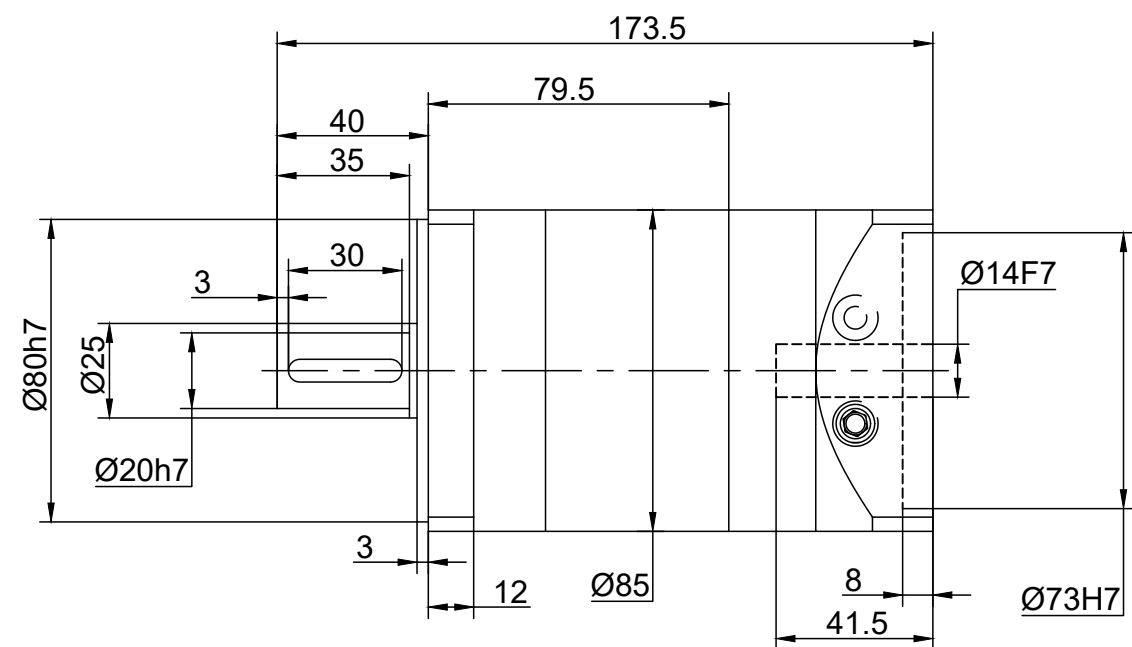


DIMENSIONS UNIT=mm

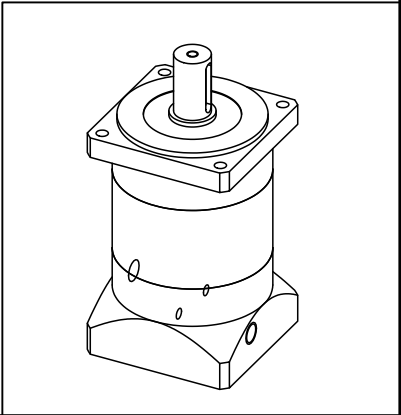

Output


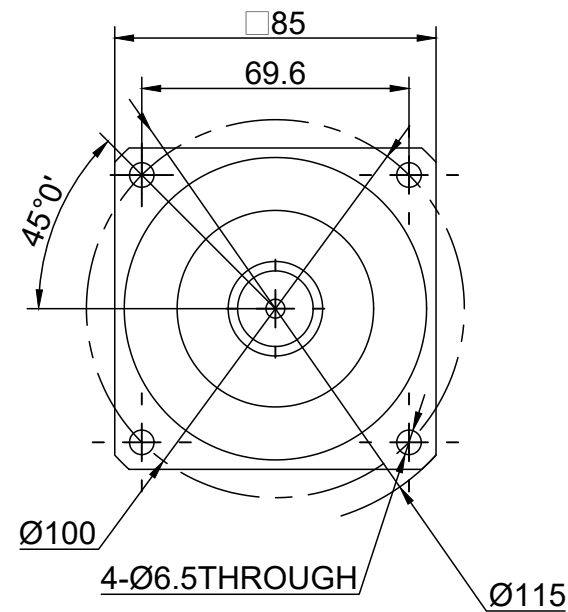


TECHNICAL PARAMETER


MOTOR DIMENSIONS	Ø14-41/Ø73-3/F69.6-M5
GEAR RATIO	20:1
BACKLASH	≤10 Arcmin
EFFICIENCY	≥95%
NOMINAL OUTPUT TORQUE	105N.M
MOMENT PERMISSIBLE TORQUE	210N.M
NOMINAL INPUT SPED	3000rpm
MAX. INPUT SPEED	4000rpm
NOISE	≤60db
WATERPROOF RATING	IP65
LIFETIME	20000H
WORKING TEMPERATURE	-15℃~+80℃
LUBRICATION MODE	PERMANENT LUBRICATION
RADIAL FORCE	490N
AXIAL FORCE	460N
KEY STANDARD	ROUND COMMON FLAT KEY GB1096-79

ACCESSORY: 4 BOLTs
1 KEY
2 PLUG

Intput

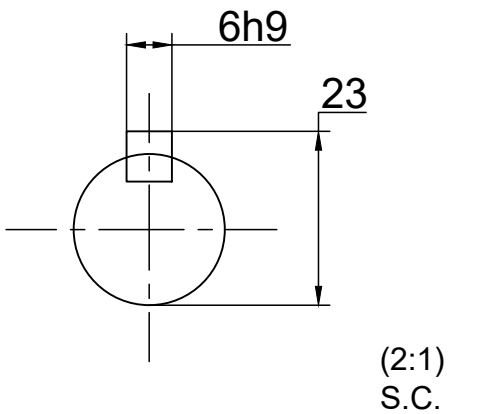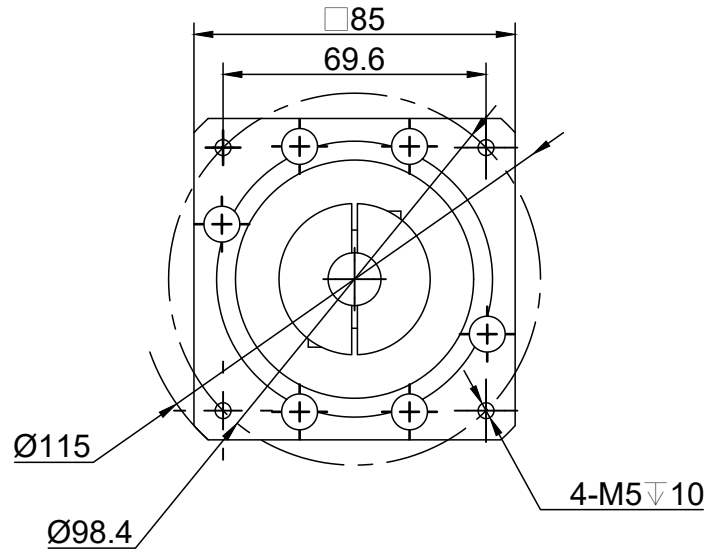

A VIEW INSTALLATION SIZE OF KEY

				MODEL		
				DLF86-L2-20-S-P2		
TOLERANCE	±0.5/±3°	REV.	DATE	REVISIONS		
				BY		
DRAWN			SCALE	2:1	PLANERRY GEARBOX SPECIFICATION	
DESIGNED			YEJMKJ			
CHECKED						
				SHEET	1/1	