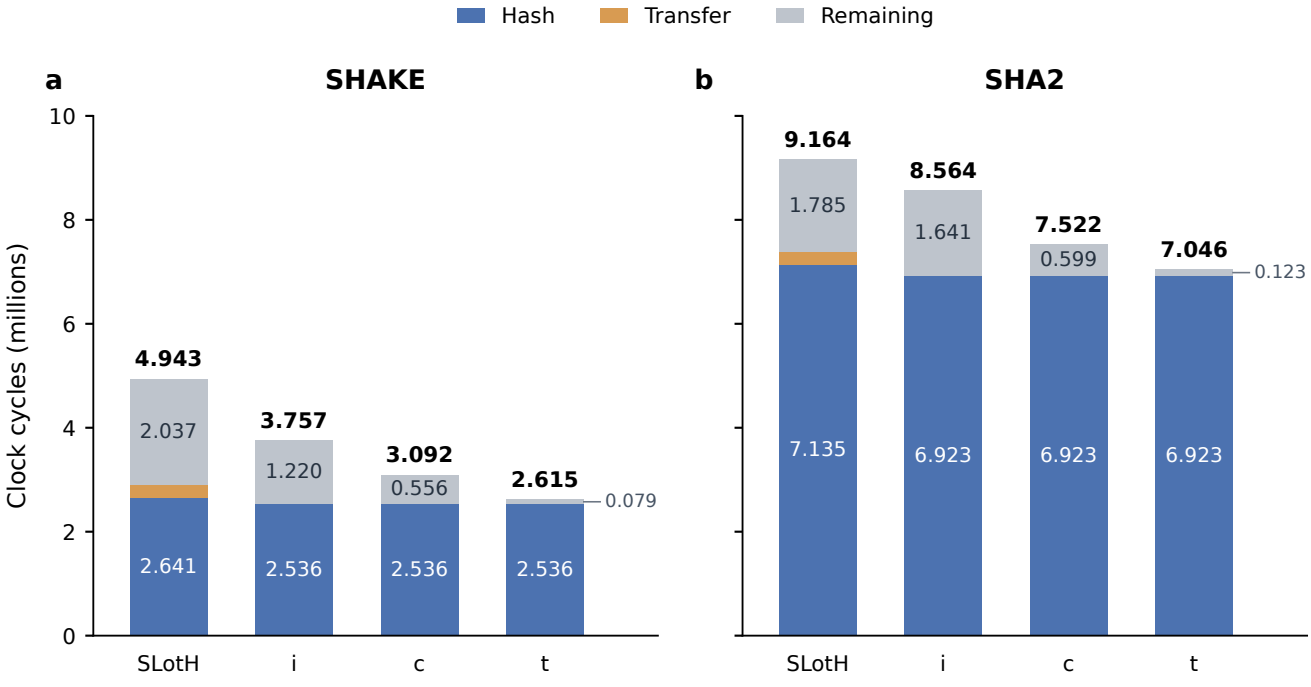

Latest adopted i / c; unchanged t. P1U1, matched 33-byte KAT; labels are million cycles.
Transfer = non-overlapped hash-MMIO clocks; i / c / t have no MMIO (Transfer = 0).
Other on-chip work is Remaining. SLotH Hash also includes in-engine setup / chain control.
SHA2: rounds + feed-forward are equal; the 0.211M Hash difference is setup accounting.