SLH-DSA-128f Sign: software and hardware control

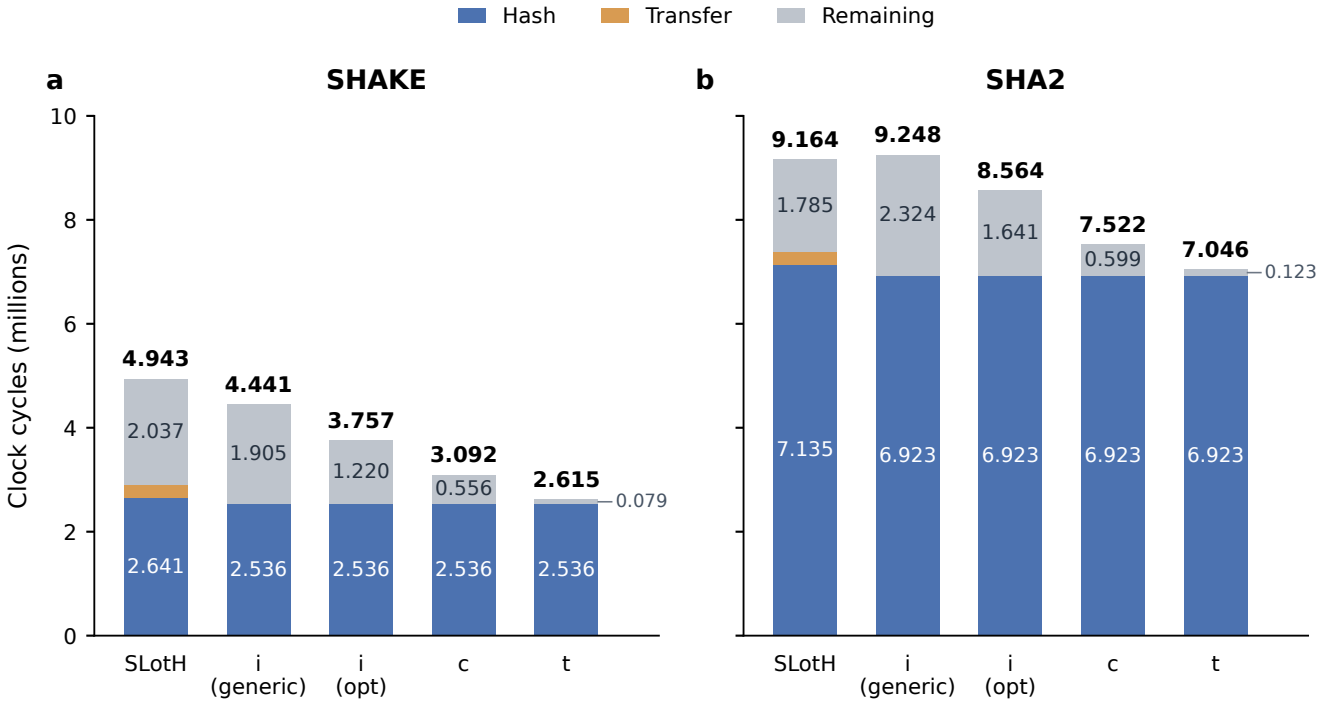

P1U1, matched 33-byte KAT; both i variants use identical RTL. Units: million cycles.
Transfer = non-overlapped hash-MMIO clocks; i / c / t have no MMIO (Transfer = 0).
i (generic): original single-loop chain program. i (opt): four-path software dispatch.
SLotH Hash includes setup / chain control; SHA2 round + feed-forward work is equal.