


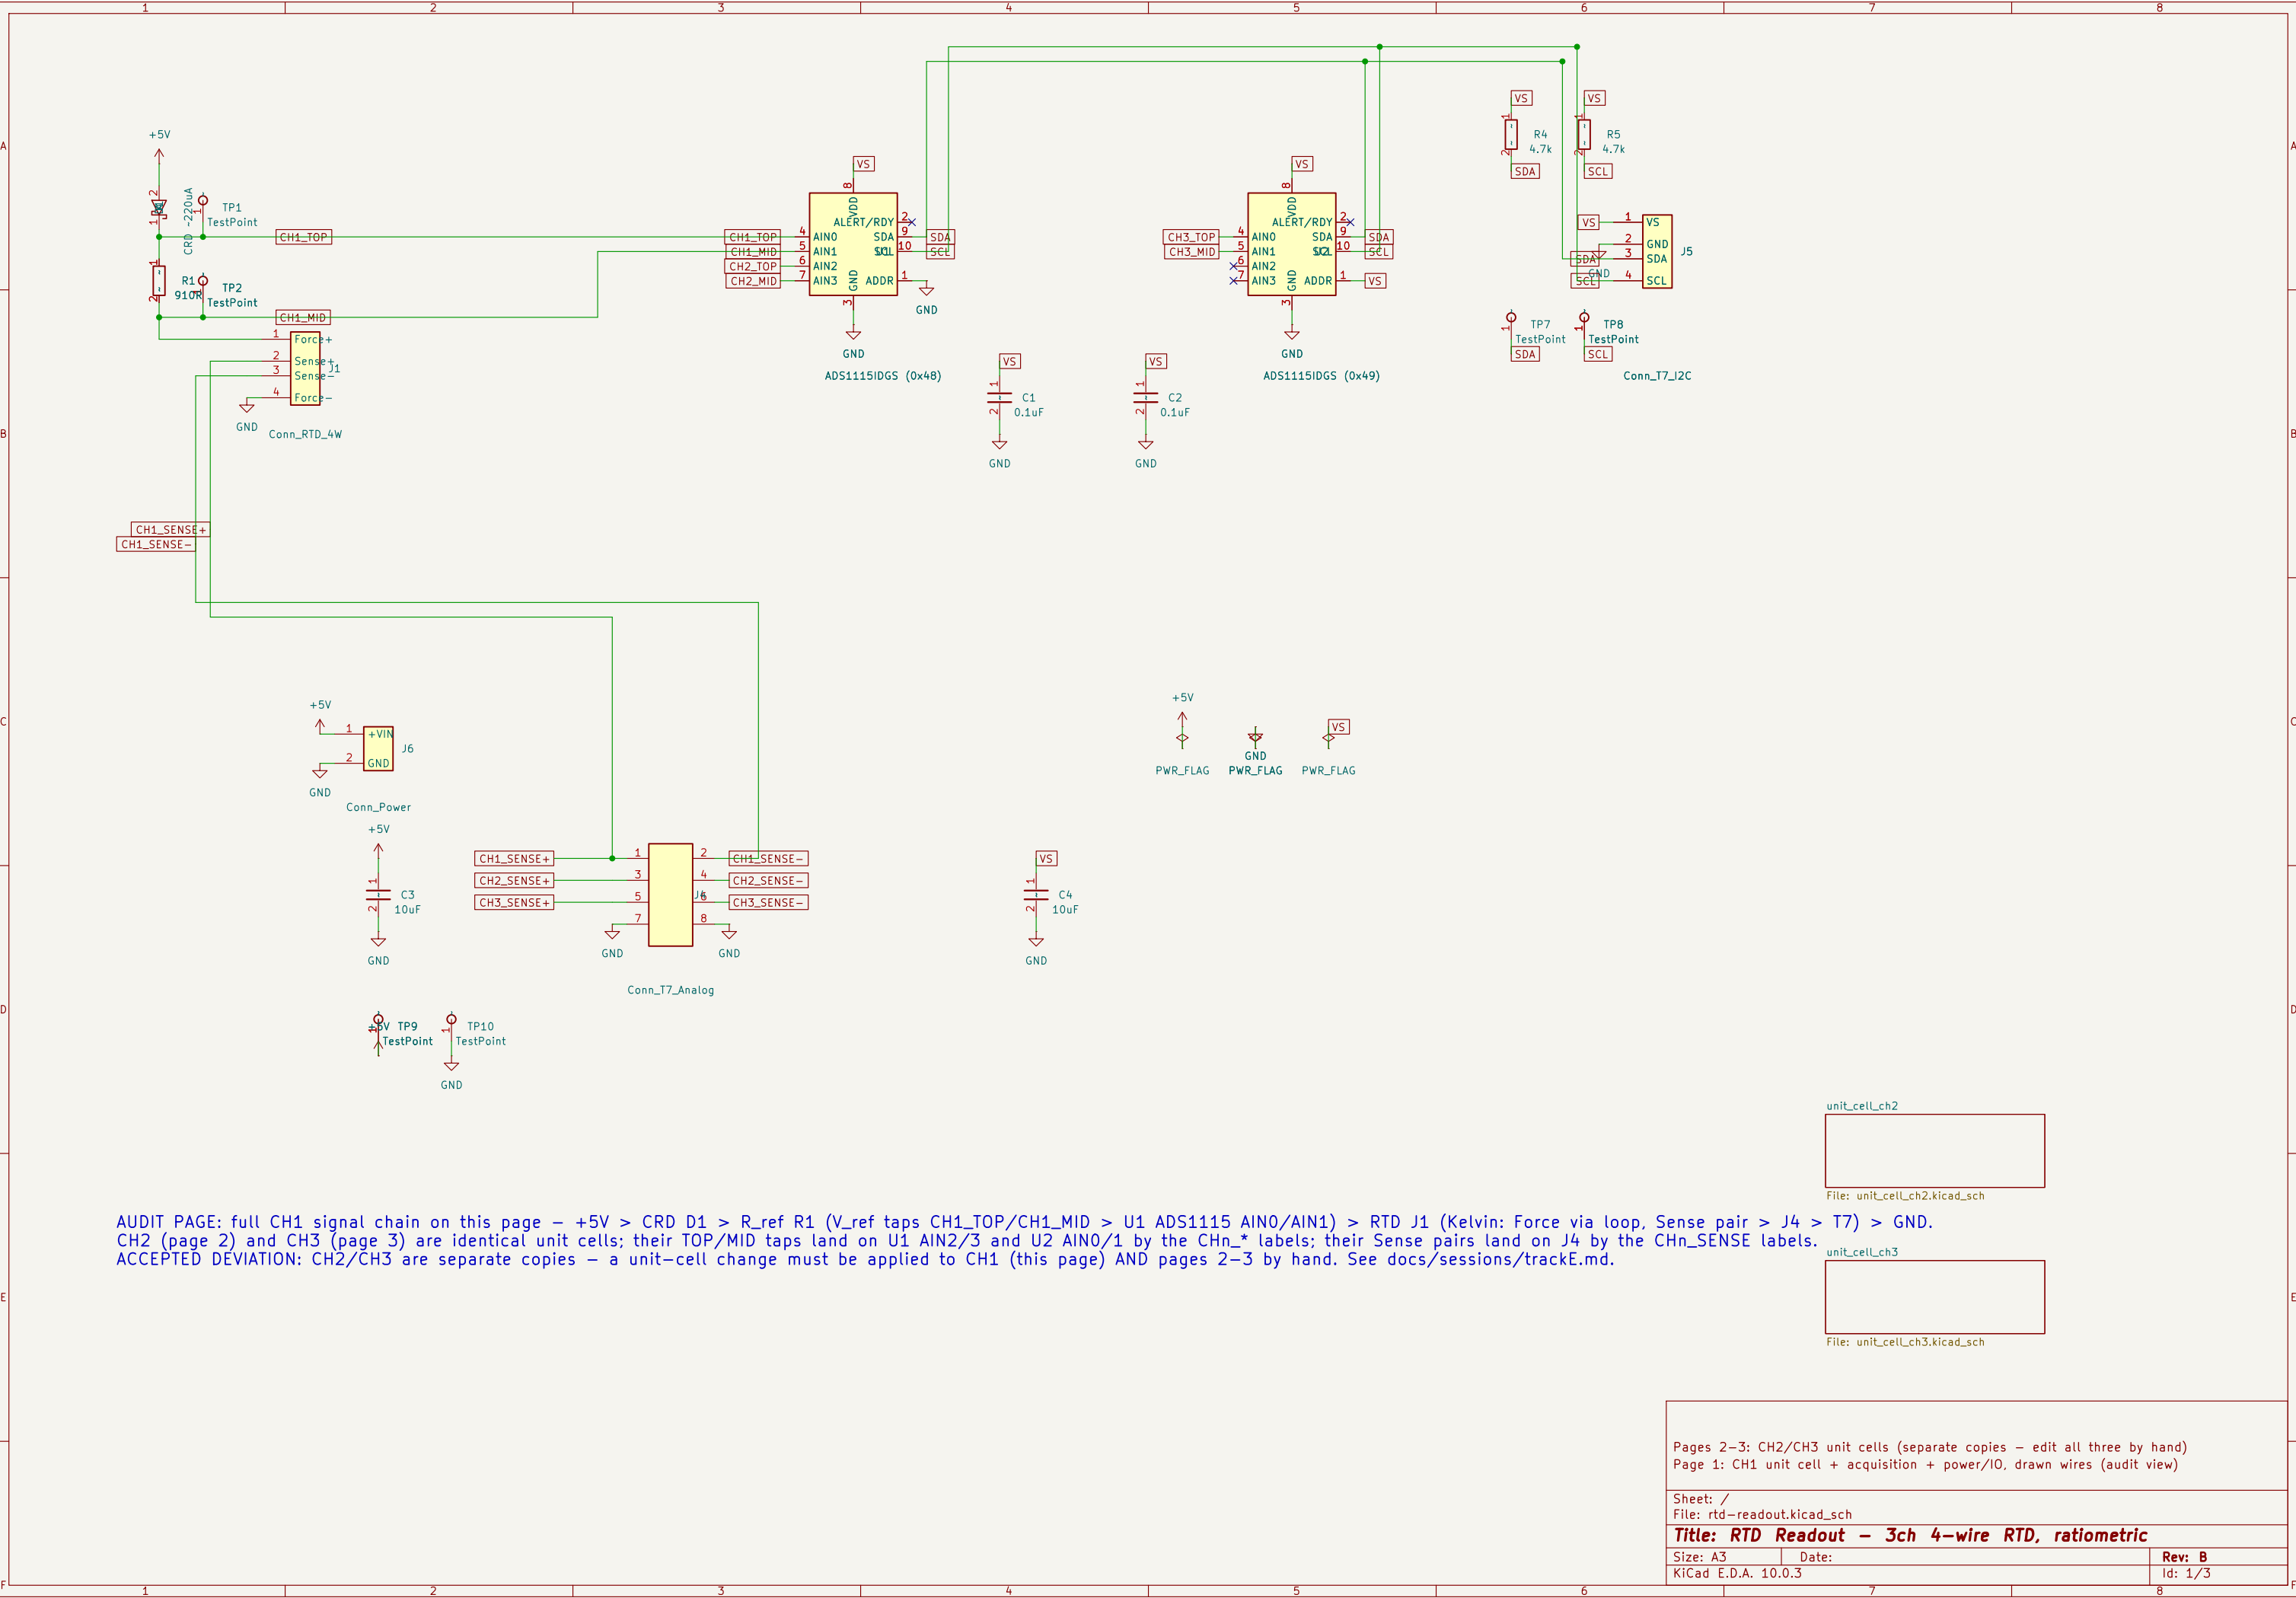

AUDIT PAGE: full CH1 signal chain on this page – +5V > CRD D1 > R_ref R1 (V_ref taps CH1_TOP/CH1_MID > U1 ADS1115 AIN0/AIN1) > RTD J1 (Kelvin: Force via loop, Sense pair > J4 > T7) > GND.
CH2 (page 2) and CH3 (page 3) are identical unit cells; their TOP/MID taps land on U1 AIN2/3 and U2 AIN0/1 by the CHn_* labels; their Sense pairs land on J4 by the CHn_SENSE labels.
ACCEPTED DEVIATION: CH2/CH3 are separate copies – a unit-cell change must be applied to CH1 (this page) AND pages 2–3 by hand. See docs/sessions/trackE.md.

unit_cell_ch2
File: unit_cell_ch2.kicad_sch

unit_cell_ch3
File: unit_cell_ch3.kicad_sch

Pages 2–3: CH2/CH3 unit cells (separate copies – edit all three by hand)
Page 1: CH1 unit cell + acquisition + power/I/O, drawn wires (audit view)

Sheet: / File: rtd--readout.kicad_sch		
Title: RTD Readout – 3ch 4-wire RTD, ratiometric		
Size: A3	Date:	Rev: B
KiCad E.D.A. 10.0.3		Id: 1/3

