




ZXM7-UHLD108 Series

16BB HALF-CELL N-Type TOPCon
Double Glass Monocrystalline PV Module

425-440W **22.53%** **0.40%**
POWER RANGE MAXIMUM EFFICIENCY YEARLY DEGRADATION

12 12 YEARS PRODUCT WARRANTY **30** 30 YEARS OUTPUT GUARANTEE

12 years product warranty for general application
15 years product warranty for Rooftop PV system
30 years output warranty / 0.40% Annual Degradation over 30 years

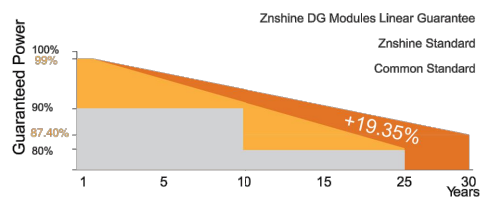

*Please check the valid version of Limited Product Warranty which is officially released by ZNSHINE PV-TECH Co.,Ltd.



IEC 61215/IEC 61730

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

*As there are different certification requirements in different markets, please contact your local znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

KEY FEATURES



Excellent Cells Efficiency

SMBB technology reduce the distance between busbars and finger grid line which is benefit to power increase.



Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



TIER 1

Global, Tier 1 bankable brand, with independently certified advanced automated manufacturing.




Excellent Quality Management System

Warranted reliability and stringent quality assurances well beyond certified requirements.

ZXM7-UHLD108 Series | Znshinesolar 16BB HALF-CELL N-Type TOPCon Double Glass Monocrystalline PV Module




DIMENSIONS OF PV MODULE(mm)

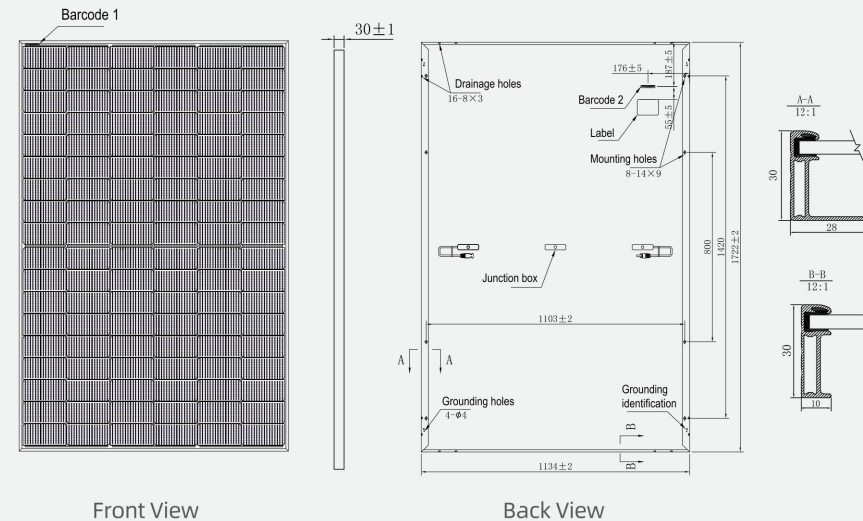


*Remark: customized frame color and cable length available upon request

I-V CURVES OF PV MODULE(435W)

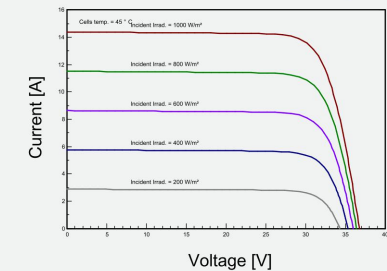

P-V CURVES OF PV MODULE(435W)

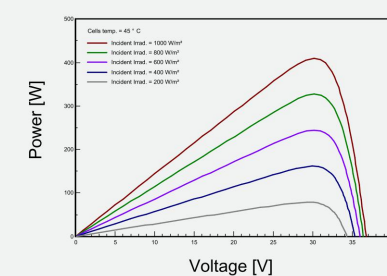

ELECTRICAL CHARACTERISTICS | STC*

Module Type	ZXM7 UHLD108-425/N	ZXM7 UHLD108-430/N	ZXM7 UHLD108-435/N	ZXM7 UHLD108-440/N
Nominal Power Watt Pmax(W)*	425±5	430±5	435±5	440±5
Maximum Power Voltage Vmp(V)	31.70	31.90	32.10	32.30
Maximum Power Current Imp(A)	13.41	13.47	13.56	13.63
Open Circuit Voltage Voc(V)	38.30	38.50	38.70	38.90
Short Circuit Current Isc(A)	14.12	14.19	14.26	14.39
Module Efficiency (%)	21.76	22.02	22.28	22.53

*The data above is for reference only and the actual data is in accordance with the practical testing

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5

*Measuring uncertainty: ±3%, all the electrical characteristics such as Power, Im, Vm and FF are within ±3% tolerance.

MECHANICAL DATA

Solar cells	N-type Monocrystalline
Cells orientation	108 (6×18)
Module dimension	1722×1134×30 mm (With Frame)
Weight	24.5±1.0 kg
Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	PV-XT1609Nxyz, IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm²
Connectors*	PV-XT101.1 Suzhou Xtong Photovoltaic Technologies Co., Ltd. PV Modules manufactured in china

*Please refer to regional datasheet for specified connector

ELECTRICAL CHARACTERISTICS | NMOT

Maximum Power Pmax(Wp)	320.90	324.30	328.60	332.3
Maximum Power Voltage Vmp(V)	29.90	30.10	30.30	30.40
Maximum Power Current Imp(A)	10.73	10.78	10.84	10.93
Open Circuit Voltage Voc(V)	36.10	36.30	36.50	36.70
Short Circuit Current Isc(A)	11.39	11.45	11.51	11.61

*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

PACKAGING CONFIGURATION*

Piece/Box	36
Piece/Container(40'HQ)	936

*Customized packaging is available upon request.

TEMPERATURE RATINGS

NMOT	44°C ±2°C	Maximum system voltage	1500 V DC
Temperature coefficient of Pmax	(-0.30±0.03)%/°C	Operating temperature	-40°C~+85°C
Temperature coefficient of Voc	-0.25%/°C	Maximum series fuse	25 A
Temperature coefficient of Isc	0.046%/°C	Maximum load front/back	3600/1600 with safety factor 1.5
		Fire safety class	Class A

*Remark: Do not connect Fuse in Combiner Box with two or more strings in parallel connection

*Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.

They only serve for comparison among different module types.

*Caution: Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills

and please carefully read the safety and installation instructions before using our PV modules.

Founded in 1988, Znshine solar is a world's leading high-tech PV module manufacturer. With the advanced production lines, the company boasts module capacity of 10 GW. Bloomberg has listed Znshine as a global Tier 1 PV module maker. Today Znshine has distributed its sales to more than 60 countries around the globe.

www.znshinesolar.com

Address: 1#, Zhixi Industrial Zone, Jintan Jiangsu 213251, P.R. China Tel: +86 519 6822 0233 E-mail: info@znshinesolar.com

Note: Specifications included in this datasheet are subject to change without notice. ZNSHINE reserves the right of final interpretation © ZNSHINE SOLAR 2023 | Version: ZXM7-UHLD108 2307.E

No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document



infinity solar

INFINITY HOME SOLUTIONS
6405 E MILL PLAIN
VANCOUVER WA 98661
PHONE: 1-800-818-0598
INFINITY.SOLAR.COM

REVISIONS

Description	Date	Rev
Initial Design	6/16/26	00

Signature with Seal

Project Name & Address

KEVIN GONZALEZ RESIDENCE
925 N GRANT ST
LAFAYETTE, OR 97127
PHONE:- N/A
EMAIL:- N/A

Sheet Name
PV MODULE
SPECIFICATION
SHEET

Sheet Size

ANSI B
11" X 17"

Sheet Number

DS 01