


Module 3: Protocols and Models

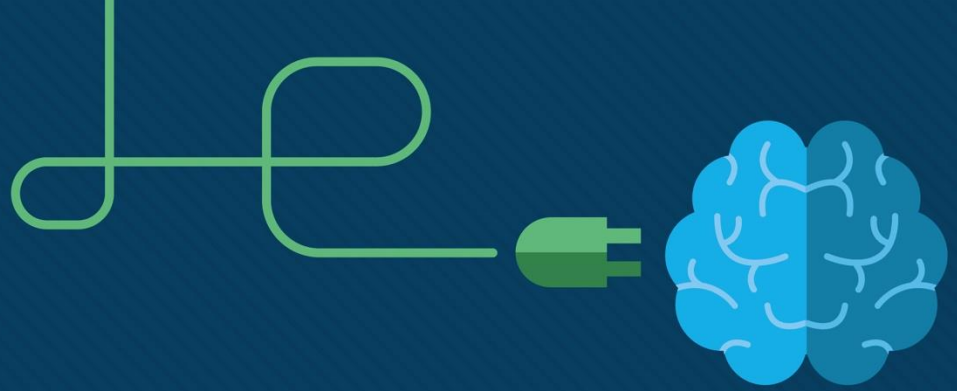

Introduction to Networks 7.0 (ITN)

Module Objectives

Module Title: Protocols and Models

Module Objective: Explain how network protocols enable devices to access local and remote network resources.

Topic Title	Topic Objective
The Rules	Describe the types of rules that are necessary to successfully communicate.
Protocols	Explain why protocols are necessary in network communication.
Protocol Suites	Explain the purpose of adhering to a protocol suite.
Standards Organizations	Explain the role of standards organizations in establishing protocols for network interoperability.
Reference Models	Explain how the TCP/IP model and the OSI model are used to facilitate standardization in the communication process.
Data Encapsulation	Explain how data encapsulation allows data to be transported across the network.
Data Access	Explain how local hosts access local resources on a network.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

3.1 The Rules

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Communications Fundamentals

Networks can vary in size and complexity. It is not enough to have a connection, devices must agree on “how” to communicate.

There are three elements to any communication:


- There will be a source (sender).
- There will be a destination (receiver).
- There will be a channel (media) that provides for the path of communications to occur.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential


Communications Protocols

- All communications are governed by protocols.
- Protocols are the rules that communications will follow.
- These rules will vary depending on the protocol.







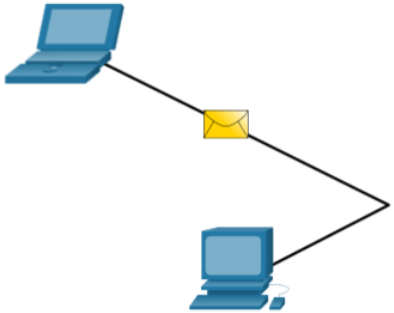

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Rule Establishment

- Individuals must use established rules or agreements to govern the conversation.
- The first message is difficult to read because it is not formatted properly. The second shows the message properly formatted

```
humans communication between govern rules. It is verydifficult tounderstand messages that are not
correctly formatted and donot follow the established rules and protocols. A estrutura da
gramatica, da lingua, da pontuacao e do sentence faz a configuracao humana compreensivel por
muitos individuos diferentes.
```

```
Rules govern communication between humans. It is very difficult to understand messages that are
not correctly formatted and do not follow the established rules and protocols. The structure of
the grammar, the language, the punctuation and the sentence make the configuration humanly
understandable for many different individuals.
```

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Rule Establishment (Cont.)

Protocols must account for the following requirements:

- An identified sender and receiver
- Common language and grammar
- Speed and timing of delivery
- Confirmation or acknowledgment requirements

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Network Protocol Requirements


Common computer protocols must be in agreement and include the following requirements:


- Message encoding
- Message formatting and encapsulation
- Message size
- Message timing
- Message delivery options


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential


Message Encoding

- Encoding is the process of converting information into another acceptable form for transmission.
- Decoding reverses this process to interpret the information.





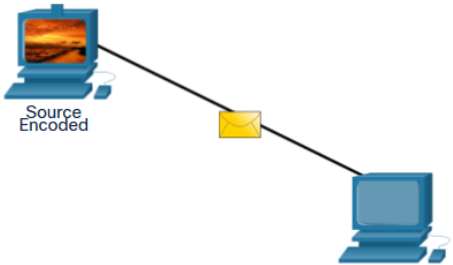


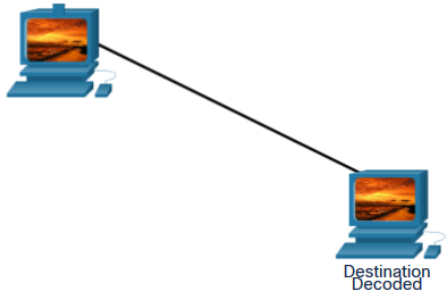


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Message Formatting and Encapsulation

- When a message is sent, it must use a specific format or structure.
- Message formats depend on the type of message and the channel that is used to deliver the message.

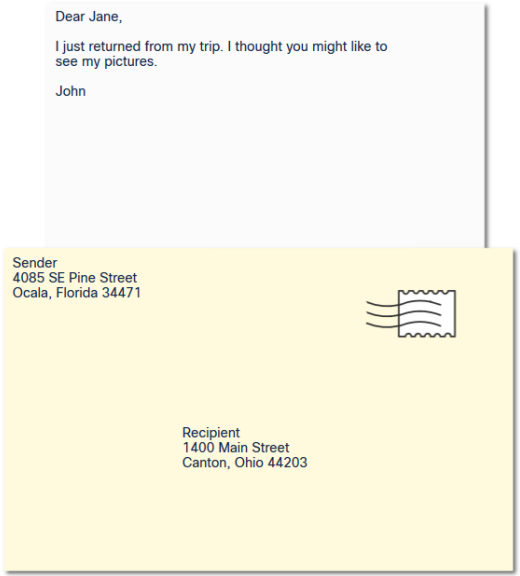


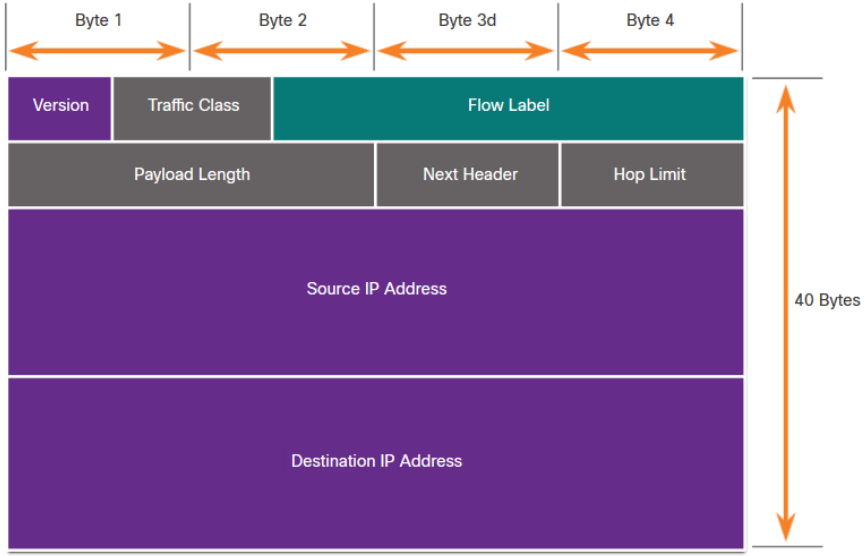


Message Size

Encoding between hosts must be in an appropriate format for the medium.

- Messages sent across the network are converted to bits
- The bits are encoded into a pattern of light, sound, or electrical impulses.
- The destination host must decode the signals to interpret the message.

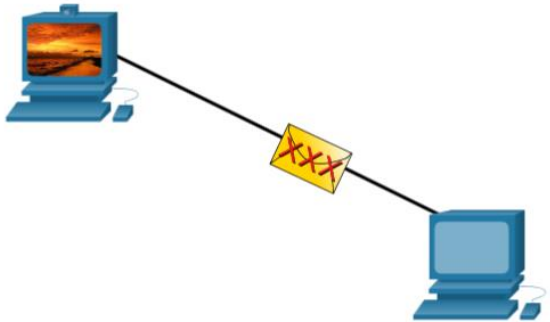

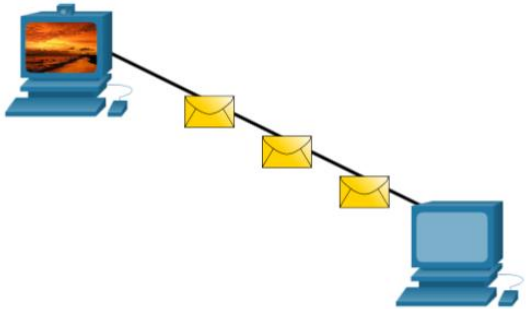

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Message Timing

Message timing includes the following:

Flow Control – Manages the rate of data transmission and defines how much information can be sent and the speed at which it can be delivered.

Response Timeout – Manages how long a device waits when it does not hear a reply from the destination.

Access method - Determines when someone can send a message.

- There may be various rules governing issues like “collisions”. This is when more than one device sends traffic at the same time and the messages become corrupt.
- Some protocols are proactive and attempt to prevent collisions; other protocols are reactive and establish a recovery method after the collision occurs.


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential


Message Delivery Options


Message delivery may one of the following methods:

- **Unicast –** one to one communication
- **Multicast –** one to many, typically not all
- **Broadcast** – one to all

Note: Broadcasts are used in IPv4 networks, but are not an option for IPv6. Later we will also see “Anycast” as an additional delivery option for IPv6.

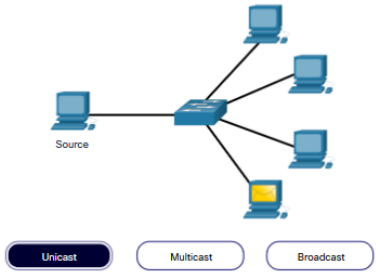

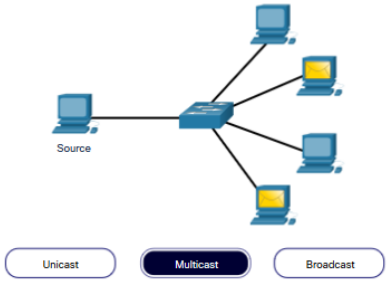


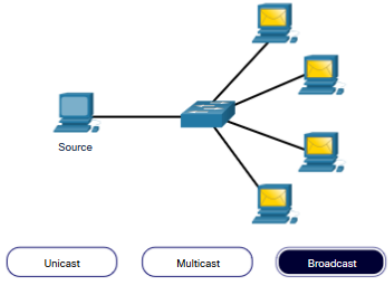

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

A Note About the Node Icon

- Documents may use the node icon , typically a circle, to represent all devices.
- The figure illustrates the use of the node icon for delivery options.

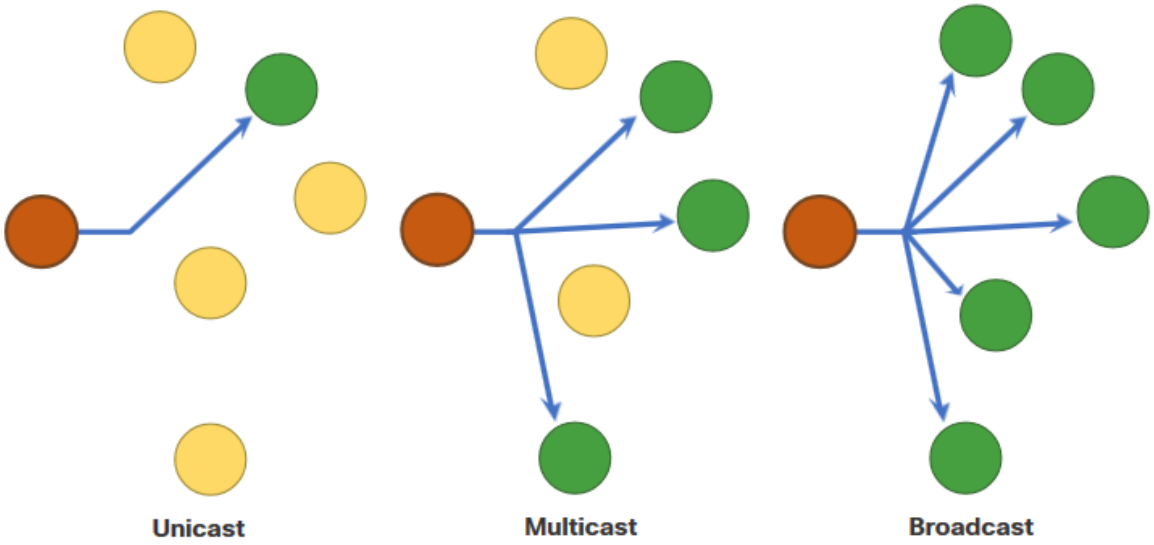

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

3.2 Protocols

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Network Protocol Overview

Network protocols define a common set of rules.


- Can be implemented on devices in:
  - Software
  - Hardware
  - Both
- Protocols have their own:
  - Function
  - Format
  - Rules

Protocol Type	Description
Network Communications	enable two or more devices to communicate over one or more networks
Network Security	secure data to provide authentication, data integrity, and data encryption
Routing	enable routers to exchange route information, compare path information, and select best path
Service Discovery	used for the automatic detection of devices or services

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Network Protocol Functions


- Devices use agreed-upon protocols to communicate .
- Protocols may have may have one or functions.

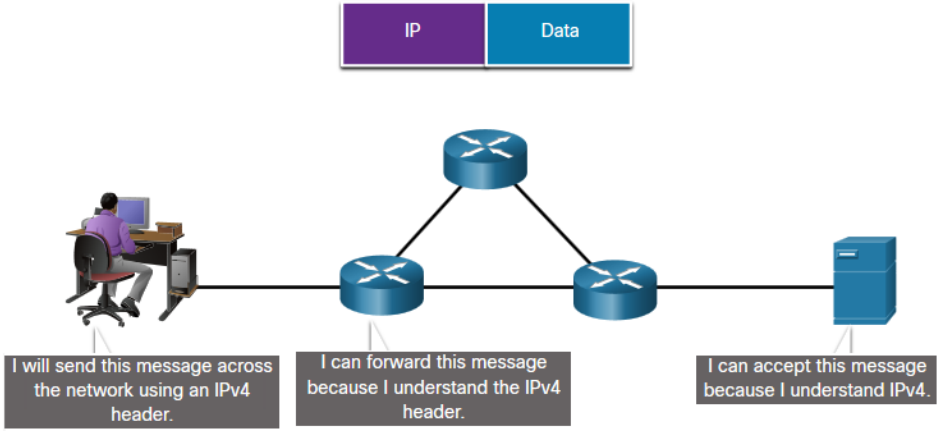

Function	Description
Addressing	Identifies sender and receiver
Reliability	Provides guaranteed delivery
Flow Control	Ensures data flows at an efficient rate
Sequencing	Uniquely labels each transmitted segment of data
Error Detection	Determines if data became corrupted during transmission
Application Interface	Process-to-process communications between network applications

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Protocol Interaction

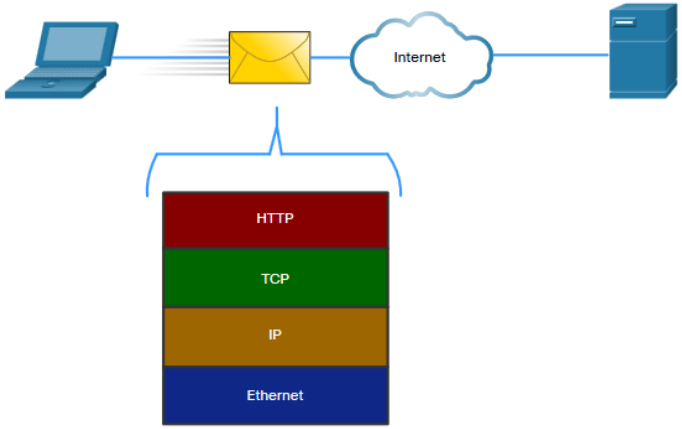

- Networks require the use of several protocols.
- Each protocol has its own function and format.

Protocol	Function
Hypertext Transfer Protocol (HTTP)	▪ Governs the way a web server and a web client interact ▪ Defines content and format
Transmission Control Protocol (TCP)	▪ Manages the individual conversations ▪ Provides guaranteed delivery ▪ Manages flow control
Internet Protocol (IP)	Delivers messages globally from the sender to the receiver
Ethernet	Delivers messages from one NIC to another NIC on the same Ethernet Local Area Network (LAN)

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

3.3 Protocol Suites

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Network Protocol Suites


Protocols must be able to work with other protocols.

Protocol suite:

- A group of inter-related protocols necessary to perform a communication function
- Sets of rules that work together to help solve a problem

The protocols are viewed in terms of layers:

- Higher Layers
- Lower Layers- concerned with moving data and provide services to upper layers

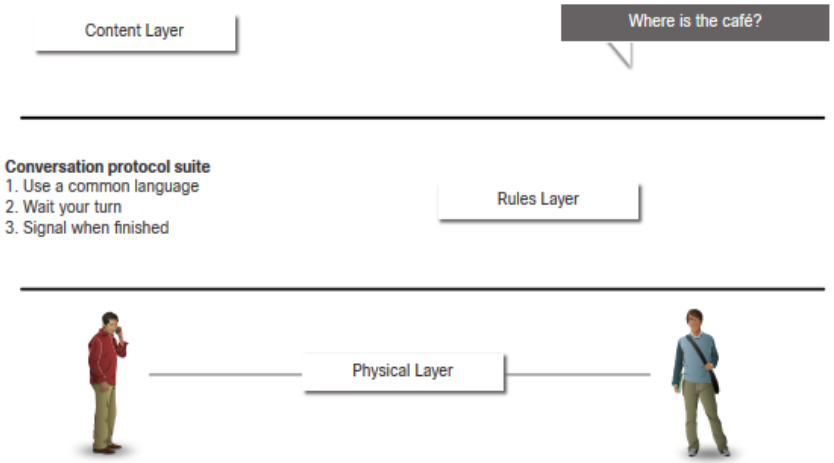


Protocol suites are sets of rules that work together to help solve a problem.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Evolution of Protocol Suites

There are several protocol suites.


- **Internet Protocol Suite or TCP/IP-** The most common protocol suite and maintained by the Internet Engineering Task Force (IETF)
- **Open Systems Interconnection (OSI) protocols-** Developed by the International Organization for Standardization (ISO) and the International Telecommunications Union (ITU)
- **AppleTalk-** Proprietary suite release by Apple Inc.
- **Novell NetWare-** Proprietary suite developed by Novell Inc.

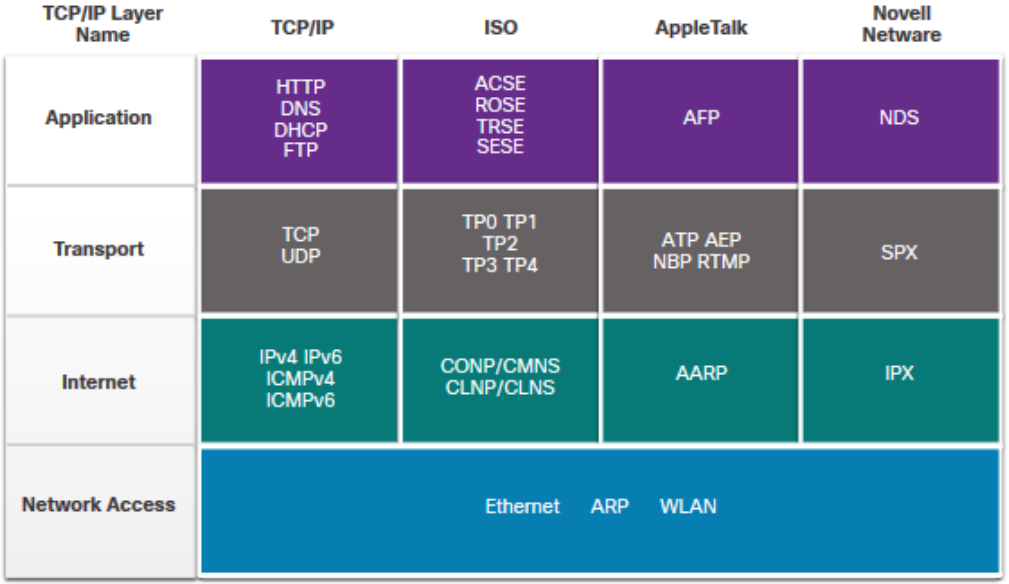

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

TCP/IP Protocol Example


- TCP/IP protocols operate at the application, transport, and internet layers.
- The most common network access layer LAN protocols are Ethernet and WLAN (wireless LAN).

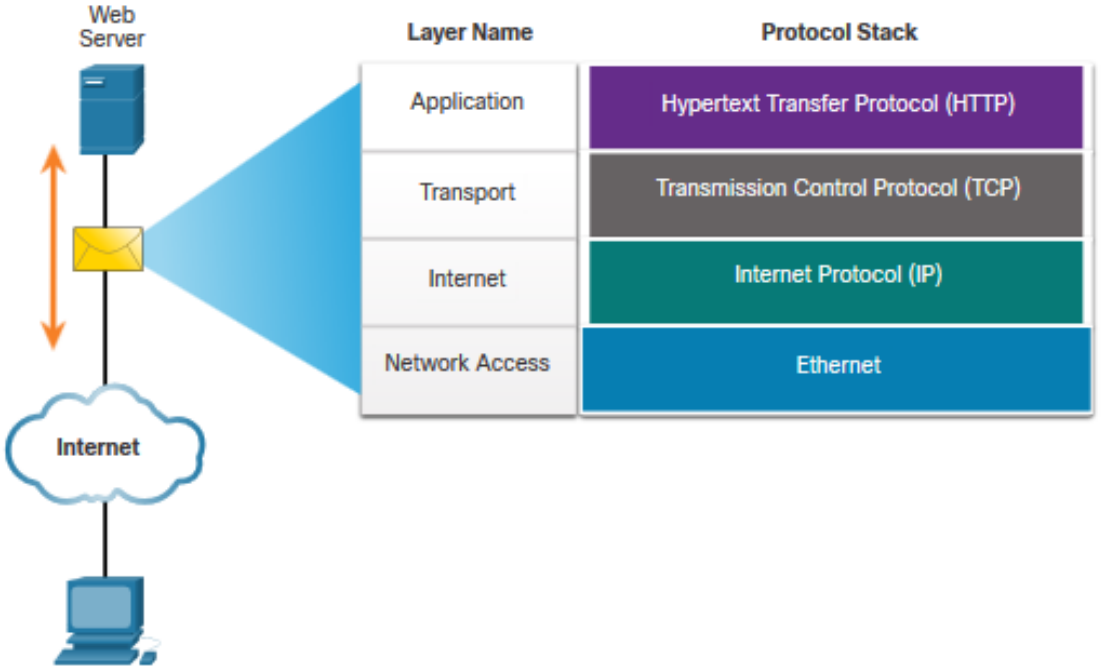

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

TCP/IP Protocol Suite


- TCP/IP is the protocol suite used by the internet and includes many protocols.
- TCP/IP is:
  - An open standard protocol suite that is freely available to the public and can be used by any vendor
  - A standards-based protocol suite that is endorsed by the networking industry and approved by a standards organization to ensure interoperability

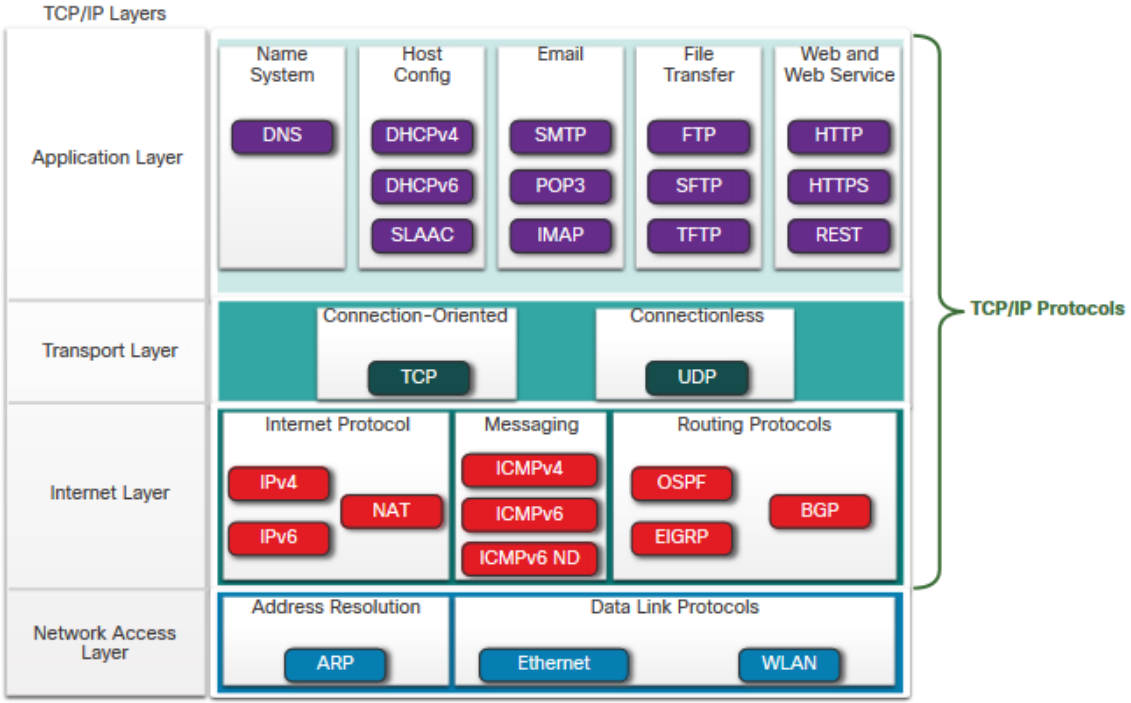


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

TCP/IP Communication Process

- A web server encapsulating and sending a web page to a client.
- A client de-encapsulating the web page for the web browser

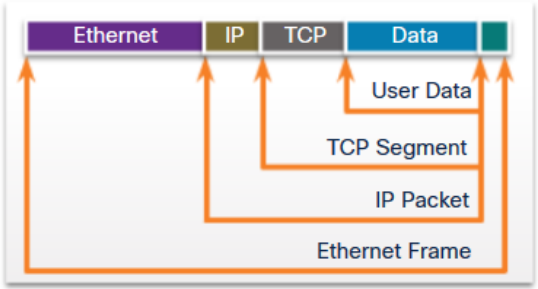

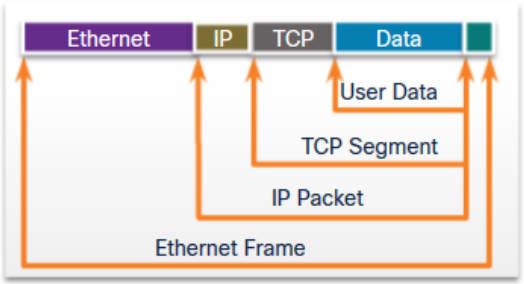



© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

3.4 Standards Organizations

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Open Standards



Open standards encourage:


- interoperability
- competition
- innovation

Standards organizations are:

- vendor-neutral
- non-profit organizations
- established to develop and promote the concept of open standards.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential


Internet Standards

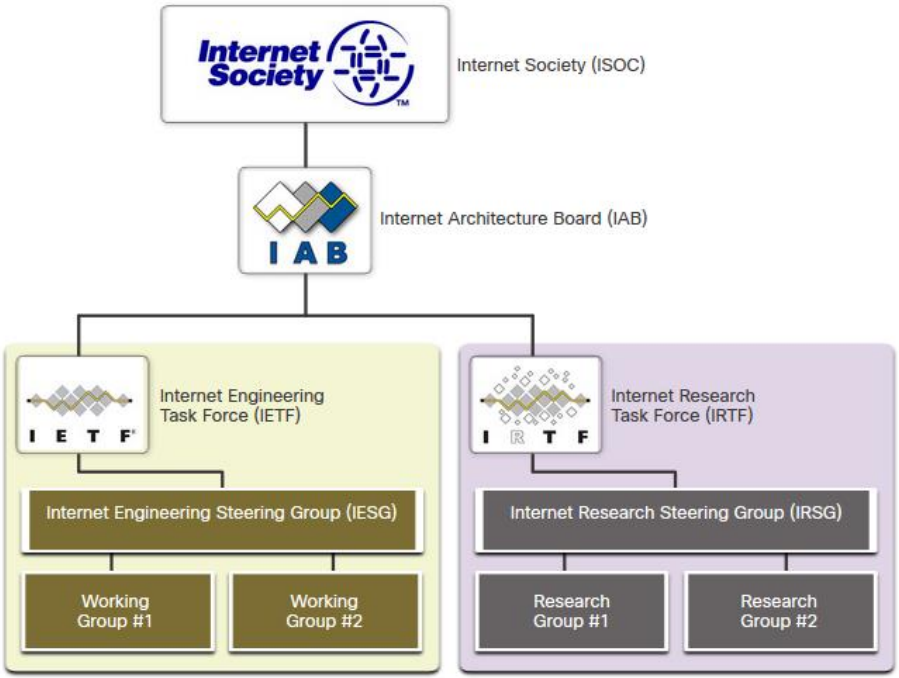

- **Internet Society (ISOC)** - Promotes the open development and evolution of internet
- **Internet Architecture Board (IAB)** - Responsible for management and development of internet standards
- **Internet Engineering Task Force (IETF)** - Develops, updates, and maintains internet and TCP/IP technologies
- **Internet Research Task Force (IRTF)** - Focused on long-term research related to internet and TCP/IP protocols

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Internet Standards (Cont.)

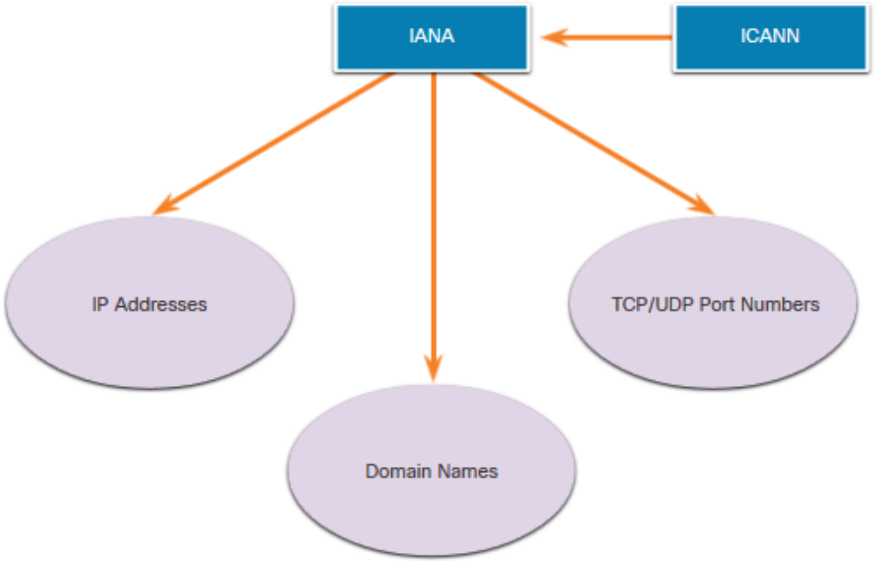

Standards organizations involved with the development and support of TCP/IP

- **Internet Corporation for Assigned Names and Numbers (ICANN)** - Coordinates IP address allocation, the management of domain names, and assignment of other information
- **Internet Assigned Numbers Authority (IANA)** - Oversees and manages IP address allocation, domain name management, and protocol identifiers for ICANN

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Electronic and Communications Standards


- **Institute of Electrical and Electronics Engineers** (**IEEE**, pronounced “I-triple-E”) - dedicated to creating standards in power and energy, healthcare, telecommunications, and networking
- **Electronic Industries Alliance (EIA)** - develops standards relating to electrical wiring, connectors, and the 19-inch racks used to mount networking equipment
- **Telecommunications Industry Association (TIA)** - develops communication standards in radio equipment, cellular towers, Voice over IP (VoIP) devices, satellite communications, and more
- **International Telecommunications Union-Telecommunication Standardization Sector (ITU-T**) - defines standards for video compression, Internet Protocol Television (IPTV), and broadband communications, such as a digital subscriber line (DSL)

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

3.5 Reference Models

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

The Benefits of Using a Layered Model

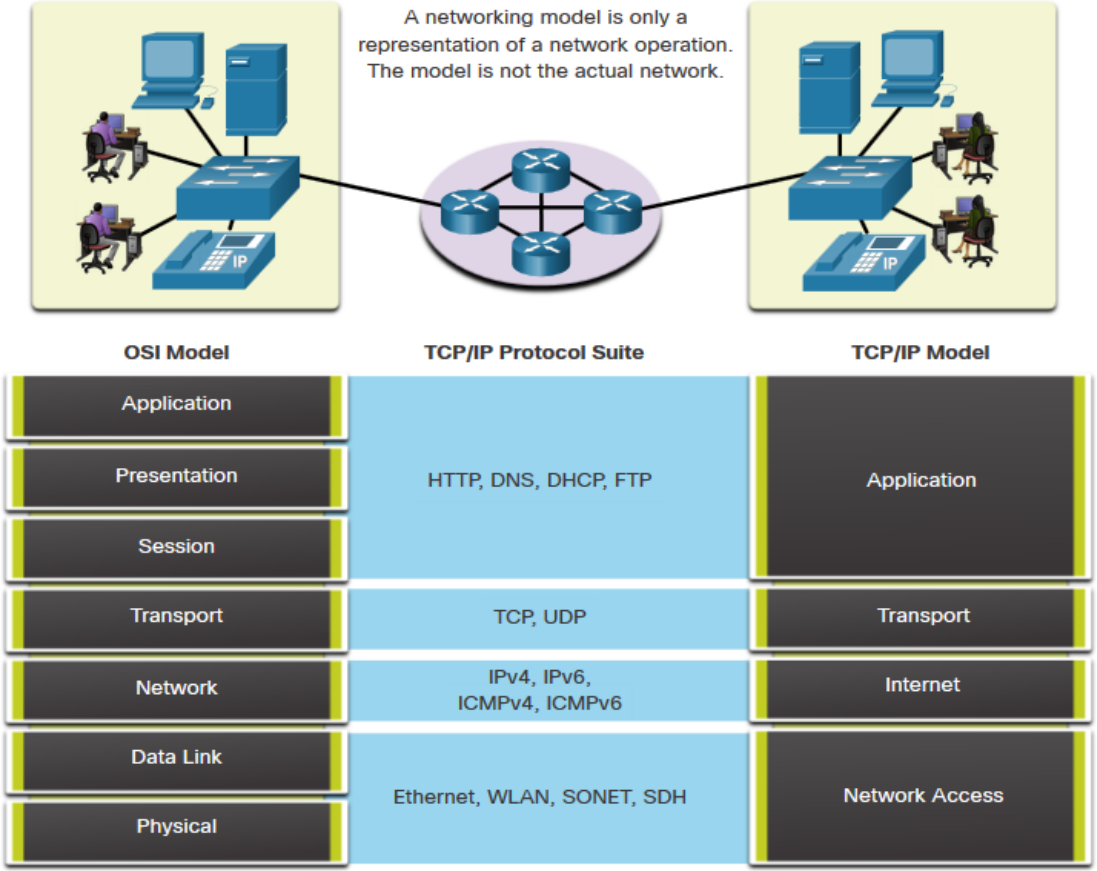

Complex concepts such as how a network operates can be difficult to explain and understand. For this reason, a layered model is used.

Two layered models describe network operations:

- Open System Interconnection (OSI) Reference Model
- TCP/IP Reference Model

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

The Benefits of Using a Layered Model (Cont.)

These are the benefits of using a layered model:

- Assist in protocol design because protocols that operate at a specific layer have defined information that they act upon and a defined interface to the layers above and below
- Foster competition because products from different vendors can work together
- Prevent technology or capability changes in one layer from affecting other layers above and below
- Provide a common language to describe networking functions and capabilities

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

The OSI Reference Model

OSI Model Layer	Description
7 - Application	Contains protocols used for process-to-process communications.
6 - Presentation	Provides for common representation of the data transferred between application layer services.
5 - Session	Provides services to the presentation layer and to manage data exchange.
4 - Transport	Defines services to segment, transfer, and reassemble the data for individual communications.
3 - Network	Provides services to exchange the individual pieces of data over the network.
2 - Data Link	Describes methods for exchanging data frames over a common media.
1 - Physical	Describes the means to activate, maintain, and de-activate physical connections.


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

The TCP/IP Reference Model

TCP/IP Model Layer	Description
Application	Represents data to the user, plus encoding and dialog control.
Transport	Supports communication between various devices across diverse networks.
Internet	Determines the best path through the network.
Network Access	Controls the hardware devices and media that make up the network.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

OSI and TCP/IP Model Comparison

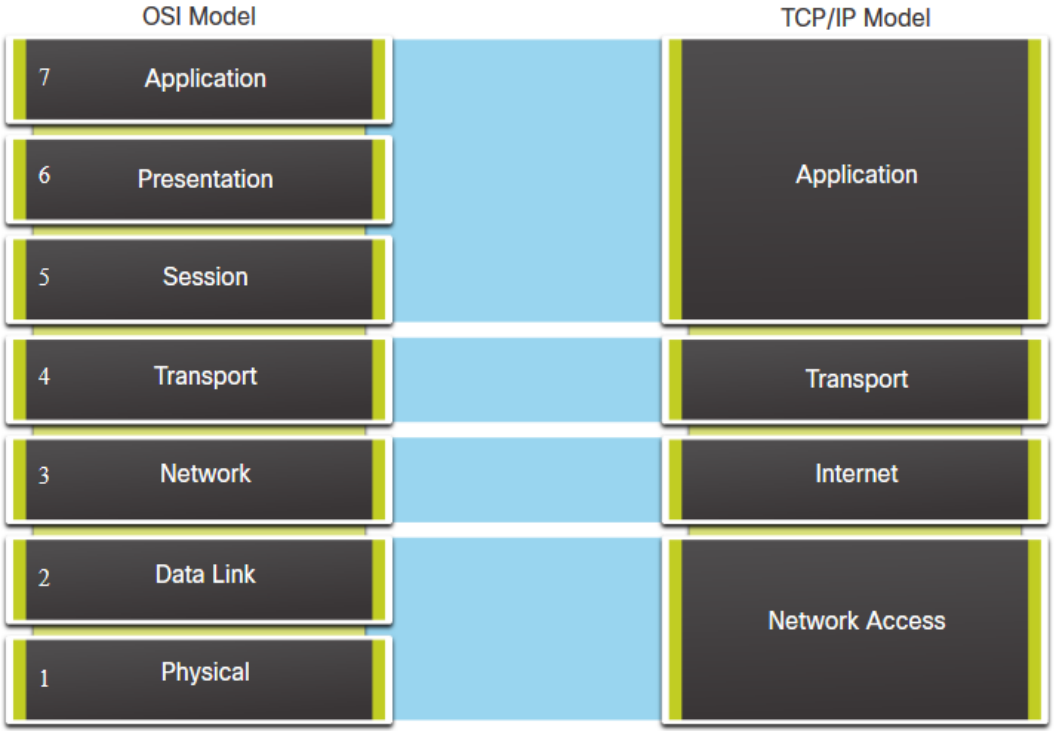

- The OSI model divides the network access layer and the application layer of the TCP/IP model into multiple layers.
- The TCP/IP protocol suite does not specify which protocols to use when transmitting over a physical medium.
- OSI Layers 1 and 2 discuss the necessary procedures to access the media and the physical means to send data over a network.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Packet Tracer – Investigate the TCP/IP and OSI Models in Action

This simulation activity is intended to provide a foundation for understanding the TCP/IP protocol suite and the relationship to the OSI model. Simulation mode allows you to view the data contents being sent across the network at each layer.

In this Packet Tracer, you will:


- Part 1: Examine HTTP Web Traffic
- Part 2: Display Elements of the TCP/IP Protocol Suite

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

3.6 Data Encapsulation

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Segmenting Messages

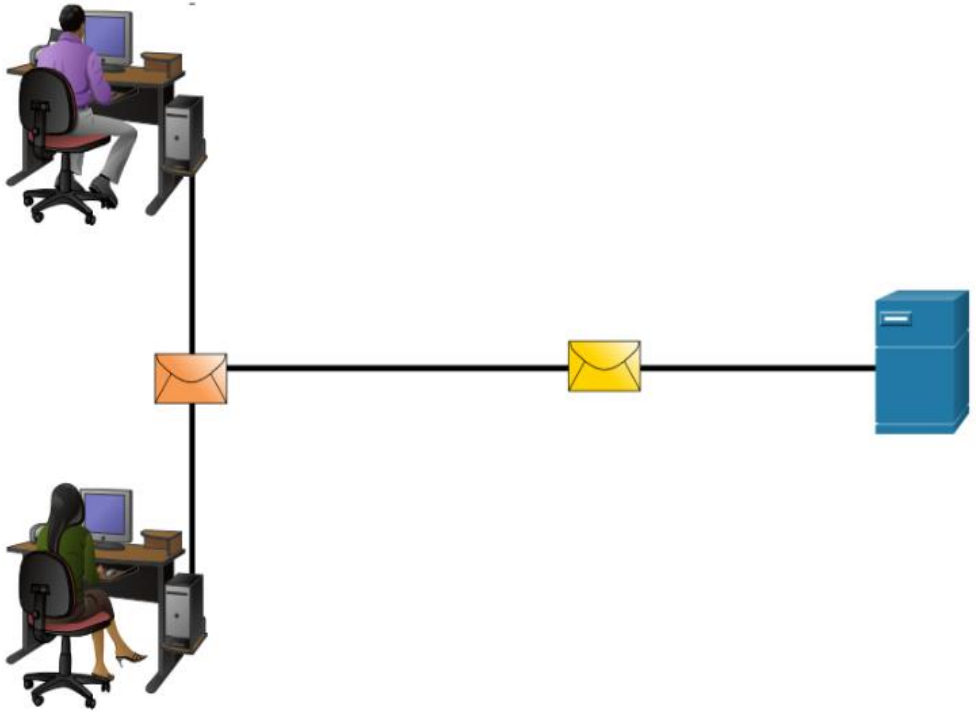


Segmenting is the process of breaking up messages into smaller units. Multiplexing is the processes of taking multiple streams of segmented data and interleaving them together.

Segmenting messages has two primary benefits:

- **Increases speed** - Large amounts of data can be sent over the network without tying up a communications link.
- **Increases efficiency** - Only segments which fail to reach the destination need to be retransmitted, not the entire data stream.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Sequencing

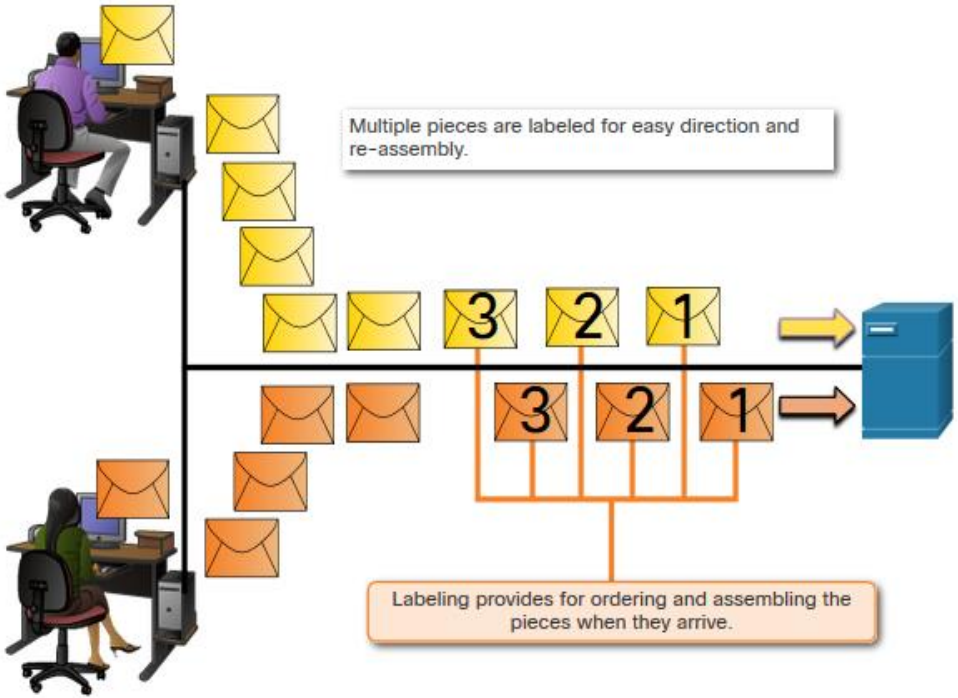


Sequencing messages is the process of numbering the segments so that the message may be reassembled at the destination.

TCP is responsible for sequencing the individual segments.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Protocol Data Units

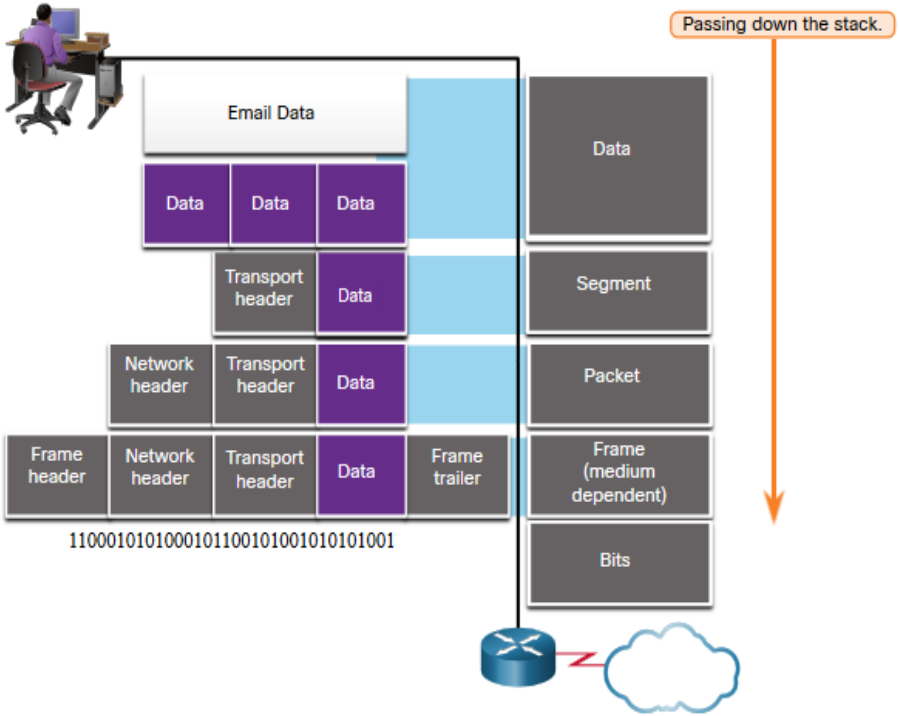


Encapsulation is the process where protocols add their information to the data.


- At each stage of the process, a PDU has a different name to reflect its new functions.
- There is no universal naming convention for PDUs, in this course, the PDUs are named according to the protocols of the TCP/IP suite.
- PDUs passing down the stack are as follows:
  1. Data (Data Stream)
  2. Segment
  3. Packet
  4. Frame
  5. Bits (Bit Stream)

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Encapsulation Example

- Encapsulation is a top down process.
- The level above does its process and then passes it down to the next level of the model. This process is repeated by each layer until it is sent out as a bit stream.

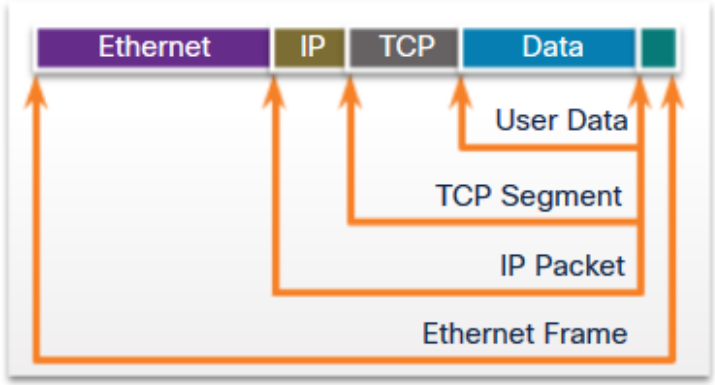

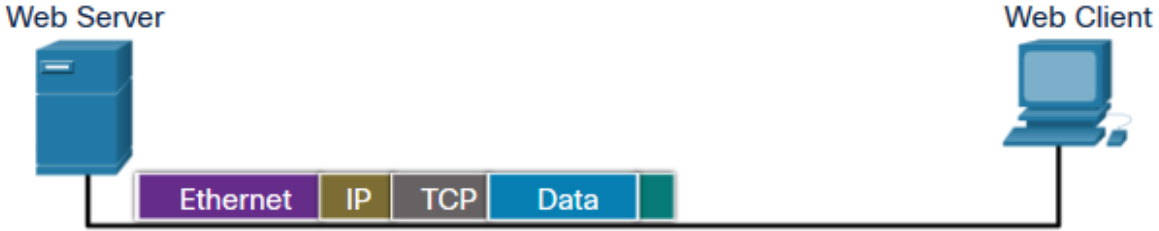


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

De-encapsulation Example

- Data is de-encapsulated as it moves up the stack.
- When a layer completes its process, that layer strips off its header and passes it up to the next level to be processed. This is repeated at each layer until it is a data stream that the application can process.

1. Received as Bits (Bit Stream)
2. Frame
3. Packet
4. Segment
5. Data (Data Stream)

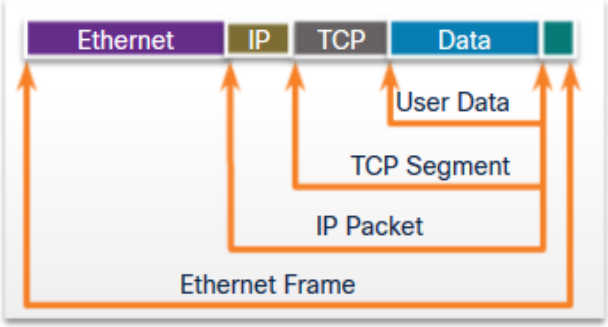



© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

3.7 Data Access


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Addresses

Both the data link and network layers use addressing to deliver data from source to destination.

Network layer source and destination addresses - Responsible for delivering the IP packet from original source to the final destination.

Data link layer source and destination addresses – Responsible for delivering the data link frame from one network interface card (NIC) to another NIC on the same network.

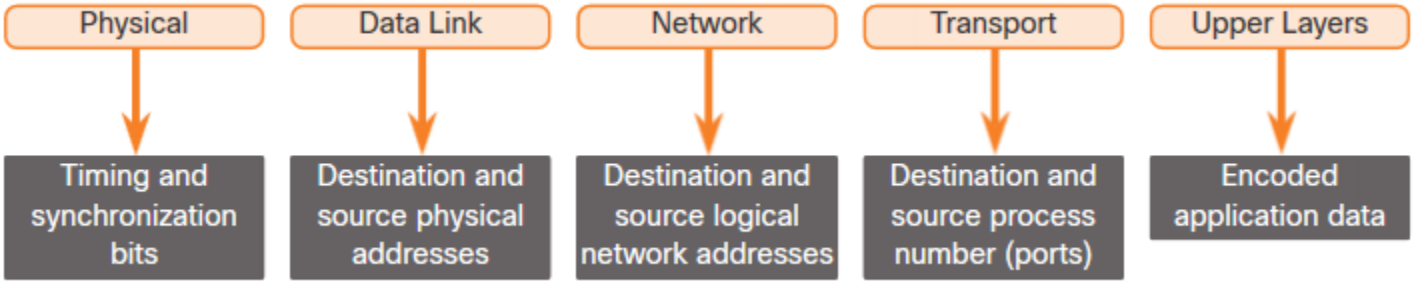


Layer 3 Logical Address

The IP packet contains two IP addresses:

- **Source IP address** - The IP address of the sending device, original source of the packet.
- **Destination IP address** - The IP address of the receiving device, final destination of the packet.

These addresses may be on the same link or remote.

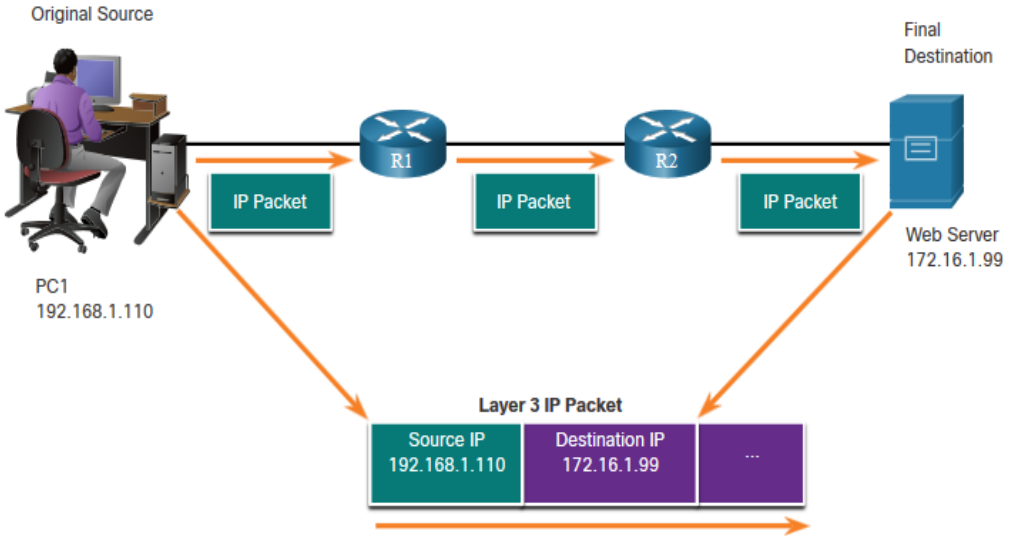


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Layer 3 Logical Address (Cont.)

An IP address contains two parts:

- **Network portion (IPv4) or Prefix (IPv6)**
  - The left-most part of the address indicates the network group which the IP address is a member.
  - Each LAN or WAN will have the same network portion.
- **Host portion (IPv4) or Interface ID (IPv6)**
  - The remaining part of the address identifies a specific device within the group.
  - This portion is unique for each device on the network.

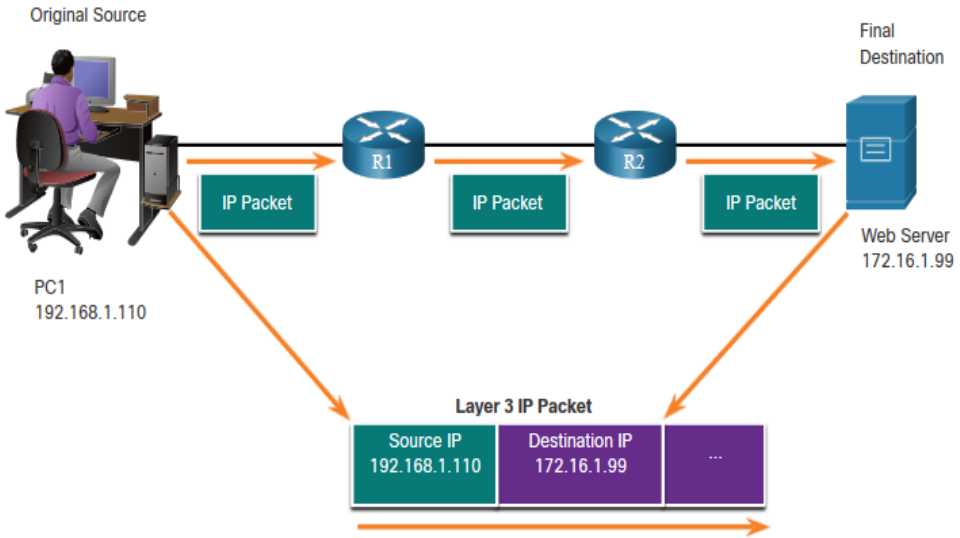


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Devices on the Same Network

When devices are on the same network the source and destination will have the same number in network portion of the address.

- PC1 – 192.168.1.110
- FTP Server – 192.168.1.9

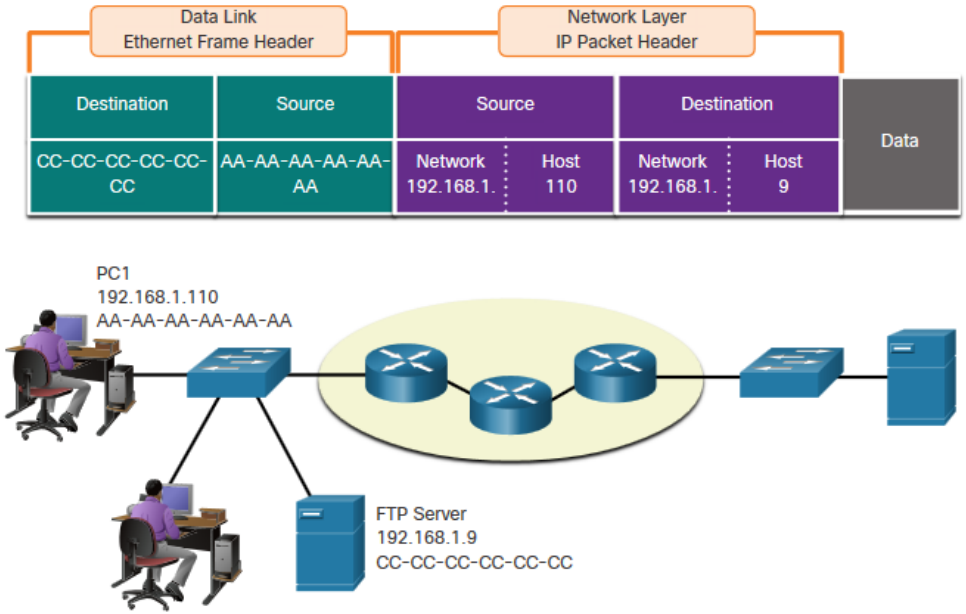


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Role of the Data Link Layer Addresses: Same IP Network

When devices are on the same Ethernet network the data link frame will use the actual MAC address of the destination NIC.

MAC addresses are physically embedded into the Ethernet NIC and are local addressing.


- The Source MAC address will be that of the originator on the link.
- The Destination MAC address will always be on the same link as the source, even if the ultimate destination is remote.

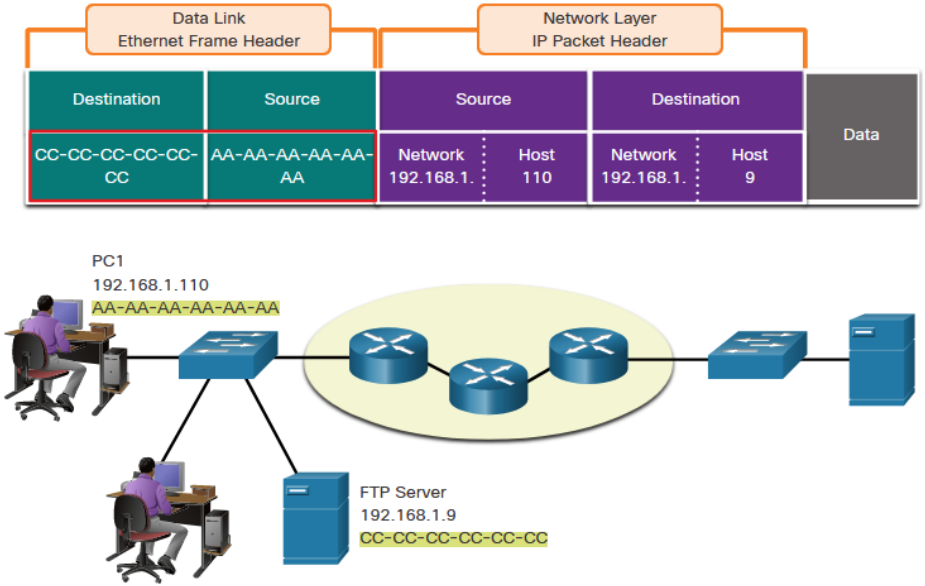

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Devices on a Remote Network

- What happens when the actual (ultimate) destination is not on the same LAN and is remote?
- What happens when PC1 tries to reach the Web Server?
- Does this impact the network and data link layers?

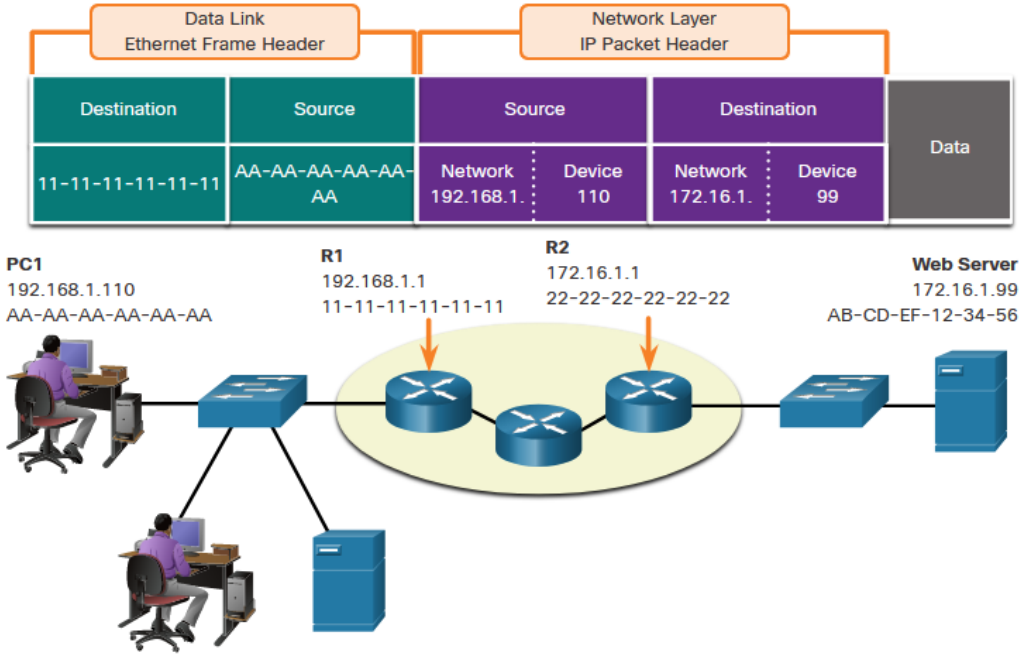


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Role of the Network Layer Addresses

When the source and destination have a different network portion, this means they are on different networks.

- PC1 – 192.168.1
- Web Server – 172.16.1

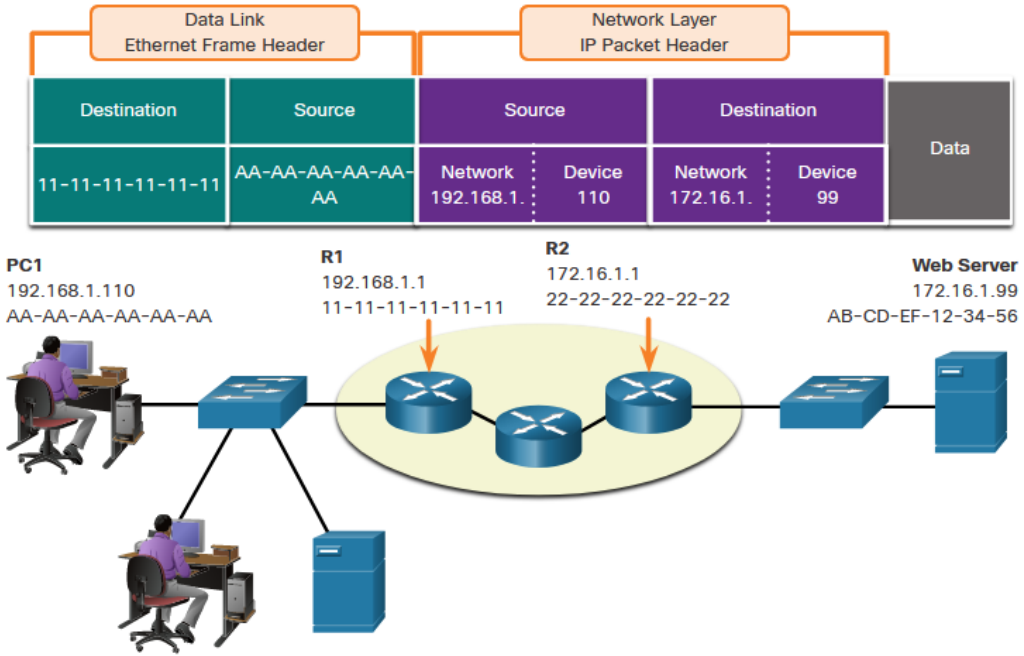


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Role of the Data Link Layer Addresses: Different IP Networks

When the final destination is remote, Layer 3 will provide Layer 2 with the local default gateway IP address, also known as the router address.

- The default gateway (DGW) is the router interface IP address that is part of this LAN and will be the “door” or “gateway” to all other remote locations.
- All devices on the LAN must be told about this address or their traffic will be confined to the LAN only.
- Once Layer 2 on PC1 forwards to the default gateway (Router), the router then can start the routing process of getting the information to actual destination.

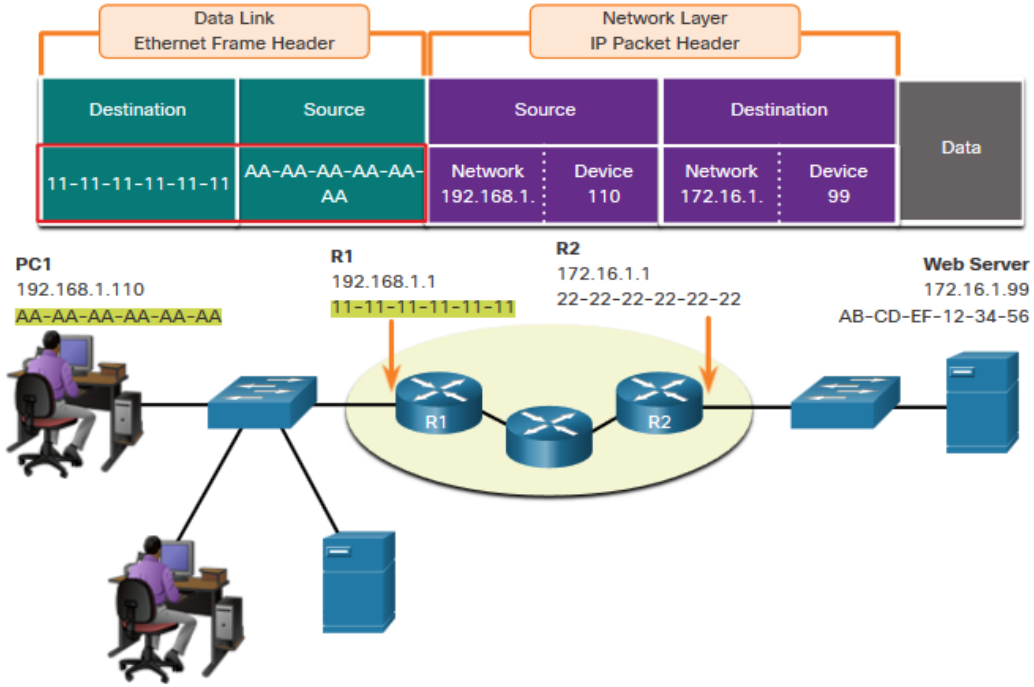


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Role of the Data Link Layer Addresses: Different IP Networks (Cont.)

- The data link addressing is local addressing so it will have a source and destination for each link.
- The MAC addressing for the first segment is :
  - Source – AA-AA-AA-AA-AA-AA (PC1) Sends the frame.
  - Destination – 11-11-11-11-11-11 (R1-Default Gateway MAC) Receives the frame.


Note: While the L2 local addressing will change from link to link or hop to hop, the L3 addressing remains the same.

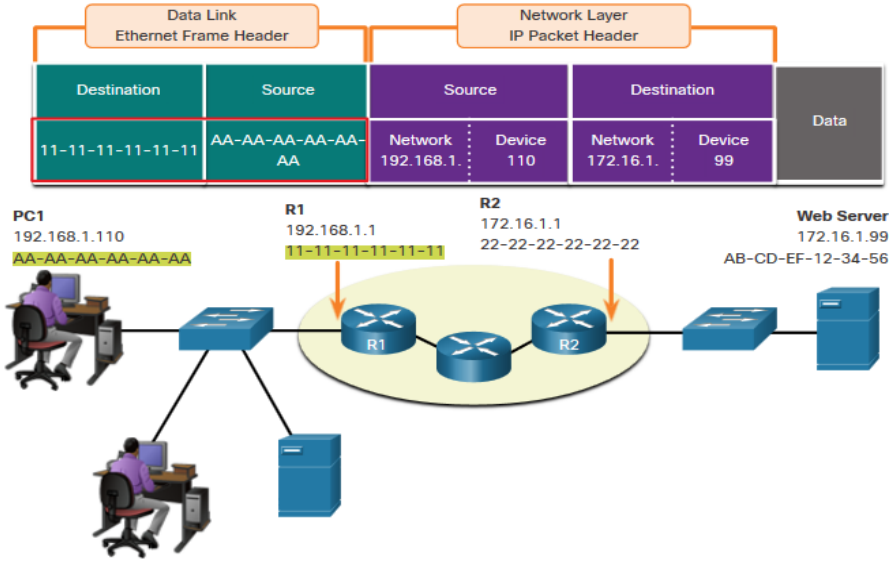

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Data Link Addresses

- Since data link addressing is local addressing, it will have a source and destination for each segment or hop of the journey to the destination.
- The MAC addressing for the first segment is:
  - Source – (PC1 NIC) sends frame
  - Destination – (First Router- DGW interface) receives frame

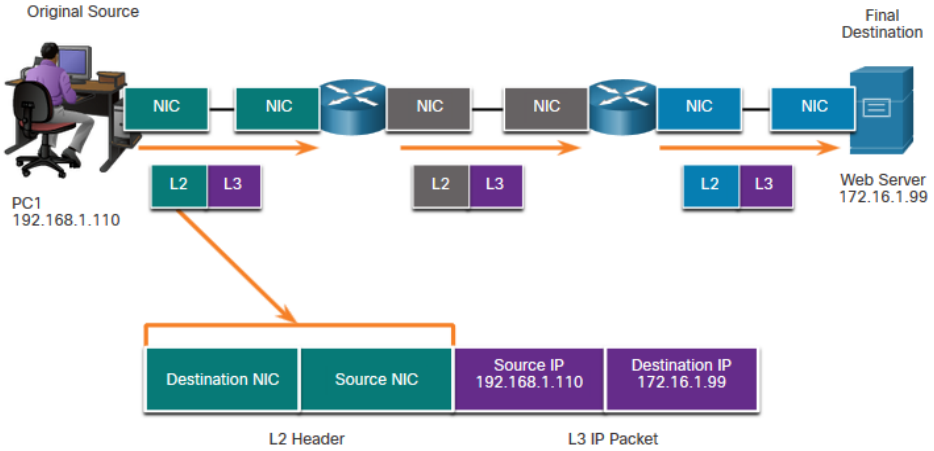


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Data Link Addresses (Cont.)

The MAC addressing for the second hop is:

- Source – (First Router- exit interface) sends frame
- Destination – (Second Router) receives frame

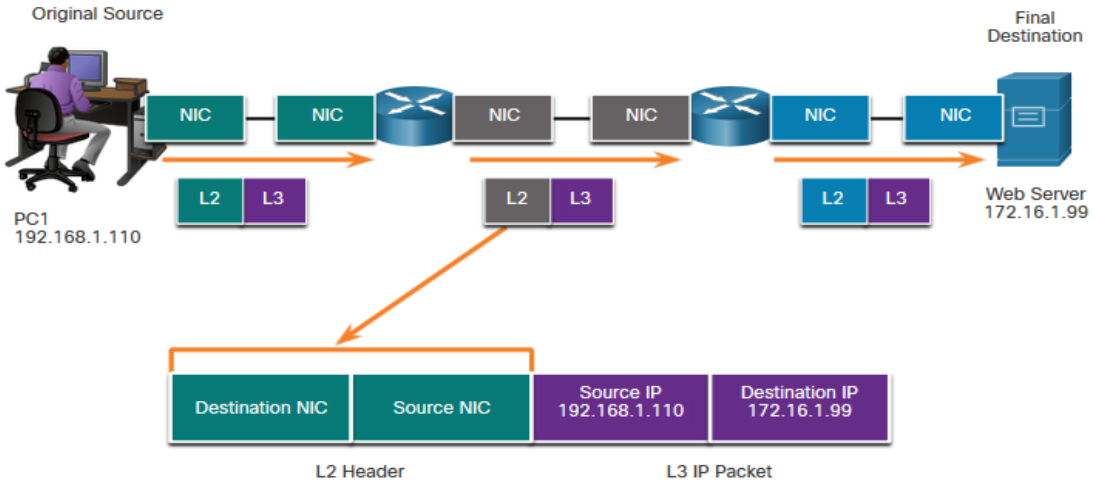


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Data Link Addresses (Cont.)

The MAC addressing for the last segment is:


- Source – (Second Router- exit interface) sends frame
- Destination – (Web Server NIC) receives frame

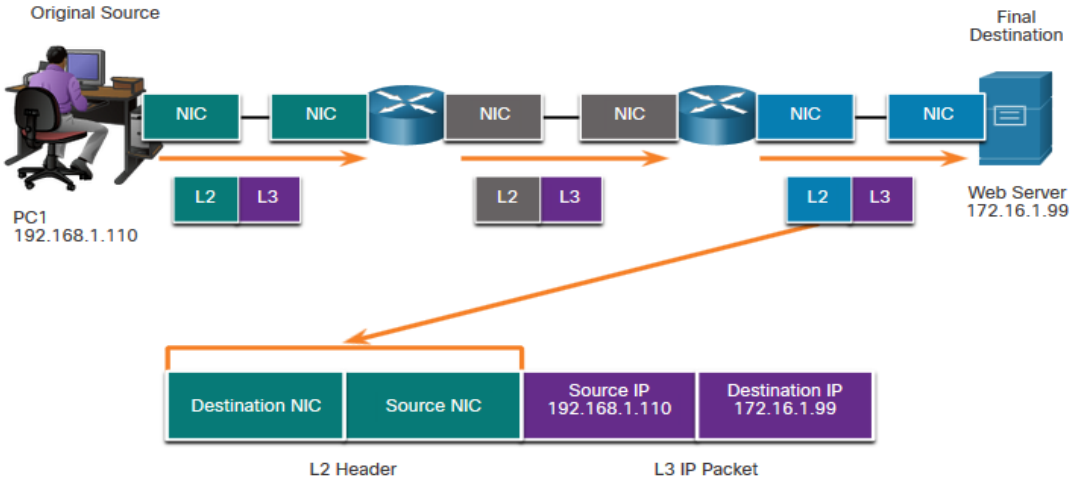

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Data Link Addresses (Cont.)

- Notice that the packet is not modified, but the frame is changed, therefore the L3 IP addressing does not change from segment to segment like the L2 MAC addressing.
- The L3 addressing remains the same since it is global and the ultimate destination is still the Web Server.

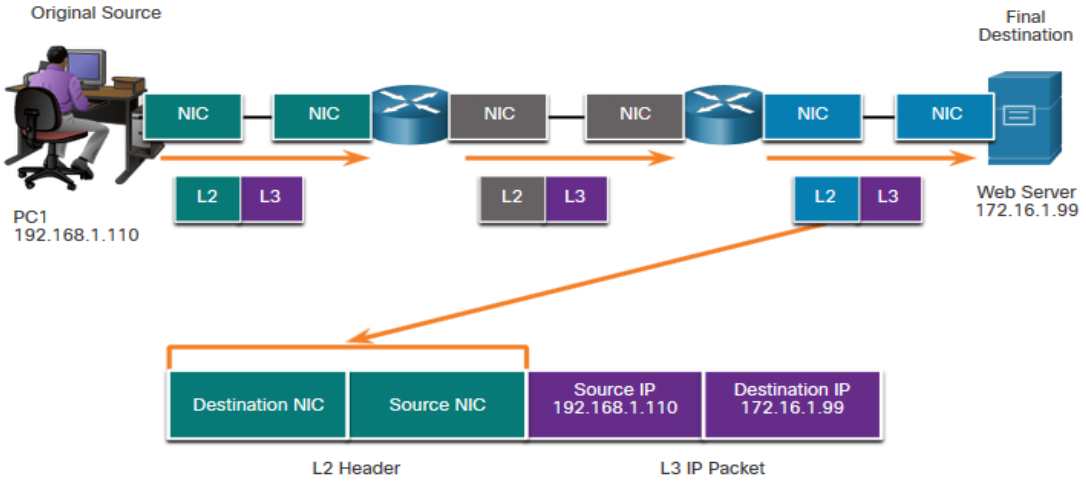

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

What did I learn in this module?

The Rules

- Protocols must have a sender and a receiver.
- Common computer protocols include these requirements: message encoding, formatting and encapsulation, size, timing, and delivery options.

Protocols

- To send a message across the network requires the use of several protocols.
- Each network protocol has its own function, format, and rules for communications.

Protocol Suites

- A protocol suite is a group of inter-related protocols.
- TCP/IP protocol suite are the protocols used today.

Standards Organizations

- Open standards encourage interoperability, competition, and innovation.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

What did I learn in this module? (Cont.)

Reference Models

- The two models used in networking are the TCP/IP and the OSI model.
- The TCP/IP model has 4 layers and the OSI model has 7 layers.

Data Encapsulation

- The form that a piece of data takes at any layer is called a *protocol data unit (PDU)*.
- There are five different PDUs used in the data encapsulation process: data, segment, packet, frame, and bits

Data Access

- The Network and Data Link layers are going to provide addressing to move data through the network.
- Layer 3 will provide IP addressing and layer 2 will provide MAC addressing.
- The way these layers handle addressing will depend on whether the source and the destination are on the same network or if the destination is on a different network from the source.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential


CISCO