





# BOARD STACK PIN CONFIG

## CORE PROTO

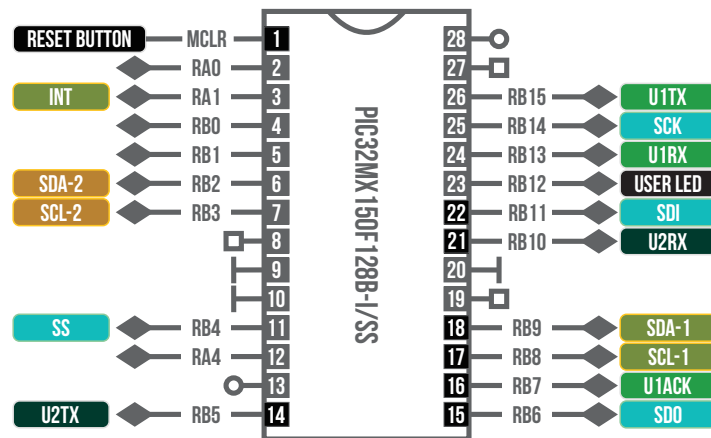

## CORE + BLE PROTO + extMod:BLE

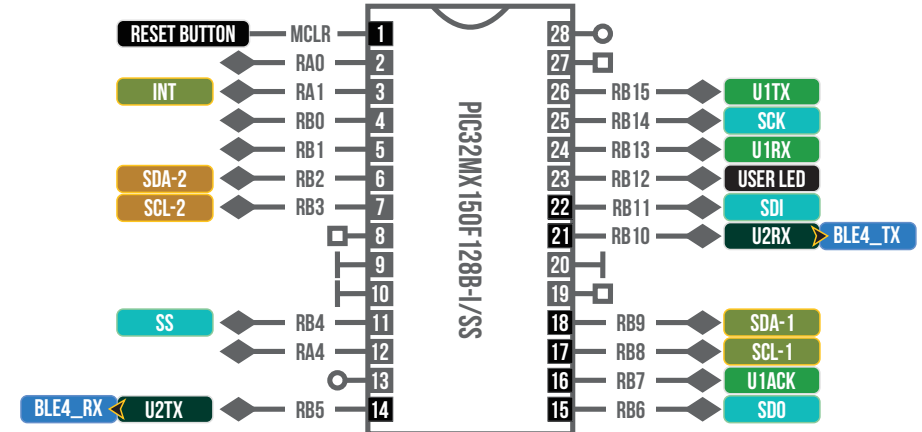

## COLOUR CODE

UART-1    UART-2    I2C-1    SPI    BLE4    I2C-2

X — 5V TOLERANT PINS

\*This is an abstract of the pinout for the 28pin PIC32MX1 chips for easy reference. Please refer to the datasheet for full details.