




BOARD STACK PIN CONFIG


CORE

PROTO:BLE

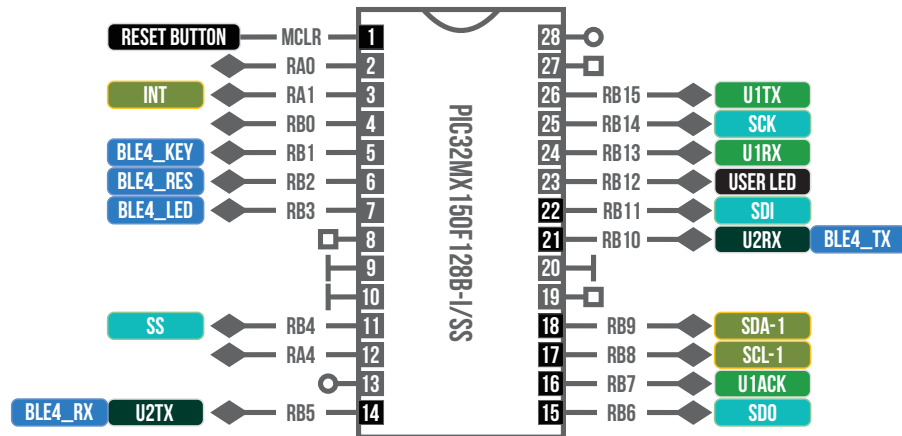

CORE + FB

PROTO:BLE + FB:mOLED

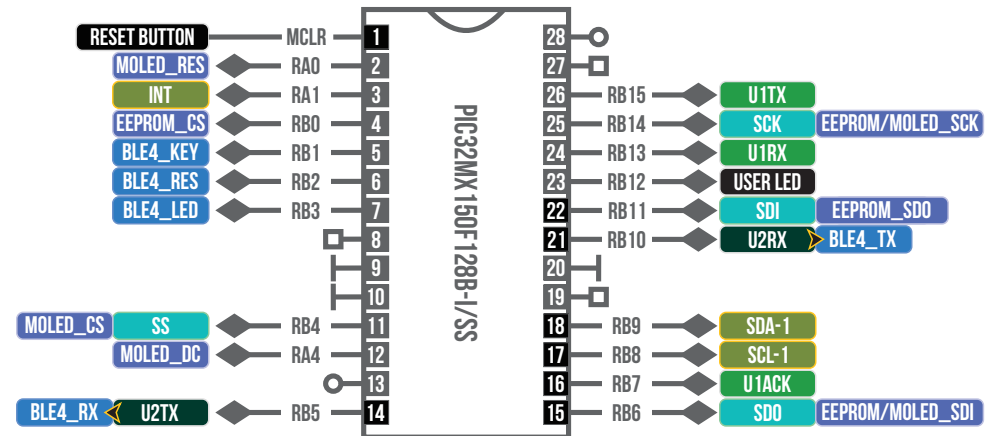

COLOUR CODE

UART-1 UART-2 I2C-1 SPI BLE4

X — 5V TOLERANT PINS

*This is an abstract of the pinout for the 28pin PIC32MX1 chips for easy reference.
Please refer to the datasheet for full details.